



(51) International Patent Classification:

G12B 21/22 (2006.01) *G01N* 13/10 (2006.01)
B01L 3/00 (2006.01)

(21) International Application Number:

PCT/EP2009/005393

(22) International Filing Date:

24 July 2009 (24.07.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

080135228.8 28 July 2008 (28.07.2008) EP

(71) Applicant (for all designated States except US): **ETH ZÜRICH** [CH/CH]; Rämistrasse 101/ ETH transfer, CH-8092 Zürich (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GABI, Michael** [CH/CH]; Hofwiesensatrasse 303, CH-8050 Zürich (CH). **VÖRÖS, Janos** [HU/CH]; Glaubtenstrasse 59, CH-8046 Zürich (CH). **ZAMBELLI, Tomaso** [IT/CH]; Zanggerweg 14, CH-8006 Zürich (CH). **BEHR, Pascal** [CH/CH]; Berninastrasse 43, CH-8057 Zürich (CH).

(74) Agent: **ETH ZÜRICH**; ETH transfer HG E 43-49, Rämistrasse 101, CH-8092 Zurich (CH).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A PROBE ARRANGEMENT FOR EXCHANGING IN A CONTROLLABLE WAY LIQUIDS WITH MICRO-SIZED SAMPLES OF MATERIAL LIKE BIOLOGICAL CELLS

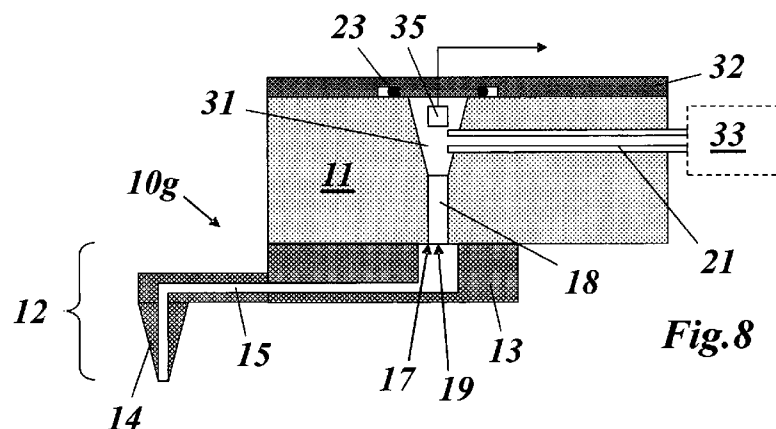**Fig. 8**

(57) Abstract: The invention relates to a probe arrangement (10g) for exchanging in a controllable way liquids with micro-sized samples of material like biological cells, especially in connection with an scanning probe microscope, said probe arrangement (10g) comprising a probe holder (11) with at least one embedded first channel (18) and a cantilever (12) with at least one embedded second channel (15) and being provided to be attached to said probe holder (11) in a way that at least one aperture (19) of the first channel (18) is connected to at least one aperture (17) of the second channel (15) in a way that permits the liquid-tight transfer of a liquid between said first and second channels (15, 18). A safe and easy use of the probe arrangement is achieved by having the cantilever (12) permanently attached to said probe holder (11) to form a prefabricated probe unit (10g).

A probe arrangement for exchanging in a controllable way liquids with micro-sized samples of material like biological cells

Field of Invention

The invention pertains to the field of the systems for exchanging in a controlled
5 way liquids with micro-sized samples of material like biological cells, or the like.
It refers to a probe arrangement for exchanging in a controllable way liquids
with micro-sized samples of material like biological cells, especially in connection with a scanning probe microscope, according to the preamble of claim 1.

Background of the invention

10 It is well-known in the art to use scanning probe microscopes, especially in the form of scanning force microscopes, to examine and non-destructively characterize surfaces of a specimen (see for example US-B2-7,114,405). The mounting of probes utilized for examining a specimen is of decisive significance for the operation of a scanning probe microscope. In any scanning probe microscope,
15 the probe must be secured in such a way that a respective measured physical variable can be detected in dependence upon a distance between the specimen and a measuring tip of the probe. One type of scanning probe microscopy is scanning force microscopy with which a spring pole is used as the probe, normally referred to as a cantilever. There is a measuring tip at one end of the cantilever.
20 The probe (cantilever) preferably consists of silicon, but other materials may be used as well, such as silicon nitride or diamond. As a rule, the cantilever, including its measuring tip, is mounted on a substrate, sometimes referred to as

base or probe holder. Adequate mounting of the cantilever must meet the corresponding diverse requirements as well. Two kinds of mounting the cantilever in a scanning probe microscope are known in the art. With one of them, the cantilever is either attached by gluing or retained by means of a liquid which has adhesive properties. The second type of known mounting is fully mechanical, usually implemented by means of a spring. Fastening of the cantilever by means of an adhesive is unsuitable for many scanning probe microscopes since the most frequently applied adhesive materials produce a long lasting bond between the probe and a retaining member to which the probe is to be fixed, a bond which can be severed only by taking recourse to solvents. Besides, the use of adhesive materials is very critical for operating scanning probe microscopes in liquids because the liquid within which the probe is located may undergo chemical changes caused by interaction with the adhesive material. For this reason, mechanical fastening by means of some spring retention often is selected (see Fig. 1 of the present application).

It is also well-known in the art (see EP-A1-1 990 626), to use a cantilevered probe arrangement including micro channels that may be controllable by a drive for performing analysis and/or manipulation of micro-sized samples of material, in, e.g., a fluid environment constituting, for example, biological material. The cantilever probe tip may for example be employed to perform electrophysiological tests in accordance to, for example, various modes such as a static and a scanning mode of samples of biological material such as biological

tissue; an individual cell as well as elements thereof including vesicles, cell membrane and portions thereof, lipid bilayers and artificial lipid bilayers. The micro-channels enable the release of fluids and the collection of samples in the very range where the electrophysiological tests are performed. One of the main applications of such a cantilever probe arrangement is associated to cell biology, such as intracellular injection or sampling of the cytoplasm, extracellular drug release or sampling of the environmental buffer in relative proximity close to the cell by means of the force-controlled cantilever probe tip.

However, in using the micro fabricated cantilevers with their internal micro channels with a scanning probe microscope, one has to mount the cantilevers on a suitable probe holder, such that the cantilever is securely fixed to said probe holder in a correct position. At the same time, a liquid-tight connection between the cantilever and the probe holder has to be established, so that liquid can be exchanged under a defined pressure between an (external or internal) liquid reservoir and the sample to be probed. This is a difficult task in the normal environment of a laboratory, and may result in damaging the cantilever or failing to achieve a pressure-tight connection between the cantilever and the probe holder.

Summary of the invention

It is therefore an objection of the present invention to provide a probe arrangement, which is easy to use and precludes any failures with regard to the positioning and hydraulic connection of the cantilever.

According to the invention the cantilever is permanently attached to said probe
5 holder to form a prefabricated probe unit.

According to one embodiment of the invention said cantilever is attached to said probe holder in a form fitting manner. The form-fit simplifies the positioning and sealing of the cantilever relative to the probe holder.

According to another embodiment of the invention said cantilever is attached to
10 said probe holder by means of an adhesive joint. The adhesive joint is space-saving and simple to apply and may be used as a sealing. The adhesive can be chosen to be compatible with the liquid flowing through the joint. However, it may be combined with additional sealing means.

According to another embodiment of the invention said cantilever is attached to
15 said probe holder by means of a welding joint. The cantilever may be either welded directly with the probe holder material or by adding an additional compound (metallic or polymeric) between cantilever and probe holder.

According to another embodiment of the invention a sealing material may be generally provided between said cantilever and said probe holder.

According to another embodiment of the invention said sealing material includes a liquid compatible, elastic material having a Young's modulus of <150 GPa, preferably between 0.01 GPa and 0.2 GPa.

According to another embodiment of the invention the elastic material between
5 the cantilever and the probe holder is a polymer, especially one of KALREZ[®],
poly(dimethyl siloxane), Poly (acrylonitrile, butadiene, styrene), vinyl acetate,
acrylates, polyamides, acetal resins, poly(vinylidene fluoride), poly(vinylidene
chloride), poly(ethylene, propylene butylene..), polyetheretherketone, polyure-
thane, silicone, polyisobutylene, epoxy, poly (ethylene therephtalate), polyimide,
10 polycarbonate, polysulfones, natural rubbers or anything similar.

According to another embodiment of the invention the elastic material between
the cantilever and the probe holder is a metal or a metal alloy containing Pb, Zn,
Sn, In, Sb or Ag.

According to another embodiment of the invention said cantilever is micro fa-
15 bricated and made of one of Si, SiO₂, SiN, GaAs, SiGe or a polymeric material,
benzocyclobutene (BCB), benzocyclobutene (BCB), Parylene, Polyamide, Acrylic
(PMMA), poly-dimethylsiloxane PDMS, liquid crystal polymer (LCP), liquid crystal
elastomer (LCE), fluorocarbon, a piezoelectric polymer, a functional hydrogel,
polyurethane or novolack.

According to another embodiment of the invention the probe holder is optically transparent enabling optical access to the cantilever, including access for laser based force feed-back. With such a probe holder the force-feedback capability of a scanning probe microscope can be used when the probe unit is mounted
5 thereon.

According to another embodiment of the invention the cantilever has a tip, and said second channel has two apertures, one of them at the apex of the tip of the cantilever, the other being connected to the at least one aperture of the probe holder. With such a cantilever the exchange of liquid with a sample can be done
10 with utmost precision.

According to another embodiment of the invention the at least one probe holder channel ends at least at two apertures, one of them being connected to a cantilever aperture, another one being connected to a liquid handling means, especially a reservoir for a liquid.

15 Especially, said probe holder may comprise a built-in reservoir, which is connected to said first channel of said probe holder.

According to another embodiment of the invention the probe holder comprises a pressure chamber containing at least one built-in liquid reservoir to control the pressure used to press the liquid out of the reservoir through the hollow

cantilever and tip opening or suck in liquid from the tip back into the cantilever or a built-in reservoir in the probe holder.

According to another embodiment of the invention said built-in liquid reservoir and/or said pressure chamber is connected to a pressure controller.

- 5 According to another embodiment of the invention the cantilever channel has inner dimensions with a width and height between 0.1 μm and 1 mm, preferably between 1 μm and 100 μm , and a length between 1 μm and 10 mm, preferably between 20 μm and 1 mm.

- According to another embodiment of the invention said cantilever is permanently attached to said probe holder by mechanical and/or magnetic forces,
10 preferably using at least one spring, clamp, or screw.

According to another embodiment of the invention the probe holder contains positioning means, especially in form of a groove, for precise positioning of the various elements during the mounting of the probe unit.

- 15 According to the invention the inventive probe arrangement is applied as a probe in a scanning probe microscope, preferably with a force feed-back system based on a laser or a piezo-resistive effect.

Brief description of the drawings

The invention will be explained below by means of various embodiments and with reference to the drawings.

Fig. 1 shows a configuration of a cantilever removably attached to a probe holder by means of a spring;

5 Fig. 2 shows a first embodiment of the probe unit according to the invention, wherein the cantilever is adhesively attached to the probe holder at its lower side;

Fig. 3 shows a second embodiment of the probe unit according to the invention, wherein the cantilever is attached to the probe holder in a
10 form fitting and sealing manner;

Fig. 4 shows a third embodiment of the probe unit according to the invention, wherein the cantilever is attached to the probe holder at its lower side by means of a weld;

Fig. 5 shows a fourth embodiment of the probe unit according to the invention, wherein the cantilever is attached to the probe holder in a
15 form fitting and sealing manner by means of a weld;

Fig. 6 shows a fifth embodiment of the probe unit according to the invention similar to Fig. 4, wherein the probe holder is connected by an external tube to an external pressure controller;

- Fig. 7 shows a sixth embodiment of the probe unit according to the invention, wherein the probe holder comprises a built-in reservoir, and bears a pressure chamber at its upper side, which is connected by an external tube to an external pressure controller; and
- 5 Fig. 8 shows a seventh embodiment of the probe unit according to the invention, wherein a built-in reservoir in the probe holder is closed by a cover and connected to an external pressure controller by means of an external tube.

Detailed description

- 10 Inspired by the operation mode of the atomic force microscope (AFM), a micro fabricated, channelled cantilever has been used, i.e. a cantilever with an embedded channel in order to be able to dispense or collect liquid with force control. As shown in Fig. 1, the channelled cantilever 12 is part of a chip which allows the mounting to a probe holder 11 and the connection to a liquid delivery or collec-
- 15 tion system (liquid handling means 25). The embedded channel 15 of the cantilever 12 starts from the hollow tip 14 of the cantilever 12 and ends in the chip body 13. Consequently, two apertures 16 and 17 are foreseen at both extremities of the channel 15: the first (17) at the surface of the chip body 13, and the second (16) at the surface of the cantilever 12. The cantilever may be eventually
- 20 provided with a hollow tip 14: in this case, the second aperture (16) is at the surface of the tip 14, as shown in Fig. 1.

On the other hand, a probe holder 11 is fabricated in such a way as to have an embedded channel 18 ending at both sides in an aperture 19 and 20 at the external surface of the probe holder 11. The cantilever chip 12 and the probe holder 11 are aligned in such a way that the aperture 17 on the cantilever chip 12 and one of the two apertures 19, 20 of the probe holder 11 coincide. The cantilever chip 12 and the probe holder channel 18 are then clamped together with a spring 22, or other means. A polymer is deposited to form an O-ring like structure or sealing 23 for sealing purposes between the cantilever chip 12 and the probe holder 11.

The polymer could be KALREZ[®], poly(dimethyl siloxane), Poly (acrylonitrile, butadiene, styrene), vinyl acetate, acrylates, polyamides, acetal resins, poly(vinylidene fluoride), poly(vinylidene chloride), poly(ethylene, propylene butylene..), polyetheretherketone, polyurethane, silicone, polyisobutylene, epoxy, poly (ethylene therepthalate), polyimide, polycarbonate, polysulfones, natural rubbers or anything similar. The polymer may also be eventually enriched with particles, beads or fibers for reinforcement. The other aperture 20 of the probe holder 11 can be connected by an external tube 21 to whatever liquid reservoir or to

Instead of having an external liquid reservoir, the reservoir can also be built-in into the probe holder In the embodiment of Fig. 7, the probe holder 11 of the probe unit 10f comprises a built-in reservoir 31, which is connected to the chan-

nel 18 of the probe holder 11, at one side, and to a pressure chamber 29, at the other side. The pressure chamber 29 is the interior of a cap 30, which sits on top of the probe holder 11 and is sealed by means of a sealing 23. In the embodiment of Fig. 8, the built-in reservoir 31 is directly covered by means of a sealed cover 32. That allows the user to pipette easily small amounts of liquid into the built-in reservoir 31. The built-in reservoir 31 can be connected to an external pressure controller (33 in probe unit 10g in Fig. 8) either directly or via the pressure chamber 29 by means of an external tube 21 to control the positive or negative pressure inside the liquid reservoir 31. This way the liquid can be ejected with a chosen pressure or local liquid samples can be sucked into the hollow cantilever 12 or into the liquid reservoir 31.

In this way, a continuous fluidic path is established from the aperture 16 of the cantilever 12 to the external tube 21 which is eventually connected to the probe holder 11 or built-in liquid reservoir 31. Thanks to the AFM force control, the channeled cantilever 12 can be approached onto whatever object and the liquid filling the fluidic path 15, 18 can be locally dispensed from the tip aperture 16.

To form the prefabricated probe unit, the cantilever 12 can be attached to the probe holder 11 either by gluing it to the lower side of the probe holder 11 with an adhesive 27 (probe unit 10a in Fig. 2), or from a side in a form fitting manner (probe unit 10b in Fig. 3). Furthermore, it may be attached to the lower side of the probe holder 11 by means of a weld 28 (probe unit 10c in Fig. 4), or welded

to the probe holder 11 from its side in a form fitting manner (probe unit 10d in Fig. 5). The welded probe unit of Fig. 4 may be connected to an external pressure controller (33 in Fig. 8) by means of an external tube 21 (probe unit 10e in Fig. 6). Furthermore, electrodes (35 in Fig. 8) can be built into the reservoirs 31 to measure electric currents through the hollow cantilever 12 used for measuring the electrophysiology of living cells.

The cantilever 12 can be a hollow bar with an opening 16 at the tip 14 or a more complex structure can be attached, such as pyramid or hemisphere. Besides a pyramid or hemisphere, a tube shaped tip may be provided at the cantilever 12.

10 The probe holder 11 can be designed like a drawer with rails/slides allowing a fast mounting on the scanning probe microscope or AFM.

Example: A channel was drilled into a commercial AFM probe holder made of polycarbonate. This channel ended in two apertures: one at the bottom surface (lower side) of the probe holder, while the other at its lateral surface. The lateral aperture was connected with a liquid reservoir through tubing. The aperture at the bottom base of the probe holder was connected to a micro channelled cantilever chip. A two component material (LOT Oriel, SP-90-10) was deposited onto the bottom channel aperture of the probe holder to form an O-ring like sealing structure. The sealing could also be made of any elastic material which is compatible with the liquid solution filling the channels during the experiment. The inner diameter of the sealing was preferentially equal to the diameter of the

bottom aperture and the outer diameter was larger than the channel opening on the chip body containing the cantilever. The chip body was aligned according to a groove (26 in Fig. 1) or markings eventually present on the probe holder and pressed against the sealing by a force, which was in this case exerted by a metal spring. The force could have also been applied by any other mechanical device e.g. involving screws or by a device involving magnetic components.

List of Reference Numerals

	10,10a-g	probe unit
	11	probe holder
10	12	cantilever (channeled)
	13	body
	14	tip
	15,18	channel
	16,17	aperture
15	19,20	aperture
	21	tube (external)
	22	spring
	23	sealing
	24	recess
20	25	liquid handling means (e.g. reservoir, etc.)
	26	groove
	27	adhesive

	28	weld
	29	pressure chamber
	30	cap
	31	reservoir (built-in)
5	32	cover
	33	pressure controller
	34	scanning probe microscope
	35	electrode



Claims

1. A probe arrangement (10a-g) for exchanging in a controllable way liquids with micro-sized samples of material like biological cells, especially in connection with an Atomic Force Microscope (34), said probe arrangement (10a-g) comprising a probe holder (11) with at least one embedded first channel (18) and a cantilever (12) with at least one embedded second channel (15) and being provided to be attached to said probe holder (11) in a way that at least one aperture (19) of the first channel (18) is connected to at least one aperture (17) of the second channel (15) in a way that permits the liquid-tight transfer of a liquid between said first and second channels (15, 18), characterized in that said cantilever (12) is permanently attached to said probe holder (11) to form a prefabricated probe unit (10a-g).
2. A probe arrangement according to claim 1, characterized in that said cantilever (12) is attached to said probe holder (11) in a form fitting manner.
3. A probe arrangement according to claim 1 or 2, characterized in that said cantilever (12) is attached to said probe holder (11) by means of an adhesive joint (27).



4. A probe arrangement according to claim 1 or 2, characterized in that said cantilever (12) is attached to said probe holder (11) by means of a welding joint (28).
5. A probe arrangement according to one of the claims 1 to 4, characterized in that a sealing material is provided between said cantilever (12) and said probe holder (11).
6. A probe arrangement according to claim 5, characterized in that said sealing material includes a liquid compatible, elastic material having a Young's modulus of <150 GPa, preferably between 0.01 GPa and 0.2 GPa.
- 10 7. A probe arrangement according to claim 6, characterized in that the elastic material between the cantilever (12) and the probe holder (11) is a polymer, especially one of KALREZ[®], poly(dimethyl siloxane), Poly (acrylonitrile, butadiene, styrene), vinyl acetate, acrylates, polyamides, acetal resins, poly(vinylidene fluoride), poly(vinylidene chloride), poly(ethylene, propylene butylene..), polyetheretherketone, polyurethane, silicone, polyisobutylene, epoxy, poly (ethylene therephthalate), polyimide, polycarbonate, polysulfones, natural rubbers or anything similar.
- 15 8. A probe arrangement according to claim 6, characterized in that the elastic material between the cantilever (12) and the probe holder (11) is a metal or a metal alloy containing Pb, Zn, Sn, In, Sb or Ag.
- 20

9. A probe arrangement according to one of the claims 1 to 8, characterized in that said cantilever (12) is micro fabricated and made of one of Si, SiO₂, SiN, GaAs, SiGe or a polymeric material, benzocyclobutene (BCB), benzocyclobutene (BCB), Parylene, Polyamide, Acrylic (PMMA), polydimethylsiloxane PDMS, liquid crystal polymer (LCP), liquid crystal elastomer (LCE), fluorocarbon, a piezoelectric polymer, a functional hydrogel, polyurethane or novolack.
10. A probe arrangement according to one of the claims 1 to 8, characterized in that the probe holder (11) is optically transparent enabling optical access to the cantilever (12), including access for laser based force feedback.
11. A probe arrangement according to one of the claims 1 to 10, characterized in that the cantilever (12) has a tip (14), and said second channel (15) has two apertures (16, 17), one of them at the apex of the tip (14) of the cantilever (12), the other being connected to the at least one aperture (19) of the probe holder (11).
12. A probe arrangement according to one of the claims 1 to 11, characterized in that the at least one probe holder channels (18) ends at least at two apertures (19, 20), one of them being connected to a cantilever aperture (17), another one being connected to a liquid handling means (25, 31), especially a reservoir (31) for a liquid.




- 13.** A probe arrangement according to one of the claims 1 to 12, characterized in that said probe holder (11) comprises a built-in reservoir (31), which is connected to said first channel (18) of said probe holder (11).
- 14.** A probe arrangement according to one of the claims 1 to 13, characterized in that said probe holder comprises a pressure chamber (29) containing at least one built-in liquid reservoir to control the pressure used to press the liquid out of the reservoir through the hollow cantilever (12) and tip opening or suck in liquid from the tip (14) back into the cantilever (12) or a built-in reservoir (31) in the probe holder (11).
- 15.** A probe arrangement according to claim 13 or 14, characterized in that said built-in liquid reservoir (31) and/or said pressure chamber (29) is connected to a pressure controller (33).
- 16.** A probe arrangement according to one of the claims 1 to 15, characterized in that the cantilever channel (15) has inner dimensions with a width and height between 0.1 μm and 1 mm, preferably between 1 μm and 100 μm , and a length between 1 μm and 10 mm, preferably between 20 μm and 1 mm.
- 17.** A probe arrangement according to claim 1, characterized in that said cantilever (12) is permanently attached to said probe holder (11) by mechanical

and/or magnetic forces, preferably using at least one spring (22), clamp, or screw.




- 5 **18.** A probe arrangement according to one of the claims 1 to 17, characterized in that the probe holder (11) contains positioning means, especially in form of a groove (26), for precise positioning of the various elements during the mounting of the probe unit (10a-g).
- 19.** Application of the probe arrangement according to one of the claims 1 to 18 as a probe in a scanning probe microscope (34), preferably with a force feed-back system based on a laser or a piezo-resistive effect.

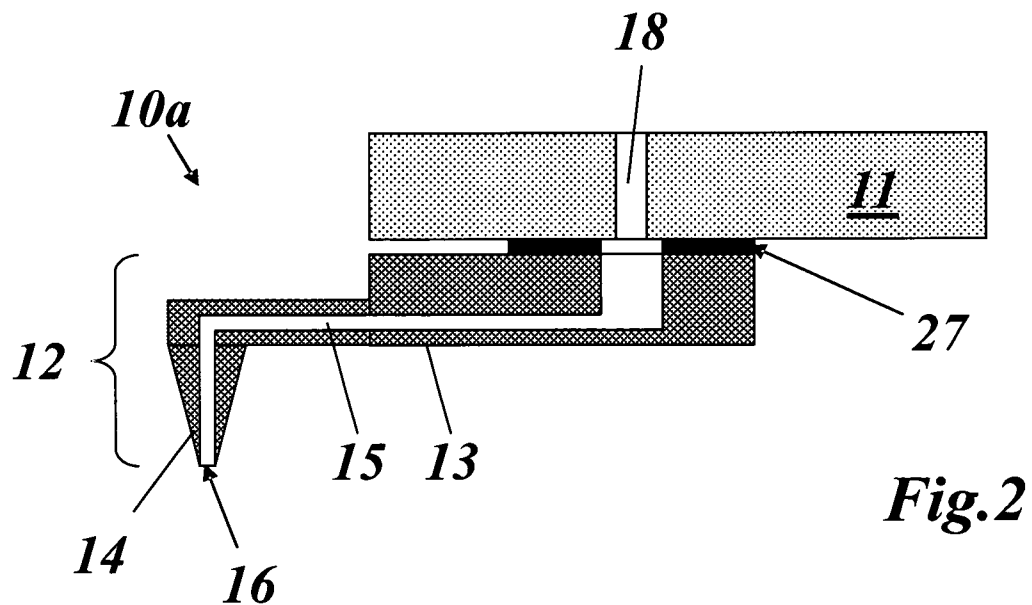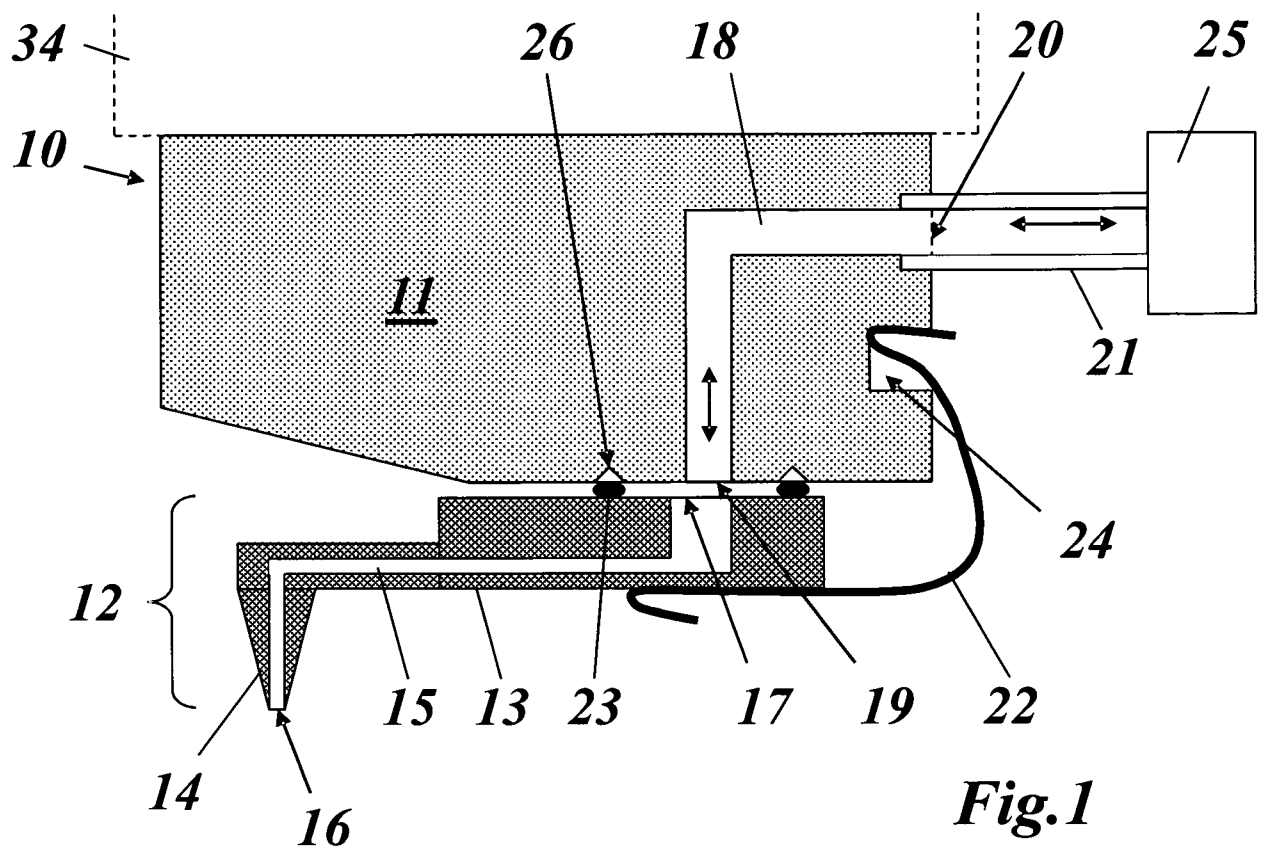

2/3

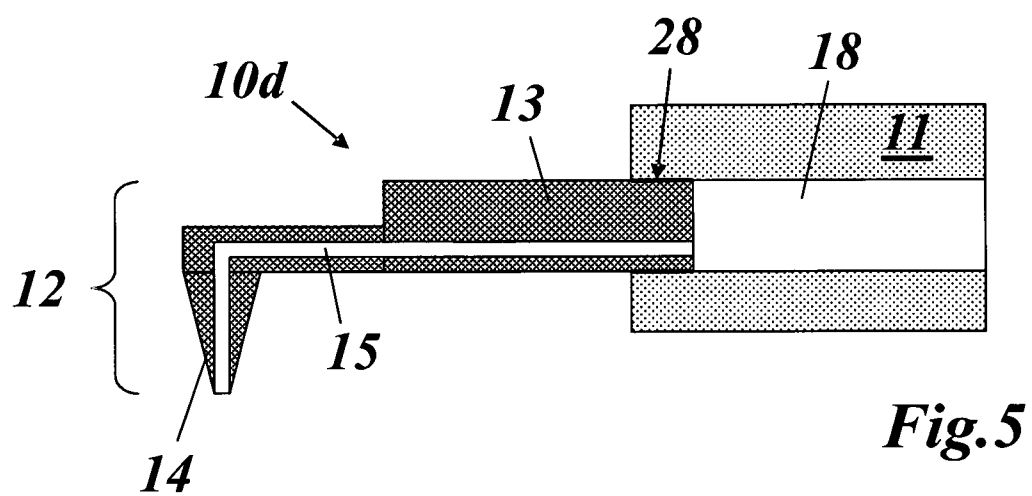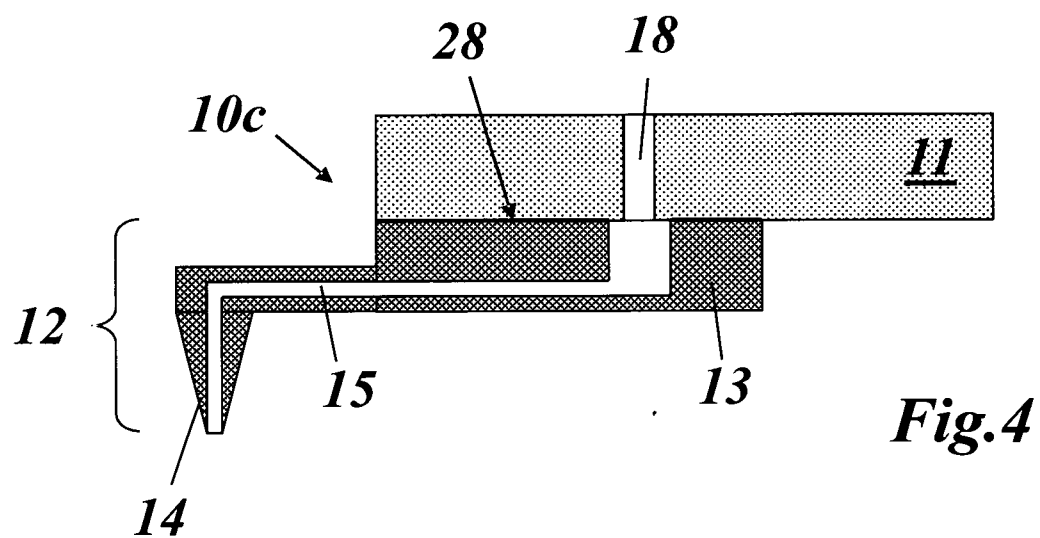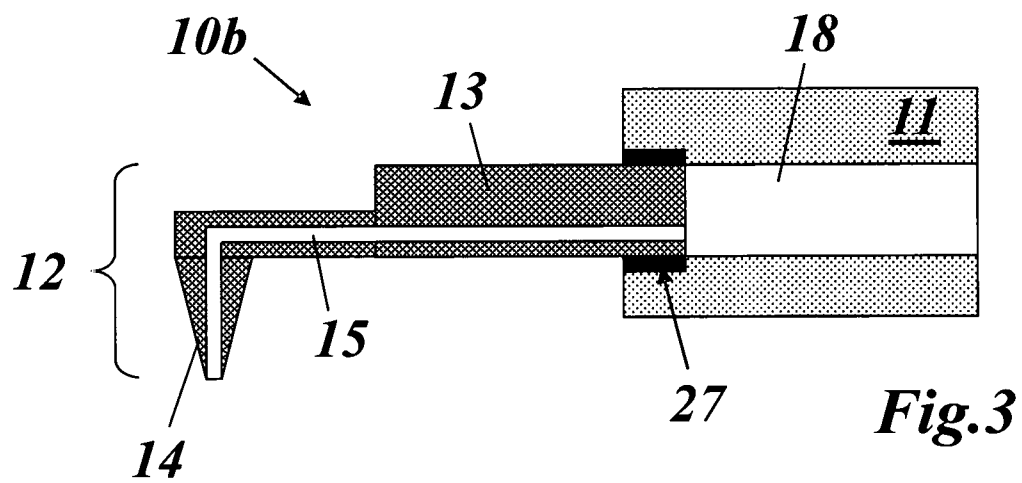

3/3

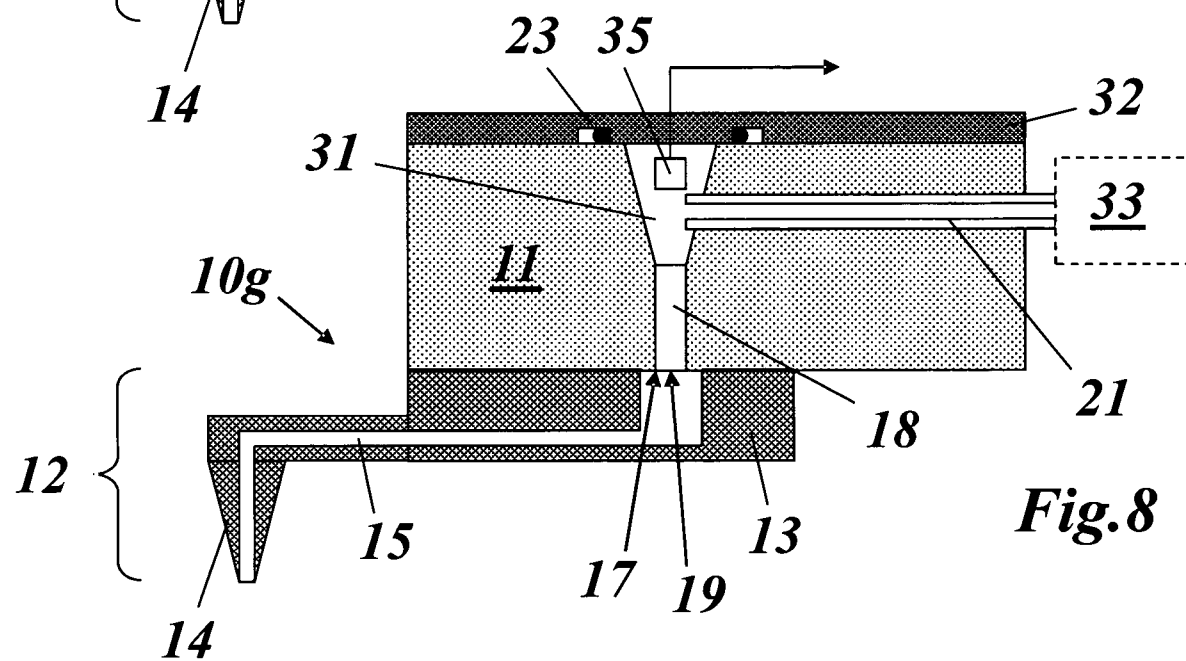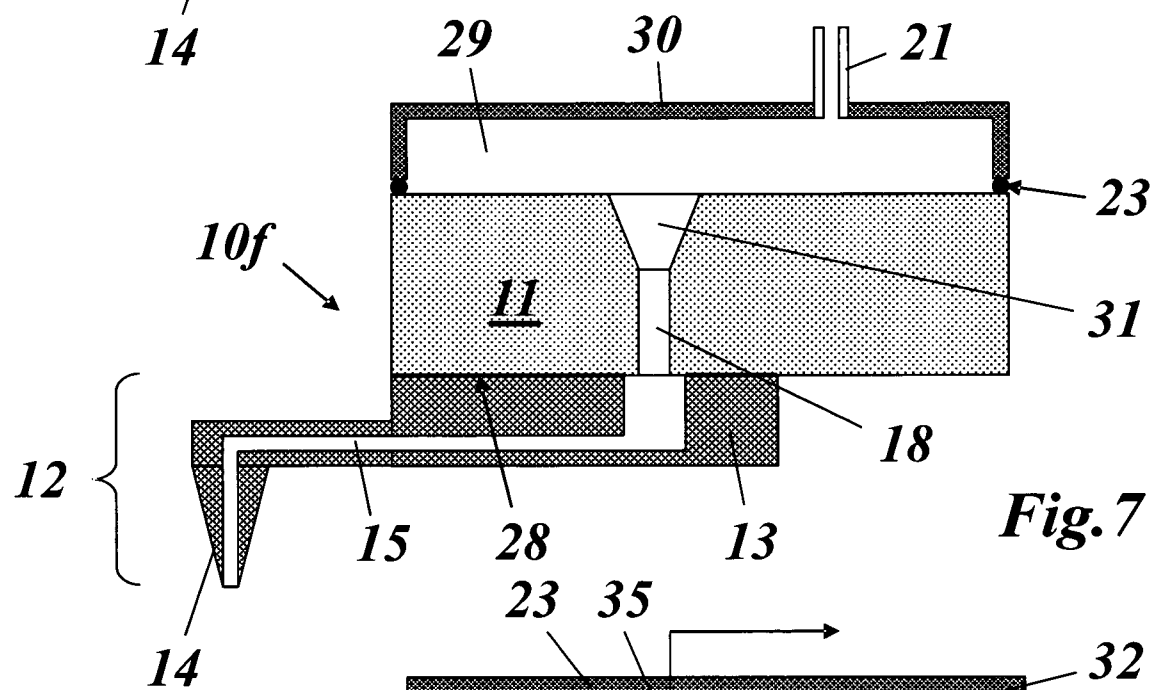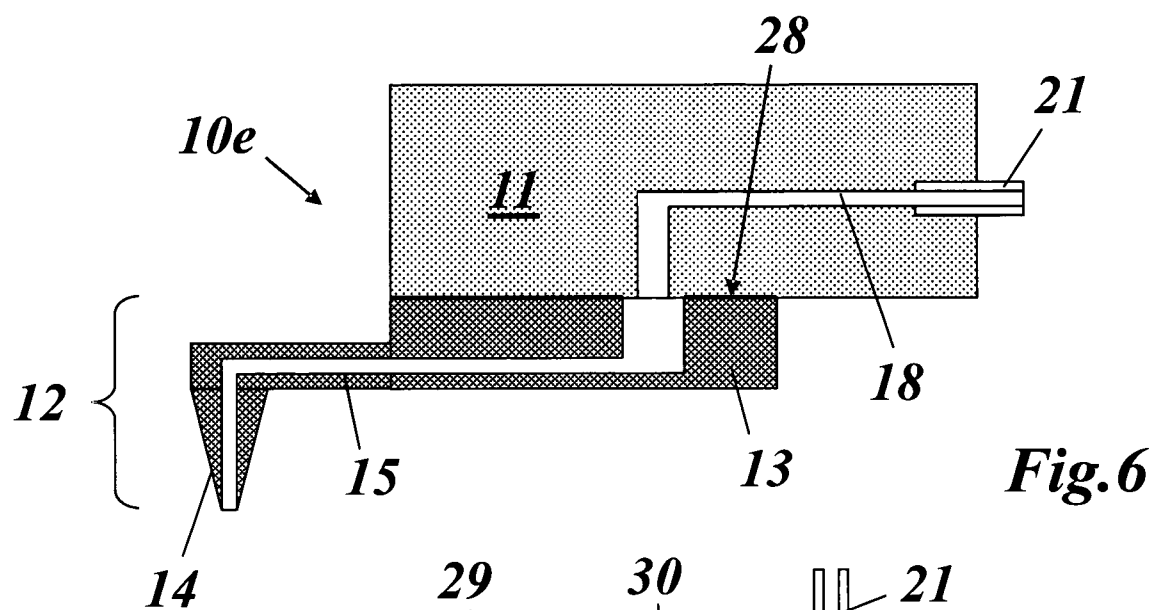

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2009/005393

A. CLASSIFICATION OF SUBJECT MATTER

INV. G12B21/22 B01L3/00 G01N13/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G12B B01L G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC, COMPENDEX, BIOSIS, EMBASE, FSTA, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	MEISTER ANDRÉ ET AL: "FluidFM: combining atomic force microscopy and nanofluidics in a universal liquid delivery system for single cell applications and beyond" NANO LETTERS, ACS, WASHINGTON, DC, US, vol. 9, no. 6, 1 June 2009 (2009-06-01), pages 2501-2507, XP007910125 ISSN: 1530-6984 figures 1, S1, S2	1, 4, 9-12, 16, 19
Y A	----- -/--	2, 3, 18 5-8, 13-15, 17, 18



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

15 October 2009

Date of mailing of the international search report

26/10/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Polesello, Paolo

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2009/005393

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 03/028036 A (JPK INSTR AG [DE]; SUENWOLDT OLAF [DE]; HASCHKE HEIKO [DE]) 3 April 2003 (2003-04-03) cited in the application figures 2,3 page 9, line 9 - page 11, line 25 -----	2,18
Y	EP 1 189 016 A (IMEC INTER UNI MICRO ELECTR [BE]) 20 March 2002 (2002-03-20) figures 1-7 paragraphs [0028] - [0047] -----	3,8
P,X	EP 1 990 626 A (SUISSE ELECTRONIQUE MICROTECH [CH]) 12 November 2008 (2008-11-12) cited in the application figure 1 paragraphs [0060] - [0069] -----	1,5-7, 9-12,16, 17,19
P,Y P,A		8 2-4, 13-15,18
X	US 6 353 219 B1 (KLEY VICTOR B [US]) 5 March 2002 (2002-03-05) figures 44-48 column 55, line 56 - column 59, line 32 -----	1,9, 11-16
A		2-8,10, 17-19
X	DELADI S ET AL: "Micromachined fountain pen for atomic force microscope-based nanopatterning" APPLIED PHYSICS LETTERS, AIP, AMERICAN INSTITUTE OF PHYSICS, MELVILLE, NY, US, vol. 85, no. 22, 1 January 2004 (2004-01-01), pages 5361-5363, XP012063642 ISSN: 0003-6951 figure 1 the whole document -----	1,4, 9-14,19
A		2,3,5-8, 17,18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2009/005393

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 03028036	A	03-04-2003	DE 10294375 D2 EP 1433184 A1 US 2005017150 A1	26-08-2004 30-06-2004 27-01-2005
EP 1189016	A	20-03-2002	AT 429626 T	15-05-2009
EP 1990626	A	12-11-2008	US 2008302960 A1	11-12-2008
US 6353219	B1	05-03-2002	NONE	