



(12) **EUROPEAN PATENT APPLICATION**
 published in accordance with Art. 153(4) EPC

(43) Date of publication:
10.07.2024 Bulletin 2024/28

(51) International Patent Classification (IPC):
F04D 13/06^(2006.01) F04D 29/00^(2006.01)

(21) Application number: **22863954.8**

(52) Cooperative Patent Classification (CPC):
F04D 13/06; F04D 29/00

(22) Date of filing: **27.05.2022**

(86) International application number:
PCT/JP2022/021701

(87) International publication number:
WO 2023/032366 (09.03.2023 Gazette 2023/10)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

Designated Extension States:
BA ME

Designated Validation States:
KH MA MD TN

(71) Applicant: **EBARA CORPORATION**
Ota-ku,
Tokyo 144-8510 (JP)

(72) Inventor: **KONISHI, Yasutaka**
Tokyo 144-8510 (JP)


(74) Representative: **Wimmer, Hubert**
Wagner & Geyer Partnerschaft mbB
Patent- und Rechtsanwälte
Gewürzmühlstrasse 5
80538 München (DE)

(30) Priority: **03.09.2021 JP 2021143964**

(54) **MOTOR PUMP**

(57) The present invention relates to a motor pump. The motor pump (MP) includes a rotor holder (200) holding a rotor (2) and an impeller (1) which is a press-molded product, and the rotor holder (200) is fixed to the impeller (1).

FIG. 35

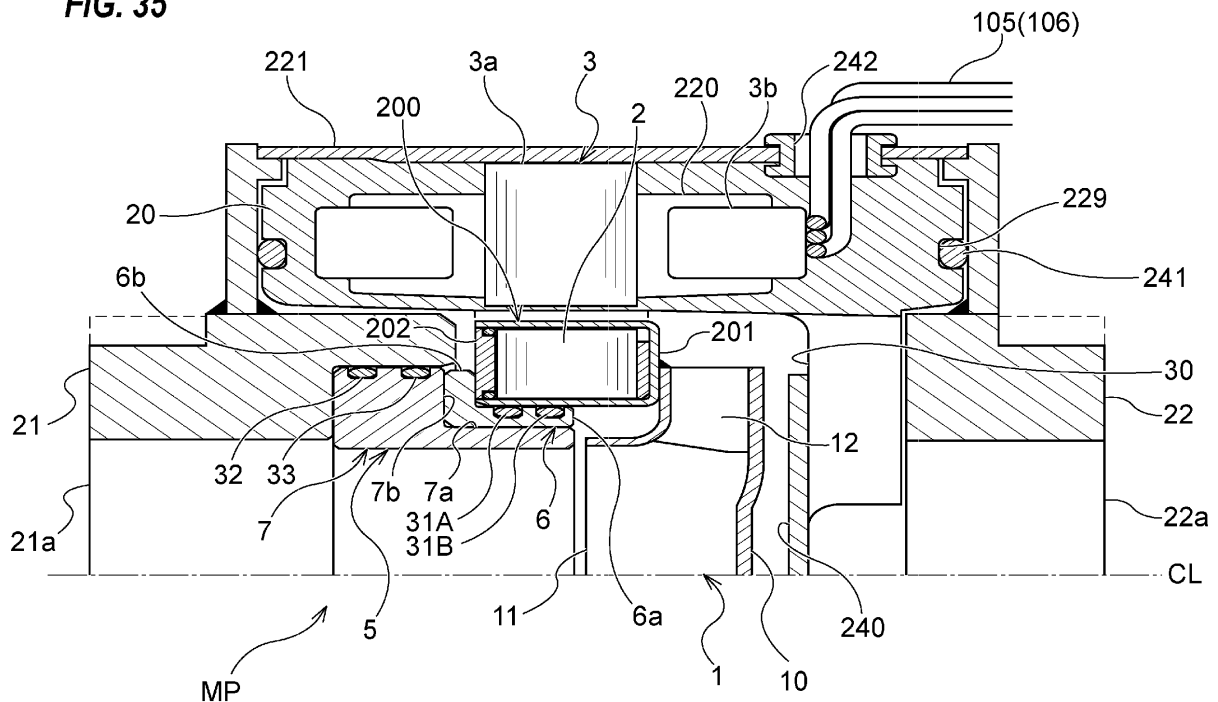

Description**Technical Field**

[0001] The present invention relates to a motor pump.

Background Art

[0002] A pump apparatus including a motor and a pump coupled by a coupling is known. Such a pump apparatus has a structure that transmits a driving force of a motor to an impeller of the pump via the coupling.

Citation List**Patent Literature**

[0003] Patent document 1: Japanese laid-open patent publication No. 2000-303986

Summary of Invention**Technical Problem**

[0004] However, in such a pump apparatus, since the pump and the motor are arranged side by side, an installation area becomes large. On the other hand, in recent years, the demand for compactness (and energy saving) has increased. As a result, the demand for an integral structure of the pump and the motor has also increased.

[0005] Therefore, the present invention provides a motor pump having a compact structure.

Solution to Problem

[0006] In an embodiment, there is provided a motor pump, comprising: a rotor; a stator arranged radially outside of the rotor; a rotor holder holding the rotor; and an impeller which is a press-molded product, and the rotor holder being fixed to the impeller.

[0007] In an embodiment, the rotor holder comprises: a press-molded annular accommodating portion accommodating the rotor; and an annular closing plate closing the accommodating portion.

[0008] In an embodiment, the rotor holder comprises a sealing member arranged between the accommodating portion and the closing plate.

[0009] In an embodiment, the rotor holder comprises a filler filled in the accommodating portion.

[0010] In an embodiment, the rotor holder comprises a spacer arranged between the accommodating portion and the rotor.

[0011] In an embodiment, the accommodating portion comprises: an outer annular portion; and an inner annular portion arranged radially inward of the outer annular portion, the inner annular portion has a plurality of protrusions formed at a contact portion with the rotor.

[0012] In an embodiment, an inner surface of the rotor

in contact with the inner annular portion has a polygonal shape.

[0013] In an embodiment, the motor pump comprises a bearing supporting the impeller and arranged outside of a flow path of the impeller, and the bearing comprises: a rotary side bearing body attached to the rotor holder; and a stationary side bearing body arranged on a suction side of the rotary side bearing body.

[0014] In an embodiment, the motor pump comprises a stator casing accommodating the stator and being integrally resin molded with the stator.

[0015] In an embodiment, the motor pump comprises a motor frame covering an outer circumferential surface of the stator casing and being in contact with the stator.

[0016] In an embodiment, the rotor and the bearing are arranged in a suction side region of the impeller.

[0017] In an embodiment, a motor pump, comprising: a rotor; a stator arranged radially outside of the rotor; a rotor holder holding the rotor; and an impeller which is a resin-molded product, and the rotor holder being integrally molded to the impeller.

[0018] In an embodiment, the rotor holder comprises: a resin-molded annular accommodating portion accommodating the rotor; and a ring holder closing the accommodating portion.

[0019] In an embodiment, the ring holder has a rotation prevention structure formed at a connection portion with the accommodating portion.

[0020] In an embodiment, the rotation prevention structure is an embedded hole in which a portion of the accommodating portion is embedded.

[0021] In an embodiment, the rotation prevention structure is a bent portion bent in a U-shape.

[0022] In an embodiment, the rotor holder comprises a spacer arranged between the ring holder and the rotor.

[0023] In an embodiment, the ring holder has a plurality of protrusions formed at a contact portion with the rotor.

[0024] In an embodiment, an inner surface of the rotor in contact with the ring holder has a polygonal shape.

[0025] In an embodiment, the motor pump comprises a bearing supporting the impeller and arranged outside of a flow path of the impeller, and the bearing comprises: a rotary side bearing body attached to the rotor holder; and a stationary side bearing body arranged on a suction side of the rotary side bearing body.

[0026] In an embodiment, the motor pump comprises a stator casing accommodating the stator and being integrally resin molded with the stator.

[0027] In an embodiment, the motor pump comprises a motor frame covering an outer circumferential surface of the stator casing and in contact with the stator.

[0028] In an embodiment, the rotor and the bearing are arranged in a suction side region of the impeller.

Advantageous Effects of Invention

[0029] The motor pump includes an impeller connected to a rotor holder that holds a rotor. Therefore, there

is no need to arrange the pump and the motor side by side, and as a result the motor pump can have a compact structure.

Brief Description of Drawings

[0030]

[FIG. 1] FIG. 1 is a view showing one embodiment of a motor pump;

[FIG. 2] FIG. 2 is a view showing a flow of a liquid to be handled passing through a gap between a rotary side bearing body and a stationary side bearing body;

[FIG. 3] FIG. 3 is a view showing an embodiment of a plurality of grooves formed in a flange portion of the stationary side bearing;

[FIG. 4A] FIG. 4A is a view showing an embodiment of a plurality of grooves formed in a cylindrical portion of the stationary side bearing body;

[FIG. 4B] FIG. 4B is a view showing another embodiment of grooves formed in the cylindrical portion of the stationary side bearing body;

[FIG. 4C] FIG. 4C is a view showing another embodiment of grooves formed in the cylindrical portion of the stationary side bearing body;

[FIG. 5A] FIG. 5A is a view showing an embodiment of a thrust load reduction structure provided on a back surface of an impeller;

[FIG. 5B] FIG. 5B is a view of FIG. 5A viewed from an arrow A;

[FIG. 6] FIG. 6 is a view showing another embodiment of the thrust load reduction structure;

[FIG. 7A] FIG. 7A is a view showing a rotor arranged offset with respect to a stator;

[FIG. 7B] FIG. 7B is a view showing the rotor arranged offset with respect to the stator;

[FIG. 8] FIG. 8 is a view showing an embodiment of a bearing having a tapered structure;

[FIG. 9] FIG. 9 is a view showing another embodiment of a bearing having a tapered structure;

[FIG. 10] FIG. 10 is a view showing a pump unit including a plurality of motor pumps;

[FIG. 11] FIG. 11 is a view showing another embodiment of the pump unit;

[FIG. 12] FIG. 12 is a view showing another embodiment of the pump unit;

[FIG. 13A] FIG. 13A is a view showing a motor pump as a comparative example;

[FIG. 13B] FIG. 13B is a view showing another embodiment of the motor pump;

[FIG. 13C] FIG. 13C is a view showing another embodiment of the motor pump;

[FIG. 14] FIG. 14 is a view showing one embodiment of a method of balancing;

[FIG. 15] FIG. 15 is a view showing one embodiment of the method of balancing;

[FIG. 16] FIG. 16 is a view showing one embodiment

of the method of balancing;

[FIG. 17] FIG. 17 is a view showing one embodiment of the method of balancing;

[FIG. 18] FIG. 18 is a view showing one embodiment of the method of balancing;

[FIG. 19] FIG. 19 is a view showing another embodiment of the balancing jig;

[FIG. 20] FIG. 20 is a view showing another embodiment of the method of balancing;

[FIG. 21A] FIG. 21A is a perspective view of another embodiment of the pump unit;

[FIG. 21B] FIG. 21B is a plan view of the pump unit shown in FIG. 21A;

[FIG. 22] FIG. 22 is a view showing a control flow of the motor pump by a control device;

[FIG. 23] FIG. 23 is a view showing another embodiment of the impeller;

[FIG. 24] FIG. 24 is a view showing another embodiment of the impeller;

[FIG. 25] FIG. 25 is a view showing a sealing member arranged between a cover and a side plate;

[FIG. 26] FIG. 26 is a view showing another embodiment of the impeller;

[FIG. 27] FIG. 27 is a view showing another embodiment of the motor pump;

[FIG. 28] FIG. 28 is a view showing another embodiment of the motor pump;

[FIG. 29] FIG. 29 is a view showing another embodiment of the motor pump;

[FIG. 30] FIG. 30 is a view showing a motor pump in which various components can be selected depending on operating conditions;

[FIG. 31A] FIG. 31A is a sectional view of a motor pump according to another embodiment;

[FIG. 31B] FIG. 31B is a view of the motor pump shown in FIG. 31A viewed from an axial direction;

[FIG. 32A] FIG. 32A is a cross sectional view of a motor pump according to another embodiment;

[FIG. 32B] FIG. 32B is a front view of a suction casing of the motor pump shown in FIG. 32A;

[FIG. 33] FIG. 33 is a view showing a pump unit including motor pumps connected in series;

[FIG. 34] FIG. 34 is a view showing another embodiment of the impeller;

[FIG. 35] FIG. 35 is a view showing another embodiment of the motor pump;

[FIG. 36] FIG. 36 is an enlarged view of a rotor holder;

[FIG. 37] FIG. 37 is a view showing another embodiment of the spacer;

[FIG. 38] FIG. 38 is a view showing the rotor inserted into the rotor holder;

[FIG. 39] FIG. 39 is a view showing the rotor inserted into the rotor holder;

[FIG. 40] FIG. 40 is a view showing another embodiment of the impeller;

[FIG. 41] FIG. 41 is an enlarged view of the rotor holder;

[FIG. 42] FIG. 42 is a view showing another embod-

iment of the rotation prevention structure;

[FIG. 43] FIG. 43 is a view showing another embodiment of the motor pump;

[FIG. 44] FIG. 44 is a view showing another embodiment of the motor pump;

[FIG. 45] FIG. 45 is an enlarged view of the first impeller and the second impeller;

[FIG. 46] FIG. 46 is a view showing another embodiment of a connection structure of the first impeller and the second impeller and the communication shaft;

[FIG. 47] FIG. 47 is a view showing another embodiment of the fastener;

[FIG. 48] FIG. 48 is a view showing another embodiment of the second bearing;

[FIG. 49] FIG. 49 is a view showing another embodiment of the second bearing;

[FIG. 50] FIG. 50 is a view showing the side plate provided in the motor pump according to the embodiment described above;

[FIG. 51] FIG. 51 is a view showing another embodiment of the side plate; and

[FIG. 52] FIG. 52 is a view showing another embodiment of the motor pump.

Description of Embodiments

[0031] The following is an embodiment of a motor pump, which will be described with reference to the drawings. In the following embodiments, identical or equivalent components will be marked with the same symbol and redundant explanations will be omitted.

[0032] FIG. 1 is a view showing one embodiment of a motor pump. As shown in FIG. 1, a motor pump MP includes an impeller 1, an annular rotor 2 fixed to the impeller 1, a stator 3 arranged radially outward of the rotor 2, and a bearing 5 that supports the impeller 1. The impeller 1 has a flow path formed inside it, and the bearing 5 is arranged outside the flow path (e.g., an inlet flow path) of the impeller 1.

[0033] In the embodiment shown in FIG. 1, the motor pump MP is a rotating machine including a permanent magnet type motor, but the type of the motor pump MP is not limited to this embodiment. In one embodiment, the motor pump MP may include an induction type motor or a reluctance type motor. If the motor pump MP includes the permanent magnet type motor, the rotor 2 is a permanent magnet. If the motor pump MP includes the induction motor, the rotor 2 is a squirrel cage rotor.

[0034] In the embodiment shown in FIG. 1, the impeller 1 is a centrifugal impeller. More specifically, the impeller 1 includes a disc-shaped main plate 10, a side plate 11 arranged opposite to the main plate 10, and a plurality of vanes 12 arranged between the main plate 10 and the side plates 11. The motor pump MP including the impeller 1 as a centrifugal impeller has excellent lift characteristics and can generate high pressure compared to a pump such as an axial flow pump and a mixed flow pump. Fur-

thermore, the motor pump MP in this embodiment can contribute to a rotational stability of the impeller 1 by utilizing the pressure difference generated inside the motor pump MP.

[0035] The side plate 11 includes a suction portion 15 formed in its central portion, and a body portion 16 connected to the suction portion 15. The suction portion 15 extends in a direction of a center line CL of the motor pump MP, and the body portion 16 extends in a direction inclined (more specifically, perpendicular) to the center line CL. The center line CL is parallel to a flow direction of the liquid (liquid to be handled) caused by an operation of the motor pump MP.

[0036] As shown in FIG. 1, the side plate 11 includes an annular protrusion 17 extending from an outer edge portion 11a of the side plate 11 (more specifically, an end portion of the body portion 16) toward the suction portion 15. In the embodiment shown in FIG. 1, the body portion 16 and the protrusion 17 are integrally formed, but the protrusion 17 may be a separate member from the body portion 16.

[0037] The rotor 2 has an inner diameter larger than an outer diameter of the protrusion 17, and is fixed to an outer circumferential surface 17a of the protrusion 17. The stator 3 is arranged to surround the rotor 2, and is accommodated in a stator casing 20. The stator casing 20 is arranged radially outward of the impeller 1.

[0038] The motor pump MP includes a suction casing 21 and a discharge casing 22 arranged on both sides of the stator casing 20. The suction casing 21 is arranged on a suction side of the impeller 1, and the discharge casing 22 is arranged on a discharge side of the impeller 1. The impeller 1, the rotor 2, and the bearing 5 are arranged radially inward of the stator casing 20 and between the suction casing 21 and the discharge casing 22.

[0039] The suction casing 21 has an inlet 21a at its central portion. The discharge casing 22 has an outlet 22a in its central portion. The inlet 21a and the outlet 22a are arranged in a straight line along the center line CL. Therefore, the liquid to be handled sucked from the inlet 21a and discharged from the outlet 22a flows in the straight line.

[0040] As shown in FIG. 1, an operator inserts a through bolt 25 into the suction casing 21 and the discharge casing 22 with the stator casing 20 sandwiched between the suction casing 21 and the discharge casing 22, and tightens the through bolt 25. Thus, the motor pump MP is assembled.

[0041] When the motor pump MP is operated, the liquid to be handled is sucked through the inlet 21a of the suction casing 21 (see a black line arrow in FIG. 1). The impeller 1 pressurizes the liquid to be handled by its rotation, and the liquid to be handled flows inside the impeller 1 in a direction perpendicular (i.e., in a centrifugal direction) to the center line CL. The liquid to be handled discharged to the outside of the impeller 1 collides with an inner circumferential surface 20a of the stator casing 20, and a direction of the liquid to be handled is changed.

Thereafter, the liquid to be handled passes through a gap between a back surface of the impeller 1 (more specifically, the main plate 10) and the discharge casing 22, and is discharged from the outlet 22a.

[0042] As shown in FIG. 1, the motor pump MP includes a return vane 30 arranged on a back side of the impeller 1. In the embodiment shown in FIG. 1, a plurality of return vanes 30 extending spirally are provided. These return vanes 30 are fixed to the discharge casing 22, and face the main plate 10 of the impeller 1. By providing the return vanes 30, the liquid to be handled discharged from the impeller 1 is smoothly guided to the outlet 22a. The return vanes 30 contribute to the conversion of the liquid to be handled discharged from the impeller 1 from velocity energy to pressure energy.

[0043] In the embodiment shown in FIG. 1, the motor pump MP is divided into a suction side region Ra, a discharge side region Rb, and an intermediate region Rc between the suction side region Ra and the discharge side region Rb. The suction side region Ra is a region between the suction casing 21 (more specifically, the inlet 21a of the suction casing 21) and the impeller 1 (more specifically, the side plate 11 of the impeller 1). The discharge side region Rb is a region between the discharge casing 22 (more specifically, the outlet 22a of the discharge casing 22) and the impeller 1 (more specifically, the main plate 10 of the impeller 1). A plurality of vanes 12 are arranged in the intermediate region Rc.

[0044] The rotor 2 and the bearing 5 are arranged in the suction side region Ra of the impeller 1. In this embodiment, the impeller 1 includes the side plate 11 having a tapered shape that widens from the suction side region Ra toward the discharge side region Rb. Therefore, a space (dead space) is formed in the suction side region Ra of the impeller 1. According to this embodiment, by arranging the rotor 2 and the bearing 5 in the suction side region Ra, the motor pump MP can have a structure that effectively utilizes the dead space, and as a result, has a compact structure.

[0045] The bearing 5 includes a rotary side bearing body 6 attached to the protrusion 17 of the side plate 11 and a stationary side bearing body 7 attached to the suction casing 21. The stationary side bearing body 7 is arranged on the suction side of the rotary side bearing body 6. The rotary side bearing body 6 is a rotating member that rotates with the rotation of the impeller 1, and the stationary side bearing body 7 is a stationary member that does not rotate even when the impeller 1 rotates.

[0046] The rotary side bearing body 6 has a cylindrical portion 6a having an outer diameter smaller than an inner diameter of the protrusion 17, and a flange portion 6b projecting outward from the cylindrical portion 6a. Therefore, a cross section of the rotary side bearing body 6 has an L shape. A sealing member (e.g., an O ring) 31 is arranged between an inner circumferential surface 17b of the protrusion 17 and the cylindrical portion 6a.

[0047] The rotary side bearing body 6 is attached to the protrusion 17 of the impeller 1 with the sealing mem-

ber 31 attached to the cylindrical portion 6a. By mounting the rotary side bearing body 6, the rotor 2 is arranged adjacent to the flange portion 6b of the rotary side bearing body 6.

[0048] The stationary side bearing body 7 includes a cylindrical portion 7a arranged opposite to the cylindrical portion 6a of the rotary side bearing body 6, and a flange portion 7b arranged opposite to the flange portion 6b of the rotary side bearing body 6. A cross section of the stationary side bearing body 7 has an L-shape like the cross section of the rotary side bearing body 6. Seal members 32 and 33 are arranged between the cylindrical portion 7a of the stationary side bearing body 7 and the suction casing 21. In this embodiment, two seal members 32 and 33 are arranged, but the number of seal members is not limited to this embodiment.

[0049] FIG. 2 is a view showing a flow of the liquid to be handled passing through a gap between the rotary side bearing body and the stationary side bearing body. Since a pressure of the liquid to be handled is increased by the rotation of the impeller 1, the pressure of the liquid to be handled in the discharge side region Rb is higher than the pressure of the liquid to be handled in the suction side region Ra. Therefore, a part of the liquid to be handled discharged from the impeller 1 flows back into the suction side region Ra (see the black line arrow in FIG. 2).

[0050] More specifically, a part of the liquid to be handled passes through the gap between the stationary casing 20 and the rotor 2, and flows into through the flange portion 6b of the rotary side bearing body 6 and the flange portion 7b of the stationary side bearing body 7.

[0051] FIG. 3 is a view showing an embodiment of a plurality of grooves formed in the flange portion of the stationary side bearing. As shown in FIG. 3, the stationary side bearing body 7 has a plurality of grooves 40 formed in the flange portion 7b. These grooves 40 are formed on a surface of the flange portion 7b facing the flange portion 6b of the rotary side bearing body 6. The grooves 40 are formed to generate dynamic pressure of the liquid to be handled in the gap between the flange portion 7b and the flange portion 6b. In this embodiment, the grooves 40 are spiral grooves extending spirally. In one embodiment, the grooves 40 may be radial grooves extending radially. By forming the grooves 40, the bearing 5 can support a thrust load of the impeller 1 without contact.

[0052] In the embodiment shown in FIG. 3, the grooves 40 are formed in the flange portion 7b, but in one embodiment, the grooves 40 may be formed in the flange portion 6b of the rotary side bearing body 6. With such a configuration, the bearing 5 can also support the thrust load of the impeller 1 without contact.

[0053] FIG. 4A is a view showing an embodiment of a plurality of grooves formed in the cylindrical portion of the stationary side bearing body. FIG. 4A shows a plurality of grooves 41 when viewed from the direction of the center line CL. The stationary side bearing body 7 may have the grooves 41 formed in the cylindrical portion

7a along the circumferential direction of the cylindrical portion 7a. In the embodiment shown in FIG. 4A, the grooves 41 are arranged at equal intervals, but they may be arranged at uneven intervals.

[0054] The grooves 41 are formed on a surface of the cylindrical portion 7a facing the cylindrical portion 6a of the rotary side bearing body 6, and extend parallel to the cylindrical portion 7a (i.e., in the direction of the center line CL). In the embodiment shown in FIG. 4A, each of the grooves 41 has an arcuate concave shape when viewed from the direction of the center line CL. The shapes of the grooves 41 are not limited to this embodiment. In one embodiment, each of the grooves 41 may have a concave shape when viewed from the direction of the center line CL.

[0055] FIGS. 4B and 4C are views showing another embodiment of grooves formed in the cylindrical portion of the stationary side bearing body. As shown in FIGS. 4B and 4C, the stationary side bearing body 7 has an annular groove 42 formed in the cylindrical portion 7a along a circumferential direction of the cylindrical portion 7a. The groove 42 is formed in a portion of the cylindrical portion 7a, and has a concave shape when viewed from a direction perpendicular to the direction of the center line CL (see FIGS. 4B and 4C). The cylindrical portions 7a are present at both ends 42a, 42a of the groove 42 in the direction of the center line CL. With such a structure, even if a radial load acts on the impeller 1, the stationary side bearing body 7 (more specifically, the cylindrical portion 7a) can reliably support the impeller 1 via the rotary side bearing body 6. A length of the groove 42 in the direction of the center line CL is not particularly limited. In the embodiment shown in FIGS. 4B and 4C, the stationary side bearing body 7 has a single groove 42, but in one embodiment the stationary side bearing body 7 may have the grooves 42 arranged along the direction of the center line CL.

[0056] The liquid to be handled that has passed through the gap between the flange portion 6b and the flange portion 7b flows into the gap between the cylindrical portion 6a and the cylindrical portion 7a. When the rotary side bearing body 6 rotates together with the impeller 1, viscous resistance is generated in the liquid to be handled flowing through this gap. This viscous resistance may have an adverse effect on an operating efficiency of the motor pump MP.

[0057] As shown in the embodiment described above, by forming the grooves 41 (or grooves 42), a size of the narrow region formed in the gap between the cylindrical portion 6a and the cylindrical portion 7a is reduced. Therefore, viscous resistance generated in the liquid to be handled can be reduced. Furthermore, by forming the grooves 41 (or grooves 42), dynamic pressure of the liquid to be handled is generated, and the bearing 5 can support a radial load of the impeller 1 without contact. The effect of reducing the viscous resistance by reducing the size of the narrow region formed between the flange portions 6b and 7b can also be achieved by providing

the grooves 40 (see FIG. 3).

[0058] In the embodiment shown in FIGS. 4A to 4C, the grooves 41 and 42 are formed in the cylindrical portion 7a, but in one embodiment, the grooves 41 and 42 may be formed in the cylindrical portion 6a of the rotary side bearing body 6. With such a configuration as well, the bearing 5 can support the radial load of the impeller 1 without contact.

[0059] As shown in FIG. 2, the liquid to be handled that has passed through the gap between the cylindrical portion 6a of the rotary side bearing body 6 and the cylindrical portion 7a of the stationary side bearing body 7 passes through the gap between the side plate 11 of the impeller 1 and the suction casing 21, and returns to the suction side of the motor pump MP. In this embodiment, the bearing 5 is arranged on a path of a leakage flow of the liquid to be handled. With such a configuration, a part of the liquid to be handled flows into the minute gap between the rotary side bearing body 6 and the stationary side bearing body 7, and as a result, the motor pump MP can suppress leakage of the liquid to be handled.

[0060] As described above, the pressure of the liquid to be handled in the discharge side region Rb is higher than the pressure of the liquid to be handled in the suction side region Ra. Therefore, a thrust load acts on the impeller 1 from the outlet 22a of the discharge casing 22 toward the inlet 21a of the suction casing 21 (see a white arrow in FIG. 1). The motor pump MP according to this embodiment has a structure that reduces the thrust load.

[0061] FIG. 5A is a view showing an embodiment of a thrust load reduction structure provided on the back surface of the impeller. FIG. 5B is a view of FIG. 5A viewed from an arrow A. As shown in FIGS. 5A and 5B, the motor pump MP includes a thrust load reduction structure 45 provided on the back surface of the impeller 1 (more specifically, on the main plate 10). In the embodiment shown in FIGS. 5A and 5B, the thrust load reducing structure 45 is a plurality of back vanes 46 extending spirally attached to the main plate 10. The back vanes 46 can generate a load in the direction opposite to the thrust load as the impeller 1 rotates. As a result, the thrust load reduction structure 45 can reduce the thrust load generated in the motor pump MP.

[0062] FIG. 6 is a view showing another embodiment of the thrust load reduction structure. As shown in FIG. 6, the thrust load reduction structure 45 may be a plurality of notch structures formed along the circumferential direction of the impeller 1 (more specifically, the main plate 10) and extending toward a center side of the impeller 1. In the embodiment shown in FIG. 6, a plurality of notches 47 are formed in the main plate 10 of the impeller 1. By forming the notches 47, a contact area of the liquid to be handled with the main plate 10 is reduced. As a result, the thrust load reduction structure 45 can reduce the thrust load generated in the motor pump MP. Although not shown, the embodiment shown in FIG. 5 and the embodiment shown in FIG. 6 may be combined.

[0063] In this embodiment, the impeller 1 always re-

ceives the thrust load from the discharge side toward the suction side. Furthermore, the bearing 5 supports the impeller 1 that generates a rotational force. Therefore, a parallelism of the impeller 1 itself is maintained, and wobbling of the impeller 1 can be suppressed. As a result, the motor pump MP can continue its operation stably with a structure in which only a single bearing 5 is arranged in the suction side region Ra (i.e., a single bearing structure).

[0064] In one embodiment, at least one of the impeller 1 and the bearing 5 may be constructed from a lightweight material. An example of the lightweight material includes a resin or a metal with low specific gravity (e.g., aluminum alloys, magnesium alloys, titanium alloys, etc.). With such a structure, a weight of the motor pump MP itself can be reduced, and further, the bearing 5 (and the impeller 1) can be made more compact. The material of the member that come into contact with the liquid (i.e., member in contact with the liquid), such as the impeller 1 and the bearing 5, are not particularly limited, and can be changed to any material as appropriate depending on the quality of the liquid.

[0065] Furthermore, in this embodiment, the return vanes 30 (see FIG. 1) can reduce the radial load generated on the impeller 1. The return vanes 30 are arranged at equal intervals along the circumferential direction of the outlet 22a. With such an arrangement, the radial load is evenly distributed, and as a result the radial load generated on the impeller 1 is reduced.

[0066] In this embodiment, the motor pump MP includes a permanent magnet type motor. Therefore, when the motor pump MP is started, a constant load acts on the bearing 5 for converting a repulsive force caused by the magnetic force into a rotational force. This load is a force generated on the rotor 2, and the bearing 5 supports this load.

[0067] FIGS. 7A and 7B are views showing a rotor arranged offset with respect to a stator. As shown in FIG. 7A, when the rotor 2 is shifted toward the discharge side with respect to the stator 3, the impeller 1 is subjected to a force acting in the direction in which the rotary side bearing body 6 approaches the stationary side bearing body 7 due to the magnetic force generated between the rotor 2 and the stator 3 (see arrow in FIG.7A). With this arrangement, it is possible to adjust (increase) the thrust load of the rotary side bearing body 6 acting on the stationary side bearing body 7.

[0068] As shown in FIG. 7B, when the rotor 2 is shifted toward the suction side with respect to the stator 3, the impeller 1 is subjected to a force acting in the direction in which the rotary side bearing body 6 is separated from the stationary side bearing body 7 due to the magnetic force generated between the rotor 2 and the stator 3 (see FIG. 7B). With this arrangement, it is possible to adjust (decrease) the thrust load of the rotary side bearing body 6 acting on the stationary side bearing body 7.

[0069] FIG. 8 is a view showing an embodiment of a bearing having a tapered structure. In the embodiment

shown in FIG. 8, the bearing 5 has a tapered structure in which the gap between the rotary side bearing body 6 and the stationary side bearing body 7 extends from the suction side to the discharge side in the direction closer to the center line CL (i.e., the central portion of the impeller 1). As shown in FIG. 8, the rotary side bearing body 6 and the stationary side bearing body 7 respectively have inclined surfaces 50 and 51 facing each other. With such a configuration, the bearing 5 can concentrate the radial load and thrust load acting on the rotary side bearing body 6 and the stationary side bearing body 7 on the inclined surfaces 50 and 51, and the bearing 5 has a simple structure.

[0070] FIG. 9 is a view showing another embodiment of a bearing having a tapered structure. In the embodiment shown in FIG. 9, the bearing 5 has a tapered structure in which the gap between the rotary side bearing body 6 and the stationary side bearing body 7 extends from the suction side to the discharge side in the direction away from the center line CL (i.e., the central portion of the impeller 1). As shown in FIG. 9, the rotary side bearing body 6 and the stationary side bearing body 7 have inclined surfaces 53 and 54, respectively, facing each other.

[0071] FIG. 10 is a view showing a pump unit including a plurality of motor pumps. As shown in FIG. 10, the pump unit PU may include a plurality of motor pumps MP arranged in series, and an inverter 60 that controls the operation of each of the motor pumps MP. In the embodiment shown in FIG. 10, each of the motor pumps MP has the same structure as that shown in the above described embodiment(s). Therefore, a detailed explanation of the motor pump MP will be omitted.

[0072] In the embodiment shown in FIG. 10, the pump unit PU includes three motor pumps MP, but the number of motor pumps MP is not limited to this embodiment. As described above, the inlet 21a and the outlet 22a of the pump unit PU are arranged in a straight line along the center line CL. Therefore, the motor pumps MP can be continuously arranged in a straight line, and the pump unit PU can easily have a multistage motor pump structure.

[0073] As shown in FIG. 10, two intermediate casings 61 are arranged between the suction casing 21, arranged adjacent to the first-stage impeller 1A, and the discharge casing 22 arranged adjacent to the third-stage impeller 1C. The second-stage impeller 1B is arranged between these intermediate casings 61, 61. Each of the intermediate casings 61, 61 has a common (i.e., similar) structure to the suction casing 21. An operator can assemble the pump unit by inserting and tightening the through bolt 25 into the suction casing 21, the intermediate casings 61, 61, and the discharge casing 22 with the intermediate casings 61, 61 sandwiched between the suction casing 21 and discharge casing 22.

[0074] As shown in FIG. 10, one inverter 60 is connected to the stators 3 of the motor pumps MP. The inverter 60 can independently control each of the motor pumps

MP. Therefore, the operator can operate at least one motor pump MP at any timing depending on the operating conditions of the pump unit.

[0075] FIGS. 11 and 12 are views showing another embodiment of the pump unit. In the embodiment shown in FIGS. 11 and 12, the pump unit PU includes a plurality of motor pumps MP arranged in parallel. In FIG. 11, although it is simply drawn, each of the motor pumps MP is installed inside a pipe 65. Although four motor pumps MP are provided in FIG. 11, the number of motor pumps MP is not limited to this embodiment. As shown in FIG. 12, three motor pumps MP may be provided.

[0076] FIG. 13A is a view showing a motor pump as a comparative example. FIGS. 13B and 13C are views showing another embodiment of the motor pump. As shown in FIG. 13A, the motor pump as a comparative example includes a rotary shaft RS, but the motor pump MP according to the embodiment does not have the rotary shaft RS. Instead, the impeller 1 includes a rounded convex portion 70 arranged at its central portion.

[0077] In the embodiment shown in FIG. 13B, the impeller 1 has a convex portion 70A having a first radius of curvature, and in the embodiment shown in FIG. 13C, the impeller 1 has a convex portion 70B having a second radius of curvature. Hereinafter, the convex portions 70A and 70B may be simply referred to as the convex portion 70 without distinguishing between them.

[0078] The convex portion 70 is arranged at the center of the main plate 10, and is integrally formed with the main plate 10. In one embodiment, the convex portion 70 may be a different member from the main plate 10. In this case, the convex portions 70 having different radius of curvature may be replaced depending on the operating conditions of the motor pump.

[0079] A tip portion 71 of the convex portion 70 has a smooth convex shape, and the liquid to be handled flowing into the impeller 1 comes into contact with the tip portion 71 of the convex portion 70. By providing the convex portion 70, the liquid to be handled is smoothly and efficiently guided to the vane 12 without its flow being obstructed. On the other hand, in the motor pump as a comparative example, the rotary shaft RS is fixed to an impeller by a nut Nt. Therefore, the flow of the liquid to be handled may be obstructed by the nut Nt (and the rotary shaft RS).

[0080] The convex portion 70A shown in FIG. 13B has a radius of curvature larger than that of the convex portion 70B shown in FIG. 13C. By increasing the radius of curvature of the convex portion 70, a distance between the convex portion 70 and the side plate 11 becomes smaller. Conversely, by decreasing the radius of curvature of the convex portion 70, the distance between the convex portion 70 and the side plate 11 increases. In this manner, by changing the radius of curvature of the convex portion 70, a size of the flow path of the impeller 1 for liquid to be handled can be adjusted. The flow path of the impeller 1 shown in FIG. 13C is larger than the flow path of the impeller 1 shown in FIG. 13B.

[0081] According to this embodiment, since the motor pump MP does not have a rotary shaft, the number of parts can be reduced and the size of the flow path can be adjusted. Furthermore, since there is no need to provide a rotary shaft, the impeller 1 can have a compact size. As a result, an entire motor pump MP can have a compact size.

[0082] The motor pump rotates the impeller 1 at high speed by its operation. If a center of gravity of the impeller 1 is shifted, the impeller 1 rotates at high speed in an eccentric state. As a result, noise may be generated, and in the worst case, the motor pump may break down.

[0083] Therefore, the operator performs a method of balancing (dynamic balance) to determine the center of gravity of the impeller 1 to a desired position. As shown in FIG. 13A, when the rotary shaft RS is attached to the impeller, it is necessary to attach the rotary shaft RS to a test machine and rotate the impeller together with the rotary shaft RS. In this embodiment, since the rotary shaft RS is not attached to the impeller 1, the operator can perform the method of balancing (i.e., balance adjustment method) described below.

[0084] FIGS. 14 to 18 are views showing one embodiment of the method of balancing. As shown in FIG. 14, the operator first performs a process of forming a through hole 10a in the center of the impeller 1 (more specifically, in the main plate 10). After that, as shown in FIG. 15, the operator inserts a shaft body 76 of a balancing jig 75 into the through hole 10a. The shaft body 76 of the balancing jig 75 corresponds to a rotary shaft.

[0085] After that, as shown in FIG. 16, the operator places a fixed body 77 on the back side of the impeller 1, and fastens the shaft body 76 to the fixed body 77. In this state, the operator rotates the impeller 1 together with the balancing jig 75, determines the center of gravity of the impeller 1, and performs a process of adjusting the center of gravity. In this manner, the balancing jig 75 has a structure that supports the center of the impeller 1. Therefore, the balancing jig 75 may be referred to as a center support adjustment jig.

[0086] After determining the center of gravity of the impeller 1 at the desired position, the operator pulls out the shaft body 76 of the balancing jig 75, and then inserts a center cap 80 into the through hole 10a to close the through hole 10a. (See FIGS. 17 and 18). The center cap 80 has a rounded shape similar to the convex portion 70 according to the embodiment shown in FIGS. 13B and 13C. Therefore, the liquid to be handled is smoothly and efficiently guided to the vane 12 without its flow being obstructed.

[0087] FIG. 19 is a view showing another embodiment of the balancing jig. In the embodiment shown in FIG. 18, the balancing jig 75 has a structure that supports the center of the impeller 1. In the embodiment shown in FIG. 19, the balancing jig 85 includes a supporter 86 that supports the rotary side bearing body 6 of the bearing 5, and a shaft portion 87 fixed to the supporter 86. In this manner, the balancing jig 85 has a structure for supporting an end

portion of the impeller 1. Therefore, the balancing jig 85 may be referred to as an edge support adjustment jig.

[0088] The supporter 86 has an annular shape having an outer diameter smaller than the inner diameter of the rotary side bearing body 6, and by inserting the supporter 86 into the rotary side bearing body 6, the balancing jig 85 supports to the impeller 1 via the rotary side bearing body 6. In this state, the operator performs a process of rotating the impeller 1 together with the balancing jig 85. Thereafter, the operator determines the center of gravity of the impeller 1 while rotating the impeller 1, and performs a process of adjusting the center of gravity.

[0089] According to the embodiment shown in FIG. 19, the operator does not need to form the through hole 10a. Also in the embodiment shown in FIG. 19, the impeller 1 may have the convex portion 70 formed at its center position (see FIGS. 13A and 13B).

[0090] FIG. 20 is a view showing another embodiment of the method of balancing. As shown in FIG. 20, the rotor 2 includes an annular iron core 2a, and a plurality of magnets 2b embedded in the iron core 2a. The magnets 2b are arranged at equal intervals along a circumferential direction of the rotor 2 (more specifically, the iron core 2a). The operator performs a process of forming a plurality of weight insertion holes 90 along the circumferential direction of the rotor 2. The process of forming the weight insertion hole 90 is performed when manufacturing of the iron core 2a.

[0091] The weight insertion hole 90 is formed between the magnets 2b adjacent to each other. The operator performs the process of determining the center of gravity of the impeller 1 to determine the current center of gravity of the impeller 1. If the center of gravity of the impeller 1 is shifted, the operator inserts a weight 91 into at least one of the weight insertion holes 90 to adjust the center of gravity.

[0092] In one embodiment, when the center of gravity of the impeller 1 is shifted, instead of inserting the weight 91 into the weight insertion hole 90, the operator may remove any excess weight that may cause a shift in the center of gravity of the impeller 1.

[0093] FIG. 21A is a perspective view of another embodiment of the pump unit. FIG. 21B is a plan view of the pump unit shown in FIG. 21A. As shown in FIGS. 21A and 21B, the pump unit PU includes a plurality of (in this embodiment, three) motor pumps MP, a control device 100 that operates the motor pumps MP at variable speeds, and a current sensor 101 that is electrically connected to the control device and detects the current supplied to the motor pumps MP.

[0094] In the embodiment, two current sensors 101 are arranged, but at least one current sensor 101 may be arranged. Examples of the current sensor 101 include a hall element and a CT (current converter).

[0095] The pump unit PU includes a power line 105 and a signal line 106 extending from the motor pumps MP, and a protective cover 107 that protects the current sensor 101, the power line 105, and the signal line 106.

The power line 105 and the signal line 106 are electrically connected to the inverter 60.

[0096] Copper bars (in other words, current plate, copper plate) 108 having a U-phase, a V-phase, and a W-phase are stretched between the motor pumps MP, and the current sensor 101 is connected to one of copper bars 108. Each of the motor pumps MP includes a terminal block 102, and the copper bar 108 is connected to the terminal block 102.

[0097] The control device 100 is electrically connected to the inverter 60, and configured to control the operation of motor pump MP via the inverter 60. The control device 100 may be arranged outside the inverter 60 or inside the inverter 60.

[0098] The control device 100 includes a signal receiver 100a that receives a signal from the current sensor 101 through the signal line 106, a memory 100b that stores information regarding the operation of the motor pump MP and an operation program, and a controller 100c controls the operation of the motor pump MP based on data received at the signal receiver and data stored in the memory.

[0099] In this embodiment, the pump unit PU includes one inverter 60 for the motor pumps MP. The pump unit PU may include a number of inverters 60 corresponding to the number of motor pumps MP. When the motor pumps MP are arranged, each of the inverters 60 controls the operation of each of the motor pumps MP by the control device 100.

[0100] As described above, the motor pump MP has a compact structure that makes effective use of dead space. Therefore, by connecting these motor pumps MP in series, the pump unit PU can be operated at a pump head without increasing its installation area.

[0101] The motor pump MP is the rotating machine with the permanent magnet type motor. Such motor rotates uncontrolled by forcibly applying a voltage at start up. The control of the rotational speed of the motor pump MP by the inverter 60 is started immediately, and then a steady operation of motor pump MP is started.

[0102] In this embodiment, the pump unit PU includes the motor pumps MP. Therefore, there is no problem if a difference in rotational speed between the motor pumps MP is eliminated before starting control of the rotational speed of the motor pump MP. However, if the difference in rotational speed is not resolved, there may be a startup failure of the motor pump MP.

[0103] Generally, when the number of magnetic poles of the rotor 2 increases, the motor pump MP rotates smoothly, and the difference in rotational speed between the motor pumps MP tends to be eliminated. The motor pump MP in the embodiment has a structure in which a flow path is formed inside the rotor 2, and the outer diameter of the rotor 2 is designed to be large.

[0104] When the outer diameter of the rotor 2 is large, a size of the rotor 2 in an outer peripheral direction becomes large, so that a plurality of magnets can be easily arranged and the number of magnetic poles can be in-

creased. With such a configuration, the pump unit PU can eliminate the difference in rotational speed among the motor pumps MP. Furthermore, in this embodiment, by using inexpensive planar magnets, the cost of the rotor 2 can be reduced compared to a general motor using curved magnets.

[0105] Furthermore, in this embodiment, the motor pump MP has a canned motor structure in which the stator 3 is accommodated in the stator casing 20, and the distance between the rotor 2 and the stator 3 is generally larger than that of the motor. Therefore, the motor pump MP can reduce torque ripple, which means a range of torque fluctuations, and as a result, the pump unit PU can eliminate the difference in rotational speed among the motor pumps MP.

[0106] In this manner, the pump unit PU can eliminate the difference in rotational speed, but it is desirable to operate the motor pump MP more stably during the startup and/or the steady operation of the motor pump MP.

[0107] Therefore, a method of controlling the motor pump MP will be described below. In the embodiment, the motor pumps MP are connected in series. In this case, if the liquid to be handled contains foreign matter, the foreign matter may become entangled with the motor pump MP (especially the first motor pump MP), and as a result, the operation of the pump unit PU may be hindered by the foreign matter. Furthermore, for some reason, there is a possibility that the difference in rotational speed between the motor pumps MP will not be resolved.

[0108] FIG. 22 is a view showing a control flow of the motor pump by the control device. As shown in step S101 in FIG. 22, the control device 100 electrically connected to the inverter 60 determines the current values of the motor pumps MP during the current operation of the motor pumps MP based on the output current of the inverter 60 (more specifically, a total current value of each of motor pumps MP).

[0109] The control device 100 then calculates a lower current limit value based on an assumed current value during a normal operation of the motor pump MP (more specifically, during the startup and the steady operation), and compares a total measured current value (measured current value A_{max}) with a predetermined lower current limit value (see step S102). In one embodiment, the memory 100b of the control device 100 stores the assumed current values for each motor pump MP and the assumed current values for the motor pumps MP. The memory 100b may calculate the assumed current values of each motor pump MP from the assumed current values of each motor pump MP.

[0110] The control device 100 may determine "the assumed current value expected during normal operation" based on at least one of a rated current value and an allowable current value of each motor pump MP, or determine "the assumed current value expected during normal operation" based on the current value when operating the motor pump MP.

[0111] In one embodiment, the control device 100 de-

termines the lower limit current value based on the number of motor pumps MP. For example, the lower limit current value is determined by the following formula.

5 The lower limit current value = the assumed current value of the motor pumps MP \times (1-1/the number of motor pumps n)

10 **[0112]** In this embodiment, since three motor pumps MP are arranged, the lower limit current value is 2/3 of the assumed current value.

[0113] After step S102, the control device 100 compares the calculated lower limit current value and the measured current value (see step S103). More specifically, the control device 100 determines whether or not the measured current value is lower than the lower limit current value (measured current value A_{max} > lower limit current value).

20 **[0114]** If the measured current value is lower than the lower limit current value (see "YES" in step S103), in this embodiment, in a case in which the measured current value is less than 2/3 of the assumed current value (i.e., the lower limit current value), the control device 100 determines that at least one of the motor pumps MP is abnormal (see step S104). If the measured current value has not decreased below the lower limit current value (see "NO" in step S103), the control device 100 repeats steps S102 and S103.

30 **[0115]** When the control device 100 determines the abnormal occurrence, the control device 100 may issue an alarm while continuing to operate the motor pump MP, or may stop the operation of the motor pump MP and issue the alarm.

35 **[0116]** Such a control flow may be performed at the time of starting the motor pump MP, or may be performed during the steady operation of the motor pump MP. When performing the control flow at the time of starting the motor pump MP, the measured current value corresponds to a starting current value at the time of starting the motor pumps MP, and the assumed current value is a current value expected during normal startup of the motor pumps MP.

45 **[0117]** When performing the control flow during the steady operation of the motor pump MP, the measured current value corresponds to an operating current value during the steady operation of the motor pumps MP, and the assumed current value is the current value expected during the normal steady operation of the motor pumps MP.

50 **[0118]** The starting current value and the operating current value may be the same or different. Similarly, the assumed current value assumed during normal start up and the assumed current value assumed during the normal steady operation may be the same or different.

55 **[0119]** In one embodiment, the control device 100 may determine the assumed current value based on the flow rates on the discharge sides of the motor pumps MP. In

this case, the pump unit PU includes a flow rate sensor (not shown) that detects the flow rate of the liquid to be handled, and the flow rate sensor is electrically connected to the control device 100.

[0120] The memory 100b of the control device 100 stores data indicating a correlation between the flow rate of the liquid to be handled during normal operation and the current supplied to the motor pumps MP during normal operation. The control device 100 determines the assumed current value based on this data, and calculates the lower limit current value based on the determined assumed current value. The above formula can be used as an example of the calculation formula for the lower limit current value.

[0121] The control device 100 compares the measured current value during the steady operation of the motor pumps MP with the lower limit current value, and when the measured current value is lower than the lower limit current value, it is determined that at least one of the motor pump MP has an abnormality.

[0122] In one embodiment, the control device 100 may determine the assumed current value based on the pressure on the discharge side of the motor pumps MP. In this case, the pump unit PU includes a pressure sensor (not shown) that detects the pressure of the liquid to be handled, and the pressure sensor is electrically connected to the control device 100.

[0123] The memory 100b of the control device 100 stores data indicating the correlation between the pressure of the liquid to be handled and the current supplied to the motor pumps MP during normal operation. The control device 100 determines the assumed current value based on this data, and calculates the lower limit current value based on the determined assumed current value. The above formula can be used as an example of the calculation formula for the lower limit current value.

[0124] The control device 100 compares the measured current value during the steady operation of the motor pumps MP with the lower limit current value, and when the measured current value is lower than the lower limit current value, it is determined that at least one of the motor pumps MP has an abnormality.

[0125] In the embodiment shown in FIGS. 21A and 21B, the pump unit PU includes the current sensor 101 (first current sensor 101) arranged between the first motor pump MP and the second motor pump MP, and the current sensor 101 (second current sensor 101) arranged between the second motor pump MP and the third motor pump MP.

[0126] Therefore, the control device 100 measures the current value (i.e., the measured current value Aa1) of the first motor pump MP based on the signal sent from the first current sensor 101, and measures a sum (i.e., the measured current value Ab (= Aa1 + Aa2)) of the measured current value Aa1 of the first motor pump MP and the measured current value Aa2 of the second motor pump MP based on the signal sent from the second current sensor 101.

[0127] The control device 100 compares the measured current value Aa1 with the assumed current value assumed during normal operation (during the startup and the steady operation) of each motor pump MP, and if the measured current value Aa1 is lower than the assumed current value (Aa1 < assumed current value), the control device 100 determines that an error has occurred in the first motor pump MP.

[0128] The control device 100 compares the measured current value Aa1 with the assumed current value assumed during normal operation of each motor pump MP (during the startup and the steady operation), if the measured current value Aa1 is larger than the assumed current value (Aa1 > assumed current value), and a value (i.e., Ab - Aa1) obtained by subtracting the measured current value Aa1 from the measured current value Ab is smaller than the assumed current value ((Ab - Aa1) < assumed current value), the control device 100 determines that an abnormality has occurred in the second motor pump MP. The value obtained by subtracting the measured current value Aa1 from the measured current value Ab corresponds to the measured current value Aa2.

[0129] When the control device 100 determines that the measured current value Amax is lower than the lower limit current value, and determines that there is no abnormality in the first motor pump MP and the second motor pump MP, the control device 100 determines that the third motor pump MP has an abnormality.

[0130] When the pump unit PU includes four motor pumps MP connected in series, the pump unit PU includes the current sensor 101 (third current sensor 101) arranged between the third motor pump MP and the fourth motor pump MP.

[0131] The control device 100 determines a sum (i.e., the measured current value Ac) of the measured current value Aa1 of the first motor pump MP, the measured current value Aa2 of the second motor pump MP, and the measured current value Aa3 of the third motor pump MP based on the signal sent from the third current sensor 101.

[0132] If the measured current value Aa1 is larger than the assumed current value (Aa1 > assumed current value), the value obtained by subtracting the measured current value Aa1 from the measured current value Ab (i.e., Ab - Aa1) is larger than the assumed current value ((Ab - Aa1) > assumed current value), and the value obtained by subtracting the measured current value Ab from the measured current value Ac (i.e., Ac - Ab, where Ab = Aa1 + Aa2) is lower than the assumed current value, the control device 100 determines that an abnormality has occurred in the third motor pump MP. The value obtained by subtracting the measured current value Ab from the measured current value Ac corresponds to the assumed current value Aa3.

[0133] When the control device 100 determines that the measured current value Amax is lower than the lower limit current value, and determines that no abnormality has occurred in the first motor pump MP, the second

motor pump MP, and the third motor pump MP, the control device 100 determines that an abnormality has occurred in the fourth motor pump MP. When the pump unit PU includes five or more motor pumps MP connected in series, the control device 100 can determine the abnormality of each motor pump MP using the same method as described above.

[0134] In the above described embodiment, a method of controlling the motor pumps MP connected in series has been described, but the pump unit PU may control the motor pumps MP connected in parallel. When controlling the motor pumps MP (see FIGS. 11 and 12) connected in parallel, the control device 100 may be configured to shift a startup timing of each of the motor pumps MP.

[0135] By shifting the startup timing, the pump unit PU can form a swirling flow in the pipe 65. By forming the swirling flow, foreign matter and air adhering to the pipe 65 can be removed, and furthermore, the liquid to be handled can be prevented from stagnation.

[0136] In order to form the swirling flow, the control device 100 starts one (the first motor pump MP) of the motor pumps MP, and then may start the motor pump MP (the second motor pump MP) adjacent to the started motor pump MP (i.e., the first motor pump MP). In this manner, by sequentially starting the adjacent motor pumps MP, the pump unit PU can form the swirling flow that swirls in an order in which the motor pumps MP are started.

[0137] For example, when three motor pumps MP are arranged, the control device 100 may start the first motor pump MP, then start the second motor pump MP, or after starting the third motor pump MP, the control device 100 may start the first motor pump MP adjacent to the third motor pump MP.

[0138] FIG. 23 is a view showing another embodiment of the impeller. In this embodiment, illustration of the bearing 5 is omitted. In the embodiment described above, the impeller 1 includes the annular protrusion 17 extending from the outer edge portion 11a of the side plate 11 toward the suction portion 15 (see FIG. 1). In the embodiment shown in FIG. 23, the side plate 11 of the impeller 1 has an annular protrusion 117 arranged radially inward of the outer edge portion 11a of the side plate 11.

[0139] The rotor 2 is arranged on an annular step formed between the outer edge portion 11a of the side plate 11 and the protrusion 117, and an exposed portion of the rotor 2 is covered with a cover 110. The cover 110 is one of the components of the motor pump MP. Examples of the cover 110 include a corrosion-resistant can, a resin coat, or a Ni plating coat.

[0140] In one embodiment, the iron core 2a of the rotor 2 is joined to the protrusion 117 by adhesive, press fit, shrink fit, welding, or the like. Similarly, the cover 110 is joined to the impeller 1 by adhesive, press fitting, shrink fitting, welding, or the like.

[0141] FIG. 24 is a view showing another embodiment of the impeller. In this embodiment, illustration of the

bearing 5 is omitted. As shown in FIG. 24, the impeller 1 may include an annular mounting portion 118 arranged radially outward from the protrusion 117. By inserting the rotor 2 into an annular space between the mounting portion 118 and the protrusion 117, the rotor 2 can be fixed to the side plate 11 more reliably. Also in this embodiment, the exposed portion of the rotor 2 is covered with the cover 110.

[0142] FIG. 25 is a view showing a sealing member arranged between the cover and the side plate. In this embodiment, illustration of the bearing 5 is omitted. As shown in FIG. 25, by arranging seal members (e.g., O rings) 120, 121 between the cover 110 and the side plate 11 (more specifically, the outer edge portion 11a and the protrusion 117 of the side plate 11), the liquid can be reliably prevented from coming into contact with the rotor 2.

[0143] The impeller 1 according to the embodiment shown in FIGS. 1 to 25 is manufactured by, for example, casting, stainless steel press molding, resin molding, or the like. The impeller 1 according to the embodiment shown in FIGS. 26 to 34 described below may also be manufactured by casting, stainless steel press molding, resin molding, or the like.

[0144] FIG. 26 is a view showing another embodiment of the impeller. In this embodiment, illustration of the bearing 5 is omitted. As shown in FIG. 26, the rotor 2 is fixed to the outer edge portion 11a of the side plate 11 so as to block the flow path (i.e., an outlet flow path) of the impeller 1 formed between the main plate 10 and the side plate 11. Also in this embodiment, the rotor 2 is arranged in the suction side region Ra.

[0145] In the embodiment shown in FIG. 26, the rotor 2 is not covered with the cover 110, and the rotor 2 is made of a corrosion-resistant material. Also in the embodiment described above, the rotor 2 does not necessarily need to be covered with the cover 110, and may be made of a corrosion-resistant material. In one embodiment, the rotor 2 may be covered with the cover 110.

[0146] With this configuration, the liquid to be handled passing through the outlet flow path collides with an inner circumferential surface of the rotor 2, and a direction of the liquid to be handled is changed. Thereafter, the liquid to be handled passes through a gap between the main plate 10 and the discharge casing 22, and is discharged from the outlet 22a.

[0147] Also in the embodiment shown in FIGS. 23 to 26, the rotor 2 and the bearing 5 are arranged in the suction side region Ra of the impeller 1, so the motor pump MP has a compact structure.

[0148] FIG. 27 is a view showing another embodiment of the motor pump. As shown in FIG. 27, the motor pump MP includes a first impeller 1A arranged on the inlet 21a side, a second impeller 1B arranged on the outlet 22a side, and a communication shaft 126 connected to the first impeller 1A and the second impeller 1B. The rotor 2 is fixed to the first impeller 1A, and the stator 3 is arranged radially outward the rotor 2. The bearing 5 supports the

first impeller 1A, and the second impeller 1B is supported by the bearing 5 via the communication shaft 126.

[0149] In the embodiment shown in FIG. 27, the motor pump MP includes an intermediate casing 125 arranged between the first impeller 1A and the second impeller 1B. The intermediate casing 125 is an annular partition wall that separates the discharge side of the first impeller 1A from the suction side of the second impeller 1B. In this embodiment, the intermediate casing 125 is fixed to the stator casing 20.

[0150] In the embodiment shown in FIG. 27, the motor pump MP includes two impellers 1, but the number of impellers 1 is not limited to this embodiment. The motor pump MP may include a plurality of intermediate casings 125 depending on the number of impellers 1. In other words, the motor pump MP may include a plurality of impellers 1 including at least the first impeller 1A and the second impeller 1B.

[0151] FIG. 28 is a view showing another embodiment of the motor pump. As shown in FIG. 28, the motor pump MP further includes a discharge side bearing 128 that rotatably supports the communication shaft 126. The discharge side bearing 128 is arranged on the discharge side of the second impeller 1B. The discharge side bearing 128 is attached to the discharge casing 22, and seal members (e.g., O rings) 127A, 127B are arranged in the gap between the discharge side bearing 128 and the discharge casing 22. Although the motor pump MP includes two impellers 1 also in the embodiment shown in FIG. 28, the number of impellers 1 is not limited to this embodiment. The motor pump MP may include a plurality of impellers 1 including at least the first impeller 1A and the second impeller 1B.

[0152] As shown in FIG. 28, the discharge casing 22 has a flow path 129 communicating with the outlet 22a. The flow path 129 is arranged radially outward of the communication shaft 126. The liquid to be handled discharged from the second impeller 1B is discharged to the outside through the flow path 129 and the outlet 22a.

[0153] In the embodiment shown in FIG. 28, the first impeller 1A and the second impeller 1B are supported not only by the bearing 5 but also by the discharge side bearing 128. The discharge side bearing 128 is a radial bearing. With such a structure, the motor pump MP can suppress displacement of the first impeller 1A and the second impeller 1B in the radial direction.

[0154] FIG. 29 is a view showing another embodiment of the motor pump. As shown in FIG. 29, the motor pump MP may include a communication shaft 126 to which one impeller 1 is fixed, and the discharge side bearing 128 that rotatably supports the communication shaft 126.

[0155] FIG. 30 is a view showing a motor pump in which various components can be selected depending on operating conditions. In FIG. 30, a horizontal axis shows a flow rate, and a vertical axis shows a pump head. As shown in FIG. 30, the motor pump MP is configured to be able to select optimal components according to various operating conditions (i.e., a magnitude of the flow

rate and a magnitude of the pump head).

[0156] In the embodiment shown in FIG. 30, the motor pump MP can be selected from a plurality (four in this embodiment) of different components (i.e., configurations) depending on the magnitude of the pump head and the magnitude of the flow rate (see MPA to MPA in FIG. 30). In this embodiment, the motor pump MP includes a plurality of impellers 1 having different sizes, a plurality of rotors 2 fixed to the impellers 1 and having different lengths, a plurality of stator 3 having a length corresponding to the length of the rotors 2, and a plurality of stator casings 20 that accommodate the stators 3 and have a length corresponding to the length of the stators 3.

[0157] A size of a motor capacity of the motor pump MP depends on a length of a length L_g of the stator 3. The size of the pump head of the motor pump MP depends on a size of a diameter D_1 of the impeller 1. The magnitude of the flow rate of the motor pump MP depends on the size of an outlet flow path B_2 of the impeller 1.

[0158] The impellers 1 include the main plates 10 having different diameters from the side plates 11 having the same diameter. In this specification, the diameter D_1 of the impeller 1 corresponds to a diameter of the main plate 10.

[0159] A relationship between a motor pump MPA and a motor pump MPB will be described. As shown in FIG. 30, the motor pump MPA and the motor pump MPB have the same motor capacity (i.e., $L_gA = L_gB$). The motor pump MPA has a higher pump head capacity than that of the motor pump MPB (i.e., $D_1A > D_1B$). The motor pump MPB has a higher flow rate capacity than that of the motor pump MPA (i.e., $B_2B > B_2A$).

[0160] A relationship between the motor pump MPA and the motor pump MPC will be described. The motor pump MPC has a larger motor capacity than that of the motor pump MPA (i.e., $L_gC > L_gA$). The motor pump MPC has the same pump head capacity as that of the motor pump MPA (i.e., $D_1A = D_1C$). The motor pump MPC has a higher flow rate capacity than that of the motor pump MPA (i.e., $B_2C > B_2A$).

[0161] A relationship between the motor pump MPB and the motor pump MPC will be described. The motor pump MPC has a larger motor capacity than that of the motor pump MPB (i.e., $L_gC > L_gB$). The motor pump MPC has a higher pump head capacity than that of the motor pump MPB (i.e., $D_1C > D_1B$). An outlet flow path B_2B of the impeller 1 of the motor pump MPB has the same size as that of an outlet flow path B_2C of the impeller 1 of the motor pump MPC, or has a larger size than that of the outlet flow path B_2C (i.e., $B_2B \geq B_2C$).

[0162] A relationship between the motor pump MPC and the motor pump MPD will be described. The motor pump MPC has the same motor capacity as that of the motor pump MPD (i.e., $L_gC = L_gD$). The motor pump MPC has a higher pump head capacity than that of the motor pump MPD (i.e., $D_1C > D_1D$). The motor pump MPD has a higher flow rate capacity than that of the motor pump MPC (i.e., $B_2D > B_2C$).

[0163] A relationship between the motor pump MPB and the motor pump MPD will be described. The motor pump MPD has a larger motor capacity than that of the motor pump MPB (i.e., $LgD > LgB$). The motor pump MPD has a higher flow rate capacity than that of the motor pump MPB (i.e., $B2D > B2B$). The motor pump MPB has the same pump head capacity as that of the motor pump MPD (i.e., $D1B = D1D$).

[0164] As shown in FIG. 30, an inner diameter D2 and an outer diameter D3 of the stator casing 20 are the same in all motor pumps MP. Therefore, the operator may prepare components having different sizes depending on the pump head capacity and the flow rate capacity, and select the optimal component from the components based on the operating conditions of the motor pump MP.

[0165] By making the inner diameter D2 and the outer diameter D3 of the stator casing 20 the same, the pump unit PU can easily change its performance without changing the size of the components (e.g., the bearing 5, the suction casing 21, and the discharge casing 22) that are not dependent on the pump head or the flow rate capacity.

[0166] FIG. 31A is a sectional view of a motor pump according to another embodiment, and FIG. 31B is a view of the motor pump shown in FIG. 31A viewed from an axial direction. As shown in FIGS. 31A and 31B, the motor pump MP may include a swiveling stopper (in other words, whirl stopper) 130 arranged on the back side of the impeller 1.

[0167] In the embodiment shown in FIG. 31B, one swiveling stopper 130 is arranged, but at least one swiveling stopper 130 may be arranged. The swiveling stopper 130 is fixed to the discharge casing 22, and faces the main plate 10 of the impeller 1. The swiveling stopper 130 can prevent the liquid to be handled discharged from the impeller 1 from swiveling between the impeller 1 and the discharge casing 22.

[0168] FIG. 32A is a cross sectional view of a motor pump according to another embodiment, and FIG. 32B is a front view of a suction casing of the motor pump shown in FIG. 32A. As shown in FIGS. 32A and 32B, the motor pump MP includes a suction casing 141 and a discharge casing 142 having a flat flange shape.

[0169] In the embodiment described above, the inlet 21a of the suction casing 21 protrudes from the outer surface of the suction casing 21, and similarly, the outlet 22a of the discharge casing 22 protrudes from the outer surface of the discharge casing 22. In this embodiment, since the suction casing 141 has the flat flange shape, an inlet 141a is formed on the same plane as the outer surface of the suction casing 141. Similarly, since the discharge casing 142 has a flat flange shape, an outlet 142a is formed on the same plane as the outer surface of the discharge casing 142.

[0170] With such a structure, a connection pipe 140 connected to the motor pump MP can be directly connected to the suction casing 141. Although not shown, the connection pipe 140 may be directly connected to

the discharge casing 142 having a flat flange shape.

[0171] With such a configuration, there is no need to arrange a member (connection member) that connects the connection pipe 140 and the suction casing 141, and the number of parts for connecting a pipe (not shown) to the motor pump MP can be reduced.

[0172] Since the connection member is a member that is expected to leak liquid, by eliminating the connection member, it is possible to reliably prevent liquid leakage. In this embodiment, although not shown, a sealing member (e.g., an O ring or a gasket) is arranged between the connection pipe 140 and the suction casing 141.

[0173] An insertion hole 141b into which a fastener 150 for fastening the connection pipe 140 and the suction casing 141 is inserted is formed radially outward from the inlet 141a of the suction casing 141. The connection pipe 140 has a through hole 140a that communicates with the insertion hole 141b. The operator can fasten the connection pipe 140 and the suction casing 141 to each other by inserting the fastener 150 into the through hole 140a and the insertion hole 141b.

[0174] A bolt accommodating portion 142b for accommodating a head portion 25a of the through bolt 25 is formed radially outward from the outlet 142a of the discharge casing 142. By accommodating the head portion 25a of the through bolt 25 in the bolt accommodating portion 142b, it is possible to prevent the head portion 25a from protruding from the discharge casing 22.

[0175] In one embodiment, the suction casing 141 may have a bolt accommodating portion corresponding to the bolt accommodating portion 142b. That is, at least one of the suction casing 141 and the discharge casing 142 has a bolt accommodating portion that accommodates the head portion 25a of the through bolt 25.

[0176] FIG. 33 is a view showing a pump unit including motor pumps connected in series. As shown in FIG. 33, the motor pump MP shown in FIGS. 32A and 32B includes the suction casing 141 and the discharge casing 142 having a flat flange shape. The suction casing 141 and the discharge casing 142 arranged adjacent to each other can be in surface contact with each other. The suction casing 141 and the discharge casing 142 in surface contact with each other correspond to intermediate casings.

[0177] Although not shown, a sealing member (e.g., an O ring or a gasket) is arranged between the suction casing 141 and the discharge casing 142 that are in surface contact with each other.

[0178] According to this embodiment, there is no need to arrange the intermediate casing 61 (see FIG. 10), and by simple operating of directly connecting the motor pumps MP having the same structure in series, the pump unit PU including the motor pumps MP can be configured.

[0179] The motor pump MP according to the embodiment includes simple main components (i.e., the impeller 1, the rotor 2 and the stator 3, and the bearing 5), and is made smaller and lighter. Therefore, by using the through bolt 25, the motor pumps MP arranged in series can be

easily fastened together.

[0180] Furthermore, by bringing the suction casing 141 and the discharge casing 142 into surface contact with each other, a thermal conductivity of the pump unit PU can be improved, and a temperature balance can be achieved between the motor pumps MP. As a result, the pump unit PU can be stably operated.

[0181] FIG. 34 is a view showing another embodiment of the impeller. In the embodiment described above, the impeller 1 is a centrifugal impeller. More specifically, the impeller 1 includes the main plate 10 extending perpendicularly to the direction of the center line CL, and the liquid pressurized by the impeller 1 is discharged perpendicularly to the center line CL. In the embodiment shown in FIG. 34, the impeller 1 is a mixed flow impeller. More specifically, the impeller 1 includes a main plate 160 that is inclined at a predetermined angle with respect to the direction of the center line CL. The main plate 160 is inclined from the suction side to the discharge side, and the liquid pressurized by the impeller 1 is discharged diagonally outward with respect to the center line CL.

[0182] FIG. 35 is a view showing another embodiment of the motor pump. As shown in FIG. 35, the motor pump MP includes a rotor holder 200 that holds the rotor 2, and the impeller 1 which is a press-molded product. The rotor holder 200 is fixed to the impeller 1. Also in this embodiment, the rotor 2 and the bearing 5 are arranged in the suction side region of the impeller 1 (see FIG. 1).

[0183] The impeller 1 includes the main plate 10, the side plate 11, and the vanes 12. Each of the main plate 10, the side plate 11, and the vane 12 is a press-molded product composed of a metal material with excellent ductility. An example of such a metal material is stainless steel. In one embodiment, the main plate 10, the side plate 11, and the vane 12 are separately press-molded, and then joined together after being formed.

[0184] By composing the impeller 1 from the press-molded product, an overall weight of the impeller 1 can be reduced. This weight reduction of the impeller 1 contributes to a reduction (or elimination) of the balancing (dynamic balancing) that determines the center of gravity of the impeller 1 as desired position. Furthermore, this configuration allows the distance between the main plate 10 and the side plate 11 to be reduced, resulting in further compacting of the motor pump MP.

[0185] The rotor holder 200 prevents a corrosion of the rotor 2 due to contact of the rotor 2 with the liquid to be handled. The rotor holder 200 includes a press-molded annular accommodating portion 201 that accommodates the rotor 2 and an annular closing plate 202 that closes the accommodating portion 201. The accommodating portion 201 has an annular concave shape, and is arranged concentrically with the impeller 1 about the center line CL. For example, the accommodating portion 201 may be manufactured by deep drawing.

[0186] The accommodating portion 201 is fixed (joined) to the side plate 11 of the impeller 1. In one embodiment, the accommodating portion 201 is welded to

the side plate 11. In order to easily fix the accommodating portion 201 to the impeller 1, it is preferable that the impeller 1 and the accommodating portion 201 are made of the same material.

[0187] FIG. 36 is an enlarged view of the rotor holder. As shown in FIG. 36, in order to prevent the liquid to be handled from entering through the gap between the accommodating portion 201 and the closing plate 202, the rotor holder 200 includes a sealing member (e.g., an O ring) 205 arranged between the accommodating portion 201 and the closing plate 202. The sealing member 205 fixes the closing plate 202 to the accommodating portion 201 by an elastic force of the sealing member 205.

[0188] In one embodiment, the closing plate 202 may be inserted into the rotor holder 200 by a mechanical insertion method. An example of the mechanical insertion method is press-fitting the closing plate 202 into the rotor holder 200. As another example of the mechanical insertion method, the closing plate 202 may be inserted into the thermally expanded rotor holder 200 after heating the rotor holder 200 (shrink fitting). In this case, in order to reduce a thermal effect (i.e., thermal demagnetization) on a magnetic force of the rotor 2, it is desirable to magnetize the rotor 2 after inserting the closing plate 202 into the rotor holder 200. As another example of the mechanical insertion method, the closing plate 202 may be inserted into the rotor holder 200 by a cold fitting. As another example of the mechanical insertion method, the closing plate 202 may be inserted into the rotor holder 200 by using adhesive.

[0189] The accommodating portion 201 of the rotor holder 200 includes an outer annular portion 231, an inner annular portion 232 arranged radially inward of the outer annular portion 231, and an annular back surface portion 233 connecting the outer annular portion 231 and the inner annular portion 232.

[0190] The rotary side bearing body 6 is attached to the rotor holder 200, and the stationary side bearing body 7 is arranged on the suction side of the rotary side bearing body 6 (see FIG. 35). Seal members 31A and 31B are arranged between the inner annular portion 232 and the cylindrical portion 6a of the rotary side bearing body 6. In this embodiment, two seal members are arranged, but the number of seal members is not limited to this embodiment.

[0191] In order to bring the seal members 31A, 31B into close contact with the inner annular portion 232, the inner annular portion 232 is processed smoothly during the press molding process of the rotor holder 200. In this manner, by performing the press molding process, a new additional process for bringing the seal members 31A and 31B into close contact with the inner annular portion 232 can be omitted.

[0192] The accommodating portion 201 (more specifically, the outer annular portion 231 and the inner annular portion 232) extends parallel to the cylindrical portion 6a of the rotary side bearing body 6, and the cylindrical portion 6a is arranged radially inside the inner annular por-

tion 232 of the rotor holder 200. The flange portion 6b of the rotary side bearing body 6 extends parallel to the closing plate 202, and is arranged adjacent to the closing plate 202.

[0193] When air exists inside the accommodating portion 201, there is a possibility that the closing plate 202 moves in a direction away from the accommodating portion 201 due to expansion of the air inside the accommodating portion 201. In this embodiment, the flange portion 6b of the rotary side bearing body 6 adjacent to the closing plate 202 can restrict a movement of the closing plate 202.

[0194] In one embodiment, in order to reduce the amount of air expansion in the accommodating portion 201, the rotor holder 200 may have a filler (e.g., grease, potting material, adhesive, etc.) filled into the accommodating portion 201.

[0195] The accommodating portion 201 has an outer surface 201a that contacts the rotary side bearing body 6, an inner surface 201b that contacts the rotor 2, and a corner surface 201c formed at a corner of the inner surface 201b. As described above, since the rotor holder 200 is a press-molded product, the corner surface 201c is a smooth curved surface. On the other hand, since the rotor 2 is manufactured by stacking laminated cores that are stamped iron plates, the rotor 2 has a sharp corner.

[0196] Therefore, even if the rotor 2 is inserted into the accommodating portion 201, the sharp corner of the rotor 2 comes into contact with the smooth corner surface 201c, and an entire rotor 2 cannot come into close contact with the back surface portion 233. As a result, the operator may not be able to reliably position the rotor 2 with respect to the rotor holder 200, and may not be able to stably accommodate the rotor 2 in the rotor holder 200.

[0197] Therefore, the rotor holder 200 includes a spacer 203 arranged between the accommodating portion 201 and the rotor 2. In the embodiment shown in FIG. 36, the spacer 203 is a shim arranged between the back surface portion 233 and the rotor 2. By arranging the spacer 203, it is possible to prevent the rotor 2 from coming into contact with the corner surface 201c. As a result, the rotor 2 is accommodated in the rotor holder 200 in close contact with the spacer 203. Therefore, the operator can securely position the rotor 2 with respect to the rotor holder 200. This configuration allows the operator to stably accommodate the rotor 2 in the rotor holder 200.

[0198] FIG. 37 is a view showing another embodiment of the spacer. As shown in FIG. 37, the rotor holder 200 may include a spacer 210 arranged between the accommodating portion 201 and the rotor 2. In the embodiment shown in FIG. 37, the spacer 210 is a protrusion protruding from the back surface portion 233 of the rotor holder 200.

[0199] An example of a fastening method of the rotor 2 to the rotor holder 200 includes a fastening method using an adhesive, a fastening method using shrink fitting, or a fastening method using cold fitting. When adopting a fastening method (e.g., shrink fitting, cold fitting,

etc.) that involves a temperature change of the rotor 2 and/or the rotor holder 200, it is necessary to appropriately determine dimensions of the rotor 2 and the rotor holder 200. Therefore, it is preferable to adopt a fastening method at room temperature as a simple fastening method.

[0200] FIG. 38 is a view showing the rotor inserted into the rotor holder. As shown in FIG. 38, an inner surface 230 of the rotor 2 that contacts the inner annular portion 232 has a polygonal shape (octagonal in this embodiment). The inner surface 230 of the rotor 2 has a polygonal shape. Therefore, when the rotor 2 is inserted into the rotor holder 200 at room temperature, the inner annular portion 232 of the rotor holder 200 can make linear contact with the inner surface 230 of the rotor 2.

[0201] This contact prevents the entire rotor 2 from contacting the inner annular portion 232 of the rotor holder 200. Therefore, even when the rotor 2 is press-fitted into the rotor holder 200, the contact area of the rotor 2 with the rotor holder 200 can be reduced, resulting in the prevention of a deformation of the rotor holder 200.

[0202] FIG. 39 is a view showing the rotor inserted into the rotor holder. As shown in FIG. 39, the inner annular portion 232 may have a plurality of protrusions 235 formed at a contact portion with the rotor 2. The protrusion 235 of the inner annular portion 232 faces the inner surface 230 of the rotor 2, and the rotor 2 is in contact with the protrusion 235. Also with such a configuration, the contact area of the rotor 2 with the rotor holder 200 can be reduced, and as a result, the deformation of the rotor holder 200 can be prevented.

[0203] Returning to FIG. 35, the motor pump MP includes a stator casing 20 that accommodates the stator 3 and is integrally resin molded with the stator 3. As shown in FIG. 35, the stator 3 includes a stator core 3a and a coil 3b wound around the stator core 3a via an insulating member 220. An example of the insulating member 220 includes insulating paper, resin, or the like. The resin constituting the stator casing 20 is made of a material (similar to a potting material) that is insulating and has excellent thermal conductivity.

[0204] The motor pump MP includes a motor frame 221 that covers an outer circumferential surface of the stator casing 20 and contacts the stator 3. The motor frame 221 has a passage hole 242 through which the power line 105 and the signal line 106 extending from the coil 3b pass. The motor frame 221 is made of a material with excellent thermal conductivity (e.g., a metal material). In this manner, the stator 3 is covered with the stator casing 20 with excellent thermal conductivity, and is in contact with the motor frame 221 with excellent thermal conductivity. Therefore, the heat generated from the coil 3b of the stator 3 is released to the outside through the stator casing 20 and the motor frame 221.

[0205] A seal member (e.g., an O ring) 241 for preventing the liquid to be handled from leaking to the outside is arranged between the suction casing 21 and the discharge casing 22 and the stator casing 20. The stator

casing 20 has a seal groove 229 into which the seal member 241 is attached.

[0206] The stator casing 20 is molded by pouring a resin into a mold. By forming the protrusion corresponding to the seal groove 229 on the mold in advance, a step of newly forming the seal groove 229 after manufacturing the stator casing 20 can be omitted. In one embodiment, a seal groove (not shown) in which the seal member 241 is mounted may be formed in the suction casing 21 and the discharge casing 22.

[0207] In this embodiment, the stator casing 20, the return vane 30, and a partition plate 240 fixed to the return vane 30 are integrally molded members manufactured by resin molding. The return vane 30 may have a unique non-linear shape as a flow path. According to this embodiment, by employing resin molding in which resin is poured into a mold, the stator casing 20, the return vane 30, and the partition plate 240 can be easily manufactured in large quantities integrally.

[0208] In one embodiment, in order to improve heat dissipation from the coil 3b, the stator casing 20 may cover the stator core 3a and the coil 3b covered with potting material. In this manner, by covering the coil 3b with the potting material, the potting material gets into between the wires forming the coil 3b, so that the heat dissipation of the coil 3b can be improved. In this state, by further covering the stator core 3a and the coil 3b with the resin that constitutes the stator casing 20, the heat dissipation performance of the stator 3 can be further improved.

[0209] An example of the resin constituting the stator casing 20 includes two-component mixture curing resins (e.g., dicyclopentadiene resin) or heat-curing resins (e.g., epoxy resins) that have excellent fluidity at room temperature. In one embodiment, a strength of the stator casing 20 can be improved by incorporating fibers as additives into the resin. In one embodiment, an improvement in the thermal conductivity of the stator casing 20 can be achieved by incorporating a highly thermally conductive material as an additive. Both of these fibers and a highly thermally conductive material may be mixed into the resin constituting the stator casing 20 as additives.

[0210] FIG. 40 is a view showing another embodiment of the impeller. As shown in FIG. 40, the motor pump MP includes the impeller 1 which is a resin-molded product in which the rotor holder 200 is integrally molded. The impeller 1 is made of resin, and has the main plate 10, the side plate 11, and the vane 12 integrally molded. In one embodiment, a strength of the impeller 1 can be improved by mixing fibers as additives into the resin.

[0211] The rotor holder 200 includes a resin-molded annular accommodating portion 251 that accommodates the rotor 2 and a ring holder 252 that closes the accommodating portion 251. The impeller 1 and the accommodating portion 251 of the rotor holder 200 are integrally molded and made of resin.

[0212] The ring holder 252 is made of a press-molded corrosion-resistant material (e.g., stainless steel). The

ring holder 252 and the rotor 2 are fastened together by a mechanical method such as shrink fitting, cold fitting, or press fitting. In one embodiment, the ring holder 252 and the rotor 2 may be fastened together using an adhesive.

[0213] When the rotor 2 is fastened to the ring holder 252, in order to reduce the press-fitting load of the rotor 2, the inner surface 230 of the rotor 2 that contacts the ring holder 252 may have a polygonal shape (FIG. 38), and the ring holder 252 may have the protrusions 235 formed at the contact portion with the rotor 2 (see FIG. 39).

[0214] FIG. 41 is an enlarged view of the rotor holder. As shown in FIG. 41, the ring holder 252 includes a ring portion 253 having an L-shaped cross section and a bent portion 254 bent from the ring portion 253. The ring portion 253 of the ring holder 252, which is a press-molded product, has a smooth corner surface 257 formed at a bent portion thereof.

[0215] Also in this embodiment, the rotor 2 and the bearing 5 are arranged in the suction side region (see FIG. 1) of the impeller 1. The rotary side bearing body 6 is attached to the ring holder 252, and the stationary side bearing body 7 is arranged on the suction side of the rotary side bearing body 6. The seal members 31A and 31B are arranged between the ring portion 253 of the ring holder 252 and the cylindrical portion 6a of the rotary side bearing body 6. Also in this embodiment, since the ring portion 253 is press-molded, a new additional step for bringing the seal members 31A and 31B into close contact with the ring portion 253 can be omitted.

[0216] As described above, the rotor 2 has the sharp corner. Therefore, when the rotor 2 is mounted on the ring holder 252, the sharp corner of the rotor 2 may contact the smooth corner surface 257, and as a result, the operator may not be able to stably accommodate the rotor 2 in the rotor holder 200.

[0217] Therefore, the rotor holder 200 has a spacer 260 arranged between the ring holder 252 and the rotor 2. In the embodiment shown in FIG. 41, the spacer 260 is a shim arranged between the ring holder 252 and the rotor 2. In one embodiment, the spacer 260 may be a protrusion (not shown) protruding from the ring holder 252 (see FIG. 37).

[0218] When manufacturing the rotor holder 200, a resin is poured into the mold with the ring holder 252 and the rotor 2 attached to the ring holder 252 set in the mold. With such a manufacturing method, the resin forming the accommodating portion 251 of the rotor holder 200 wraps around the rotor 2, and as a result, the accommodating portion 251 seals the rotor 2.

[0219] The resin poured into the mold is hot. Therefore, if high temperature resin is brought into contact with the rotor 2 mounted on the ring holder 252, the rotor 2 may be thermally demagnetized. Therefore, after manufacturing the rotor holder 200, it is necessary to magnetize the rotor 2.

[0220] In this embodiment, the accommodating portion

251 of the rotor holder 200 and the impeller 1 are integrally molded members manufactured by resin molding. The impeller 1, as well as the return vane 30, may have a unique nonlinear shape as a flow path. According to the embodiment, by employing the resin molding in which the resin is poured into the mold, the accommodating portion 251 of the rotor holder 200 and the impeller 1 can be easily manufactured in large quantities integrally.

[0221] The ring holder 252 has a rotation prevention structure formed at a connection portion with the accommodating portion 251. A rotational torque of the rotor 2 is transmitted to the impeller 1 by operating the motor pump MP. Since the ring holder 252 has the rotation prevention structure, the ring holder 252 does not rotate relative to the accommodating portion 251 even if the impeller 1 rotates. Hereinafter, specific configurations of the rotation prevention structure will be described.

[0222] As shown in FIG. 41, the accommodating portion 251 includes a main body portion 255 that surrounds most of the rotor 2, and a bent portion 256 that is bent from the main body portion 255. The ring portion 253 of the ring holder 252 has an embedded hole 253a into which a portion of the accommodating portion 251 (more specifically, the bent portion 256) is embedded. The embedded holes 253a are formed along a circumferential direction of the ring holder 252.

[0223] By embedding a portion of the bent portion 256 into the embedded hole 253a, the ring holder 252 and the accommodating portion 251 are firmly fastened to each other. This embedding is performed by pouring the resin into the mold when manufacturing the rotor holder 200.

[0224] Similarly, the bent portion 254 of the ring holder 252 has an embedded hole 254a into which a portion of the main body portion 255 of the accommodating portion 251 is embedded. The embedded holes 254a are formed along the circumferential direction of the ring holder 252. By embedding a portion of the main body portion 255 into the embedded hole 254a, the ring holder 252 and the accommodating portion 251 are firmly fastened to each other. This embedding is performed by pouring the resin into the mold when manufacturing the rotor holder 200. According to this embodiment, separation of the rotor holder 200 from the rotor 2 due to a difference in linear expansion between the rotor 2 and the rotor holder 200 due to temperature changes can be mechanically suppressed.

[0225] FIG. 42 is a view showing another embodiment of the rotation prevention structure. As shown in FIG. 42, the rotation prevention structure may be bent portions 253b and 254b bent in a U-shape. More specifically, the ring portion 253 of the ring holder 252 has a bent portion 253b bent in a U-shape, and similarly, the bent portion 254 has a bent portion 254b bent in a U-shape. With this structure as well, the ring holder 252 and the accommodating portion 251 are firmly fastened to each other. The embodiment shown in FIG. 41 and the embodiment shown in FIG. 42 may be combined.

[0226] In one embodiment, the rotation prevention structure may be a gear-shaped notch (not shown) formed in each of the ring portion 253 and the bent portion 254. The notches are formed along the circumferential direction of the ring holder 252.

[0227] In one embodiment, in order to improve the adhesion of the accommodating portion 251 and the ring holder 252, a primer may be applied to a surface of the ring holder 252 in advance to remove oxides on the surface of the ring holder 252.

[0228] Also in the embodiment shown in FIGS. 40 to 42, the stator casing 20 has the same structure as the stator casing 20 according to the embodiment shown in FIGS. 35 to 39. More specifically, the motor pump MP includes the stator casing 20 that accommodates the stator 3 and is resin molded integrally with the stator 3, and the motor frame 221 that covers the outer circumferential surface of the stator casing 20 and in contact with the stator 3.

[0229] FIG. 43 is a view showing another embodiment of the motor pump. In this embodiment, the same reference numerals are given to the same or corresponding components as in the above-described embodiment, and redundant explanation will be omitted.

[0230] As shown in FIG. 43, the motor pump MP includes a plurality of impellers 1, including at least a first impeller 1A arranged on the inlet 21a side and a second impeller 1B arranged on the outlet 22a side. In one embodiment, at least one impeller 1 may be arranged between the first impeller 1A and the second impeller 1B. The rotor holder 200 holding the rotor 2 is fixed to the first impeller 1A, and the stator 3 accommodated in the resin stator casing 20 is arranged radially outside of the rotor 2.

[0231] As shown in FIG. 43, the rotor 2 accommodated in the rotor holder 200 is fixed to the first impeller 1A. Therefore, the rotational force of the rotor 2 acts on the first impeller 1A. The rotational force acting on the first impeller 1A is transmitted to the second impeller 1B through a communication shaft 270. In this manner, since the first impeller 1A receives all the rotational force of the rotor 2, the load acting on the first impeller 1A increases, and there is a risk that the first impeller 1A may be damaged.

[0232] Therefore, it is desirable that the first impeller 1A has higher strength than the other impellers 1 (in this embodiment, the second impeller 1B). Furthermore, in order to realize a high head of the motor pump MP according to this embodiment, it is desirable that the first impeller 1A has high strength. In this manner, it is desirable that the motor pump MP including the impellers 1 not only have a compact structure but also a structure that has high strength. This structure allows the motor pump MP to operate stably.

[0233] Therefore, the motor pump MP according to the embodiment not only has a compact structure but also has a structure that allows stable operation. Hereinafter, structures of motor pump MP will be explained with ref-

erence to the drawings.

[0234] The first impeller 1A is supported by a first bearing 5, and the communication shaft 270 is connected to the first impeller 1A. The second impeller 1B is connected to the communication shaft 270. The motor pump MP includes an intermediate casing 275 arranged between the first impeller 1A and the second impeller 1B, and a liner ring 276 is connected to the intermediate casing 275. The liner ring 276 is a ring member that suppresses a backflow of the liquid to be handled sucked into the second impeller 1B.

[0235] In the embodiment shown in FIG. 43, the intermediate casing 275 is constructed from a different material than the stator casing 20, but the intermediate casing 275 and the stator casing 20 may be constructed from the same material. In this embodiment, the return vane 30 fixed to the intermediate casing 275 also serves as a guide vane that guides the liquid to be handled discharged from the first impeller 1A to the second impeller 1B. The return vane (and guide vane) 30 can efficiently convert a velocity of the liquid to be handled generated by a centrifugal force of the impeller 1A of the first impeller 1A into the pressure, and guide it to a liquid inlet of the first impeller 1B.

[0236] The discharge casing 22 integrally comprises the return vane 30 and a partition plate 245 fixed to the return vane 30. In other words, the discharge casing 22, the return vane 30, and the partition plate 245 are integrally molded members. The discharge casing 22, the return vane 30, and the partition plate 245, which are integrally composed, may be integrally formed by resin molding. In one embodiment, the discharge casing 22, the return vane 30, and the partition plate 245 may be a different material. The return vane 30 fixed to the discharge casing 22 also serves the same purpose as the return vane 30 fixed to the intermediate casing 275.

[0237] FIG. 44 is a view showing another embodiment of the motor pump. In the embodiment shown in FIG. 43, the rotor holder 200 has the same structure similar to the rotor holder 200 according to the embodiment shown in FIG. 35. As shown in FIG. 44, the rotor holder 200 may have the structure similar to the rotor holder 200 according to the embodiment shown in FIG. 40.

[0238] FIG. 45 is an enlarged view of the first impeller and the second impeller. As shown in FIG. 45, a boss portion 281 of the first impeller 1A has a larger size than a boss portion 282 of the second impeller 1B. The boss portion 281 is a connection portion with the communication shaft 270 of the first impeller 1A, and the boss portion 282 is a connection portion with the communication shaft 270 of the second impeller 1B.

[0239] In the embodiment shown in FIG. 45, a length L1 of the boss portion 281 in the direction of the center line CL is longer than the length L2 of the boss portion 282 in the direction of the center line CL. As described above, the load acting on the first impeller 1A as the rotor 2 rotates is larger than the load acting on the second impeller 1B. According to this embodiment, since the

boss portion 281 of the first impeller 1A has a larger size than the boss portion 282 of the second impeller 1B, the first impeller 1A can fully receive the rotational force of the rotor 2. As a result, the motor pump MP can prevent the damage to the first impeller 1A.

[0240] As shown in FIG. 45, the motor pump MP includes a sleeve 280 that forms a predetermined distance between the first impeller 1A and the second impeller 1B. The sleeve 280 is arranged between the first impeller 1A and the second impeller 1B. By arranging the sleeve 280, the operator can easily manage the distance between the first impeller 1A and the second impeller 1B.

[0241] Each of the first impeller 1A and second impeller 1B has a power transmission structure (e.g., key structure, two-chamfer structure, spline structure, etc.) and is connected to the communication shaft 270 by the structure.

[0242] In this embodiment, each of the first impeller 1A and the second impeller 1B is fixed to the communication shaft 270 by a fastener (e.g., a nut) 273 fastened to the communication shaft 270. The sleeve 280 is arranged between the first impeller 1A and the second impeller 1B, and a rotary side bearing body 272 (described below) is arranged between the fastener 273 and the second impeller 1B.

[0243] Therefore, by tightening the fastener 273, the sleeve 280 is pressed against the first impeller 1A, and the rotary side bearing body 272 is pressed against the second impeller 1B. As a result, the first impeller 1A is sandwiched between a tip portion 270a of the communication shaft 270 and the sleeve 280, and the second impeller 1B is sandwiched between the sleeve 280 and the rotary side bearing body 272. In this manner, the first impeller 1A and the second impeller 1B are firmly fixed to the communication shaft 270.

[0244] In this embodiment, the tip portion 270a of the communication shaft 270 is arranged on the suction side, and the fastener 273 is arranged on the discharge side. In one embodiment, the tip portion 270a of the communication shaft 270 may have a hexagonal head or hexagonal hole. This structure allows the operator to firmly tighten the fastener 273 to the communication shaft 270 while fixing the tip portion 270a.

[0245] FIG. 46 is a view showing another embodiment of a connection structure of the first impeller and the second impeller and the communication shaft. As shown in FIG. 46, the motor pump MP includes collets 285 and 286 that fasten each of the first impeller 1A and the second impeller 1B to the communication shaft 270. Since the collets 285 and 286 have the same structure, a structure of the collet 285 will be described below.

[0246] The collet 285 is a cylindrical member having a tapered shape, and has a notch (not shown) extending in the direction of the centerline CL. By inserting the collet 285 into the first impeller 1A from the back surface side of the first impeller 1A, the collet 285 bites into the first impeller 1A, and the first impeller 1A is fastened to the communication shaft 270. Similarly, by inserting the collet

286 into the second impeller 1B, the collet 286 bites into the second impeller 1B, and the second impeller 1B is fastened to the communication shaft 270. With this structure, each of the first impeller 1A and the second impeller 1B is more firmly fastened to the communication shaft 270.

[0247] When the first impeller 1A is fastened to the communication shaft 270, a gap is formed between a tip portion of the collet 285 and the tip portion 270a of the communication shaft 270. When the second impeller 1B is fastened to the communication shaft 270, a gap is formed between the tip portion of the collet 286 and the sleeve 280.

[0248] Returning to FIG. 43 (and FIG. 44), the motor pump MP includes a second bearing (sliding bearing) 277, which is arranged at a rear of the second impeller 1B and freely supports the communication shaft 270. The second bearing 277 includes the rotary side bearing body 272 arranged on the communication shaft 270 side and a stationary side bearing body 271 arranged on the discharge casing 22 side.

[0249] The rotary side bearing body 272 is a rotary side cylindrical body attached to the communication shaft 270, and the stationary side bearing body 271 is a stationary side cylindrical body attached to the discharge casing 22 and surrounding the rotary side bearing body 272 as the rotary side cylindrical body. The partition plate 245 of the discharge casing 22 has a bearing supporter 246 that supports the stationary side bearing body 271. The stationary side bearing body 271 is fixed to the bearing supporter 246. A small gap is formed between the stationary side bearing body 271 and the rotary side bearing body 272.

[0250] An example of a material of the second bearing 277 is ceramic or resin. When the communication shaft 270 rotates with the rotation of the first impeller 1A, the liquid enters between the stationary side bearing body 271 and the rotary side bearing body 272, and the stationary side bearing body 271 supports the rotary side bearing body 272 due to the dynamic pressure of the liquid.

[0251] By arranging the second bearing 277, the communication shaft 270 is supported not only by the first bearing 5 fixed to the impeller 1A, but also by the second bearing 277. The communication shaft 270 to which the impellers 1 connected has a longer length in the direction of the center line CL. The motor pump MP including the first bearing 5 and the second bearing 277 can suppress an axial vibration of the communication shaft 270 due to the increase in the length of the communication shaft 270, and as a result can operate stably.

[0252] A assembly procedure of the motor pump MP is described below. First, the first impeller 1A and the communication shaft 270 are fastened (process 1). Then, the intermediate casing 275 (see FIGS. 43 and 44) is inserted into the communication shaft 270 (process 2), and the sleeve 280 is inserted into the communication shaft 270 (process 3). Next, the second impeller 1B is

inserted into the communication shaft 270, and the second impeller 1B and the communication shaft 270 are fastened (process 4). The rotary side bearing body 272 is then inserted into the communication shaft 270 (process 5), and the discharge casing 22 is fastened to the stator casing 20 (process 6). The fastener 273 is then fastened to the communication shaft 270 (process 7).

[0253] In one embodiment, the operator may perform the process 5, then the process 7, and then process 6. However, as the number of impellers 1 fixed to the communication shaft 270 increases, the communication shaft 270 may tilt, resulting in a position of the communication shaft 270 shifting from the direction of the center line CL.

[0254] Therefore, it is preferable that the operator attaches the discharge casing 22 and fastens the fastener 273 to the communication shaft 270 while checking a positional relationship between the rotary side bearing body 272 and the stationary side bearing body 271. According to the embodiment, since the motor pump MP is a straight type motor pump in which the inlet 21a and the outlet 22a are aligned in a straight line, the communication shaft 270 is supported by the second bearing 277, and the fastener 273 can be fastened to shaft 270.

[0255] FIG. 47 is a view showing another embodiment of the fastener. As shown in FIG. 47, the fastener 290 has a smaller diameter than the rotary side bearing body 272. In one embodiment, the fastener 290 may have a same diameter as the rotary side bearing body 272. A spacer 291 is arranged between the fastener 290 and the communication shaft 270. By inserting the fastener 290 into a threaded hole 270b formed in an end portion of the communication shaft 270, the spacer 291 presses the rotary side bearing body 272 against the second impeller 1B. According to this embodiment, a contact of the fastener 290 with the stationary side bearing body 271 is securely prevented even when the stationary side bearing body 271 is inserted.

[0256] In this embodiment, the first impeller 1A and second impeller 1B are sufficiently fastened to the communication shaft 270 by inserting each of the collets 285 and 286 into each of the first impeller 1A and the second impeller 1B. Therefore, the fastener 290 only needs to have enough a fastening force to limit a movement of the rotary side bearing body 272 in the direction of the center line CL.

[0257] FIG. 48 is a view showing another embodiment of the second bearing. As shown in FIG. 48, the rotary side bearing body 272 may be integrally formed with the communication shaft 270. In this case, the communication shaft 270 is made of a same bearing material (e.g., ceramic or steel) as the rotary side bearing body 272. In the embodiment shown in FIG. 48, the stationary side bearing body 271 is arranged around the communication shaft 270, which is integrally formed with the rotary side bearing body 272.

[0258] FIG. 49 is a view showing another embodiment of the second bearing. In the embodiment shown in FIG. 49, the stationary side bearing body 271 is integrally

formed with the bearing supporter 246 of the discharge casing 22. In this embodiment, the bearing supporter 246 is made of a same bearing material (e.g., ceramic, steel or resin) as the stationary side bearing body 271.

[0259] In this manner, the motor pump MP may include the first impeller 1A having the same structure as the impeller 1 according to the embodiments shown in FIGS. 35 to 39 or the first impeller 1A according to the embodiments shown in FIGS. 40 to 42. In one embodiment, the motor pump MP may include the first impeller 1A having the same structure as the impeller 1 according to the embodiments shown in FIGS. 1 to 34. In other words, the embodiments shown in FIGS. 1 to 49 may be combined whenever possible.

[0260] FIG. 50 is a view showing a side plate provided in the motor pump according to the embodiment described above. As shown in FIG. 50, the motor pump MP may further include a side plate 300 that restricts an outflow of the liquid (liquid to be handled) pressurized by the impeller 1 to the discharge port 322. In the embodiment shown in FIG. 50, the side plate 300 has a disc shape and is fixed to the return vane 30.

[0261] The side plate 300 is arranged between the main plate 10 of the impeller 1 and the return vane 30. A part of the liquid pressurized by the impeller 1 flows through the gap between the side plate 300 and the discharge casing 22 via the return vane 30, and is discharged from the outlet 322a. The other part of the liquid pressurized by the impeller 1 flows into the gap between the side plate 300 and the main plate 10 of the impeller 1.

[0262] When the impeller 1 rotates, a force of the liquid (i.e., force of fluid) that pushes the impeller 1 toward the discharge casing 22 acts on the impeller 1. Since a flow of the liquid that has flowed into the gap between the side plate 300 and the main plate 10 is restricted by the side plate 300, the pressurized liquid remains in the gap between the side plate 300 and the main plate 10. Since the liquid remaining in the gap between the side plate 300 and the main plate 10 receives the force of the fluid acting on the impeller 1, a movement of the impeller 1 toward the discharge casing 22 is restricted.

[0263] When the motor pump MP is operated steadily, a thrust force acts on the impeller 1 from the discharge casing 22 side to the suction casing 21 side. Therefore, even if the force of the fluid acts on the impeller 1, the impeller 1 is stably held by the bearing 5. In the embodiment shown in FIG. 50, an embodiment in which the side plate 300 is applied to the motor pump MP according to the embodiment shown in FIG. 1 has been described. The side plate 300 is also applicable to the motor pump MP according to the embodiments shown in FIGS. 2 to 49.

[0264] FIG. 51 is a view showing another embodiment of the side plate. As shown in FIG. 51, the side plate 300 may have an opening 300a formed in the center thereof. As described above, the liquid that has flowed into the gap between the side plate 300 and the main plate 10 may remain in the gap between the side plate 300 and

the main plate 10.

[0265] In this case, by rotating the impeller 1, the remaining liquid may swirl and eventually generate heat. By forming the opening 300a in the side plate 300, a circulating flow of the liquid is formed between the gap between the side plate 300 and the discharge casing 22 and the gap between the side plate 300 and the impeller 1. Therefore, the liquid existing between the side plate 300 and the impeller 1 flows into the discharge casing 22 side, and a heat generation in the liquid is prevented and the temperature of the liquid is maintained at a constant level. Furthermore, the opening 300a can serve to discharge air contained in the remaining liquid to the discharge casing 22 side.

[0266] In the embodiment shown in FIG. 51, the opening 300a of the side plate 300 is a single opening formed on the center line CL, but the number of openings 300a is not limited to this embodiment. The side plate 300 may have a plurality of openings 300a to an extent that the movement of the impeller 1 toward the discharge casing 22 is restricted.

[0267] Furthermore, the opening 300a does not necessarily need to be formed on the center line CL as long as it can form the circulating flow of the liquid. For example, the side plate 300 may have at least one opening 300a arranged concentrically around the center line CL.

[0268] The shape of the opening 300a is also not particularly limited, and may have a circular shape or a polygonal shape (e.g., a triangular shape or a quadrangular shape). Similarly, a size (i.e., area) of the opening 300a is not particularly limited as long as the movement of the side plate 300 toward the discharge casing 22 is restricted.

[0269] FIG. 52 is a view showing another embodiment of the motor pump. In the embodiment shown in FIG. 52, the motor pump MP includes the discharge casing 22 having a discharge port 322 extending in a vertical direction perpendicular to the direction of the centerline CL of the motor pump MP. The discharge port 322 has an upwardly opening outlet 322a, and the inlet 21a and the outlet 322a are orthogonal to each other.

[0270] In the embodiment shown in FIG. 52, the motor pump MP is a so-called end-top motor pump, in which the inlet 21a and the outlet 322a are orthogonal. The motor pump MP has a compact structure. For example, depending on an installation environment of the motor pump MP, it may not be possible to install the motor pump MP with a structure in which the inlet 21a and the outlet 22a are arranged in a straight line. Even in such cases, the end-top type motor pump MP can be installed. Thus, the motor pump MP can be installed in any installation environment.

[0271] As shown in FIG. 52, the motor pump MP may further include the side plate 300 that restricts the outflow of the liquid (liquid to be handled) pressurized by the impeller 1 to the discharge port 322. Thus, the side plate 300 can be applied to the end-top type motor pump MP. In the embodiment shown in FIG. 52, the side plate 300

may also have the opening 300a (see FIG. 51).

[0272] The above embodiments are described for the purpose of practicing the present invention by a person with ordinary skill in the art to which the invention pertains. Although preferred embodiments have been described in detail above, it should be understood that the present invention is not limited to the illustrated embodiments, but many changes and modifications can be made therein without departing from the appended claims.

Industrial Applicability

[0273] The invention is applicable to a motor pump.

Reference Signs List

[0274]

1, 1A, 1B, 1C impeller
 2 rotor
 2a iron core
 2b magnet
 3 stator
 3a stator core
 3b coil
 5 bearing
 6 rotary side bearing body
 6a cylindrical portion
 6b flange portion
 7 stationary side bearing body
 7a cylindrical portion
 7b flange portion
 10 main plate
 10a through hole
 11 side plate
 11a outer edge portion
 12 vane
 15 suction portion
 16 body portion
 17 protrusion
 17a outer circumferential surface
 17b inner circumferential surface
 20 stator casing
 20a inner circumferential surface
 21 suction casing
 21a inlet
 22 discharge casing
 22a outlet
 25 through bolt
 25a head portion
 30 return vane
 31 seal member
 32, 33 seal member
 40, 41, 42 groove
 41a both ends
 45 thrust load reduction structure
 46 back vane
 47 notch

50, 51
 53, 54
 60
 61
 5 65
 70, 70A, 70B
 71
 75
 10 76
 77
 80
 85
 15 86
 87
 90
 91
 100
 20 100a
 100b
 100c
 101
 102
 25 105
 106
 107
 108
 110
 30 117
 118
 120
 121
 125
 35 126
 127A
 127B
 128
 129
 40 130
 140
 141
 141a
 141b
 45 142
 142a
 142b
 150
 160
 50 200
 201
 201a
 201b
 201c
 55 202
 203
 205
 220

inclined surface
 inclined surface
 inverter
 intermediate casing
 pipe
 convex portion
 tip portion
 balancing jig (center support adjustment jig)
 shaft body
 fixed body
 center cap
 balancing jig (edge support adjustment jig)
 supporter
 shaft portion
 weight insertion hole
 weight
 control device
 signal receiver
 memory
 controller
 current sensor
 terminal block
 power line
 signal line
 protective cover
 copper bar
 cover
 protrusion
 mounting portion
 seal member
 seal member
 intermediate casing
 communication shaft
 seal member
 seal member
 seal member
 discharge side bearing
 flow path
 swiveling stopper
 connection pipe
 suction casing
 inlet
 insertion hole
 discharge casing
 outlet
 bolt accommodating portion
 fastener
 main plate
 rotor holder
 accommodating portion
 outer surface
 inner surface
 corner surface
 closing plate
 spacer
 sealing member
 insulating member

221	motor frame			an impeller which is a press-molded product,
229	seal groove			and the rotor holder being fixed to the impeller.
230	inner surface			
231	outer annular portion		2.	The motor pump according to claim 1, wherein the
232	inner annular portion	5		rotor holder comprises:
233	back surface portion			
235	protrusion			a press-molded annular accommodating portion
240	partition plate			accommodating the rotor; and
241	seal member			an annular closing plate closing the accommo-
242	passage hole	10		dating portion.
245	partition plate			
251	accommodating portion		3.	The motor pump according to claim 2, wherein the
252	ring holder			rotor holder comprises a sealing member arranged
253	ring portion			between the accommodating portion and the closing
253a	embedded hole	15		plate.
253b	bent portion			
254	bent portion		4.	The motor pump according to claim 2 or 3, wherein
254a	embedded hole			the rotor holder comprises a filler filled in the accom-
254b	bent portion			modating portion.
255	main body portion	20		
256	bent portion		5.	The motor pump according to any one of claims 2 to
260	spacer			4, wherein the rotor holder comprises a spacer ar-
270	communication shaft			anged between the accommodating portion and the
270a	tip portion			rotor.
270b	threaded hole	25		
271	stationary side bearing body		6.	The motor pump according to any one of claims 2 to
272	rotary side bearing body			5, wherein the accommodating portion comprises:
273	fastener			
275	intermediate casing			an outer annular portion; and
276	liner ring	30		an inner annular portion arranged radially in-
277	second bearing			ward of the outer annular portion,
280	sleeve			
281	boss portion			wherein the inner annular portion has a plurality of
282	boss portion			protrusions formed at a contact portion with the rotor.
285,286	collet	35		
290	fastener		7.	The motor pump according to claim 6, wherein an
291	spacer			inner surface of the rotor in contact with the inner
300	side plate			annular portion has a polygonal shape.
300a	opening			
322	discharge port	40	8.	The motor pump according to any one of claims 1 to
322a	outlet			7, wherein the motor pump comprises a bearing sup-
MP	motor pump			porting the impeller and arranged outside of a flow
PU	pump unit			path of the impeller, and
CL	center line			wherein the bearing comprises:
Ra	suction side region	45		
Rb	discharge side region			a rotary side bearing body attached to the rotor
Rc	intermediate region			holder; and
RS	rotary shaft			a stationary side bearing body arranged on a
Nt	nut	50		suction side of the rotary side bearing body.

Claims

1. A motor pump, comprising:

- a rotor;
- a stator arranged radially outside of the rotor;
- a rotor holder holding the rotor; and

55

10. The motor pump according to claim 9, wherein the motor pump comprises a motor frame covering an outer circumferential surface of the stator casing and

being in contact with the stator.

11. The motor pump according to any one of claims 1 to 10, wherein the rotor and the bearing are arranged in a suction side region of the impeller. 5
12. A motor pump, comprising:
- a rotor;
 - a stator arranged radially outside of the rotor; 10
 - a rotor holder holding the rotor; and
 - an impeller which is a resin-molded product, and the rotor holder being integrally molded to the impeller. 15
13. The motor pump according to claim 12, wherein the rotor holder comprises:
- a resin-molded annular accommodating portion accommodating the rotor; and 20
 - a ring holder closing the accommodating portion.
14. The motor pump according to claim 13, wherein the ring holder has a rotation prevention structure formed at a connection portion with the accommodating portion. 25
15. The motor pump according to claim 14, wherein the rotation prevention structure is an embedded hole in which a portion of the accommodating portion is embedded. 30
16. The motor pump according to claim 14 or 15, wherein the rotation prevention structure is a bent portion bent in a U-shape. 35
17. The motor pump according to any one of claims 13 to 16, wherein the rotor holder comprises a spacer arranged between the ring holder and the rotor. 40
18. The motor pump according to any one of claims 13 to 17, wherein the ring holder has a plurality of protrusions formed at a contact portion with the rotor. 45
19. The motor pump according to any one of claims 13 to 17, wherein an inner surface of the rotor in contact with the ring holder has a polygonal shape.
20. The motor pump according to any one of claims 12 to 19, wherein the motor pump comprises a bearing supporting the impeller and arranged outside of a flow path of the impeller, and wherein the bearing comprises: 50
- a rotary side bearing body attached to the rotor holder; and 55
 - a stationary side bearing body arranged on a

suction side of the rotary side bearing body.

21. The motor pump according to any one of claims 12 to 20, wherein the motor pump comprises a stator casing accommodating the stator and being integrally resin molded with the stator.
22. The motor pump according to claim 21, wherein the motor pump comprises a motor frame covering an outer circumferential surface of the stator casing and in contact with the stator.
23. The motor pump according to any one of claims 12 to 22, wherein the rotor and the bearing are arranged in a suction side region of the impeller.

FIG. 1

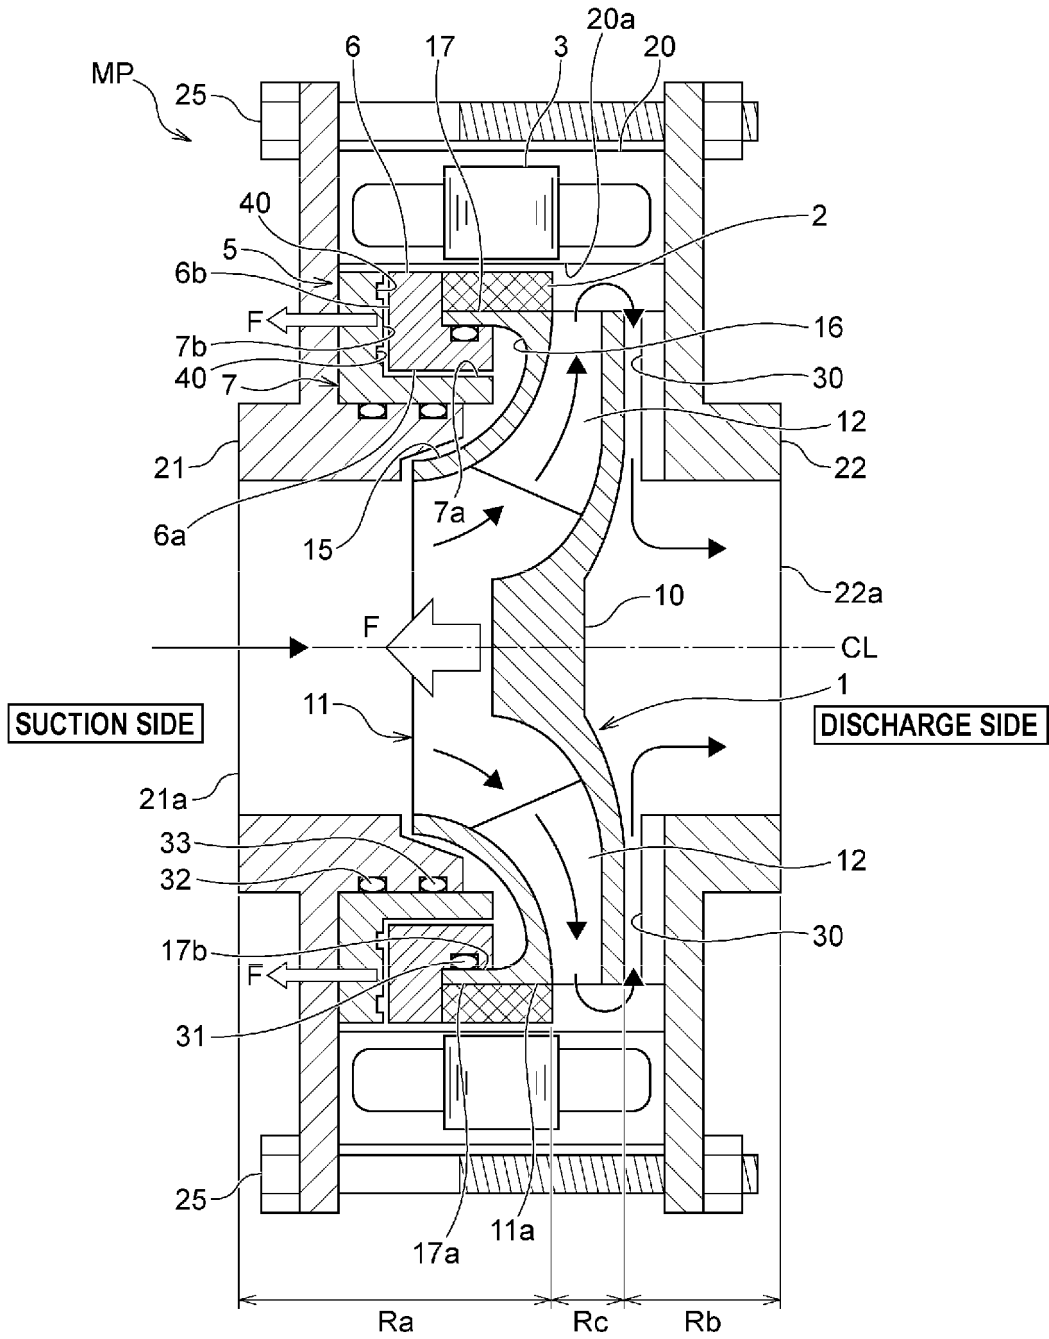


FIG. 2

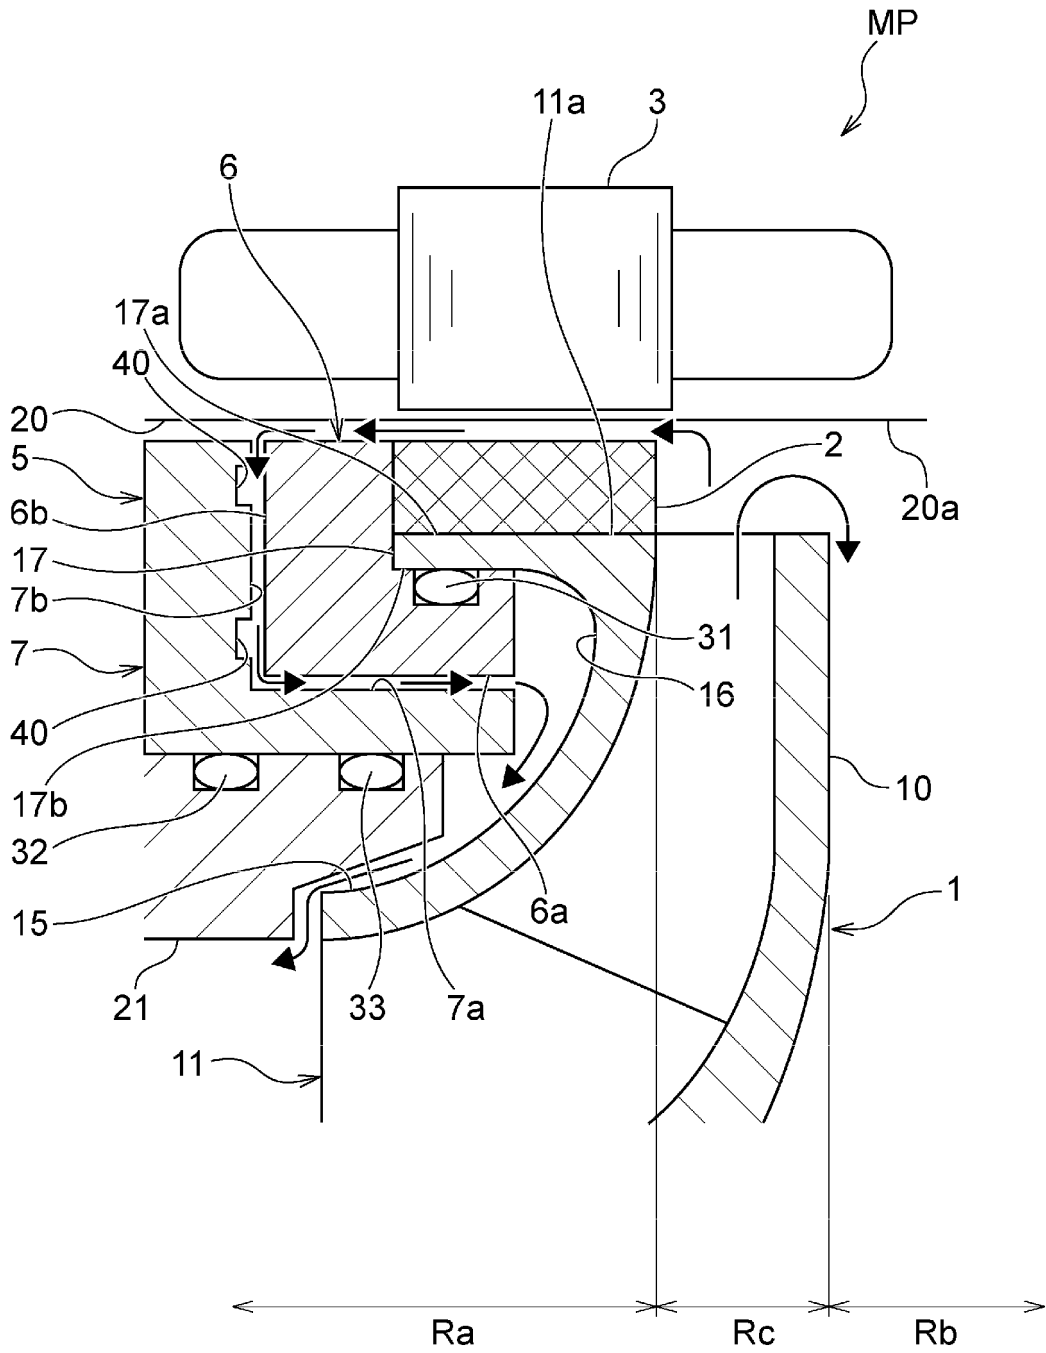


FIG. 3

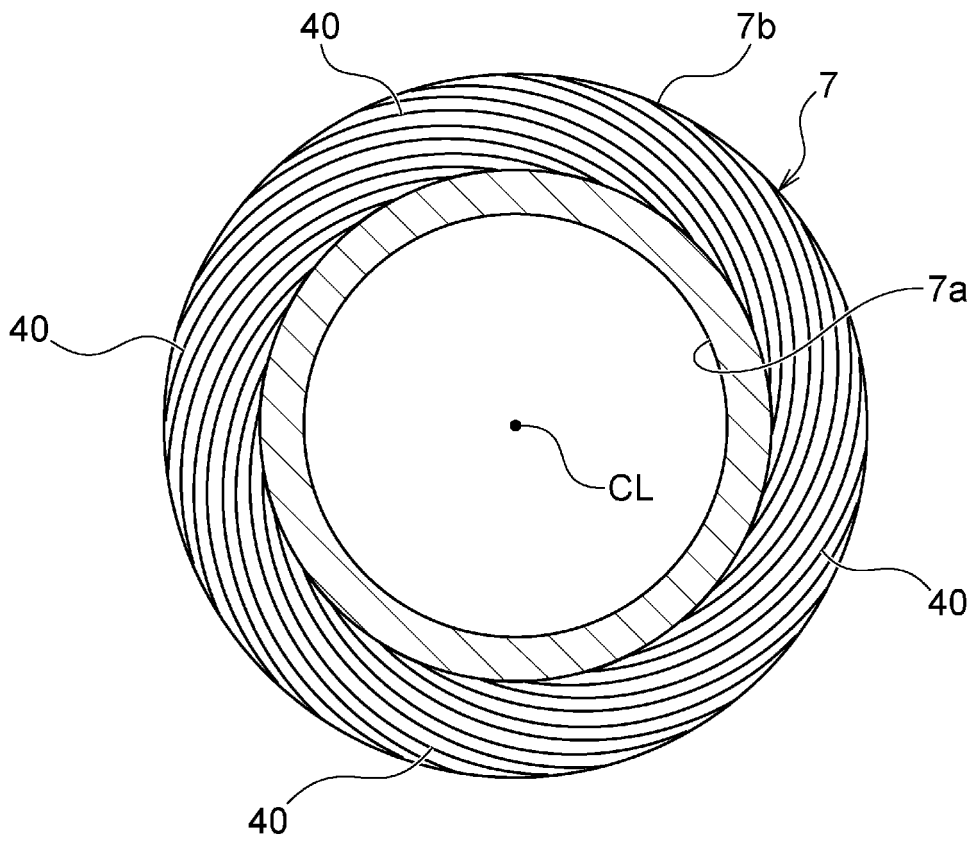


FIG. 4A

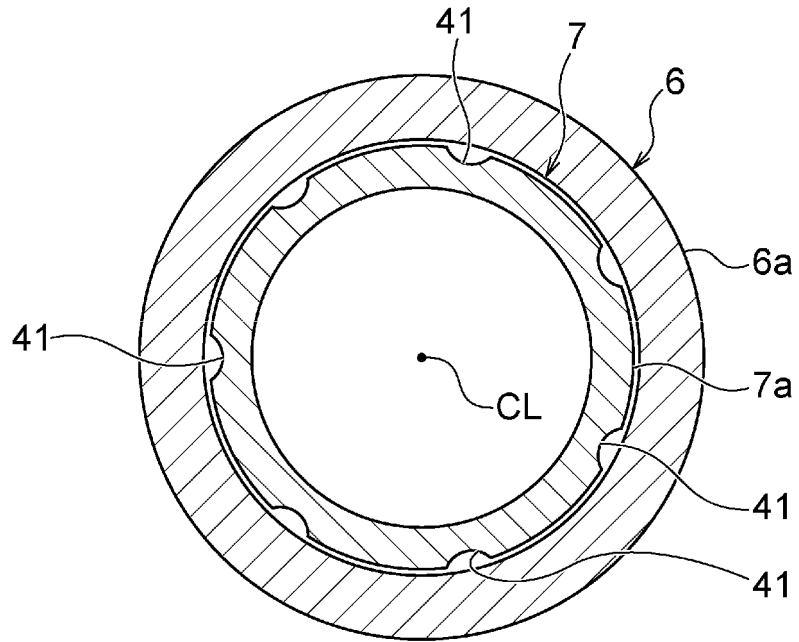


FIG. 4B

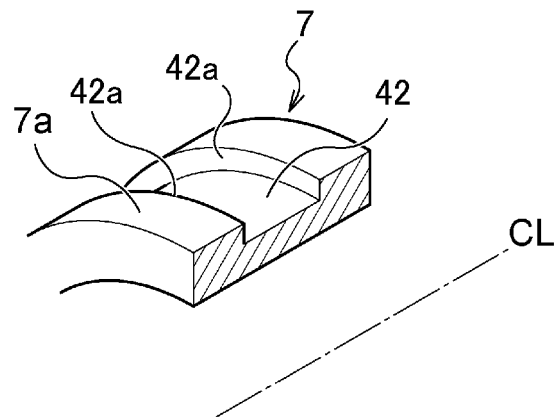


FIG. 4C

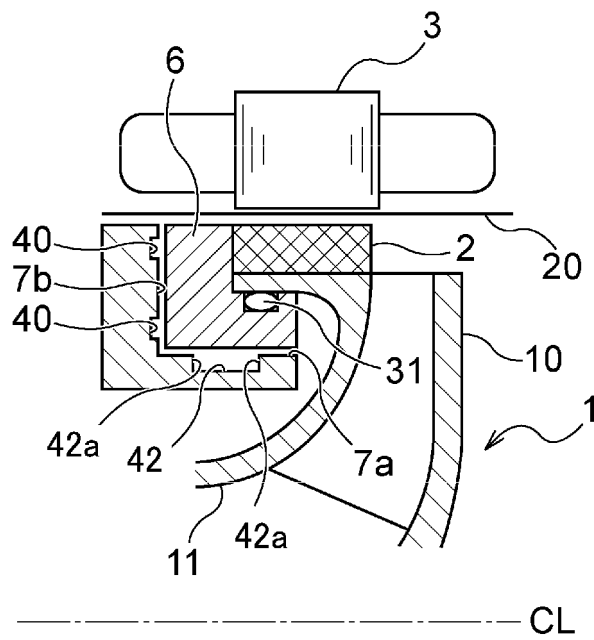


FIG. 5A

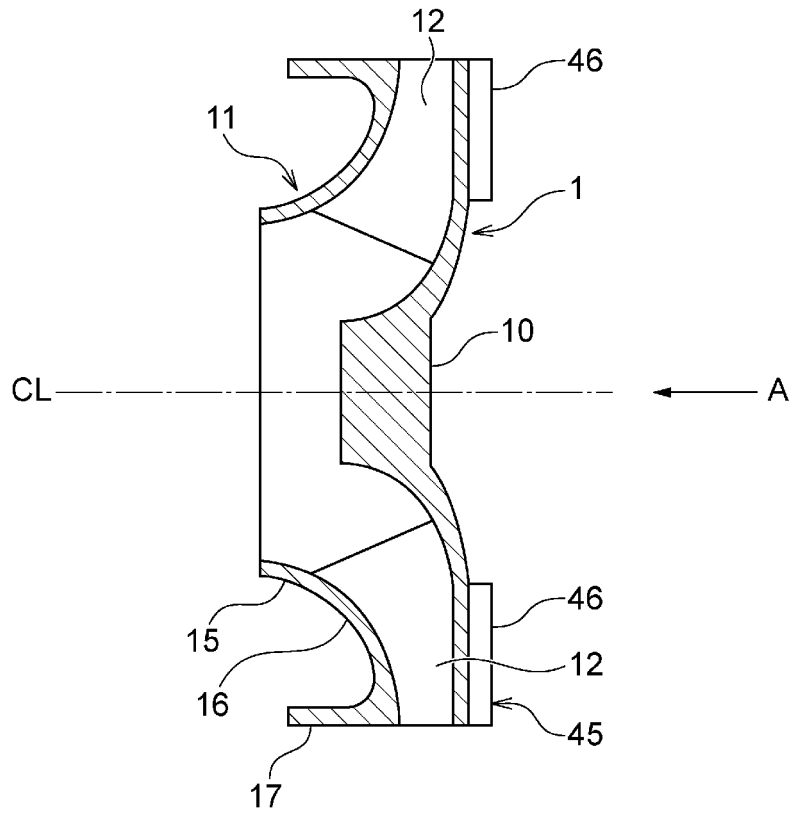


FIG. 5B

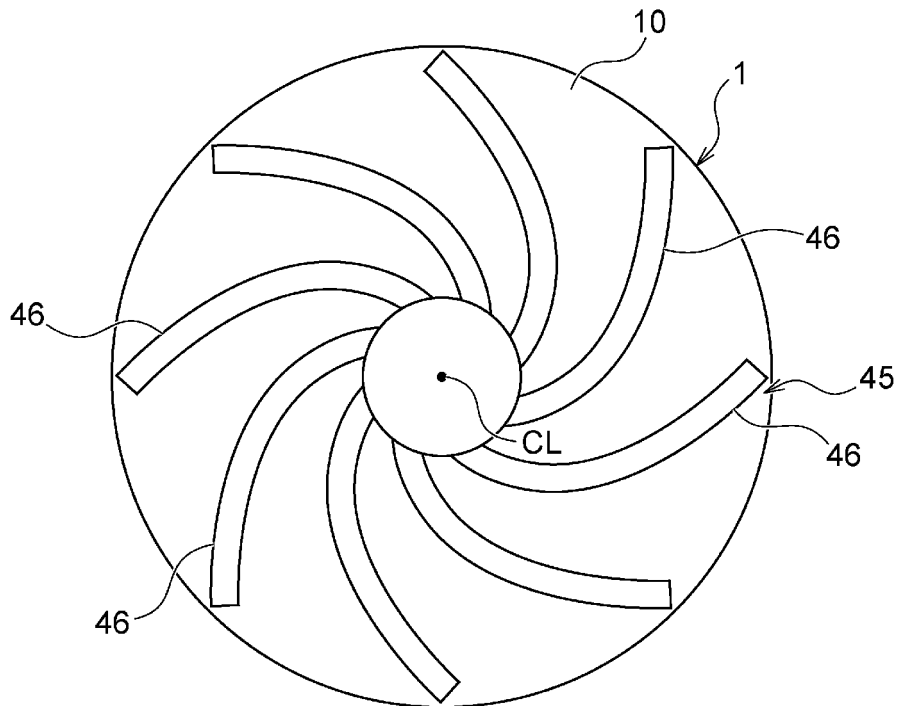


FIG. 6

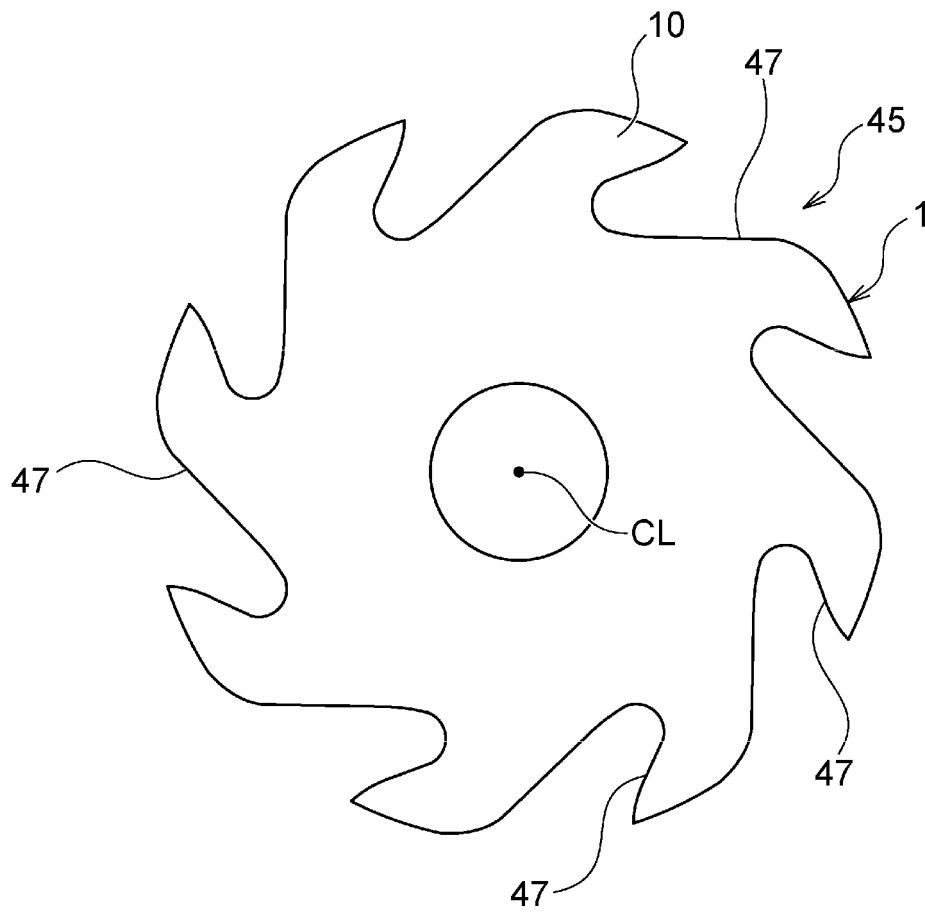


FIG. 8

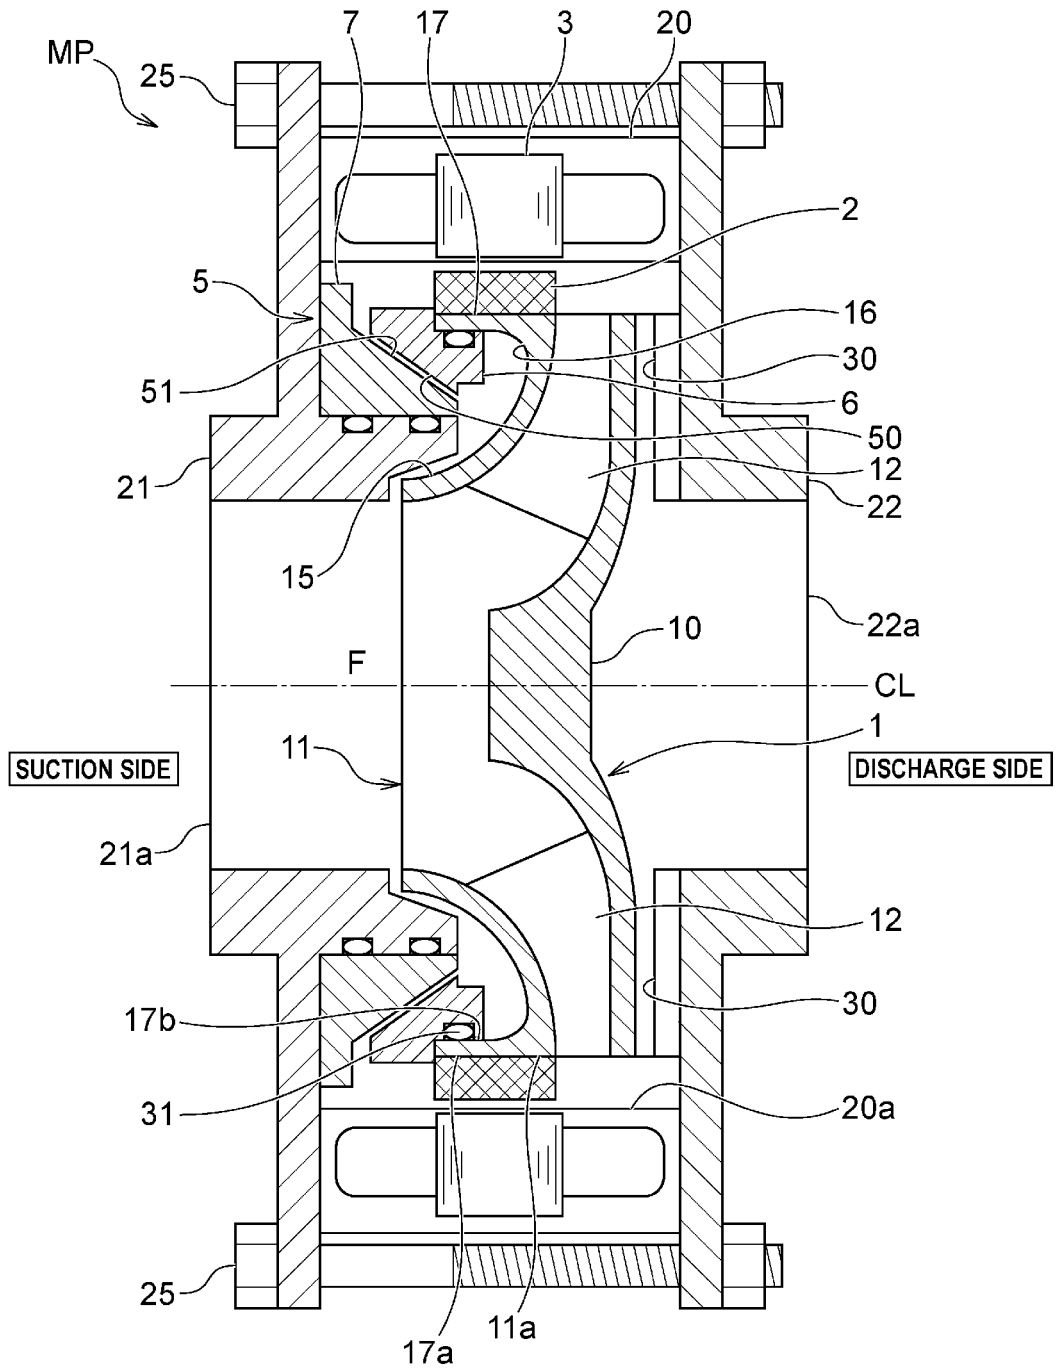


FIG. 9

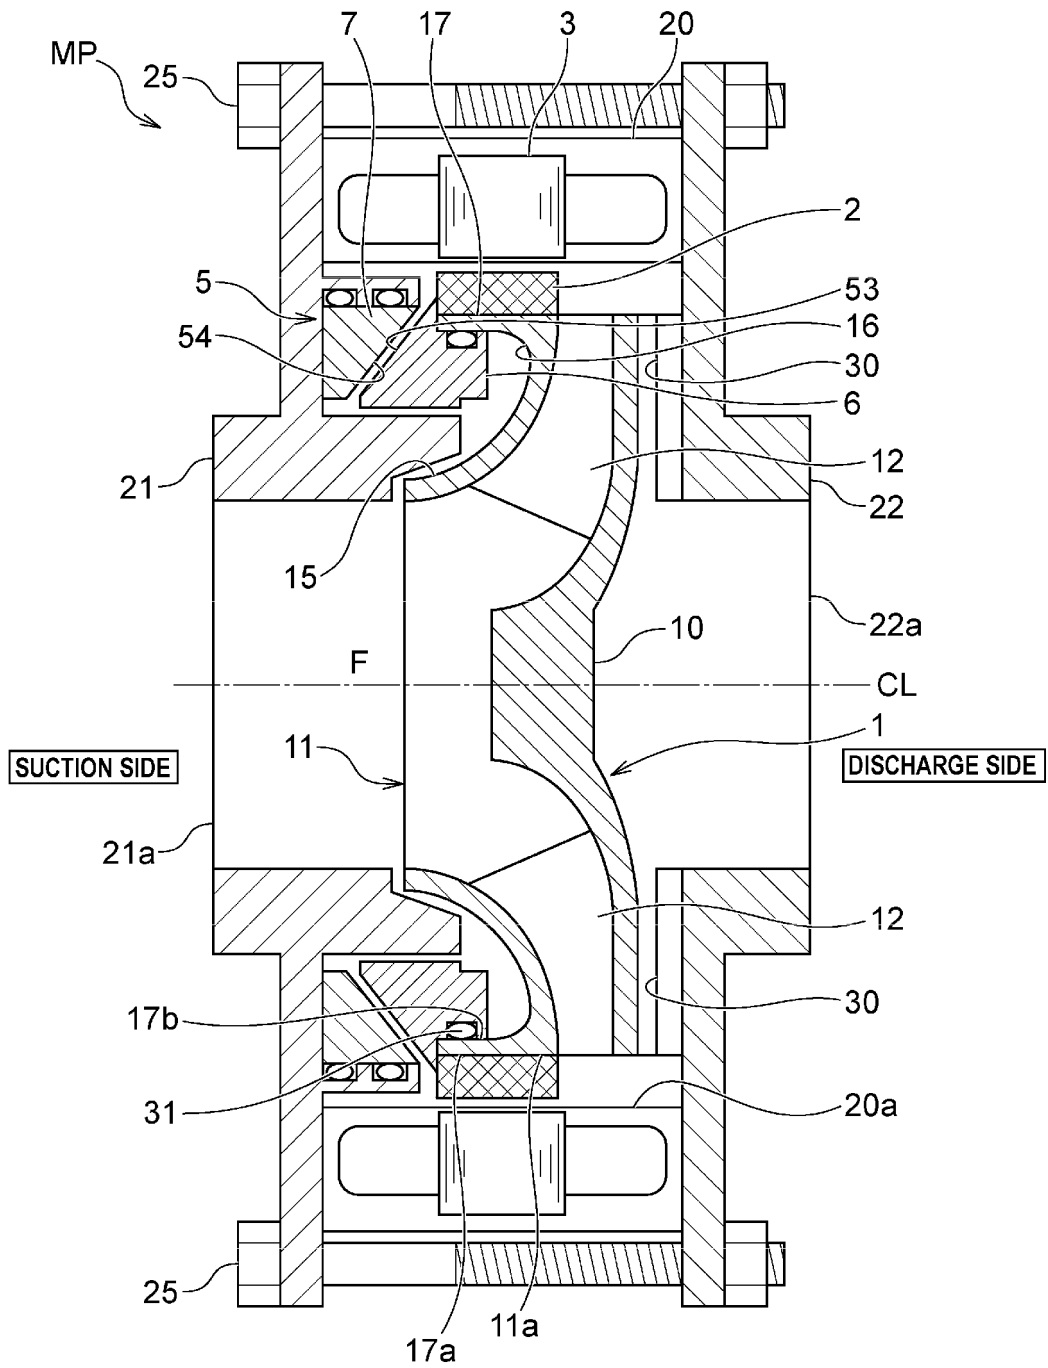


FIG. 11

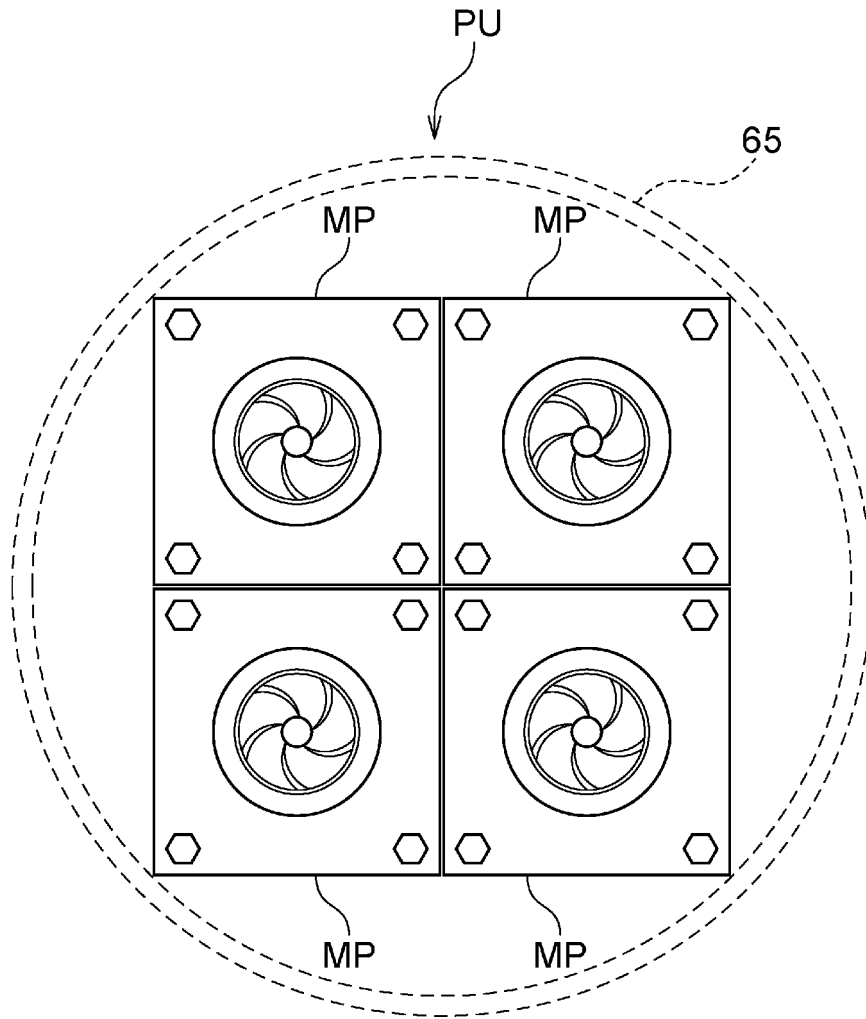


FIG. 12

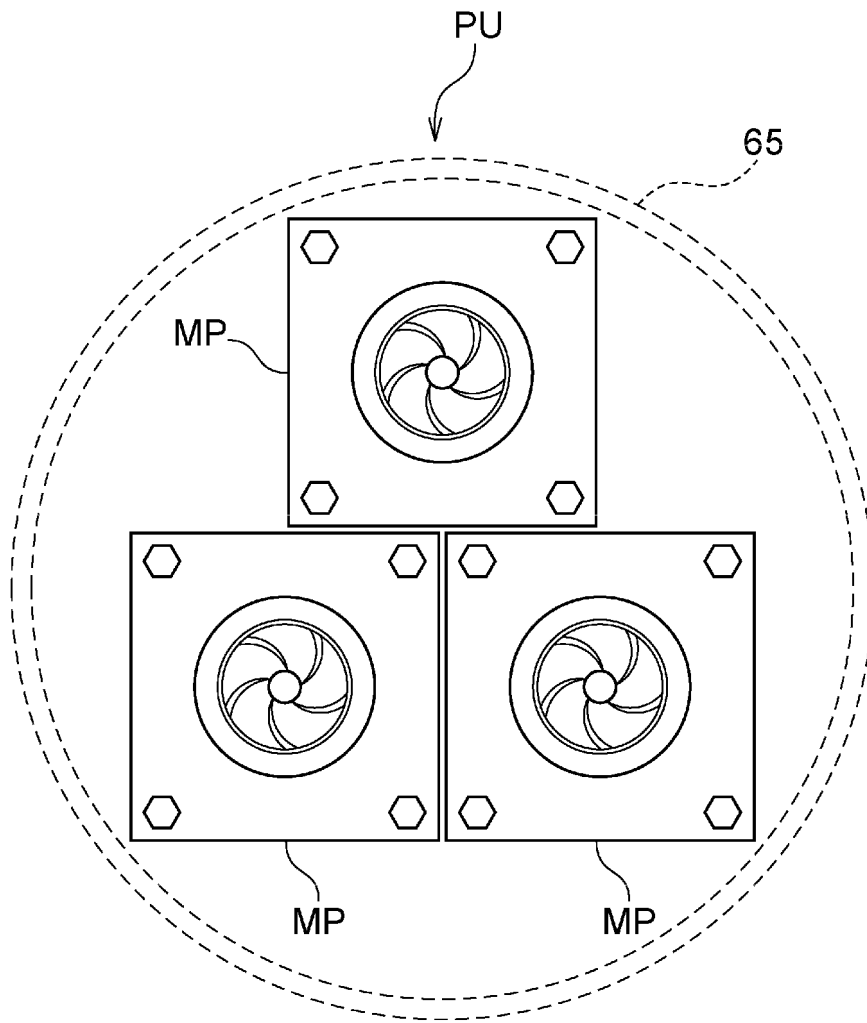


FIG. 13A

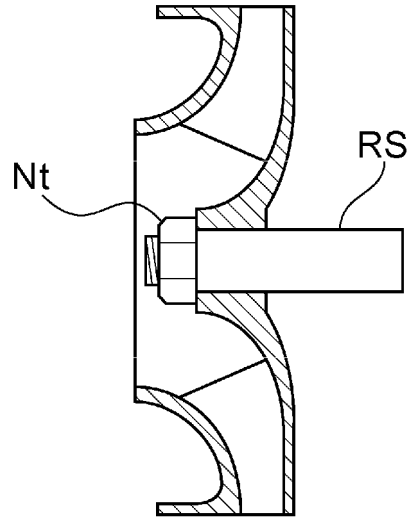


FIG. 13B

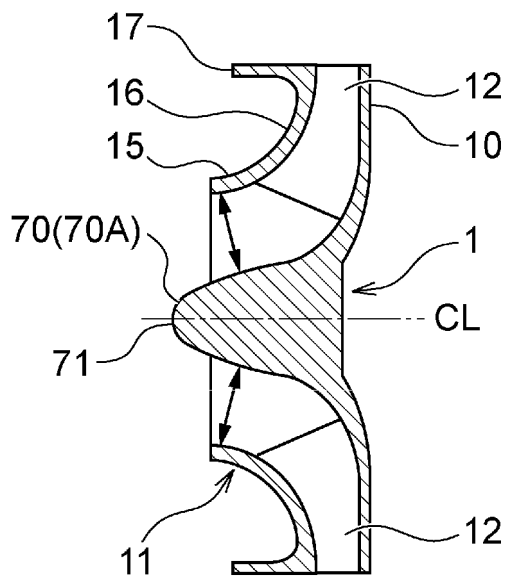


FIG. 13C

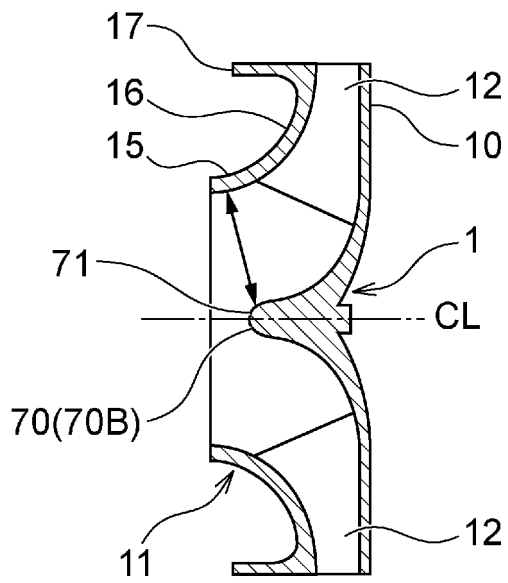


FIG. 14

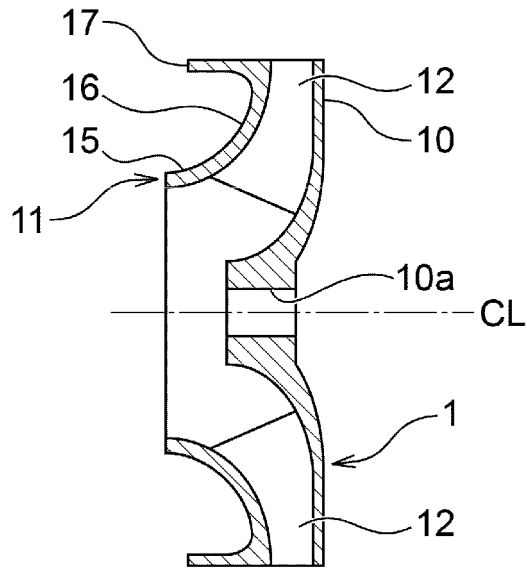


FIG. 15

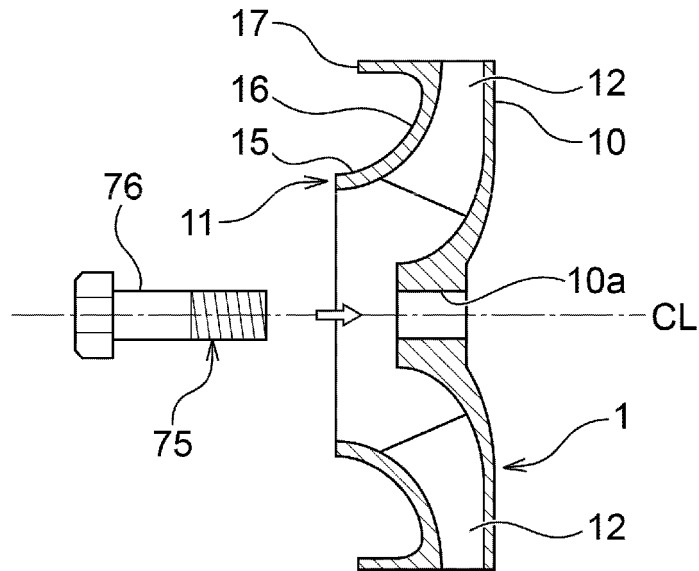


FIG. 16

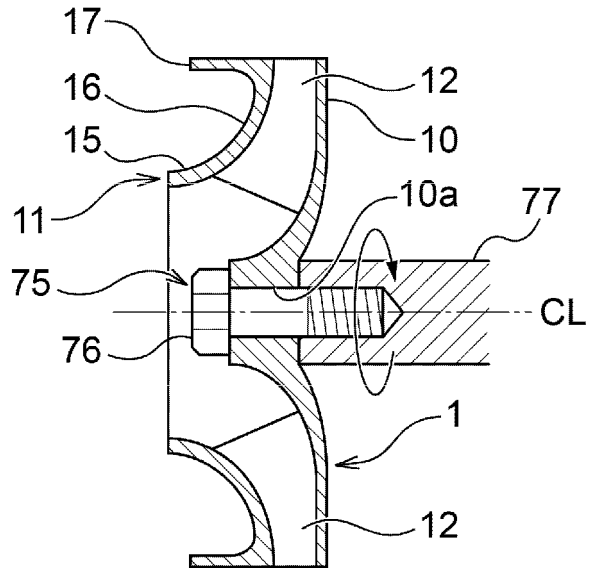


FIG. 17

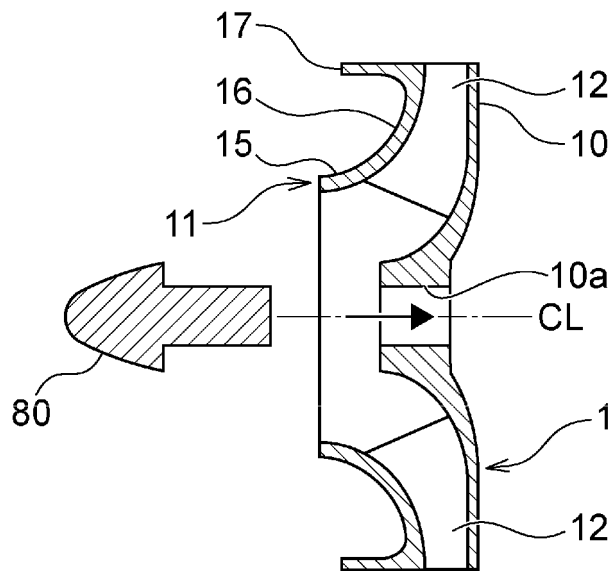


FIG. 18

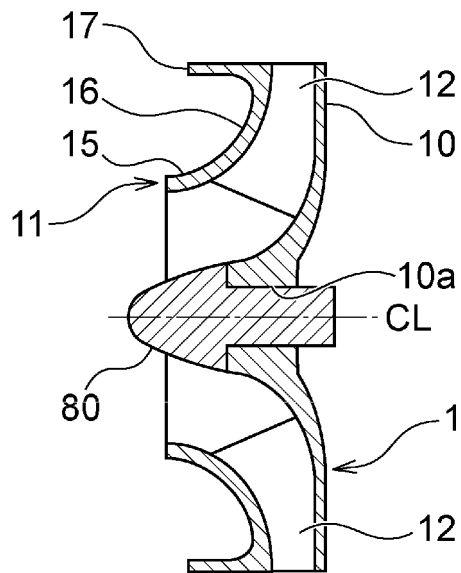


FIG. 19

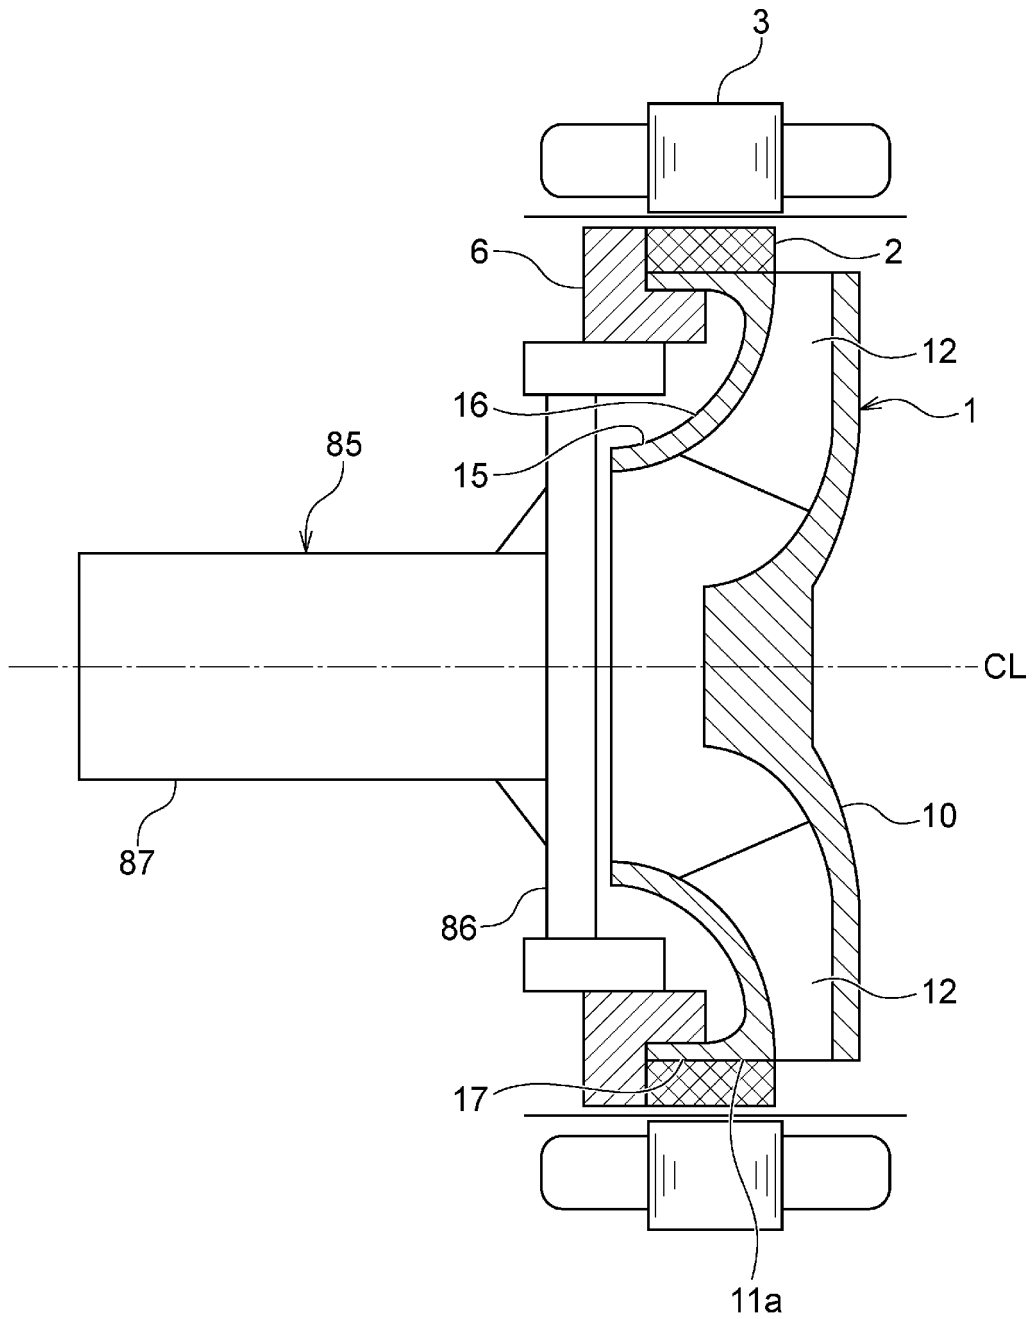


FIG. 20

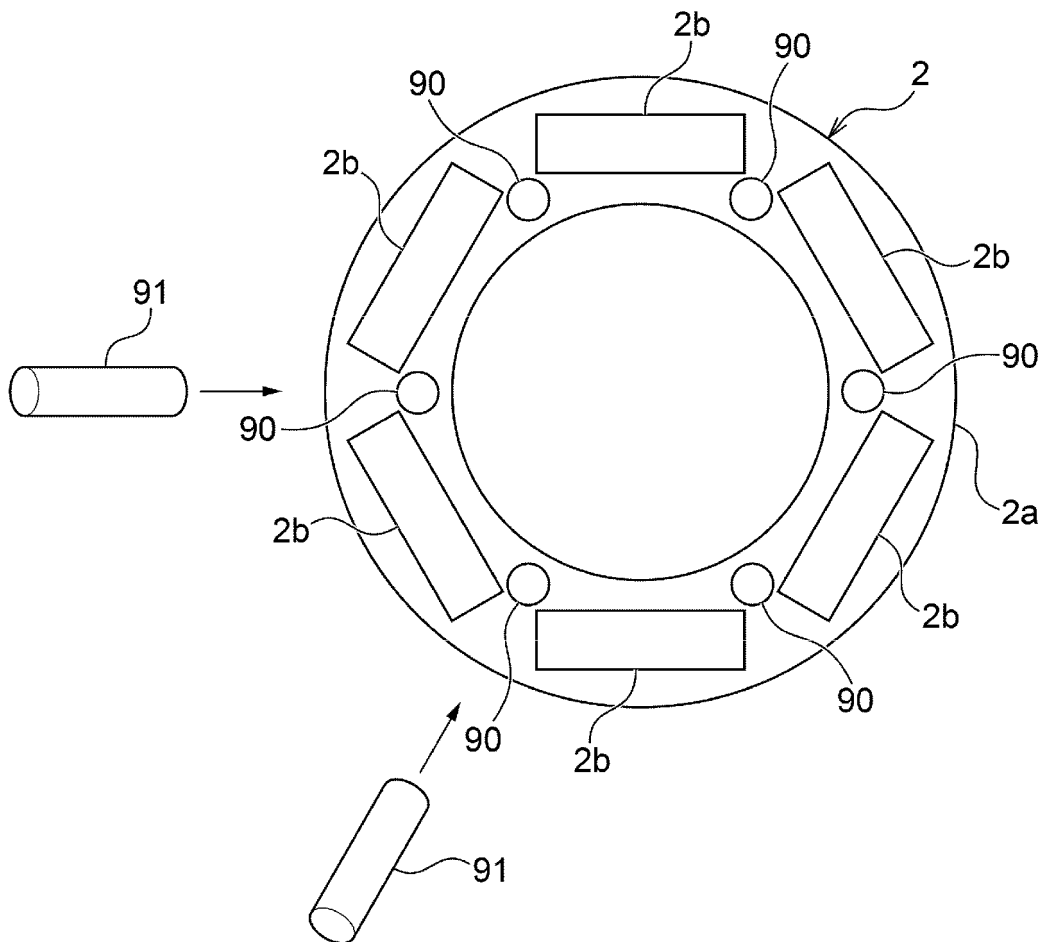


FIG. 21A

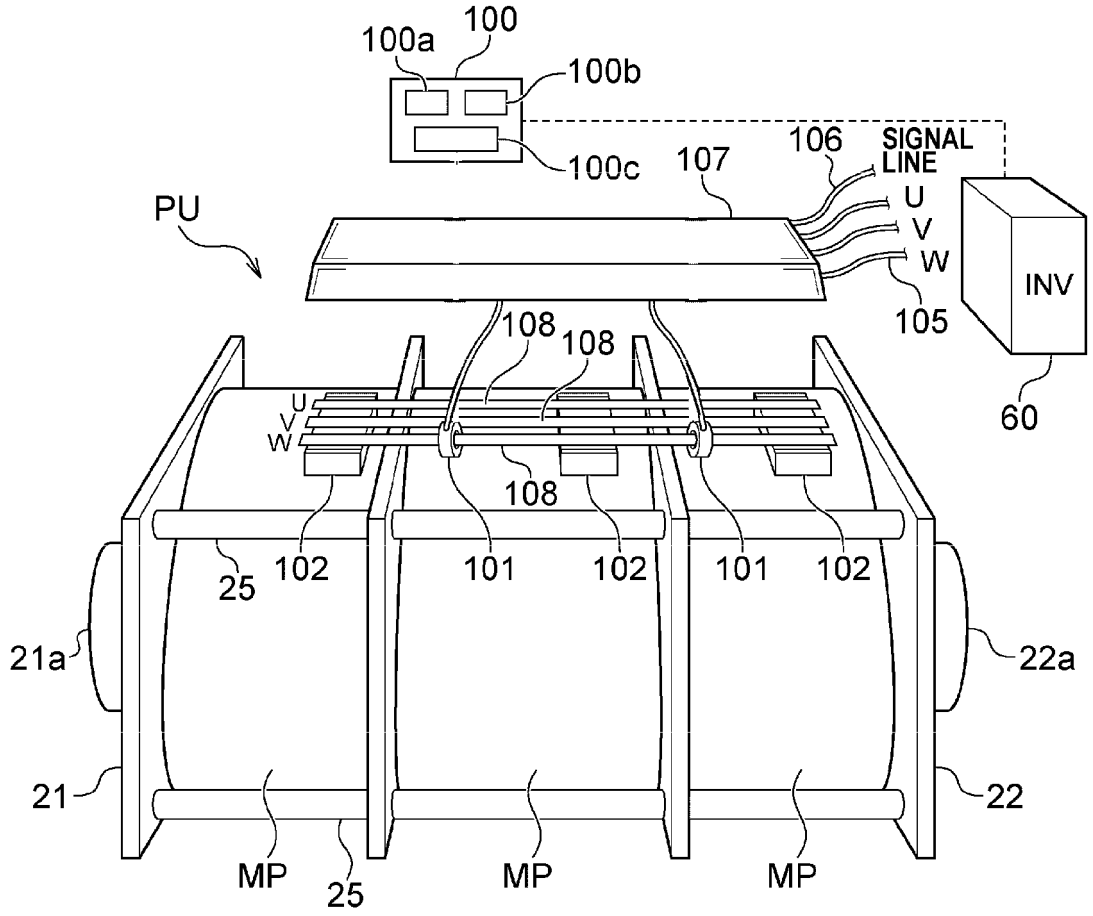


FIG. 21B

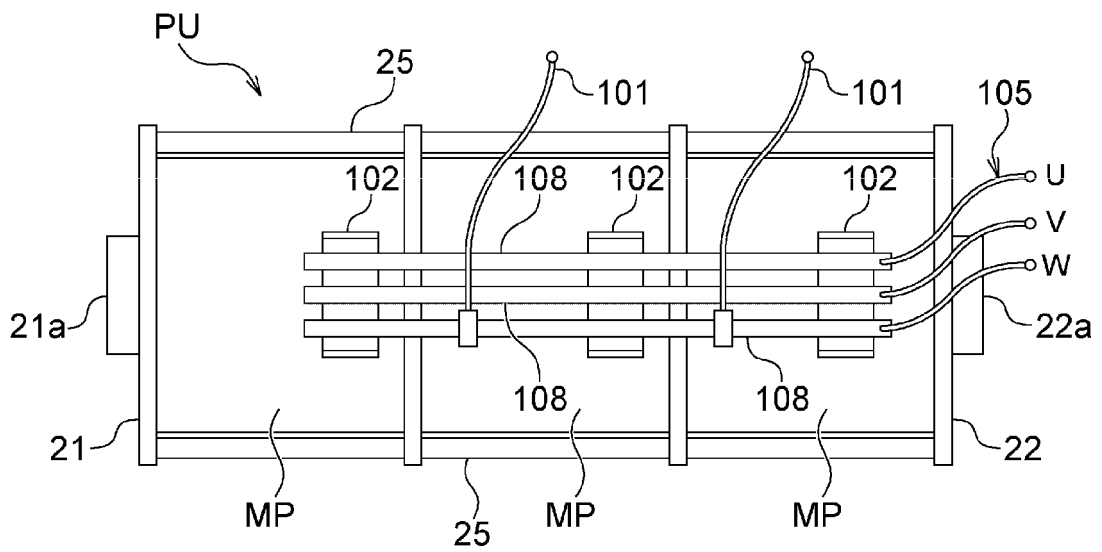


FIG. 22

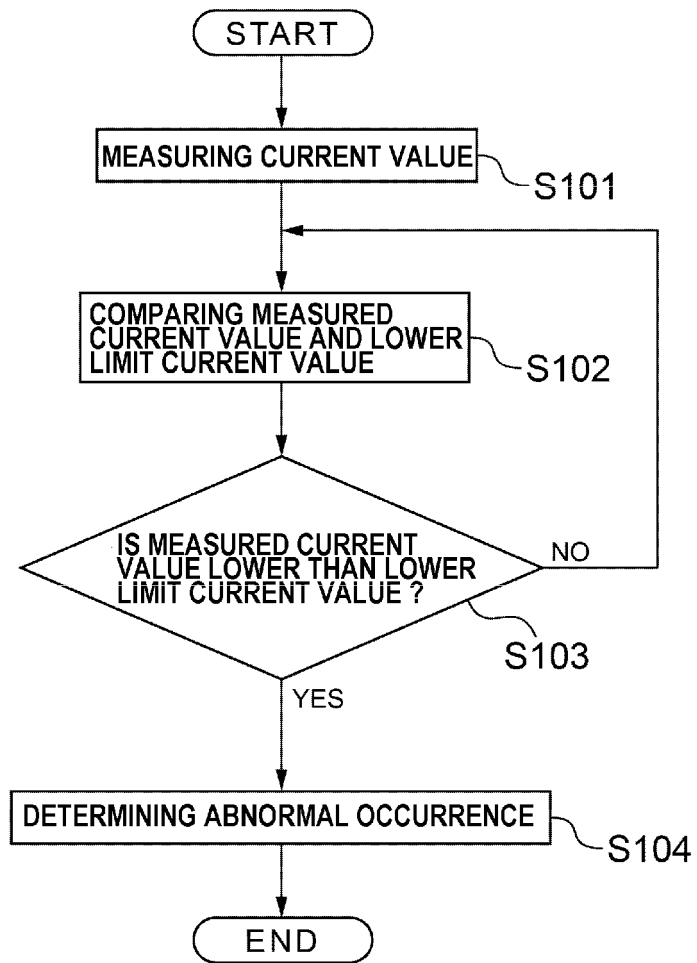


FIG. 23

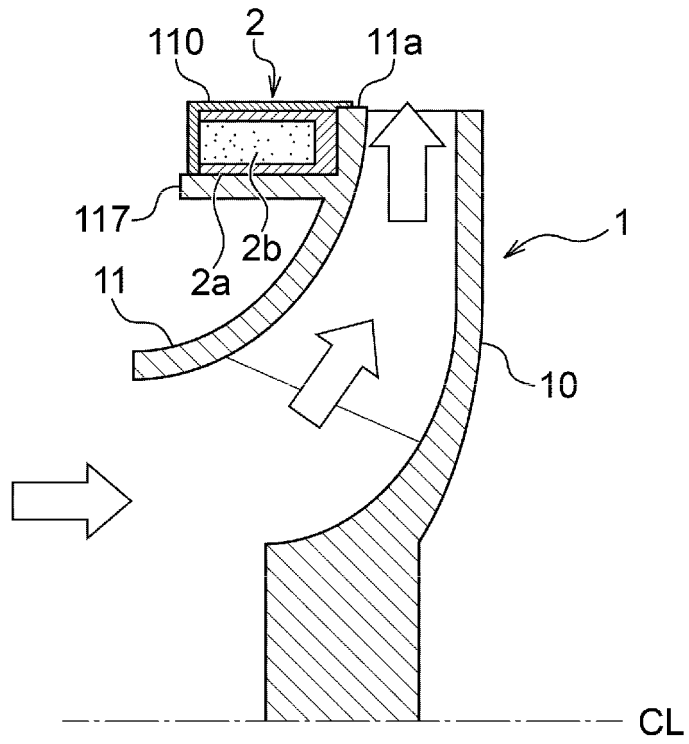


FIG. 24

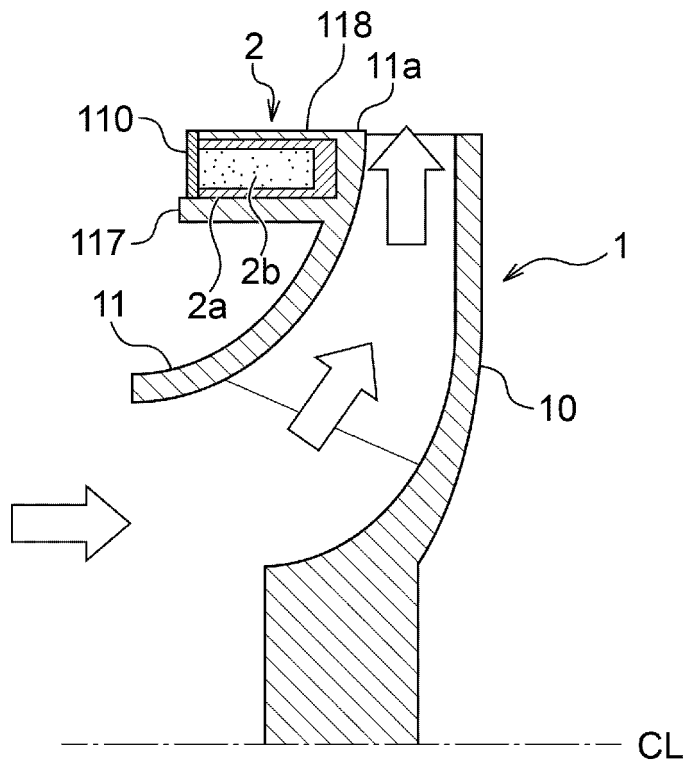


FIG. 25

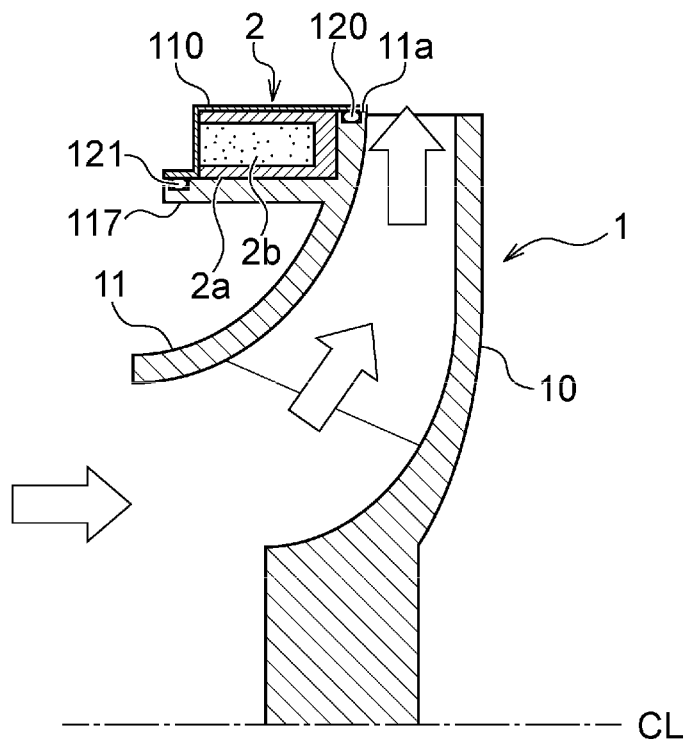


FIG. 26

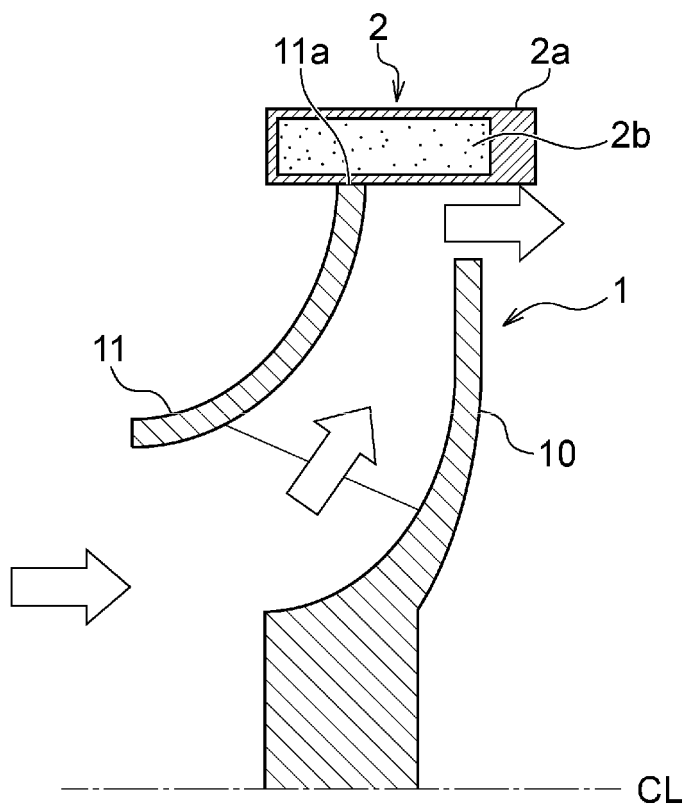
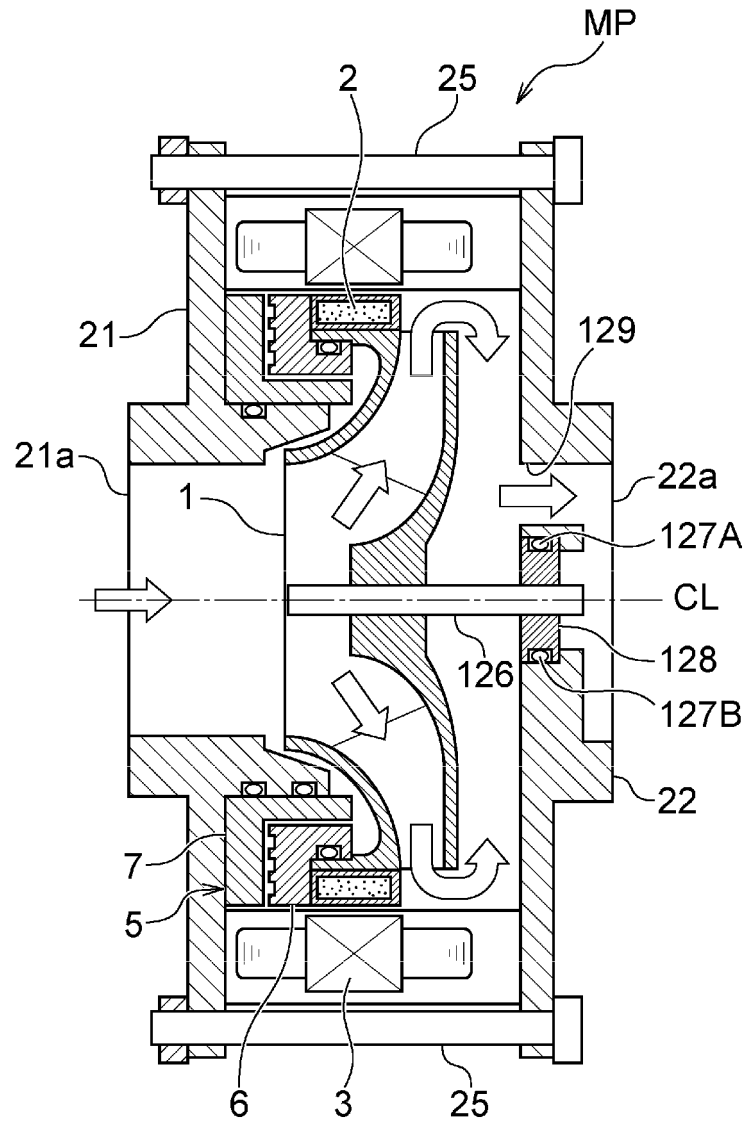


FIG. 29



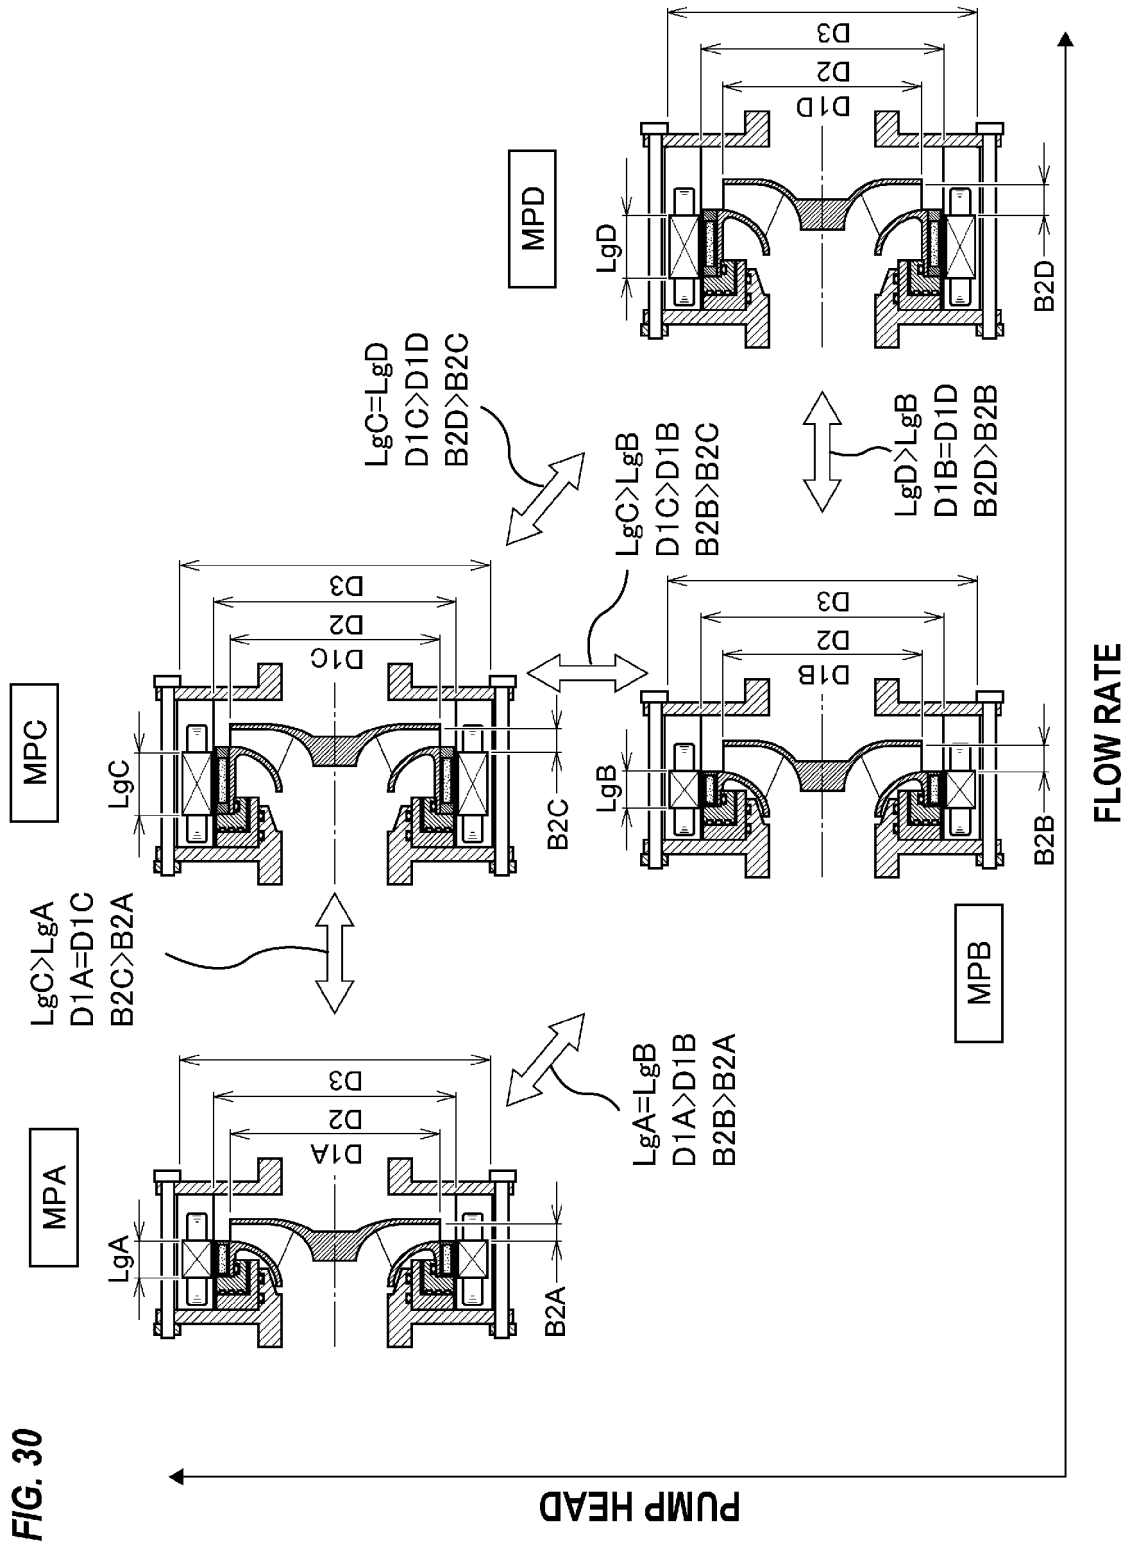


FIG. 31A

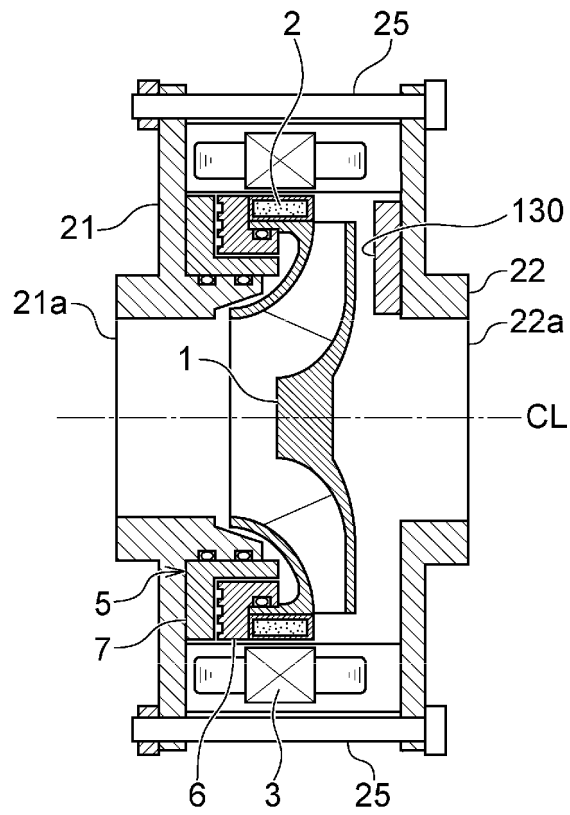


FIG. 31B

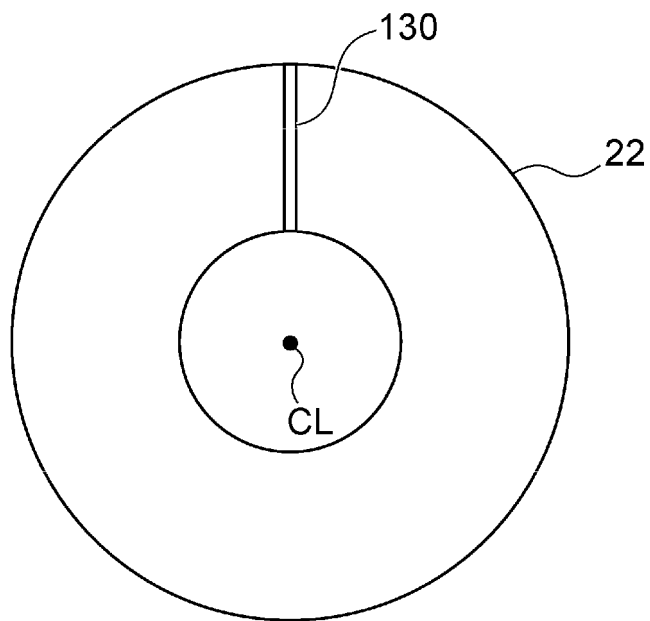


FIG. 32A

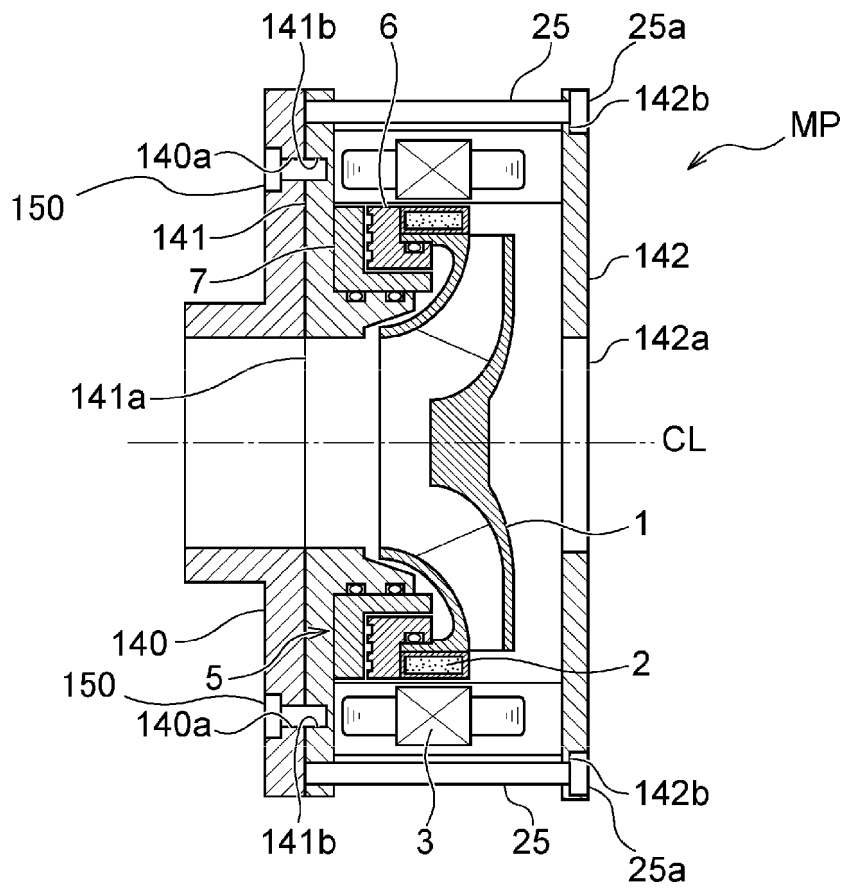
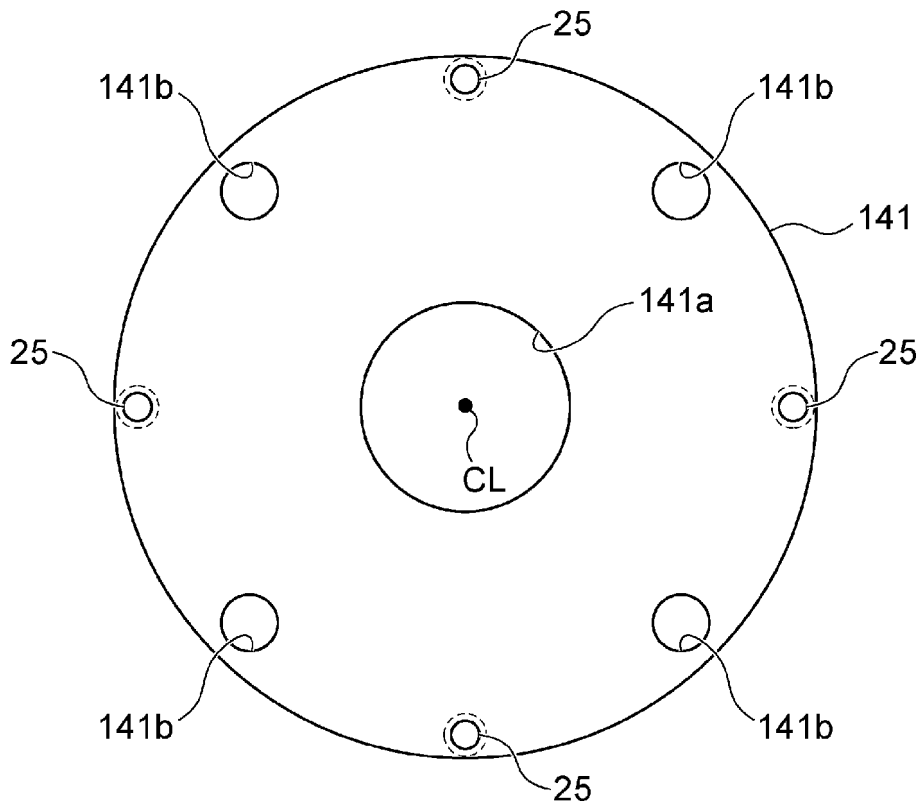


FIG. 32B



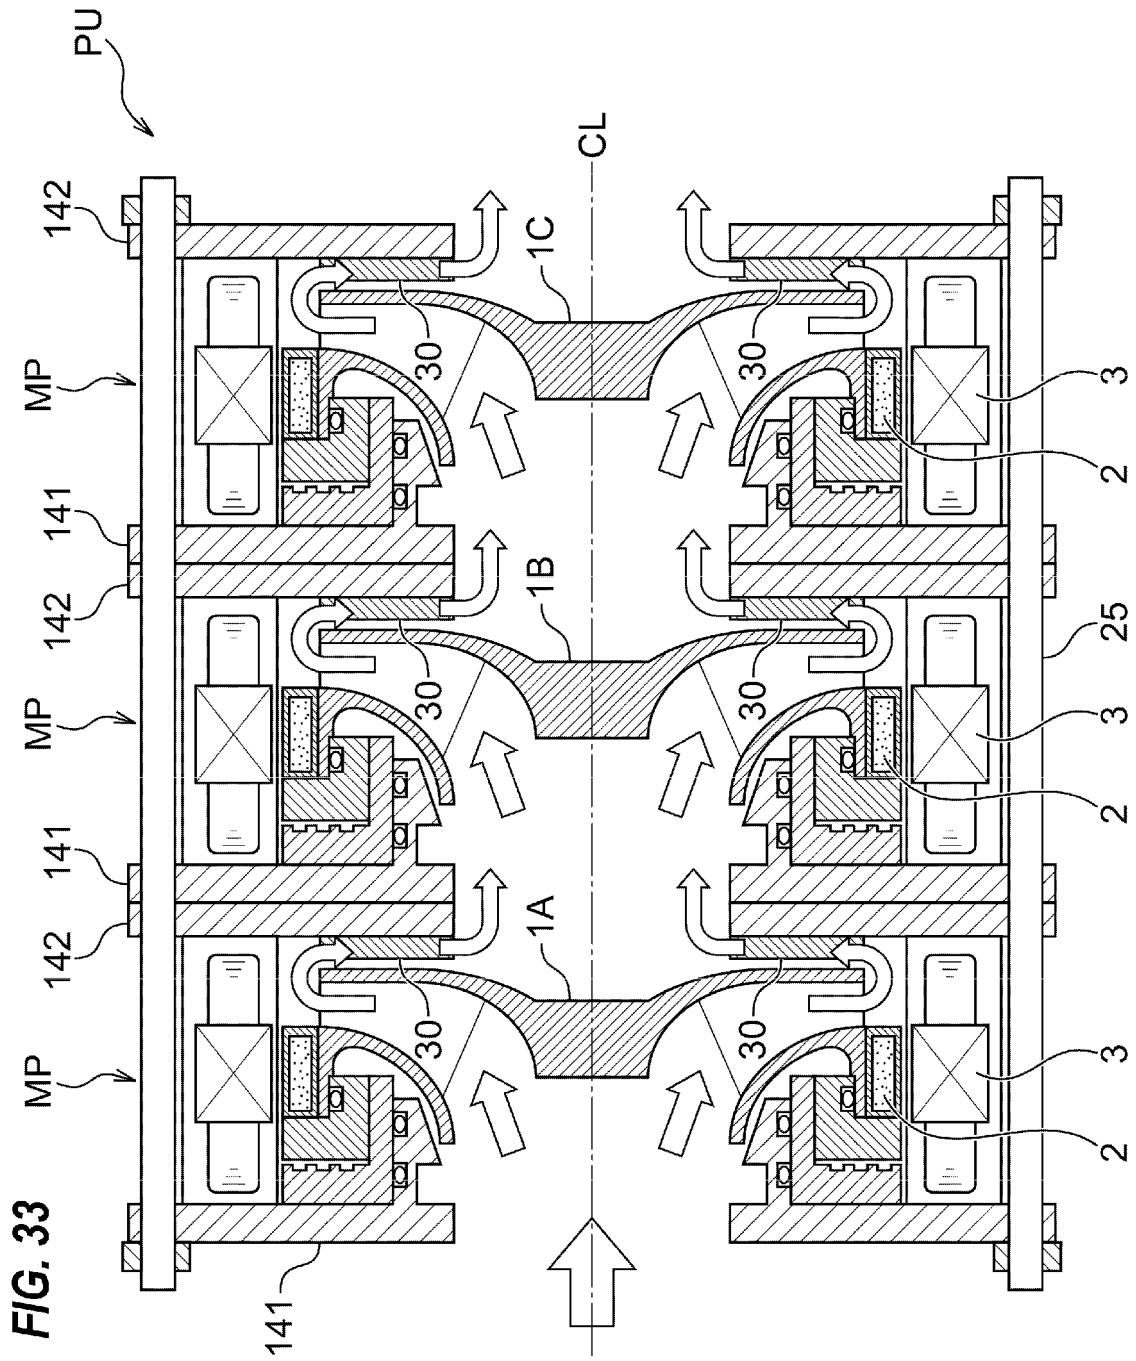


FIG. 34

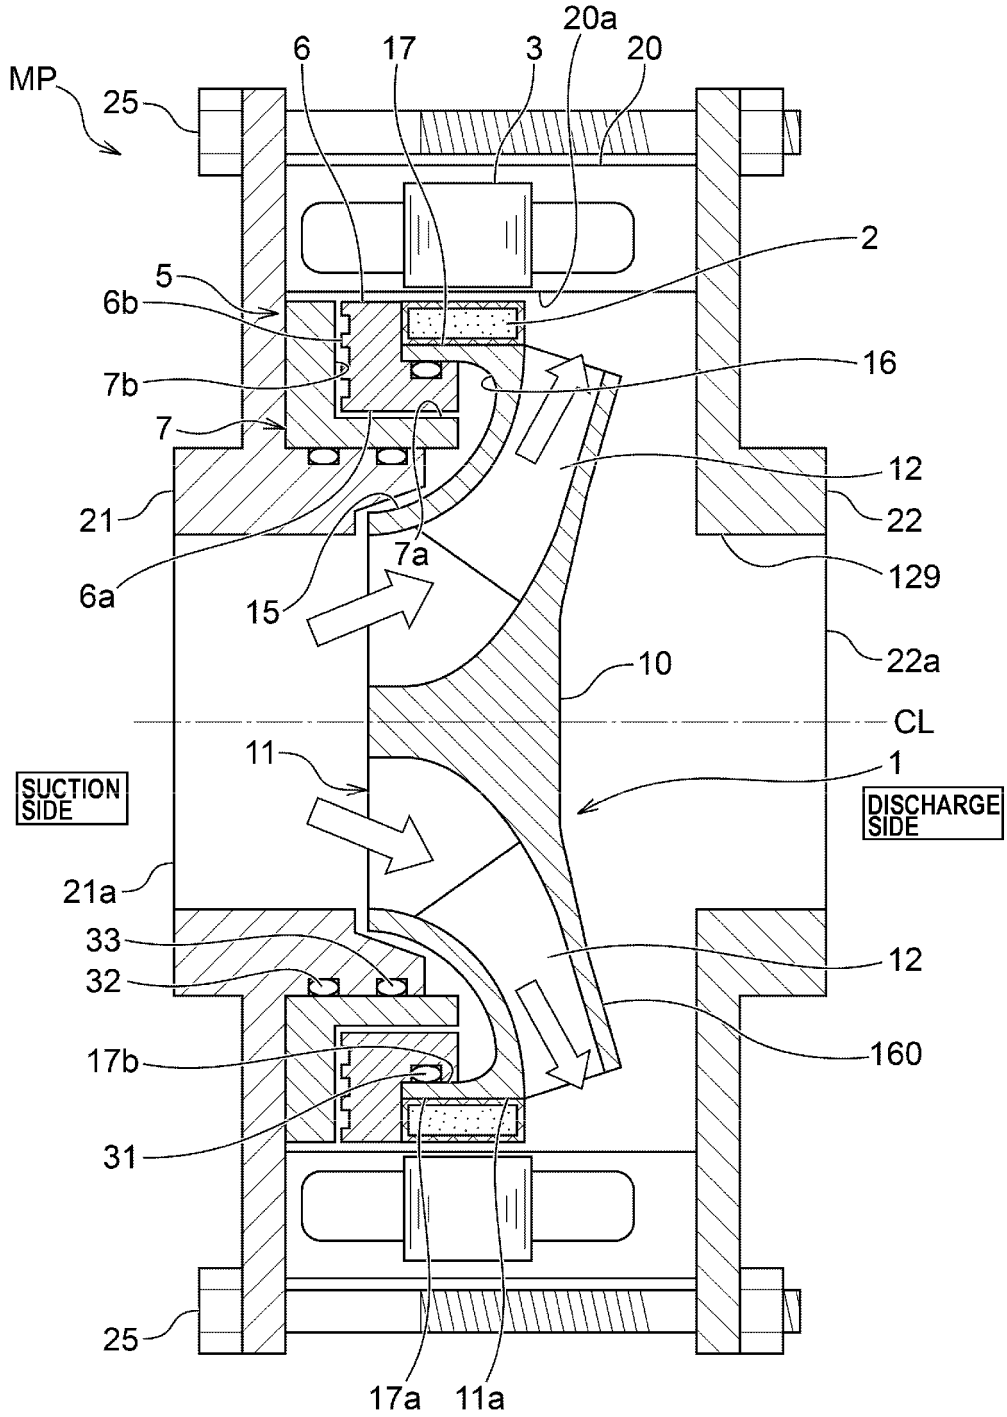


FIG. 35

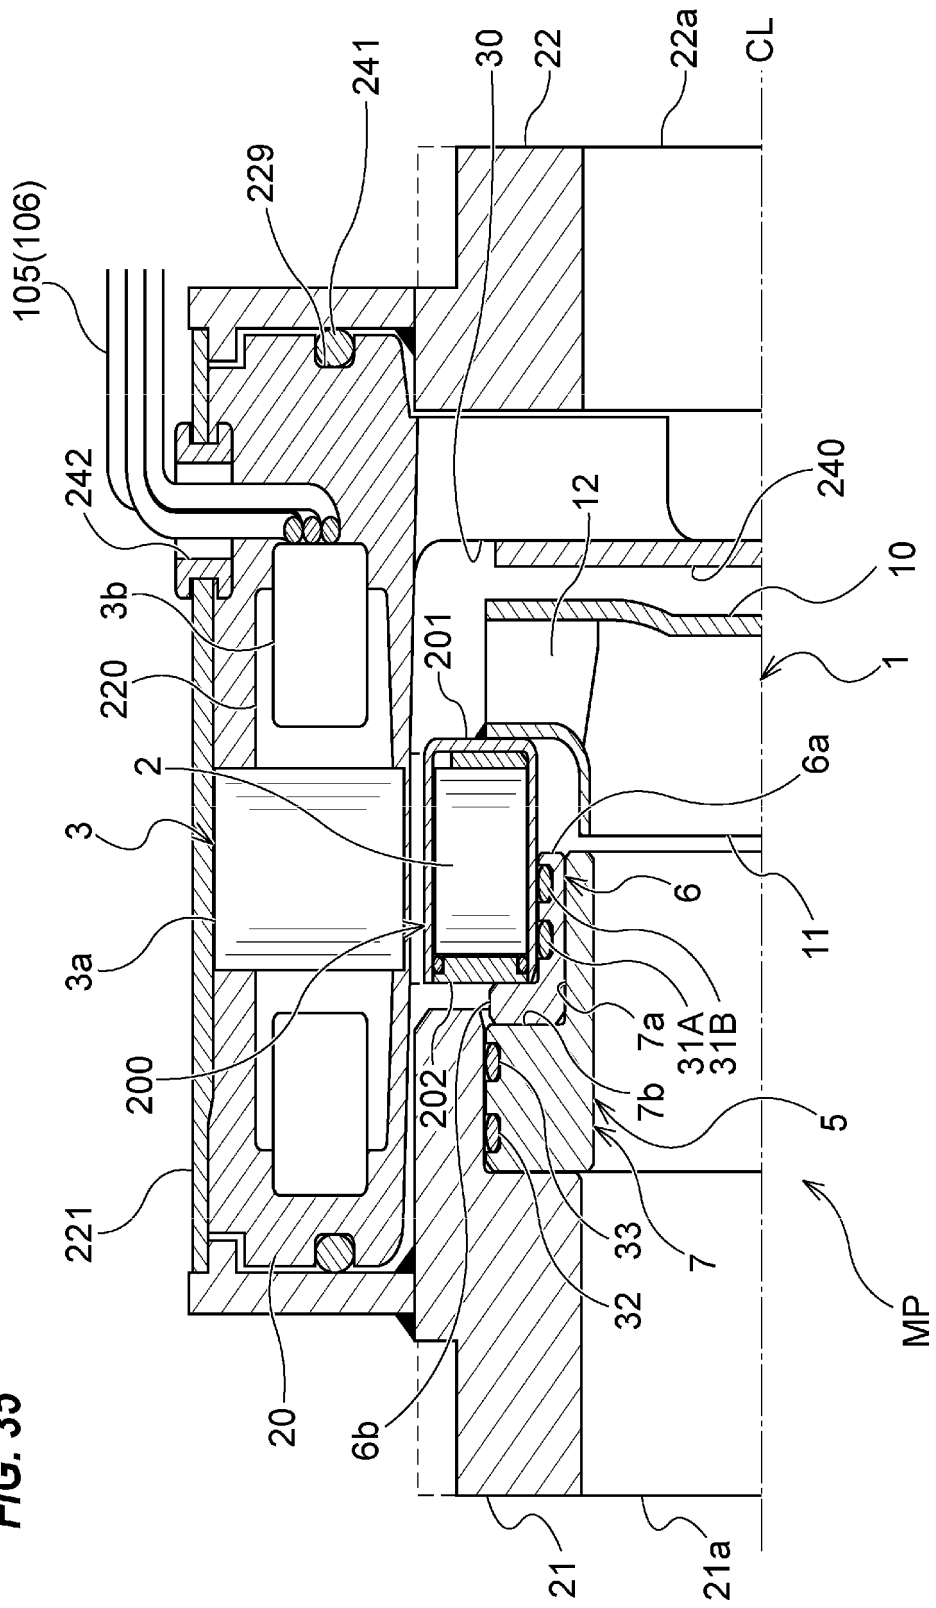


FIG. 36

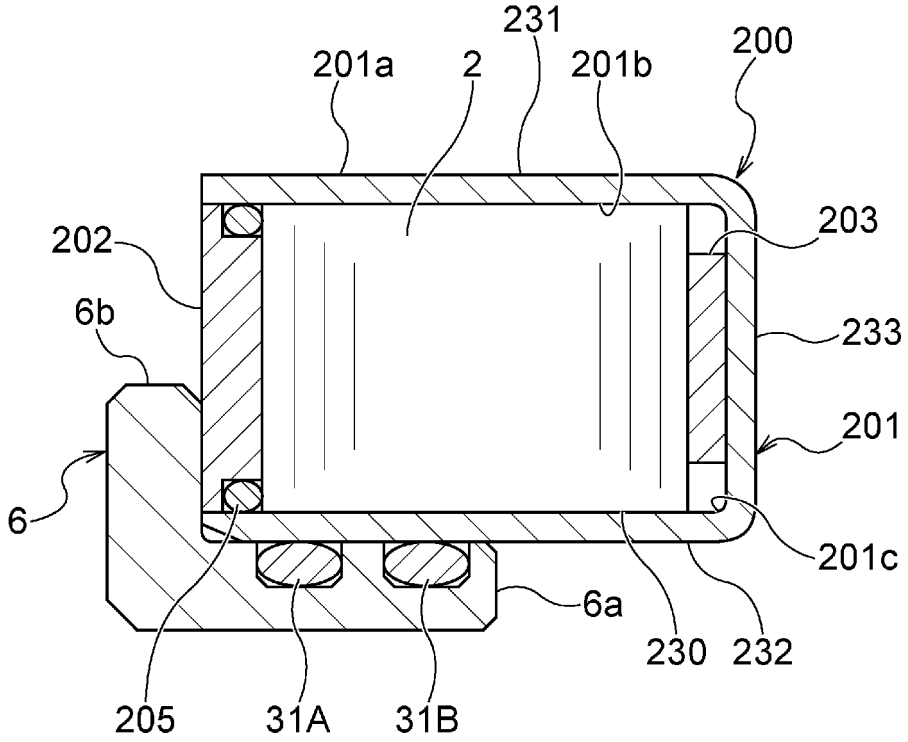


FIG. 37

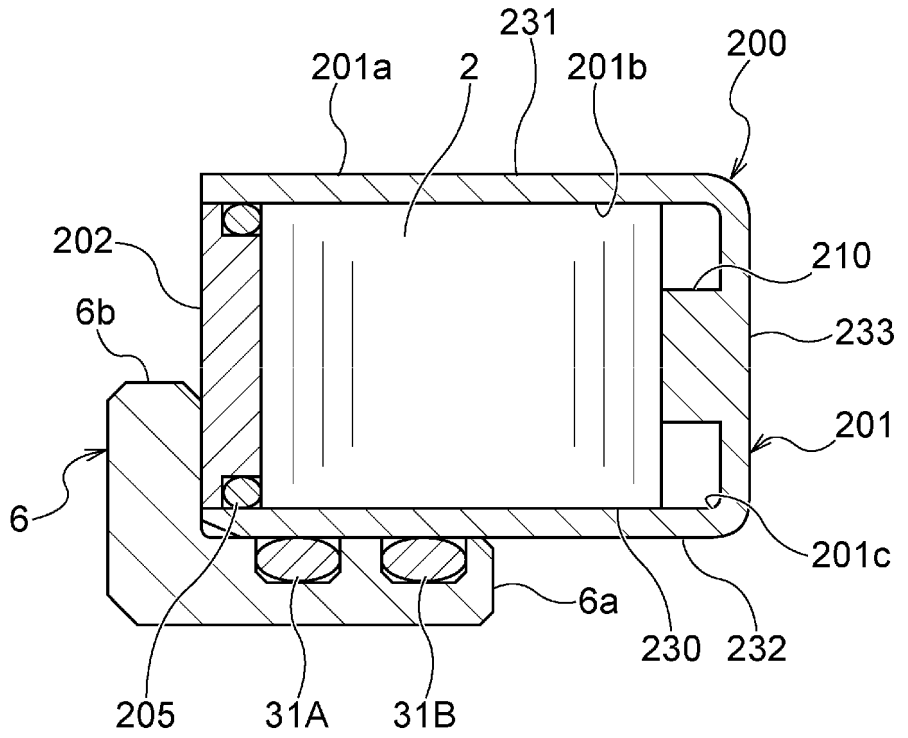


FIG. 38

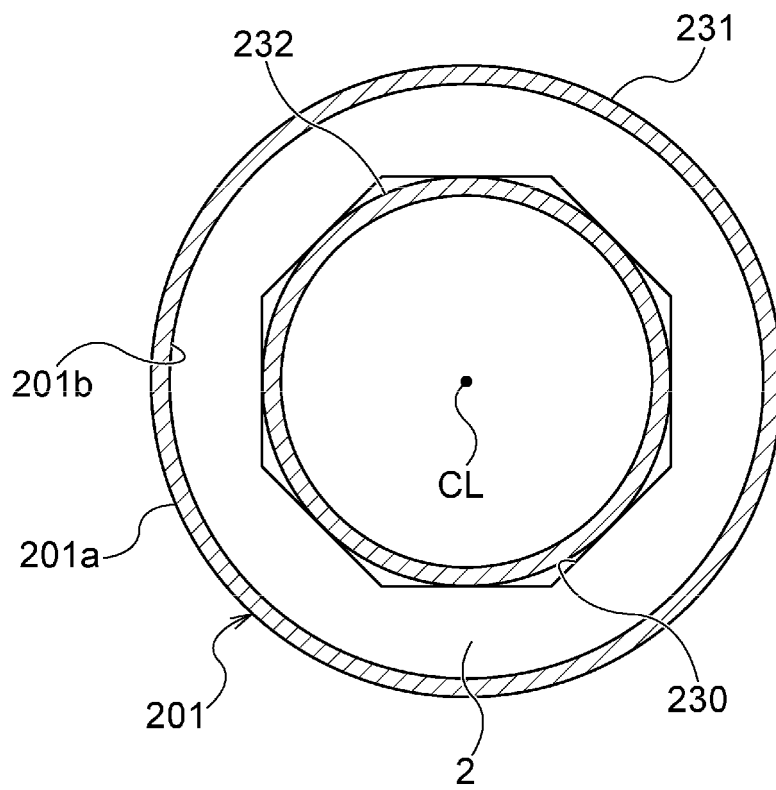
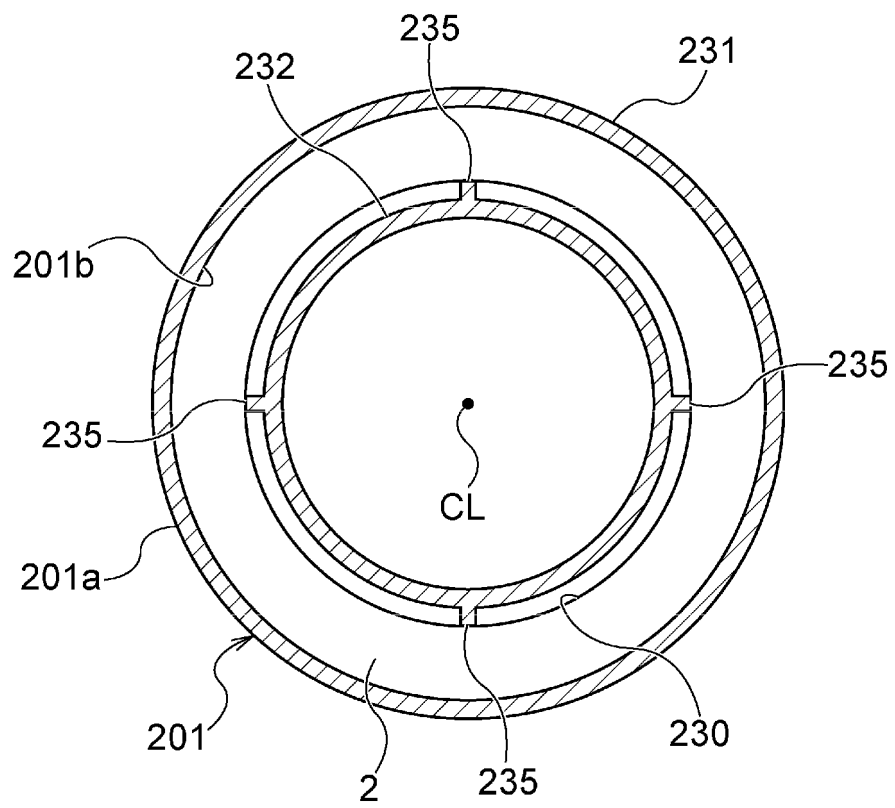


FIG. 39



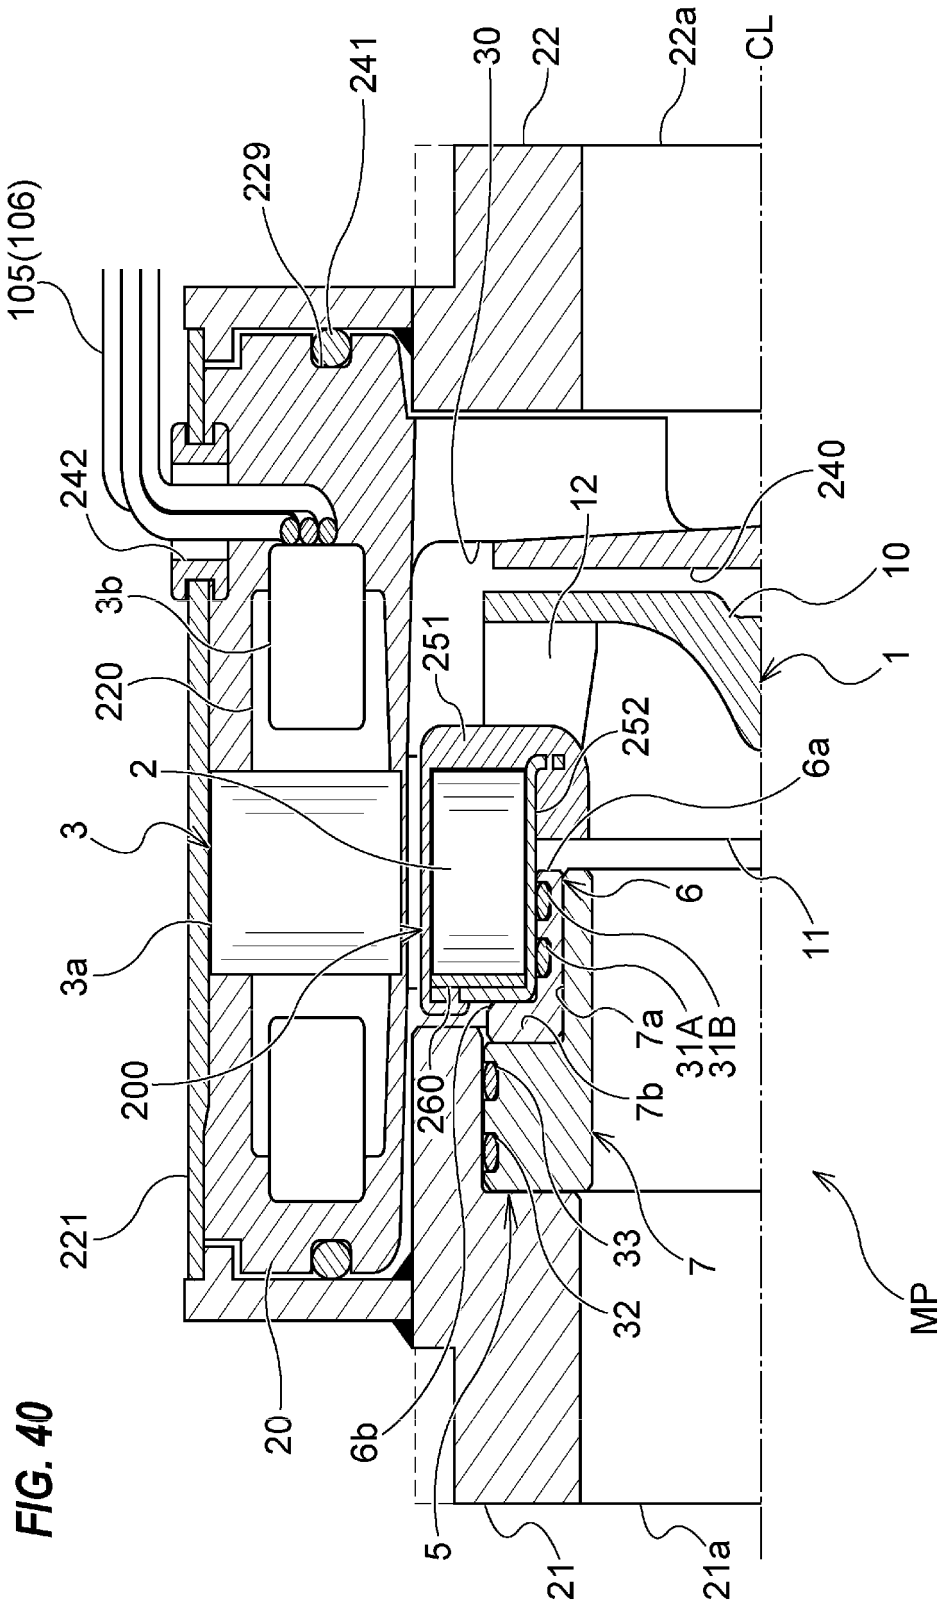


FIG. 40

FIG. 41

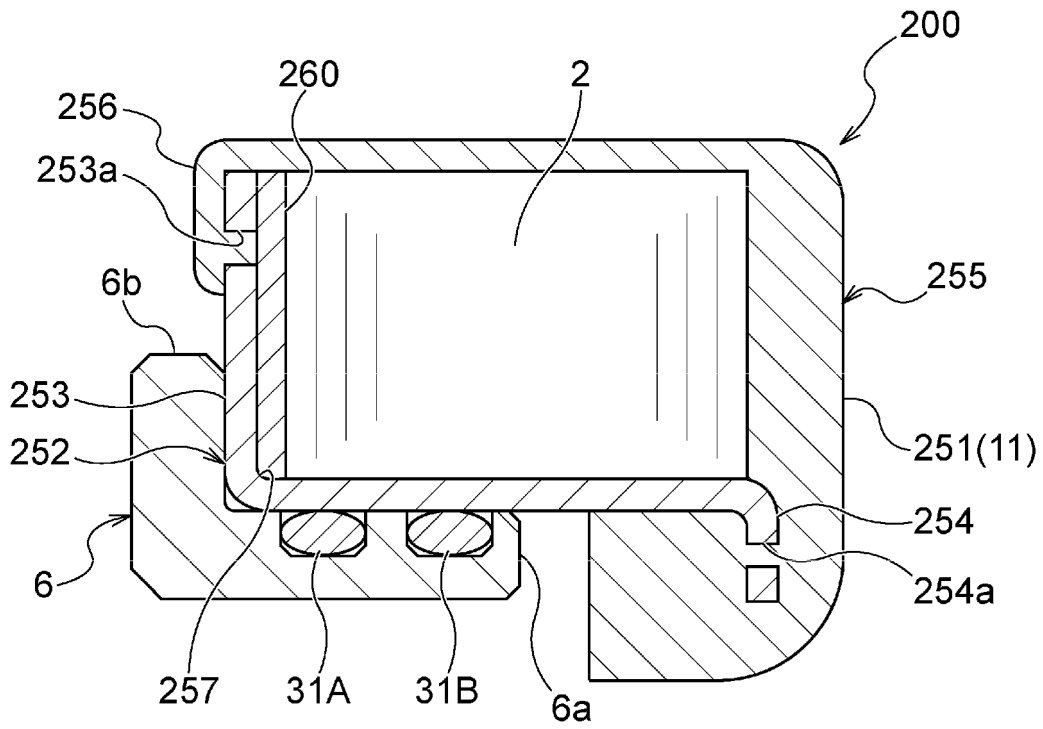
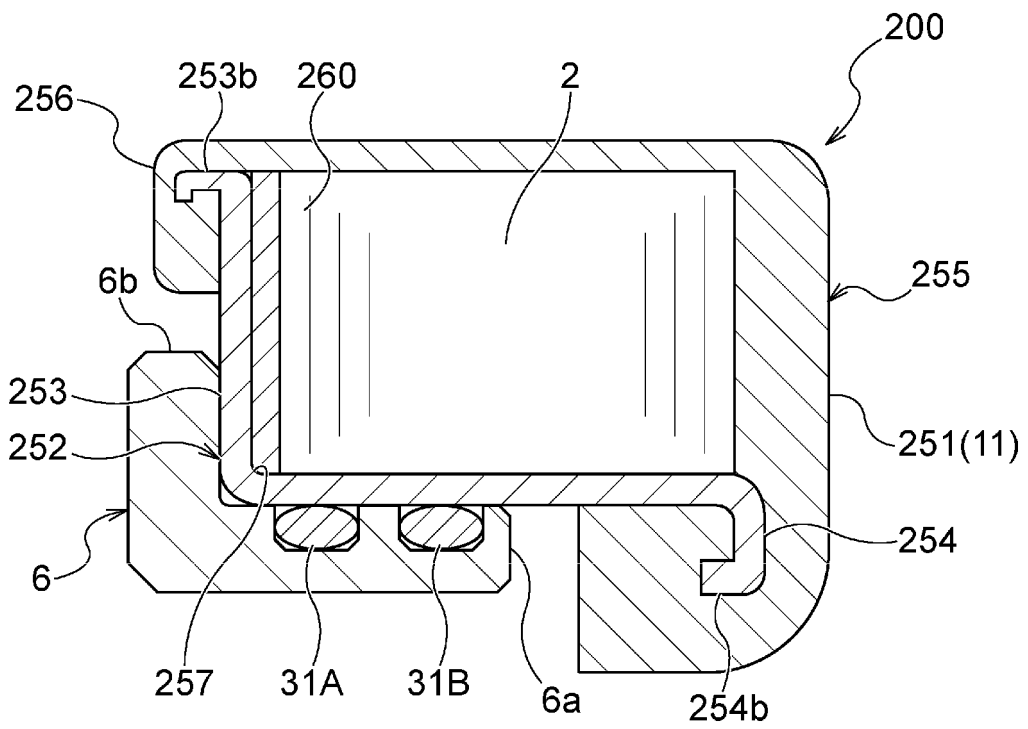


FIG. 42



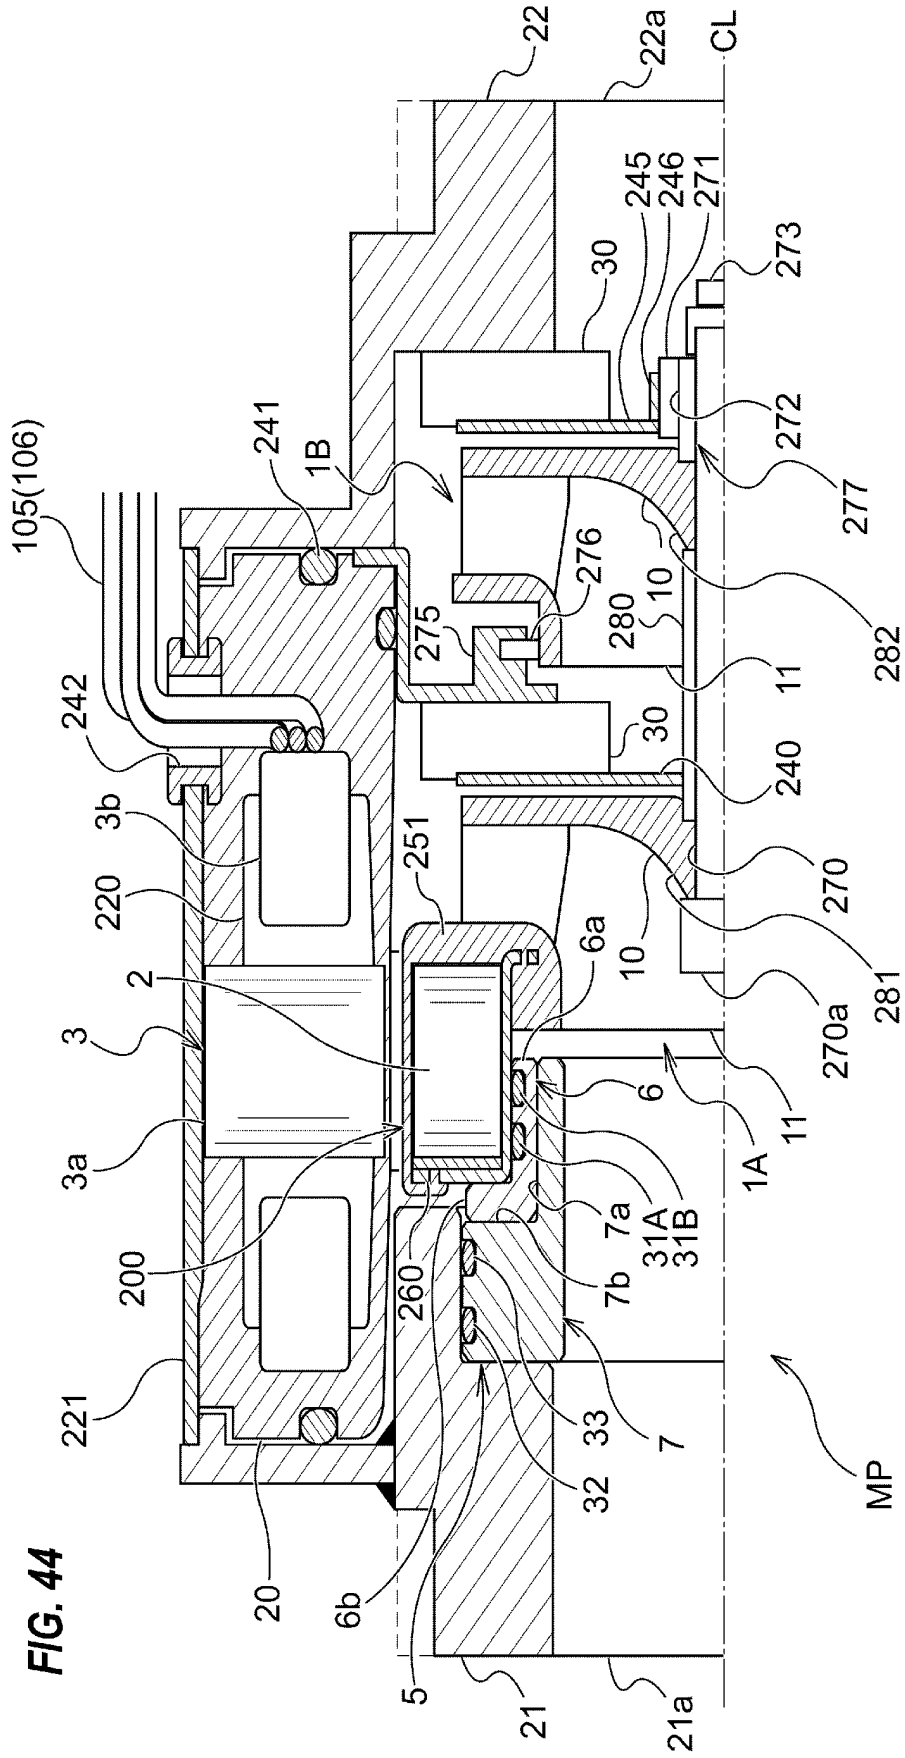


FIG. 44

FIG. 45

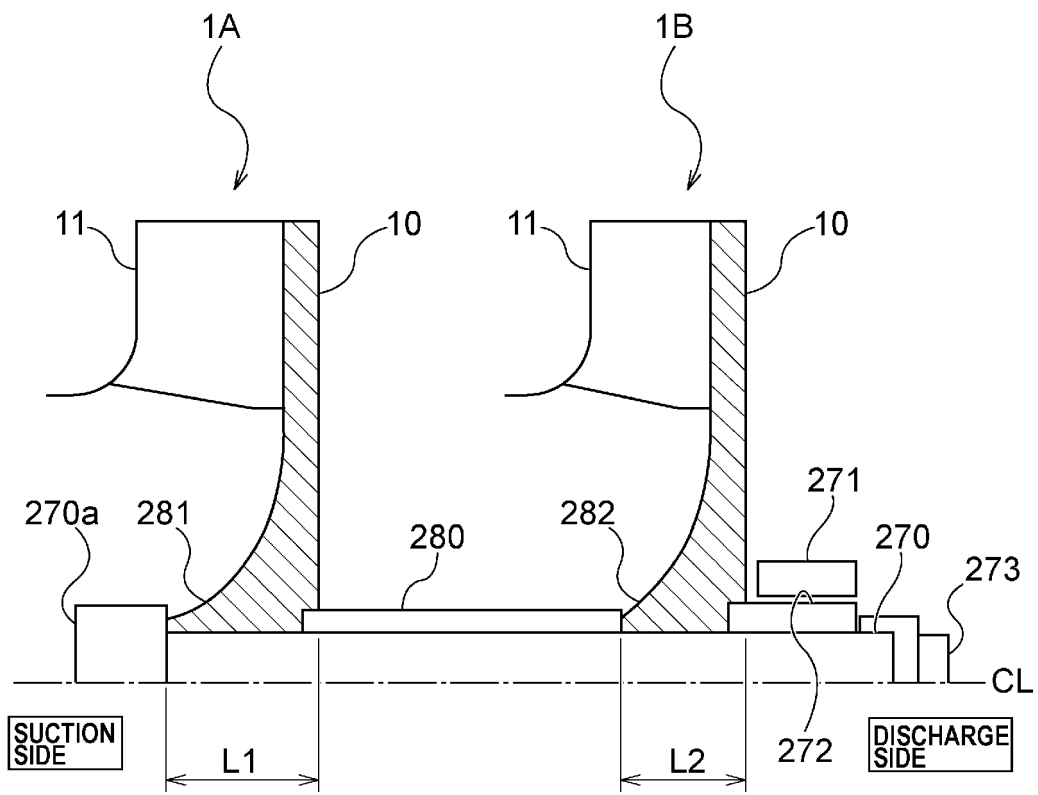


FIG. 46

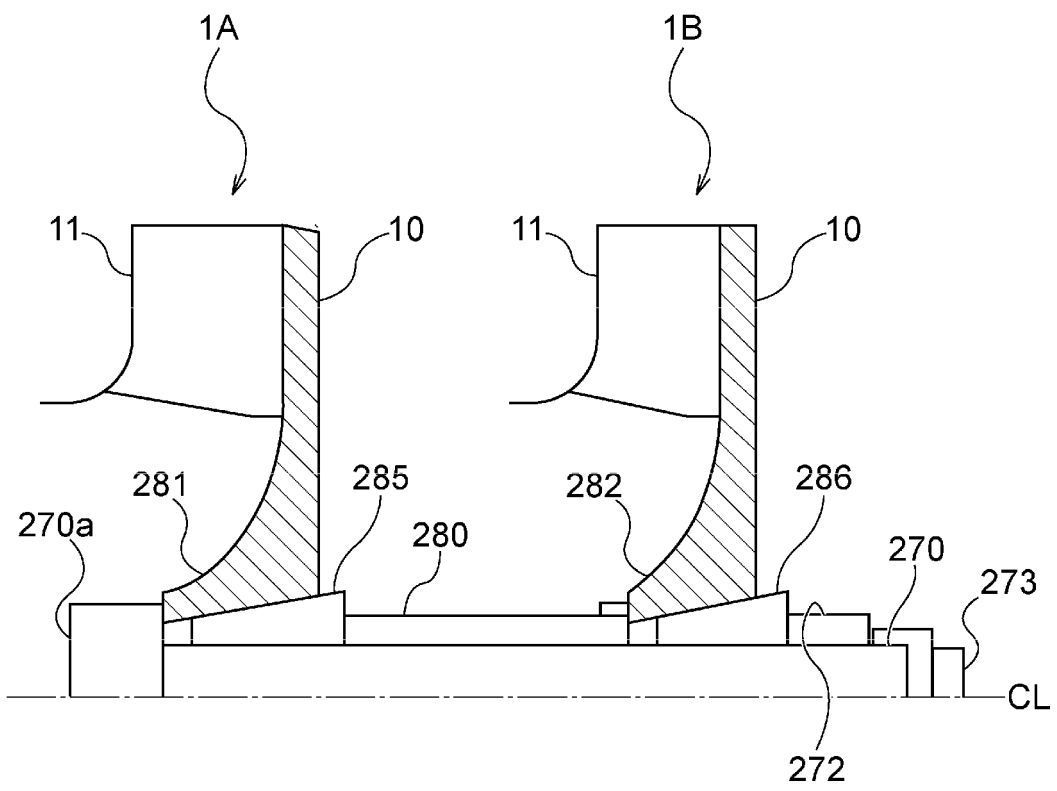


FIG. 47

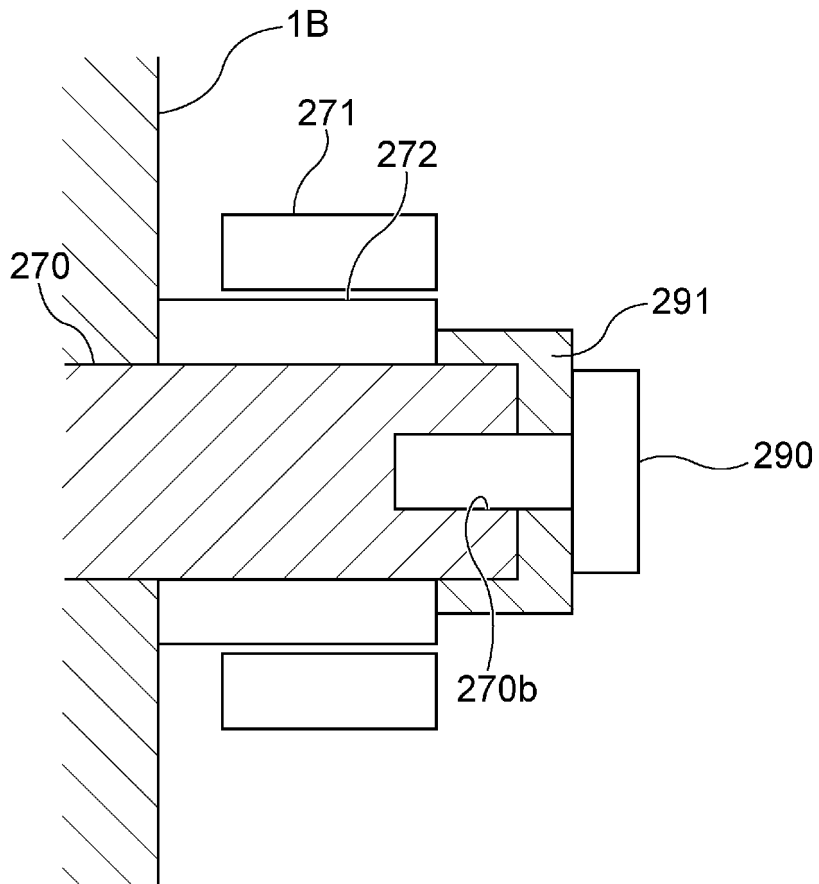


FIG. 48

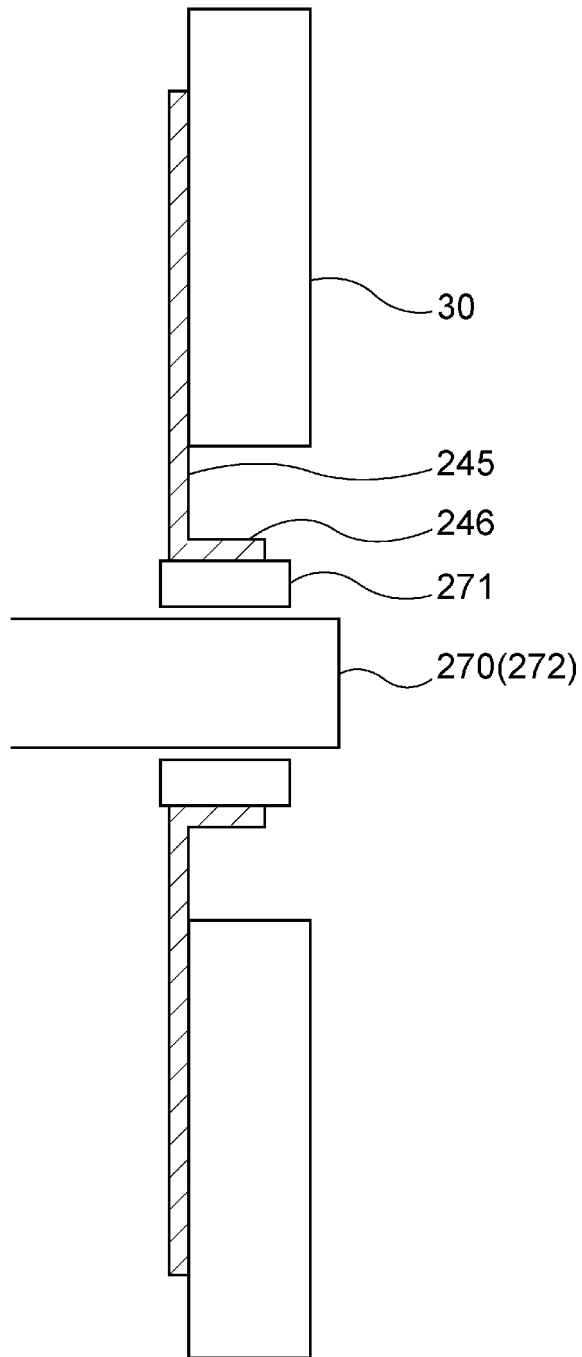


FIG. 49

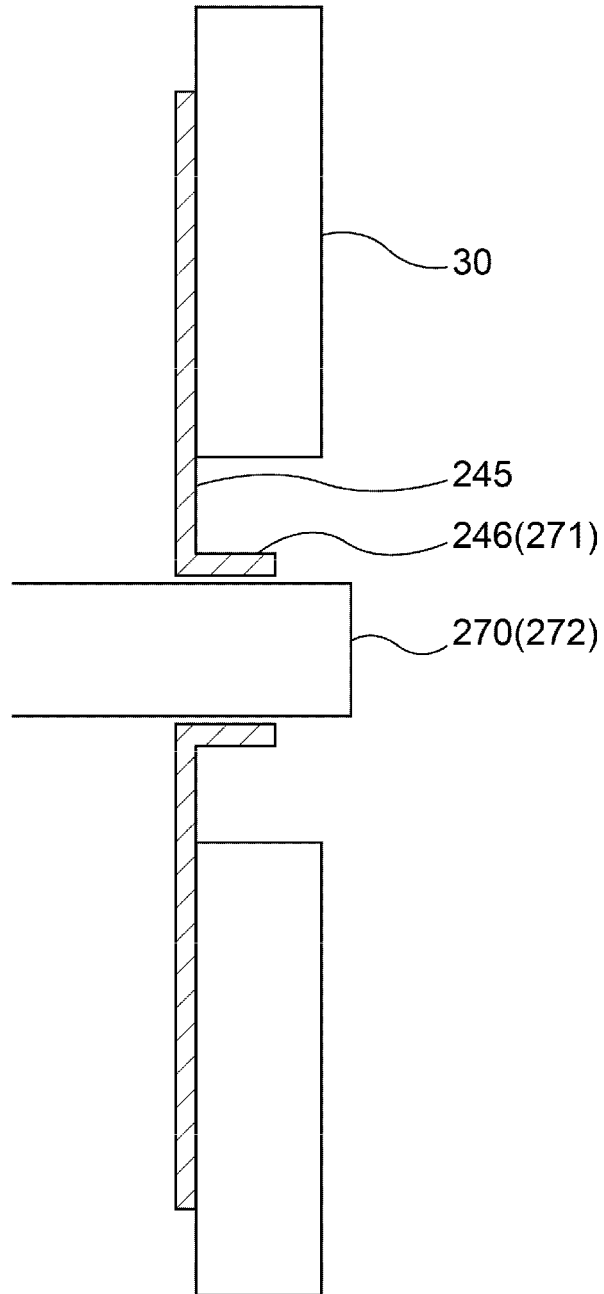


FIG. 50


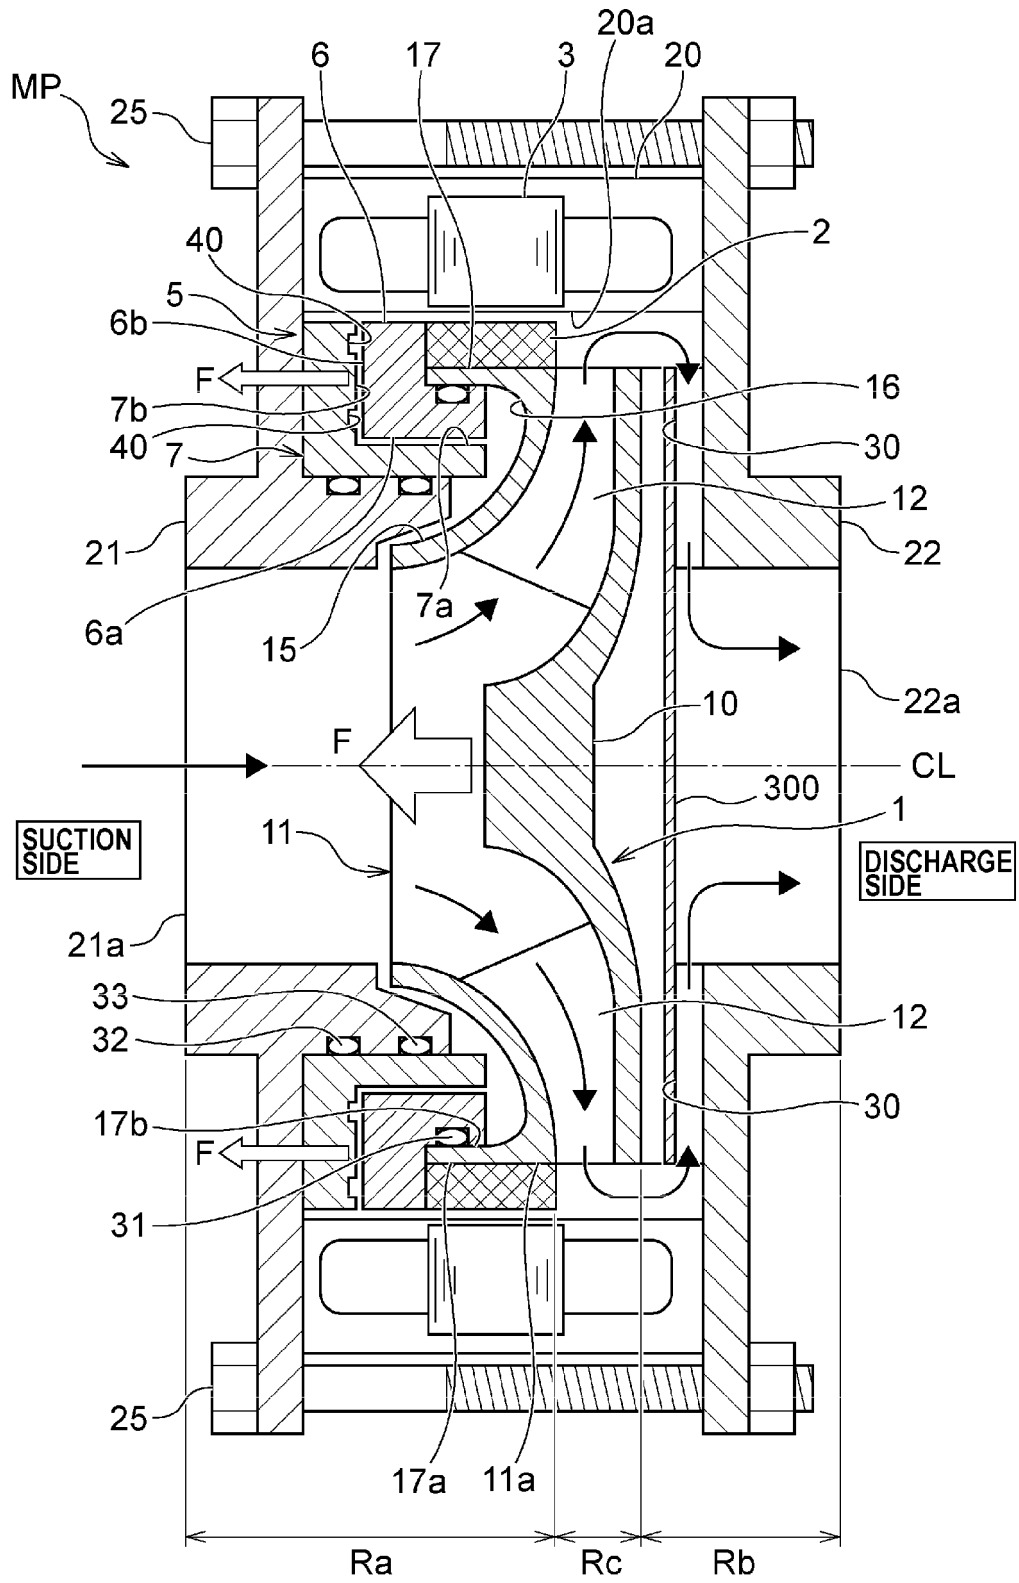


FIG. 52

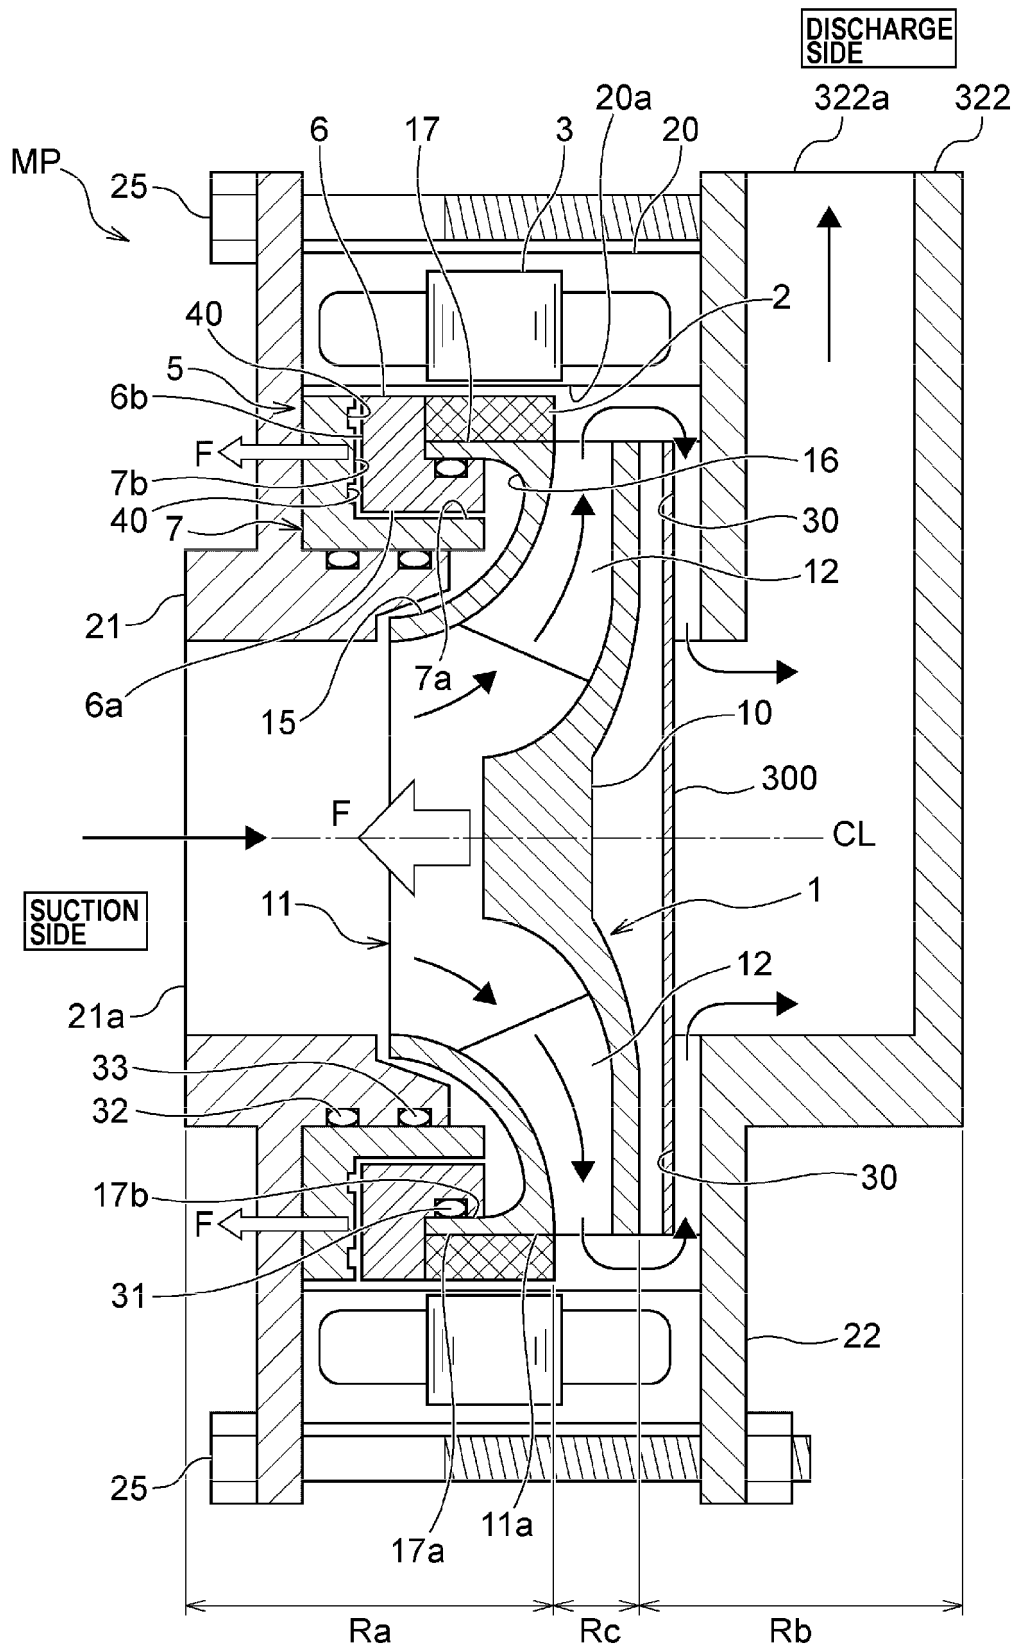

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2022/021701

5	A. CLASSIFICATION OF SUBJECT MATTER																									
	<p>F04D 13/06(2006.01)i; F04D 29/00(2006.01)i FI: F04D13/06 D; F04D29/00 B; F04D13/06 H</p> <p>According to International Patent Classification (IPC) or to both national classification and IPC</p>																									
10	B. FIELDS SEARCHED																									
	<p>Minimum documentation searched (classification system followed by classification symbols) F04D1/00-13/16;17/00-19/02;21/00-25/16;29/00-35/00</p> <p>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched</p> <p>Published examined utility model applications of Japan 1922-1996 Published unexamined utility model applications of Japan 1971-2022 Registered utility model specifications of Japan 1996-2022 Published registered utility model applications of Japan 1994-2022</p> <p>Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)</p>																									
15																										
20	C. DOCUMENTS CONSIDERED TO BE RELEVANT																									
	<table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>Y</td> <td>JP 2008-215307 A (IKUTOKU GAKUEN) 18 September 2008 (2008-09-18) paragraphs [0001], [0011]-[0032], fig. 1</td> <td>1, 8-9, 11</td> </tr> <tr> <td>A</td> <td></td> <td>2-7, 10, 12-23</td> </tr> <tr> <td>Y</td> <td>JP 2019-56343 A (EBARA CORP.) 11 April 2019 (2019-04-11) paragraphs [0001], [0014]-[0018], fig. 1-2</td> <td>1, 8-9, 11</td> </tr> <tr> <td>Y</td> <td>JP 2001-241396 A (EBARA CORP.) 07 September 2001 (2001-09-07) paragraphs [0001], [0010]-[0013], fig. 1</td> <td>1, 8-9, 11</td> </tr> <tr> <td>Y</td> <td>JP 2002-138986 A (EBARA CORP.) 17 May 2002 (2002-05-17) paragraphs [0001], [0014]-[0023], fig. 1</td> <td>9, 11</td> </tr> <tr> <td>X</td> <td></td> <td>12, 20-21, 23</td> </tr> <tr> <td>A</td> <td></td> <td>1-8, 10, 13-19, 22</td> </tr> </tbody> </table>	Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	Y	JP 2008-215307 A (IKUTOKU GAKUEN) 18 September 2008 (2008-09-18) paragraphs [0001], [0011]-[0032], fig. 1	1, 8-9, 11	A		2-7, 10, 12-23	Y	JP 2019-56343 A (EBARA CORP.) 11 April 2019 (2019-04-11) paragraphs [0001], [0014]-[0018], fig. 1-2	1, 8-9, 11	Y	JP 2001-241396 A (EBARA CORP.) 07 September 2001 (2001-09-07) paragraphs [0001], [0010]-[0013], fig. 1	1, 8-9, 11	Y	JP 2002-138986 A (EBARA CORP.) 17 May 2002 (2002-05-17) paragraphs [0001], [0014]-[0023], fig. 1	9, 11	X		12, 20-21, 23	A		1-8, 10, 13-19, 22	
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																								
Y	JP 2008-215307 A (IKUTOKU GAKUEN) 18 September 2008 (2008-09-18) paragraphs [0001], [0011]-[0032], fig. 1	1, 8-9, 11																								
A		2-7, 10, 12-23																								
Y	JP 2019-56343 A (EBARA CORP.) 11 April 2019 (2019-04-11) paragraphs [0001], [0014]-[0018], fig. 1-2	1, 8-9, 11																								
Y	JP 2001-241396 A (EBARA CORP.) 07 September 2001 (2001-09-07) paragraphs [0001], [0010]-[0013], fig. 1	1, 8-9, 11																								
Y	JP 2002-138986 A (EBARA CORP.) 17 May 2002 (2002-05-17) paragraphs [0001], [0014]-[0023], fig. 1	9, 11																								
X		12, 20-21, 23																								
A		1-8, 10, 13-19, 22																								
25																										
30																										
35																										
	<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.																									
40	<p>* Special categories of cited documents:</p> <p>“A” document defining the general state of the art which is not considered to be of particular relevance</p> <p>“E” earlier application or patent but published on or after the international filing date</p> <p>“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>“O” document referring to an oral disclosure, use, exhibition or other means</p> <p>“P” document published prior to the international filing date but later than the priority date claimed</p> <p>“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>“&” document member of the same patent family</p>																									
45																										
	Date of the actual completion of the international search	Date of mailing of the international search report																								
	01 July 2022	12 July 2022																								
50	Name and mailing address of the ISA/JP	Authorized officer																								
	<p>Japan Patent Office (ISA/JP) 3-4-3 Kasumigaseki, Chiyoda-ku, Tokyo 100-8915 Japan</p>																									
55		Telephone No.																								

Form PCT/ISA/210 (second sheet) (January 2015)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/JP2022/021701

5
10
15
20
25
30
35
40
45
50
55

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 2001-295797 A (MATSUSHITA ELECTRIC IND. CO., LTD.) 26 October 2001 (2001-10-26) paragraphs [0001], [0018]-[0023], fig. 1	9, 11
X		12, 21
A		1-8, 10, 13-20, 22-23
X	JP 6-315245 A (JAPAN SERVO CO., LTD.) 08 November 1994 (1994-11-08) paragraphs [0001]-[0008], fig. 1-3, 6-7	12-16, 18
A		1-11, 17, 19-23

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/JP2022/021701

5
10
15
20
25
30
35
40
45
50
55

Patent document cited in search report	Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
JP 2008-215307 A	18 September 2008	(Family: none)	
JP 2019-56343 A	11 April 2019	WO 2019/058669 A1	
JP 2001-241396 A	07 September 2001	WO 2001/017095 A1	
		EP 1211784 A1	
		paragraphs [0001], [0069]-[0074], fig. 4	
		CN 1371542 A	
		KR 10-2002-0033762 A	
JP 2002-138986 A	17 May 2002	(Family: none)	
JP 2001-295797 A	26 October 2001	(Family: none)	
JP 6-315245 A	08 November 1994	(Family: none)	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2000303986 A [0003]