United States Patent [19]

Bottomley

[11] **3,904,390**

[45] **Sept. 9, 1975**

[54] **GRINDING MACHINE**

[75] Inventor: **Herbert Geoffrey Bottomley,** Skipton, England

[73] Assignee: **Landis Lund Limited,** Keighley, England

[22] Filed: **May 13, 1974**

[21] Appl. No.: **469,515**

Related U.S. Application Data

[63] Continuation-in-part of Ser. No. 447,288, March 1, 1974, abandoned.

[30] **Foreign Application Priority Data**

Oct. 10, 1973 United Kingdom..... 47214/73
Mar. 6, 1973 United Kingdom..... 10952/73

[52] **U.S. Cl.**..... **51/165.8;** 51/105 R; 51/239; 82/38

[51] **Int. Cl.²**. **B24B 49/00;** B24B 49/02; B24B 9/02

[58] **Field of Search**..... 51/165 R, 105 R, 238 R, 51/238 S, 165.8; 82/38, 239

[56] **References Cited**

UNITED STATES PATENTS

2,949,708	8/1960	Wiatt et al.	51/165 R
3,330,074	7/1967	Stuckey	51/105 R
3,427,755	2/1969	Levesque et al.	51/105 R
3,427,760	2/1969	Happel	51/105 R
3,561,909	2/1971	Flohr, Jr.	51/239

Primary Examiner—Othell M. Simpson
Attorney, Agent, or Firm—Spencer T. Smith

[57] **ABSTRACT**

A cylindrical grinding machine comprising means for supporting a workpiece for rotative displacement about the axis thereof, a grinding wheel assembly including at least one grinding wheel and means for rotatively displacing the grinding wheel about the axis thereof, a workrest including an upper workrest jaw and a lower workrest jaw, first means including a first stepping motor for incrementally advancing the grinding wheel, second means including a second stepping motor for incrementally advancing the upper workrest jaw, third means including a third stepping motor for incrementally advancing the lower workrest jaw and means for conjointly supplying pulses to the first, second and third stepping motors at predetermined rates when the upper workrest jaw, lower workrest jaw and grinding wheel are located at first predetermined positions a selected distance from the non-deflected axis of the rotating workpiece to advance the grinding wheel and upper and lower workrest jaws to advanced positions.

7 Claims, 8 Drawing Figures

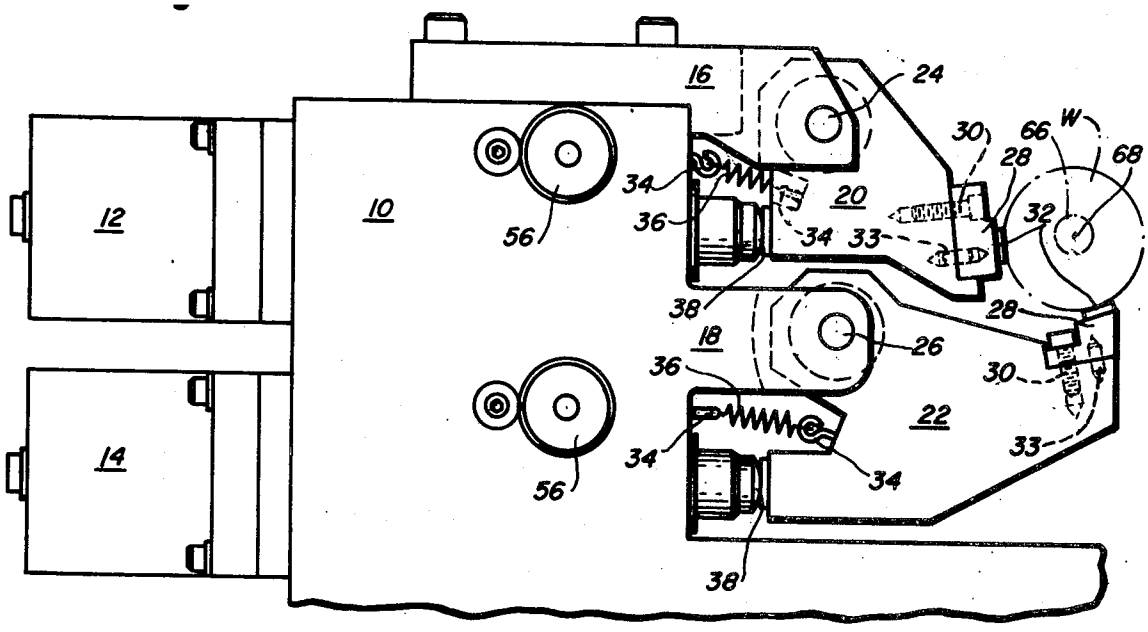
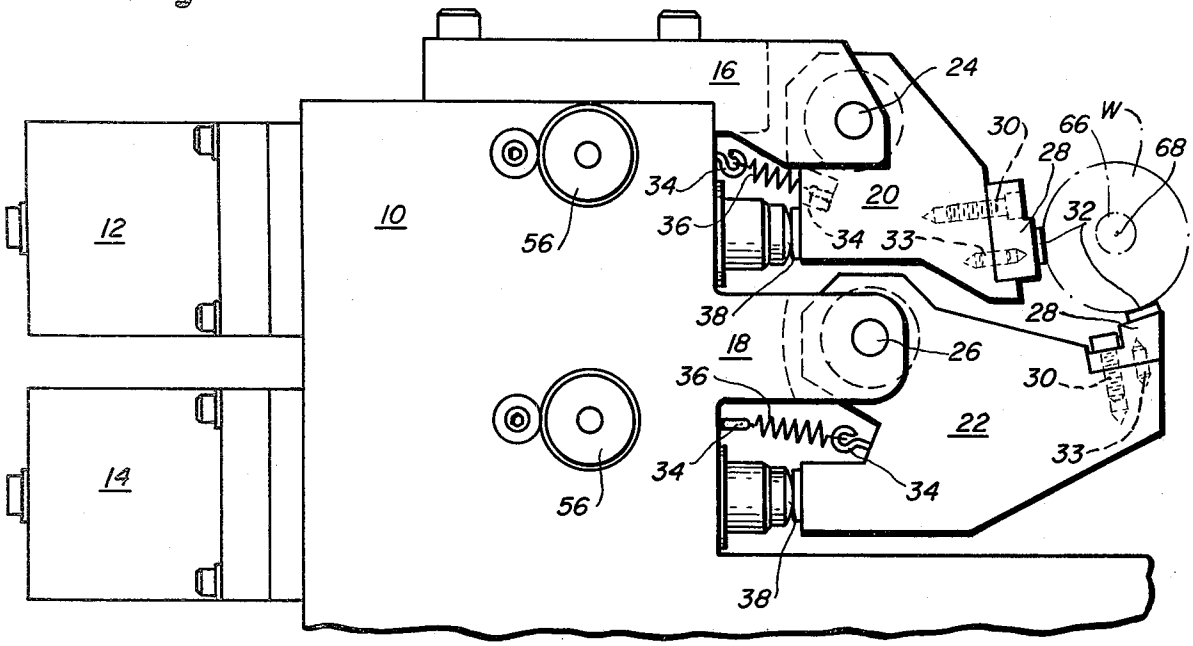


Fig_1



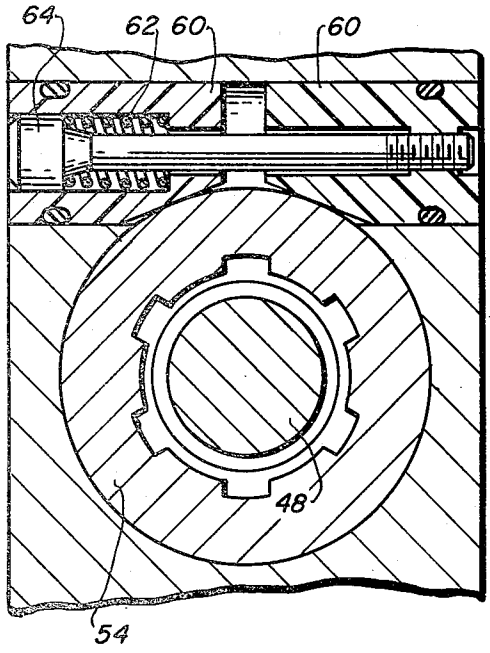


Fig_3

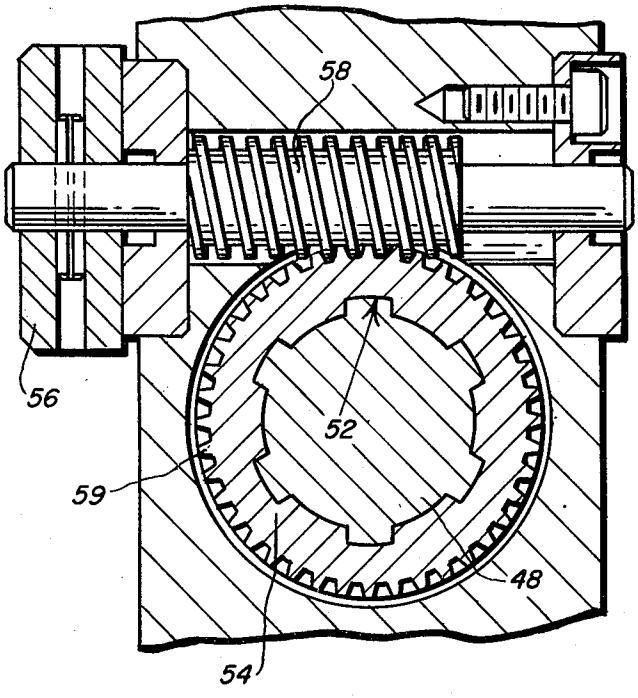


Fig_4

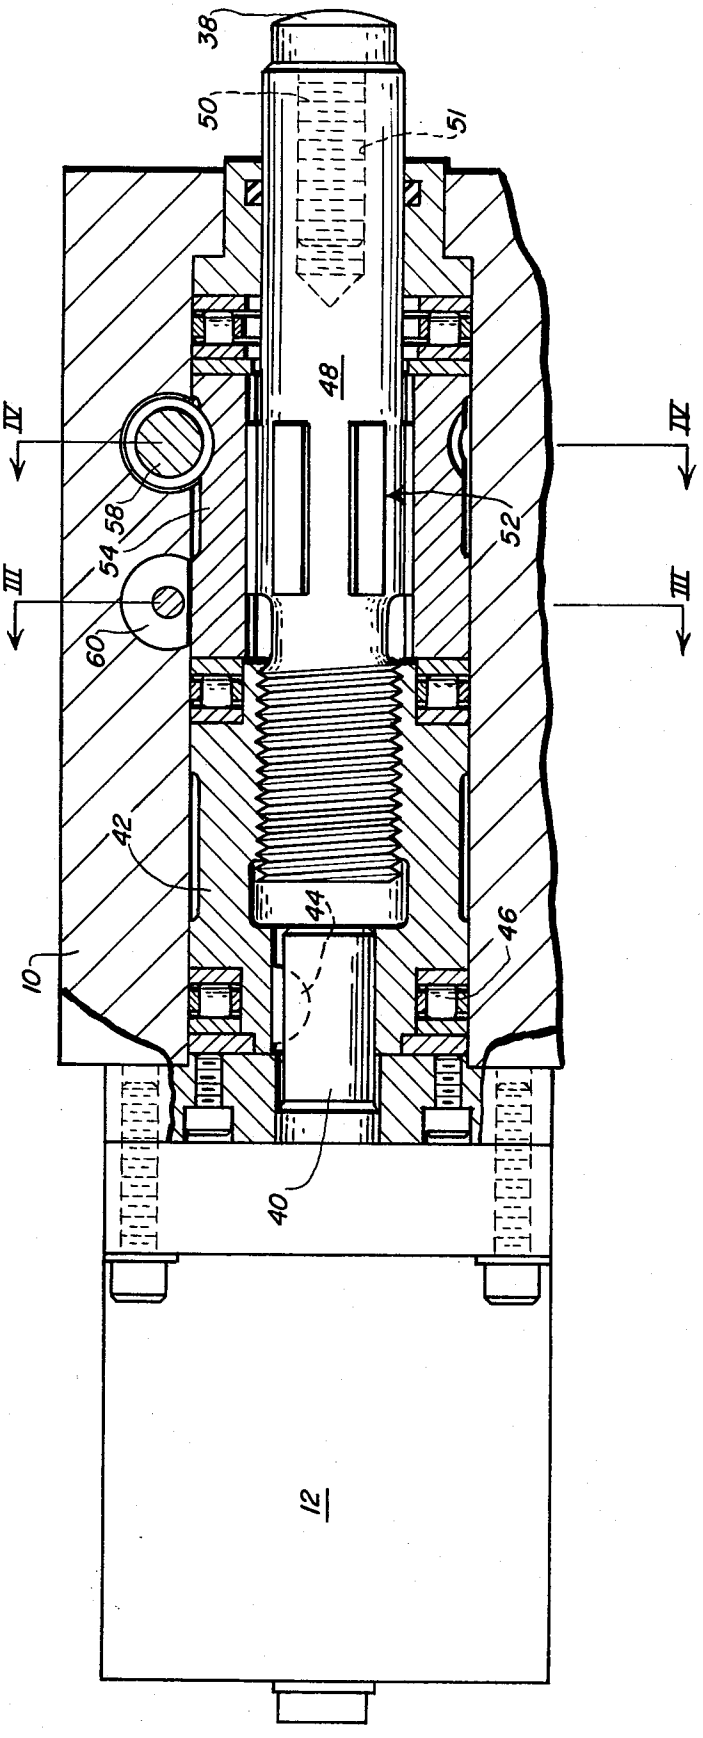


Fig_2

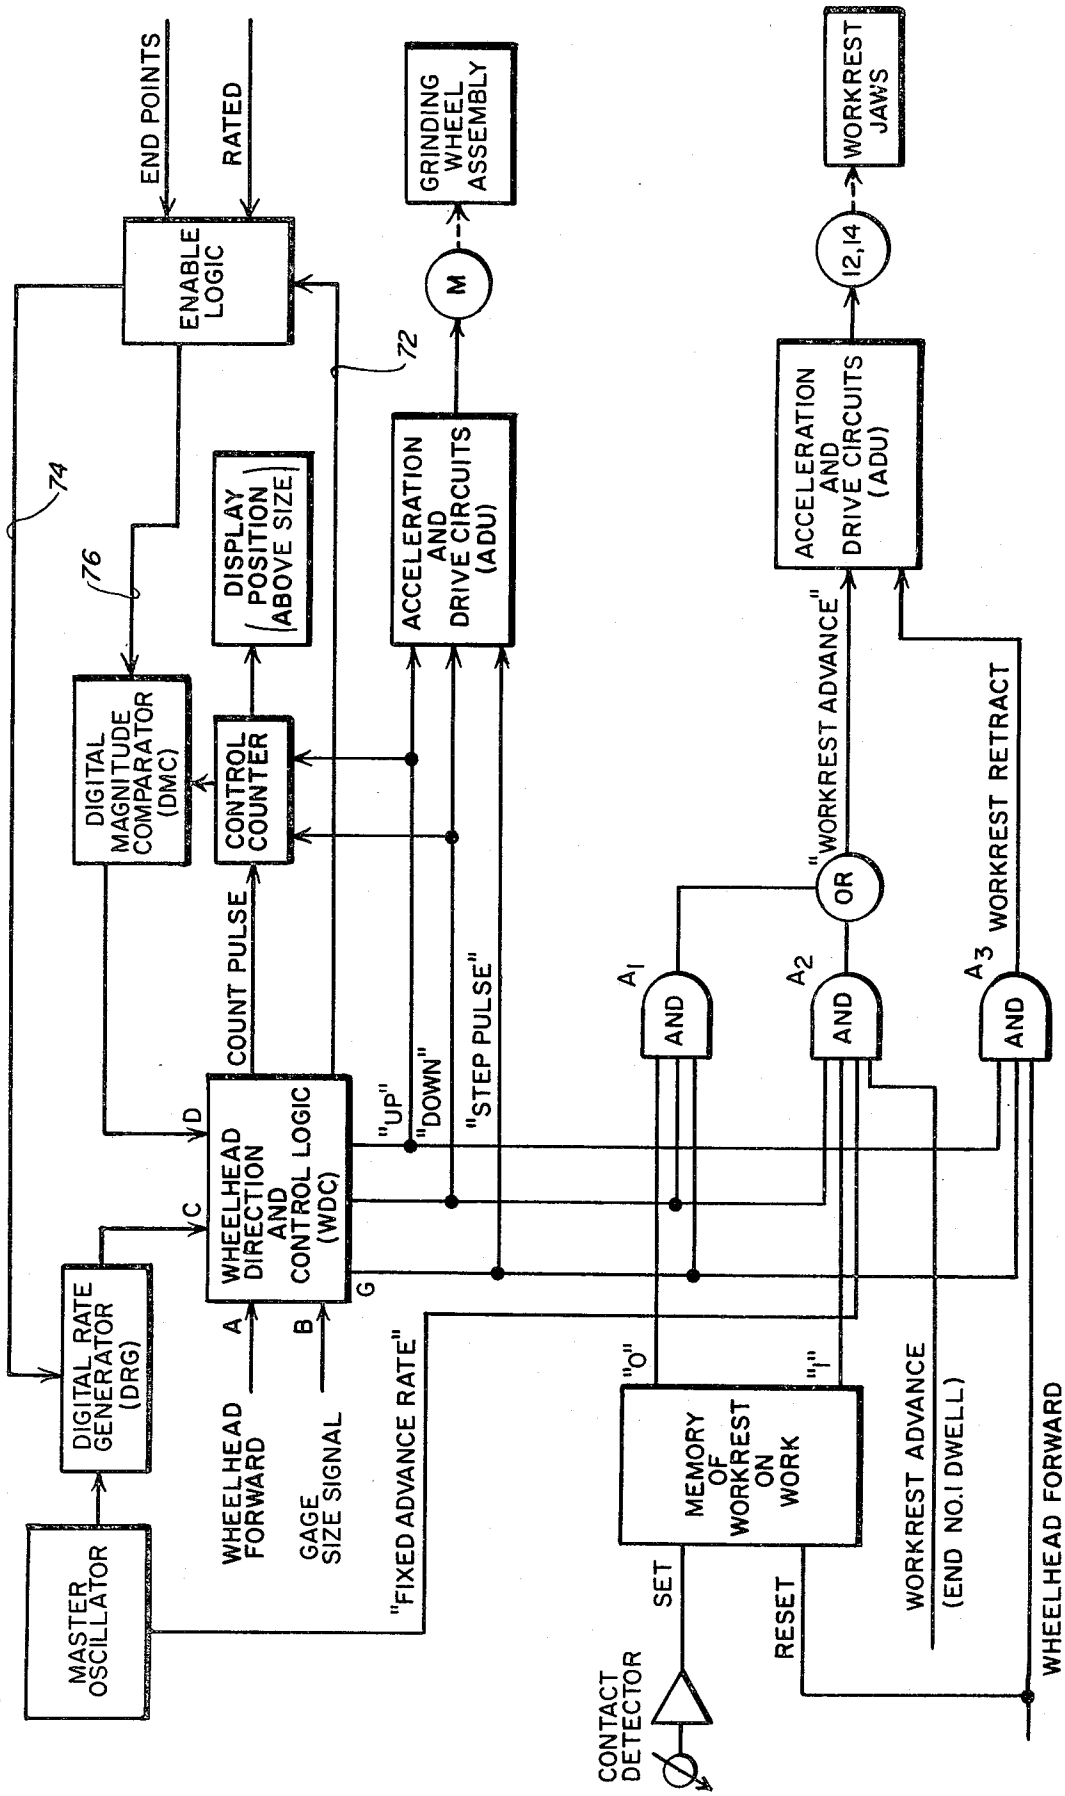

END POINTS
RATED
ENABLE LOGIC
GRINDING WHEEL ASSEMBLY
M
WORKREST JAW'S
12,14
74
76
72
DISPLAY POSITION (ABOVE SIZE)
ACCELERATION AND DRIVE CIRCUITS (ADU)
ACCELERATION AND DRIVE CIRCUITS (ADU)
DIGITAL MAGNITUDE COMPARATOR (DMC)
CONTROL COUNTER
COUNT PULSE
"UP"
"DOWN"
"STEP PULSE"
"WORKREST ADVANCE"
OR
A1
A2
A3
AND
AND
AND
WORKREST RETRACT
D
C
G
WHEELHEAD DIRECTION AND CONTROL LOGIC (WDC)
A
B
DIGITAL RATE GENERATOR (DRG)
MASTER OSCILLATOR
WHEELHEAD FORWARD
GAGE SIZE SIGNAL
"FIXED ADVANCE RATE"
"0"
"1"
MEMORY OF WORKREST ON WORK
SET
RESET
CONTACT DETECTOR
WORKREST ADVANCE
(END NO.1 DWELL)
WHEELHEAD FORWARD

Fig.-5

Fig-6

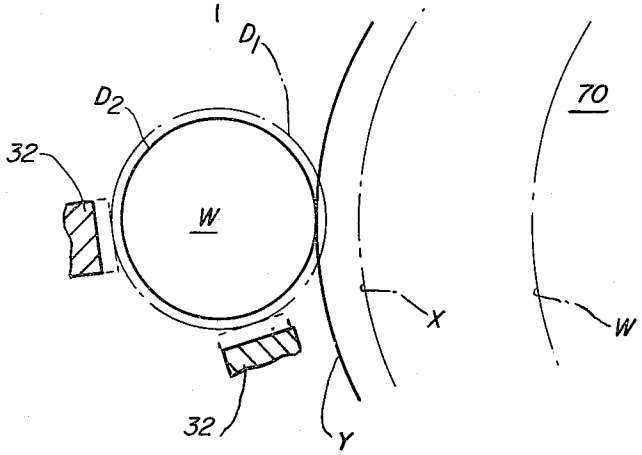


Fig-7

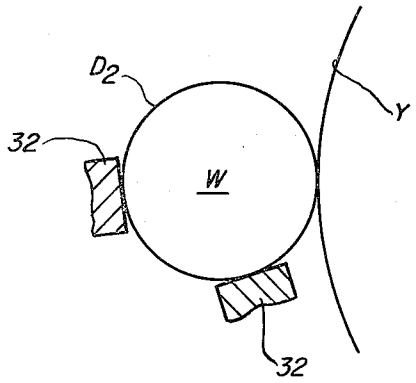
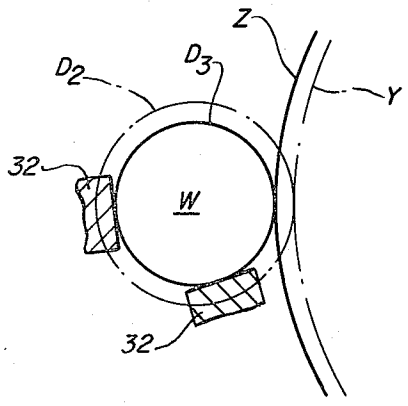


Fig-8



GRINDING MACHINE

This application is a continuation-in-part application of my copending application entitled "Grinding Machine" Ser. No. 447,288, filed Mar. 1, 1974, now abandoned, in favor of the present application.

The present invention relates to grinding machines and more particularly to cylindrical grinding machines.

In cylindrical grinding machines a workpiece to be ground is supported between a pair of rotatable chuck jaws or between work centers. Thus, the axis of the workpiece is aligned with the machine axis defined by the chuck jaws or the work centers. A grinding wheel, supported in a wheelhead, is advanced towards the workpiece in a direction transverse to the machine axis to abrasively remove stock from the surface of the workpiece.

One of the difficulties which occurs with a machine of this type is that where the workpiece is insufficiently rigidly supported or where the workpiece is of low rigidity, the workpiece tends to bow or flex away from the machine axis during grinding. Any deflection of the workpiece axis away from the machine axis gives rise to errors in the finished workpiece dimensions. Such deflection also results in the uneven wearing of the grinding wheel which necessitates frequent grinding wheel dressing and this is time consuming and uneconomical.

One known solution of this problem is to provide a workrest to oppose the deflecting force of the grinding wheel whereby the workpiece axis will be maintained in the correct machining position. Since the workrest supports a part of the workpiece which is itself being ground away, it is necessary to adjust the position of the workrest during the grinding operation if the workpiece is to be maintained in a correct machining position. Conventionally, the workrests are spring loaded so that they will follow the workpiece as it is being ground to size but the degree to which the workrests are spring loaded must be selectively chosen to compensate for the deflecting force generated by the action of the grinding wheel abrasively removing metal from the workpiece. At best, this is an approximate solution.

It is an object of the present invention to provide a cylindrical grinding machine including means for continuously substantially balancing the opposing forces generated by the grinding wheel and the workrests during the grinding process.

Among the advantages of the present invention is the provision of a cylindrical grinding machine wherein the amount of deflection arising from the advancement of the grinding wheel will not substantially vary with the rate of infeed.

Other objects and advantages of the present invention will become apparent from the following portion of this specification and from the accompanying drawings which illustrate in accordance with the mandate of the patent statutes a presently preferred embodiment incorporating the principles of the invention.

Referring to the drawings:

FIG. 1 is a side elevational view of a workrest for a grinding machine made in accordance with the teachings of the present invention;

FIG. 2 is a side elevational view partly in section of a portion of the workrest illustrated in FIG. 1;

FIG. 3 is a sectional view taken on the line III—III of FIG. 2;

FIG. 4 is a sectional view taken on the line IV—IV of FIG. 2;

FIG. 5 is an electronic diagram schematically illustrating the control circuit for the workrest and related wheelfeed of the grinding machine;

FIG. 6 is a diagrammatic representation of the rough grinding stage of a grinding cycle;

FIG. 7 is a diagrammatic representation illustrating the advancement of the workrests at the end of the rough grinding stage; and

FIG. 8 is a diagrammatic representation illustrating the conjoint advancement of the workrests and grinding wheel during the finish grinding stage.

The workrest illustrated in the drawings includes a main body portion **10**, which supports two stepping motors **12** and **14** at one end thereof. A pair of hanger brackets **16, 18** are mounted on the main body portion and extend beyond the other end of the main body portion and pivotally support upper and lower workrest jaws **20, 22** via suitable shafts **24, 26.**

The upper **20** and lower **22** workrest jaws each include a shoe **28,** which is bolted to the body of the workrest jaws by a bolt **30** or the like. A pad **32** is secured to each shoe **28** and serves to engage and support a workpiece W to be ground. Each shoe may include an indexing pin **33** to assure that the shoe will be properly located when it is bolted to the workrest jaws **20,** 22.

The upper and lower workrest jaws are maintained in a fully retracted position against hardened buttons **38** protruding from the main body portion **10** by spring elements **36,** which are secured to hooks **34** connected to the main body portion and the upper and lower workrest jaws.

It can be seen from FIG. **2** that the drive shaft **40** of each stepping motor extends into the main body portion **10.** A nut **42** rotatably mounted in bearings **46,** is keyed **44** to the drive shaft **40** for rotation therewith. A spindle **48** is threadedly received within the nut **42** whereby rotation of the nut **42** causes linear displacement of the spindle **48,** and hence, button **38.** The direction of displacement depends upon the direction of rotation of the nut **42.** The button **38** includes a threaded shank **50,** which is screwed into a bore **51** in the spindle **48** at the right-hand side of the spindle as viewed in FIG. **2.**

A further part, **52,** of each spindle **48** is splined as may be seen from both FIGS. **2** and **4.** The splined part **52** co-operates with the splined inner surface of the associated adjuster sleeve **54,** which is selectively rotatable by an adjuster knob **56** carrying a worm **58** (FIG. **4**), which meshes with the worm wheel **59** cut on the external surface of the sleeve **54.**

Rotation of the knob **56** rotates the sleeve **54** through the worm **58** to rotate the spindle **48** while nut **42** remains stationary. The spindle **48,** and hence, the button **38** can be individually, selectively axially displaced to any desired start position.

FIG. **3** illustrates the mechanism for preventing the unintentional rotation of a sleeve **54** when the associated stepping motor is utilized. This mechanism includes a pair of pads **60,** which are normally biased by a compressed spring **62** into engagement with the sleeve **54** as is illustrated in FIG. **3.** The degree of compression of the spring **62,** and hence, the extent of the frictional lock may be varied by tightening or loosening the bolt **64.** In this position, the sleeve is frictionally

locked against rotation, but can be manually rotated by turning the knob **56.**

The control circuit is illustrated in FIG. **5.** In operation, a workpiece W is loaded into the stocks **66** (FIG. **1**) for rotative displacement about the axis **68** thereof. The grinding wheel or wheelhead **70** (FIGS. **6, 7** and **8**) is rapidly advanced from a fully retracted position W to a first forward position X (FIG. **6**) by either hydraulic or pulsed control whereupon a signal is generated at input A of a wheelhead direction and control logic (WDC), which causes an output signal to be transmitted along a line **72** to an input of an enable logic for permitting the commencement of the wheelhead feed sequence at a first grinding feed rate and also for setting a first end point for the wheelhead. The feed rates and end points are programmed into the enable logic by means of binary coded decimal (BCD) switches.

The first grinding feed rate is read in BCD form along a line **74** into an input of a digital rate generator (DRG), a second input of the DRG being connected to the output of a crystal controlled master oscillator which provides a high stability reference input frequency to the DRG. The output signal from the DRG is passed to an input C of the WDC in the form of a pulse train whose frequency is controlled by the BCD input data. These pulses cause a count pulse signal to be transmitted from the (WDC) to a control counter and a synchronised output in the form of a step pulse is also transmitted from an output G of the (WDC) to an acceleration and drive unit (ADU) for the wheelhead stepping motor M.

The step pulse output is also fed to gate circuits **A1** and **A3** both of which are associated with a second ADU for the workrest stepping motors (**12, 14**).

The BCD date on the first end point i.e., the number of programmed counts in the first grinding feed is read into a digital magnitude comparator (DMC) along a line **76** from the enable logic, the latter number of counts being compared with the contents of the control counter. In addition, the control counter is employed in conjunction with a digital display to provide a visual indication of the wheelhead position during the feed sequence.

When the DMC detects equality between the counts recorded on the counter and the programmed end point indicating that the diameter of the workpiece has been reduced from D_1 to D_2 a signal is generated from the output of the DMC to an input D of the WDC logic, which terminates the first feed and initiates the first dwell period (sparkout).

The termination of the first dwell period produces a signal along line **78** to advance the workrest. This signal enables logic gate **A2** to pass a "fixed advance rate" pulse train to the ADU associated with the workrest stepping motors.

The workrest jaws **20, 22** will advance at this fixed rate until they contact the workpiece (FIG. **7**) at which point a signal from a pressure sensitive transducer, mounted on the workrest jaw, will set a "memory of workrest on work" circuit. This in turn, will disable gate **A2** and stop the workrest stepping motors. This initial contact pressure between the workpiece and the workrest jaws is extremely low, and therefore, no deflection of the workpiece is caused thereby.

Once the workrest jaws have been advanced to contact the workpiece as described, the second grinding feed will commence at a rate determined in the same manner as the first feed.

Since logic gate **A1** is now enabled, step pulses at the second grinding feed rate, are fed to both the wheelhead ADU and the workrest ADU causing both to step at the same rate.

Both motors will continue to be synchronized (FIG. **8**) until an in-process gauge generates a size signal, indicating that the diameter of the workpiece has been reduced to D_3, to input B of the (WDC). Each radial increment of advance of the grinding wheel causes a conjoint radial increment of advance of the workrest jaw buttons whereby the desired axial location of the workpiece will be continuously maintained. The size signal to the WDC logic will initiate resetting of wheelhead to a programmed total feed value at a fixed reset rate.

Gate **A3** is enabled to permit step pulses at the fixed reset rate to retract the workrest and the "memory of workrest on work" circuit will be reset at the start of the next grind cycle.

Resetting of wheelhead and workrest continues until the DMC detects equality between the total counts recorded in the control counter and the programmed total feed at which point the reset rate is stopped.

The wheelhead and workrest are then in the reset position ready for the next grinding cycle.

The paths of the workrest shoes are such that the forces applied by the grinding wheel on the workpiece are always opposed by equal and opposite forces applied by the shoes thereby maintaining the workpiece on a true axis throughout the stock removal of the grinding process.

The pulse feed advance during the third stage ceases in accordance with the control program which may or may not incorporate an in-process sizing gauge for signaling when a predetermined size of the workpiece has been reached. The position of the workrest shoe relative to the true axis of the workpiece may be used to cause the cessation of the pulse feed advance. Any such "size signal" can then be used to reset, i.e., retract the wheel and the workrest shoe or shoes from the workpiece to allow unload and loading of the workpiece.

The "size signal" initiates a sequence in which the grinding wheel is first removed from the workpiece, followed by removal of the workrest shoe or shoes from the workpiece. This avoids any marking of the workpiece which sometimes occurs if both workrest and wheel are simultaneously retracted. The signal to retract the wheel and workrest shoe or shoes may also be used to reset the wheel and shoe or shoes by a programmed amount so as to be ready to recommence the grinding of a further new workpiece.

As a result of the manner in which the grinding cycle described above is performed, in particular, by having the workpiece at a resultant but not predetermined diameter D_2 before the workrest shoes come into contact with the workpiece, and by having the finished workpiece size accurately controlled by the automatic, in process, size control gauge, it is possible to automatically account for all the normal variables associated with cylindrical grinding, for example wheel wear, thermal effects on machine elements, condition of cutting tool and pad wear.

It is to be understood that only one of the workrest shoes needs to be operated by a stepping motor, the other shoe or shoes being operated by, for example, a

rotary hydraulic cylinder. If only one shoe is operated by a stepping motor it is the shoe which exerts a force on the workpiece in a direction substantially opposite to the direction of feed movement of the grinding wheel.

If desired, conjoint advancement of the workrest jaws and the grinding wheel may take place throughout the entire grinding cycle.

In order to minimize cycle time, the workrest jaws can be manually advanced by rotating the control knobs **56** until the workrest pads **32** contact the workpiece prior to a grinding operation. This will assure that resetting of the workrest will take place in an absolute minimum of time and will require a minimum expenditure of energy.

What is claimed is:

1. A cylindrical grinding machine comprising

means for supporting a workpiece for rotative displacement about the axis thereof,

a grinding wheel assembly including at least one grinding wheel and means for rotatively displacing said grinding wheel about the axis thereof,

a workrest including

an upper workrest jaw, and

a lower workrest jaw,

first means including a first stepping motor for incrementally advancing said grinding wheel,

second means including a second stepping motor for incrementally advancing said upper workrest jaw,

third means including a third stepping motor for incrementally advancing said lower workrest jaw, and

means for conjointly supplying pulses to said first, second and third stepping motors at predetermined rates when said upper workrest jaw, lower workrest jaw and grinding wheel are located at first positions a selected distance from the nondeflected axis of the rotating workpiece to incrementally advance said grinding wheel, and upper and lower workrest jaws to advanced positions a predetermined distance from the non-deflected axis of the rotating workpiece.

2. A cylindrical grinder according to claim **1**, further comprising means for supplying pulses to said first stepping motor to selectively incrementally advance said grinding wheel from a retracted position remote from the rotating workpiece to said first grinding wheel position,

said grinding wheel effecting stock removal as it is advanced to said first position.

3. A cylindrical grinder according to claim **2**, further comprising

means for supplying pulses to said second and third stepping motors to advance said upper and lower workrest jaws from retracted positions and means for disabling said supplying means when said upper and lower workrest jaws have been advanced to said first positions.

4. A cylindrical grinder according to claim **3**, wherein said disabling means includes pressure transducers mounted on said upper and lower workrest jaws.

5. A cylindrical grinder according to claim **1**, further comprising means for supplying pulses to said first, second, and third stepping motors to retract said grinding wheel and upper and lower workrest jaws from said advanced positions, past said first positions to retracted positions.

6. A cylindrical grinding machine comprising

means for supporting a workpiece for rotative displacement about the axis thereof,

a grinding wheel assembly including at least one grinding wheel and means for rotatively displacing said grinding wheel about the axis thereof,

a workrest including

an upper workrest jaw including a workpiece engaging shoe, and

a lower workrest jaw including a workpiece engaging shoe,

first means including a first stepping motor for incrementally advancing said grinding wheel,

second means including a second stepping motor for incrementally advancing said upper workrest jaw,

third means including a third stepping motor for incrementally advancing said lower workrest jaw,

means for supplying pulses to said second and third stepping motors to advance said upper and lower workrest jaws from retracted positions and means for disabling said supplying means when said upper and lower workrest jaws have been advanced to first positions whereat the workpiece engaging surface of said upper and lower shoes and said grinding wheel are a selected distance from the nondeflected axis of the rotating workpiece, and

means for conjointly supplying pulses to said first, second and third stepping motors at predetermined rates to incrementally advance the workpiece engaging surfaces of said grinding wheel, and upper and lower workrest shoes to advanced positions a predetermined distance from the non-deflected axis of the rotating workpiece.

7. A cylindrical grinder according to claim **6**, further comprising means for supplying pulses to said first stepping motor to selectively incrementally advance said grinding wheel from a retracted position remote from the grinding wheel to said first grinding wheel position,

said grinding wheel effecting stock removal as it is advanced to said first position.

* * * * *