



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION
(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2017/01/09	(51) Cl.Int./Int.Cl. <i>H04W 72/12</i> (2009.01)
(87) Date publication PCT/PCT Publication Date: 2018/07/12	(71) Demandeur/Applicant: GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD., CN
(85) Entrée phase nationale/National Entry: 2019/07/09	(72) Inventeurs/Inventors: YANG, NING, CN; LIU, JIANHUA, CN...
(86) N° demande PCT/PCT Application No.: CN 2017/070633	(74) Agent: BENNETT JONES LLP
(87) N° publication PCT/PCT Publication No.: 2018/126477	

(54) Titre : PROCÉDE ET DISPOSITIF DE MULTIPLEXAGE DE RESSOURCES D'AUTORISATION DE LIAISON MONTANTE
(54) Title: METHOD AND DEVICE FOR MULTIPLEXING UPLINK GRANT RESOURCES

100

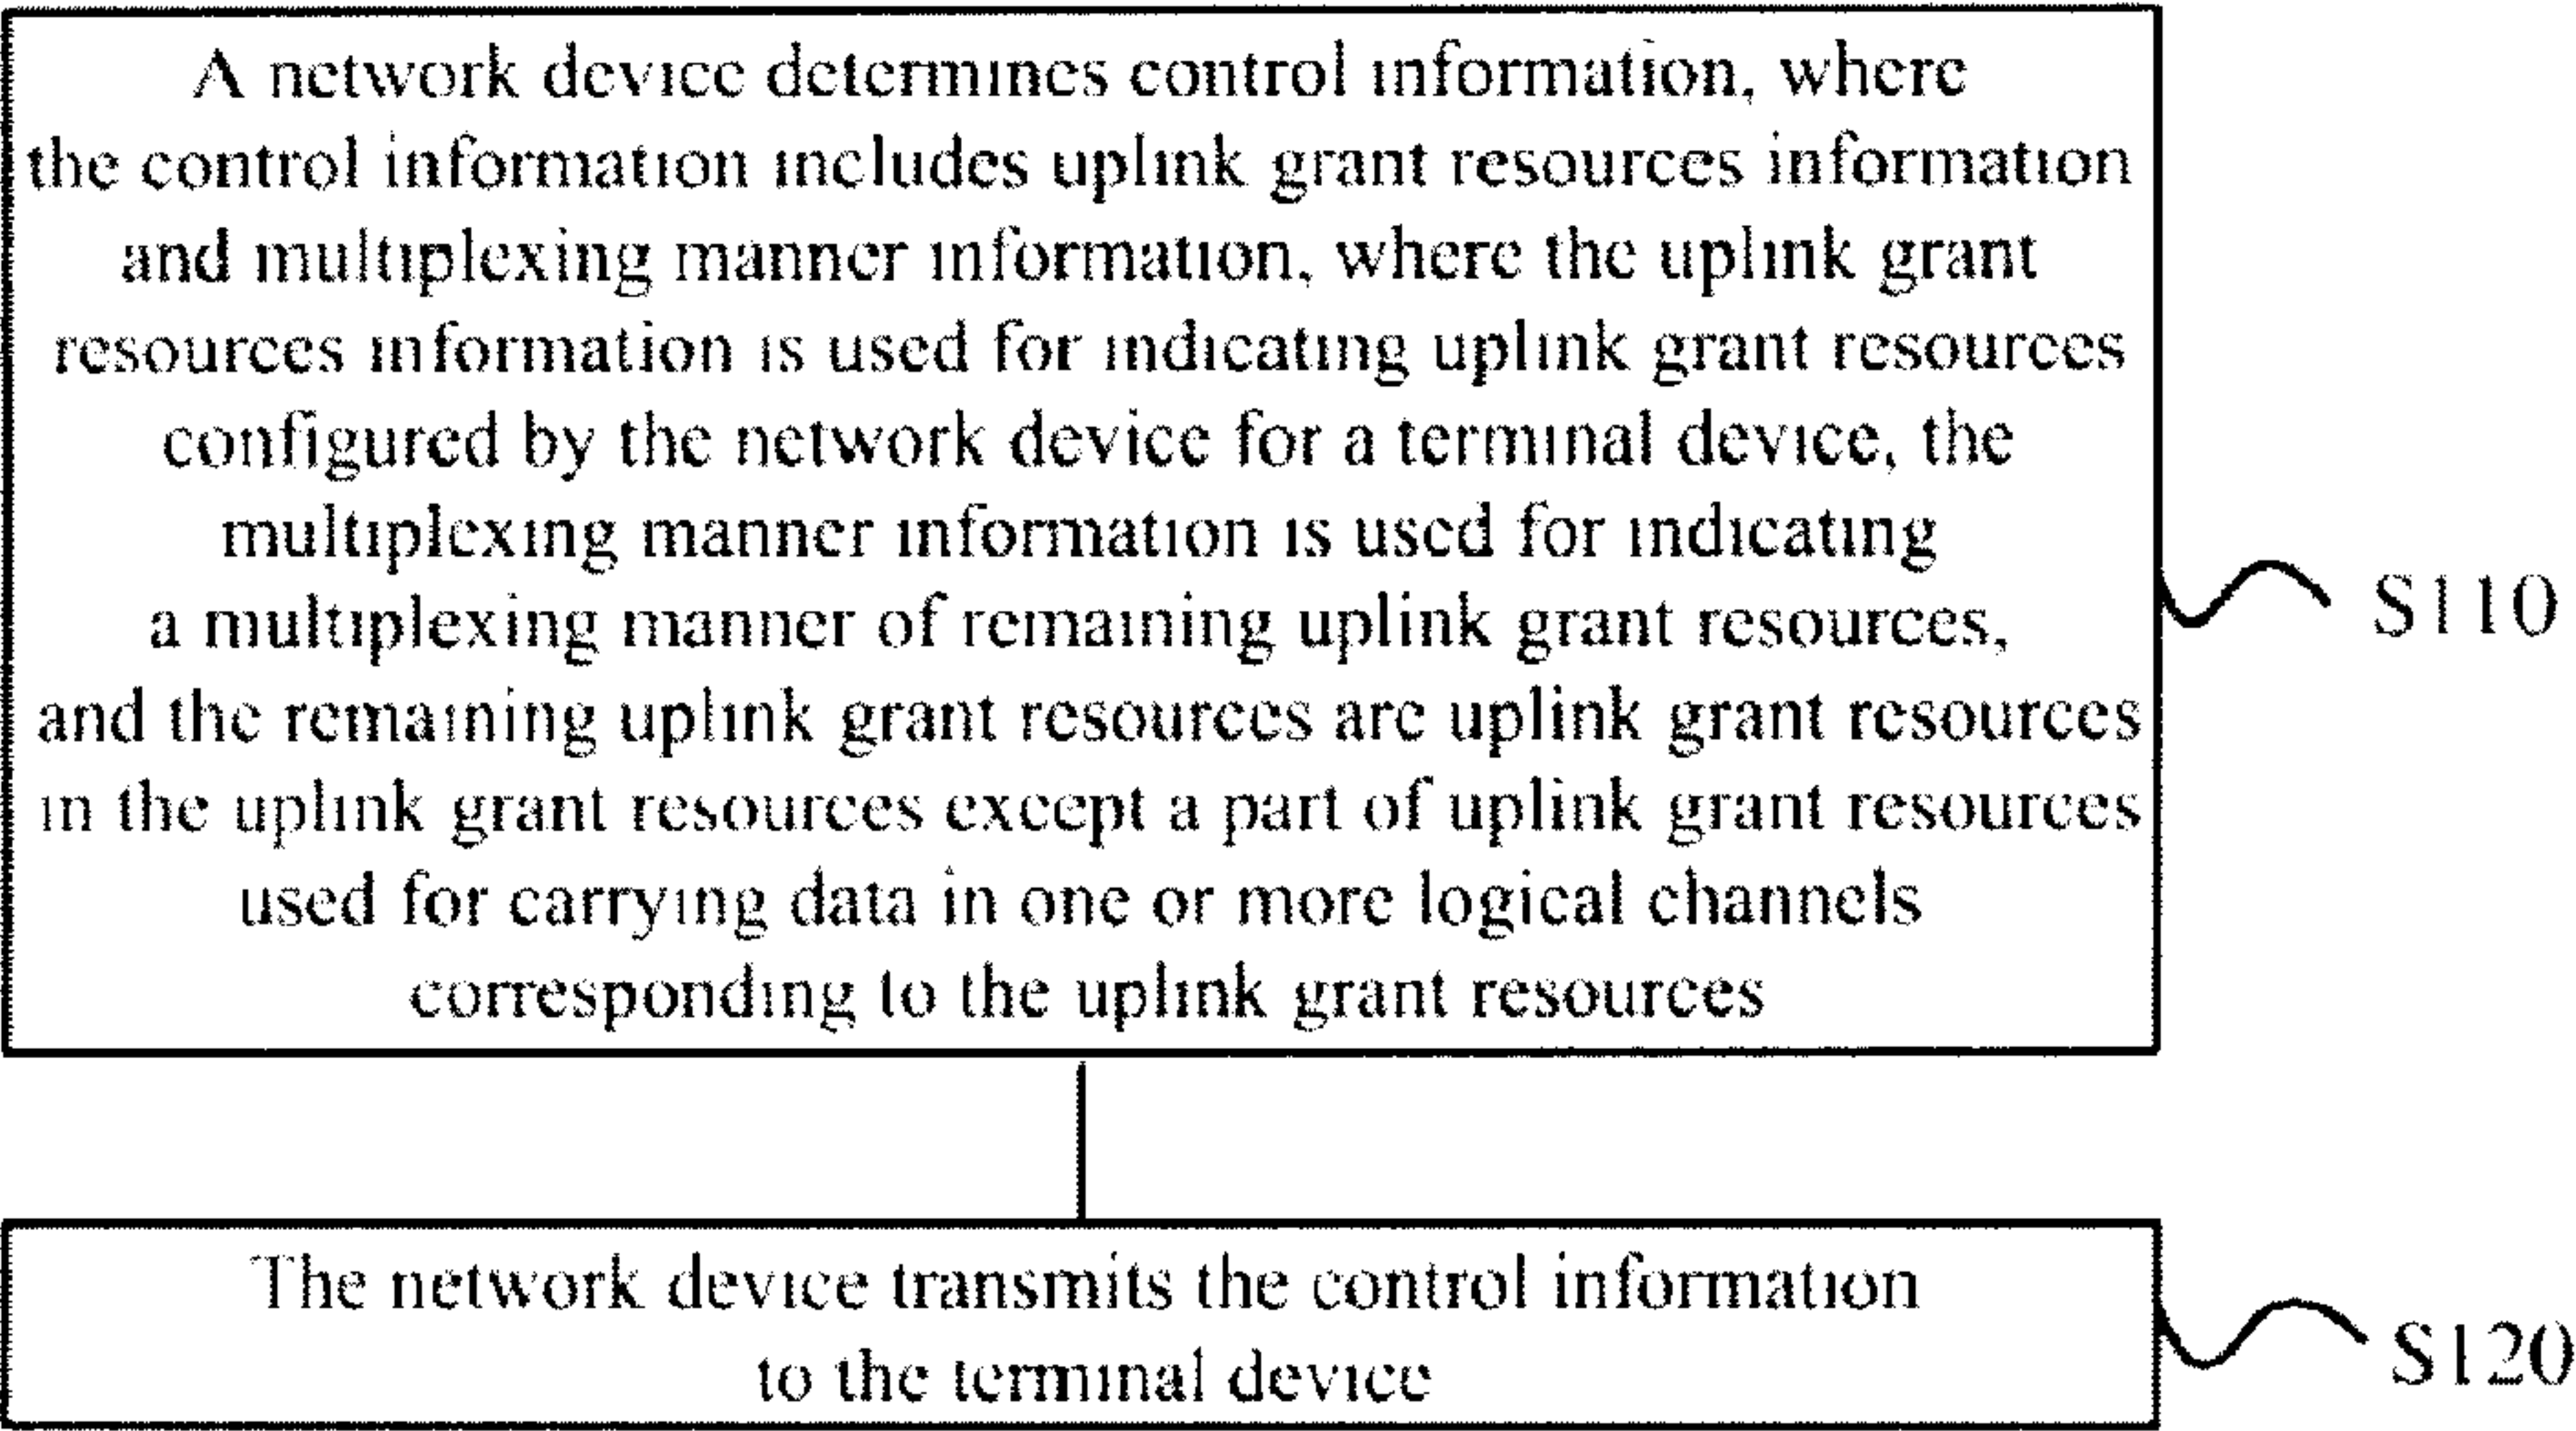


FIG. 1

(57) Abrégé/Abstract:
Provided by the present application are a method and device for multiplexing uplink authorization resources, the method comprising: a network device determines control information, the control information comprising uplink authorization resource

(57) **Abrégé(suite)/Abstract(continued):**

information and multiplexing mode information, wherein the uplink authorization resource information is used for indicating uplink authorization resources configured by the network device for a terminal device, the multiplexing mode information is used for indicating a multiplexing mode of remaining uplink authorization resources, and the remaining uplink authorization resources are uplink authorization resources other than the uplink authorization resource used for carrying data in a logical channel corresponding to the uplink authorization resource; and the network device sends the control information to the terminal device. The method for multiplexing uplink authorization resources of the present application may improve the use efficiency of uplink authorization resources.

ABSTRACT

The present application provides a method and device for multiplexing uplink grant resources, including: determining, by a network device, control information, where the control information includes uplink grant resources information and multiplexing manner information, where the uplink grant resources information is used for indicating uplink grant resources configured by the network device for a terminal device, the multiplexing manner information is used for indicating a multiplexing manner of remaining uplink grant resources, and the remaining uplink grant resources are uplink grant resources in the uplink grant resources except a part of uplink grant resources used for carrying data in one or more logical channels corresponding to the uplink grant resources; and transmitting, by the network device, the control information to the terminal device. The method for multiplexing uplink grant resources of the present application can improve a use efficiency of uplink grant resources.

METHOD AND DEVICE FOR MULTIPLEXING UPLINK GRANT RESOURCES

TECHNICAL FIELD

[0001] Embodiments of the present application relate to the field of communications, and
5 more particularly, to a method and device for multiplexing uplink grant resources.

BACKGROUND

[0002] In an existing long term revolution (Long Term Revolution, “LTE” for short) system, after a network side configures an uplink grant (Uplink Grant) resource for a terminal equipment (User Equipment, “UE” for short), the terminal device multiplexes the uplink grant
10 resources according to priorities of all logical channels.

[0003] In a new radio (New Radio, “NR” for short) system, a plurality of numerologies (numerology) are introduced, and each logical channel may be mapped to a certain type or a certain group of numerologies, so that uplink grant resources corresponding to a certain type of numerology can only be used by a certain logic channel or a certain group of logic
15 channels corresponding to that numerology, and other logic channels cannot use that uplink grant resources, thereby resulting in a waste of the uplink grant resources.

SUMMARY

[0004] The present application provides a method and a device for multiplexing uplink grant resources, which can improve a use efficiency of uplink grant resources.

20 [0005] A first aspect provides a method for multiplexing uplink grant resources, including: determining, by a network device, control information, where the control information includes uplink grant resources information and multiplexing manner information, where, the uplink grant resources information is used for indicating uplink grant resources configured by the network device for a terminal device, the multiplexing manner information is used for
25 indicating a multiplexing manner of remaining uplink grant resources, and the remaining uplink grant resources are uplink grant resources in the uplink grant resources except a part of

uplink grant resources used for carrying data in one or more logical channels corresponding to the uplink grant resources; and transmitting, by the network device, the control information to the terminal device.

[0006] In the method for multiplexing uplink grant resources according to the present application, the control information transmitted by the network device to the terminal device includes multiplexing manner information, so that the terminal device can determine the multiplexing manner of the remaining uplink grant resources in the configured uplink grant resources according to the multiplexing manner information, and multiplex the remaining uplink grant resources according to the determined multiplexing manner. Therefore, the use efficiency of uplink grant resources can be improved.

[0007] In combination with the first aspect, in an implementation of the first aspect, before the determining, by a network device, control information, the method further includes: receiving, by the network device, a resource scheduling request transmitted by the terminal device, where the resource scheduling request is used for indicating a data amount of data to be transmitted of the terminal device and a logical channel carrying the data to be transmitted; and determining, by the network device, the uplink grant resources according to the data amount and a service feature of the logical channel carrying the data to be transmitted.

[0008] In combination with the first aspect and the above implementation thereof, in another implementation of the first aspect, the multiplexing manner includes at least one of the following manners: a global logical channel multiplexing manner, a partial logical channel multiplexing manner and an undefined logical channel multiplexing manner.

[0009] It should be noted that, the global logical channel multiplexing manner refers to that the terminal device multiplexes the remaining uplink grant resources for all logical channels with a service carried thereon according to a specific priority order. The partial logical channel multiplexing manner refers to that the terminal device multiplex the remaining uplink grant resources for a logical channel specified by the network device according to a specific priority order. The undefined logical channel multiplexing manner refers to that the terminal device may voluntarily determine the logical channel that multiplex the remaining uplink grant resources in real time according to the implementation.

[0010] In combination with the first aspect and the above implementation thereof, in another implementation of the first aspect, the method further includes: transmitting, by the network device, priority indication information to the terminal device, where the priority indication information is used for the terminal device to determine a priority for each logical channel of one or more target logical channels to multiplex the remaining uplink grant

resources, and the target logical channel is a logical channel that can multiplex the remaining uplink grant resources.

[0011] In combination with the first aspect and the above implementation thereof, in another implementation of the first aspect, the priority indication information is also used for the terminal device to determine priorities that different data packets in the each logical channel multiplex the remaining uplink grant resources.

[0012] In combination with the first aspect and the above implementation thereof, in another implementation of the first aspect, the priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a service type of data that can be transmitted by a data radio bearer DRB corresponding to the each logical channel; or,

[0013] the priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a parameter configured by high layer signaling; or,

[0014] the priority indication information is used for indicating the priority for the each logical channel to multiplex the remaining uplink grant resources.

[0015] In combination with the first aspect and the above implementation thereof, in another implementation of the first aspect, the parameter configured by the high layer signaling includes at least one of the following parameters: a priority level, a prioritized bit rate PBR and a bucket size duration BSD.

[0016] A second aspect provides a method for multiplexing uplink grant resources, including: receiving, by a terminal device, control information transmitted by a network device, where the control information includes uplink grant resources information, and the uplink grant resources information is used for indicating uplink grant resources configured by the network device for the terminal device; determining, by the terminal device, a multiplexing manner of remaining uplink grant resources, where the remaining uplink grant resources are uplink grant resources in the uplink grant resources except a part of uplink grant resources used for carrying data in one or more logical channels corresponding to the uplink grant resources; and multiplexing, by the terminal device, the remaining uplink grant resources according to the multiplexing manner.

[0017] In the method for multiplexing uplink grant resources according to the present application, the control information that is received by the terminal device and transmitted by the network device includes uplink grant resources information, and the terminal device determines the uplink grant resources configured by the network device for the terminal

device according to the uplink grant resources information, determines the multiplexing manner of the remaining uplink grant resources in the uplink grant resources, and multiplexes the remaining uplink grant resources according to the multiplexing manner of the remaining uplink grant resources. Therefore, the use efficiency of uplink grant resources can be improved.

[0018] In combination with the second aspect, in an implementation of the second aspect, the method further includes: transmitting, by the terminal device, a resource scheduling request to the network device before receiving the control information, where the resource scheduling request is used for indicating a data amount of data to be transmitted of the terminal device and a logical channel carrying the data to be transmitted.

[0019] In combination with the second aspect and the above implementation thereof, in another implementation of the second aspect, the control information includes multiplexing manner information, and the multiplexing manner information is used for indicating a multiplexing manner of the remaining uplink grant resources;

[0020] where, the determining, by the terminal device, a multiplexing manner of remaining uplink grant resources include: determining, by the terminal device, a multiplexing manner of the remaining uplink grant resources according to the multiplexing manner information.

[0021] In combination with the second aspect and the above implementation thereof, in another implementation of the second aspect, the multiplexing manner includes at least one of the following manners: a global logical channel multiplexing manner, a partial logical channel multiplexing manner and an undefined logical channel multiplexing manner.

[0022] In combination with the second aspect and the above implementation thereof, in another implementation of the second aspect, the multiplexing, by the terminal device, the remaining uplink grant resources according to the multiplexing manner includes: determining, by the terminal device, one or more target logical channels according to the multiplexing manner, where the target logical channel is a logical channel that can multiplex the remaining uplink grant resources; determining, by the terminal device, a priority for each logical channel of the target logical channel to multiplex the remaining uplink grant resources; multiplexing, by the terminal device, the remaining uplink grant resources according to the priority for the each logical channel to multiplex the remaining uplink grant resources.

[0023] In combination with the second aspect and the above implementation thereof, in another implementation of the second aspect, the method further includes: receiving, by the terminal device, priority indication information transmitted by the network device, where the

priority indication information is used for the terminal device to determine the priority for the each logical channel to multiplex the remaining uplink grant resources;

[0024] where, the determining, by the terminal device, a priority for each channel of the target logical channel to multiplex the remaining uplink grant resources include: determining,
 5 by the terminal device, the priority for the each logical channel to multiplex the remaining uplink grant resources according to the priority indication information.

[0025] In combination with the second aspect and the above implementation thereof, in another implementation of the second aspect, the priority indication information is also used for the terminal device to determine priorities that different data packets in the each logical
 10 channel multiplex the remaining uplink grant resources, and the method further includes: determining, by the terminal device, the priorities that different data packets in the each logical channel multiplex the remaining uplink resources according to the priority indication information;

[0026] where, the multiplexing, by the terminal device, the remaining uplink grant
 15 resources according to the priority for the each logical channel to multiplex the remaining uplink grant resources include: multiplexing, by the terminal device, the remaining uplink grant resources according to the priority for the each logical channel to multiplex the remaining uplink grant resources and the priorities that different data packets in the each logical channel multiplex the remaining uplink grant resources.

[0027] In combination with the second aspect and the above implementation thereof, in another implementation of the second aspect, the priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a service type of data that can be transmitted by a data radio bearer DRB corresponding to the each logical channel; or, the
 25 priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a parameter configured by high layer signaling; or, the priority indication information is used for indicating the priority for the each logical channel to multiplex the remaining uplink grant resources.

[0028] In combination with the second aspect and the above implementation thereof, in another implementation of the second aspect, the parameter configured by the high layer signaling includes at least one of the following parameters: a priority level, a prioritized bit rate PBR and a bucket size duration BSD.

[0029] A third aspect provides a network device, configured to perform the method of the

first aspect or any of the possible implementations of the first aspect described above. Specifically, the network device includes a functional module configured to perform the method of the first aspect or any of the possible implementations of the first aspect described above.

5 **[0030]** A fourth aspect provides a terminal device, configured to perform the method of the second aspect or any of the possible implementations of the second aspect described above. Specifically, the terminal device includes a functional module configured to perform the method of the second aspect or any of the possible implementations of the second aspect described above.

10 **[0031]** A fifth aspect provides a network device, including a processor, a memory, a transceiver. The processor, the memory and the transceiver communicate with each other, transfer a control and/or data signal to each other via internal connection path, so that the network device performs the method of the first aspect or any of the possible implementations of the first aspect described above.

15 **[0032]** A sixth aspect provides a terminal device, including a processor, a memory, a transceiver. The processor, the memory and the transceiver communicate with each other, transfer a control and/or data signal to each other via internal connection path, so that the terminal device performs the method of the second aspect or any of the possible implementations of the second aspect described above.

20 **[0033]** A seventh aspect provides a computer readable medium, configured to store a computer program, where the computer program includes an instruction for performing the method of the first aspect or any of the possible implementations of the first aspect described above.

25 **[0034]** A eighth aspect provides a computer readable medium, configured to store a computer program, where the computer program includes an instruction for performing the method of the second aspect or any of the possible implementations of the second aspect described above.

BRIEF DESCRIPTION OF DRAWINGS

30 **[0035]** FIG. 1 is a schematic flowchart of a method for multiplexing uplink grant resources according to an embodiment of the present application;

[0036] FIG. 2 is another schematic flowchart of a method for multiplexing uplink grant resources according to an embodiment of the present application;

[0037] FIG. 3 is a schematic flowchart of a method for multiplexing uplink grant resources according to another embodiment of the present application;

[0038] FIG. 4 is another schematic flowchart of a method for multiplexing uplink grant resources according to another embodiment of the present application;

5 [0039] FIG. 5 is a schematic block diagram of a network device according to an embodiment of the present application;

[0040] FIG. 6 is a schematic block diagram of a terminal device according to an embodiment of the present application;

[0041] FIG. 7 is a schematic block diagram of a network device according to another
10 embodiment of the present application;

[0042] FIG. 8 is a schematic block diagram of a terminal device according to another embodiment of the present application.

DESCRIPTION OF EMBODIMENTS

[0043] Technical solutions in embodiments of the present application will be clearly and
15 completely described in the following with reference to the accompanying drawings in the embodiments of the present application.

[0044] It should be understood that, the technical solutions of the embodiments of the present application can be applied to various communication systems, for example, a global system of mobile communication (Global System of Mobile communication, "GSM" for short)
20 system, a code division multiple access (Code Division Multiple Access, "CDMA" for short) system, a wideband code division multiple access (Wideband Code Division Multiple Access, "WCDMA" for short) system, a general packet radio service (General Packet Radio Service, "GPRS" for short), a long term evolution (Long Term Evolution "LTE" for short) system, a LTE frequency division duplex (Frequency Division Duplex, "FDD" for short) system, a LTE
25 time division duplex (Time Division Duplex, "TDD" for short), a universal mobile telecommunication system (Universal Mobile Telecommunication System, "UMTS" for short) or a worldwide interoperability for microwave access (Worldwide Interoperability for Microwave Access, "WiMAX" for short) communication system, a 5G system, or a new radio (New Radio, NR) system.

30 [0045] In the embodiments of the present application, a terminal device may include, but is not limited to, a mobile station (Mobile Station, MS), a mobile terminal (Mobile Terminal), a mobile telephone (Mobile Telephone), a user equipment (User Equipment, UE), a handset, a

portable equipment, a vehicle, etc. The terminal device can communicate with one or more core networks via a radio access network (Radio Access Network, RAN), for example, the terminal device may be a mobile phone (or referred to as a “cellular” phone), a computer with a wireless communication capability, etc. The terminal device may also be a portable,
 5 pocket-sized, handheld, computer-integrated or in-vehicle mobile apparatus.

[0046] The network device involved in the embodiments of the present application is an apparatus deployed in a radio access network to provide a wireless communication function for the terminal device. The network device may be a base station, and the base station may include various forms of a macro base station, a micro base station, a relay station, an access
 10 point, etc. In systems with different radio access technologies, the names of devices with base station function may vary. For example, the evolved NodeB (Evolved NodeB, “eNB” or “eNodeB” for short) is called in the LTE network, and Node B is called in the 3rd Generation (“3G” for short) network, and the like.

[0047] FIG. 1 illustrates a method for multiplexing uplink grant resources according to an
 15 embodiment of the present application. As shown in FIG. 1, a method 100 includes:

[0048] S110, a network device determines control information, where the control information includes uplink grant resources information and multiplexing manner information, where the uplink grant resources information is used for indicating uplink grant resources configured by the network device for a terminal device, the multiplexing manner information
 20 is used for indicating a multiplexing manner of remaining uplink grant resources, and the remaining uplink grant resources are uplink grant resources in the uplink grant resources except a part of uplink grant resources used for carrying data in one or more logical channels corresponding to the uplink grant resources; and

[0049] S120, the network device transmits the control information to the terminal device.

[0050] It can be understood that, in S110, the uplink grant resources configured by the
 25 network device for the terminal device may correspond to a numerology of a specific numerology in physical layer, or correspond to various numerologies. The terminal device firstly multiplexes the uplink grant resources for logical channels related to the above-mentioned specific numerology or various numerologies according to a priority order,
 30 in order to preferentially satisfy quality of service (Quality of Service, “QoS” for short) requirements of these channels.

[0051] And when the data amount of data to be transmitted carried on the logical channel(s) related to the numerology corresponding to the uplink grant resources does not fill up the uplink grant resources, there will be a surplus of the uplink grant resources, which is

the remaining uplink grant resources mentioned above. In this case, the terminal device may determine a multiplexing manner of the remaining uplink grant resources according to the multiplexing manner information, and multiplex the uplink grant resources according to the determined multiplexing manner, which avoids a waste of the uplink grant resources, and improves the utilization rate of the uplink grant resources.

[0052] In the embodiment of the present application, optionally, as shown in FIG. 2, the method 100 further includes:

[0053] S130, the network device receives a resource scheduling request transmitted by the terminal device, where the resource scheduling request is used for indicating a data amount of data to be transmitted of the terminal device and a logical channel carrying the data to be transmitted.

[0054] S140, the network device determines the uplink grant resources according to the data amount and a service feature of the logical channel carrying the data to be transmitted.

[0055] Optionally, in some embodiments, the resource scheduling request is a buffer status report (Buffer Status Report, “BSR” for short). The service feature of the logical channel includes, but is not limited to, a QoS requirement.

[0056] In the embodiment of the present application, optionally, the multiplexing manner includes at least one of the following manners: a global logical channel multiplexing manner, a partial logical channel multiplexing manner and an undefined logical channel multiplexing manner.

[0057] It should be noted that, the global logical channel multiplexing manner refers to that the terminal device may multiplex the remaining uplink grant resources for all logical channels with a service carried thereon according to a specific priority order. The partial logical channel multiplexing manner refers to that the terminal device multiplex the remaining uplink grant resources for some logical channels specified by the network device according to a specific priority order. Herein, the network device may configure the remaining uplink grant resources to correspond to one or multiple numerologies. If the remaining uplink grant resources are configured to correspond to one numerology, then only the logical channel corresponding to that numerology can multiplex the remaining uplink grant resources, and this kind of multiplexing manner is also called “specific logic channel multiplexing manner”; If the remaining uplink grant resources are configured to correspond to multiple numerologies, then all of the logical channels corresponding to that multiple numerologies can multiplex the remaining uplink grant resources.

[0058] And the corresponding relationship between the numerology and the logical

channel may be configured by the network device dynamically or semi-statically, which is not limited by the embodiments of the present application.

[0059] In the above embodiments, the priority order may be determined by the terminal device according to a preset ordering rule, or determined by the terminal device according to priority indication information transmitted by the network device.

[0060] Specifically, in some embodiments, the network device transmits the priority indication information to the terminal device, where the priority indication information is used for the terminal device to determine a priority for each logical channel of one or more target logical channels to multiplex the remaining uplink grant resources, and the target logical channel is a logical channel that can multiplex the remaining uplink grant resources.

[0061] For example, the priority indication information indicates that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a service type of data that can be transmitted by a data radio bearer (Data Radio Bearer, “DRB”) corresponding to the each logical channel. For example, a sequence order of the priority corresponding to different service types may be pre-configured, and the terminal device determines the priority of logical channel according to the service types of data that can be transmitted by DRB corresponding to the logical channel. For example, assuming that a priority of the session-type service is higher than a priority of the traffic-type service and is higher than a priority of interaction-type service, and there are three logical channels that can multiplex the remaining uplink grant resources, which respectively are a logical channel 1, a logical channel 2, and a logical channel 3. And service types of the data that the corresponding DRB can transmit respectively are an interaction-type, a session-type and a traffic-type, thus, the priorities that these three logical channels multiplex the remaining uplink grant resources from high to low are: the logical channel 2, the logical channel 3, and the logical channel 1.

[0062] Or, the priority indication information indicates that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a parameter configured by high layer signaling. The parameter configured by high layer signaling includes, but is not limited to: a priority (Priority) level, a prioritized bit rate (Prioritized Bit Rate, “PBR” for short) and a bucket size duration (Bucket Size Duration, “BSD” for short).

[0063] Or, the priority indication information indicates the priority for the each logical channel to multiplex the remaining uplink grant resources. For example, assuming that there are three logical channels that can multiplex the remaining uplink grant resources, which

respectively are a logical channel 1, a logical channel 2, and a logical channel 3, and the network device, through the priority indication information, may directly indicate that the priorities that these three logical channels multiplex the remaining uplink grant resources from high to low in sequence are: the logical channel 3, the logical channel 2, and the logical channel 1.

[0064] Further, the priority indication information is also used for the terminal device to determine priorities that different data packets in the each logical channel multiplex the remaining uplink resources grant. For example, the priority indication information indicates that the terminal device performs the priority ordering on data packets with different QoS-Flow-IDs corresponding to a same logical channel, and specifies that a data packet with a greater ID value has a higher priority. Then, the terminal device determines the priorities that data packets with different IDs multiplex the remaining uplink grant resources according to the ordering rule, that is, an order in which the data packets with different IDs are transmitted.

[0065] Optionally, the priority indication information may be included in the control information, or the priority indication information may be separate information.

[0066] The method for multiplexing uplink grant resources according to the embodiment of the present application is described in detail from the perspective of the network device side with reference to FIG. 1 and FIG. 2, and a method for multiplexing uplink grant resources according to another embodiment of the present application will be described in detail from the perspective of the terminal device side with reference to FIG. 3 and FIG. 4. It should be noted that, the interaction between the terminal device and the network device described from the perspective of the terminal device side is the same as that described from the perspective of the network device side. To avoid repetition, the related description is omitted as appropriate.

[0067] FIG. 3 is a method for multiplexing uplink grant resources according to another embodiment of the present application, as shown in FIG. 3, a method 200 includes:

[0068] S210, a terminal device receives control information transmitted by a network device, where the control information includes uplink grant resources information, where the uplink resources information is used for indicating uplink grant resources configured by the network device for the terminal device; and

[0069] S220, the terminal device determines a multiplexing manner of remaining uplink grant resources, where the remaining uplink grant resources are uplink grant resources in the uplink grant resources except a part of uplink grant resources used for carrying data in one or

more logical channels corresponding to the uplink grant resources;

[0070] S230, the terminal device multiplexes the remaining uplink grant resources according to the multiplexing manner.

[0071] As a result, in the method for multiplexing uplink grant resources according to the embodiment of the present application, the control information that is received by the terminal device and transmitted by the network device includes uplink grant resources information, and the terminal device determines the uplink grant resources configured by the network device for the terminal device according to the uplink grant resources information, determines the multiplexing manner of the remaining uplink grant resources in the uplink grant resources, and multiplexes the remaining uplink grant resources according to the multiplexing manner of the remaining uplink grant resources. Therefore, the use efficiency of uplink grant resources can be improved.

[0072] Optionally, in S220, the terminal device may determine the multiplexing manner of the remaining uplink grant resources by itself.

[0073] In the embodiment of the present application, optionally, as shown in FIG. 4, the method further includes:

[0074] S240, the terminal device transmits a resource scheduling request to the network device before receiving the control information, where the resource scheduling request is used for indicating a data amount of data to be transmitted of the terminal device and a logical channel carrying the data to be transmitted.

[0075] In the embodiment of the present application, optionally, the control information includes multiplexing manner information, where the multiplexing manner information is used for indicating a multiplexing manner of the remaining uplink grant resources;

[0076] where, S230 specifically is: the terminal device determines a multiplexing manner of the remaining uplink grant resources according to the multiplexing manner information.

[0077] In the embodiment of the present application, optionally, the multiplexing manner includes at least one of the following manners: a global logical channel multiplexing manner, a partial logical channel multiplexing manner and an undefined logical channel multiplexing manner.

[0078] In the embodiment of the present application, optionally, S230 specifically is: the terminal device determines one or more target logical channels according to the multiplexing manner, where the target logical channel is a logical channel that can multiplex the remaining uplink grant resources; the terminal device determines a priority for each logical channel of the target logical channel to multiplex the remaining uplink grant resources; the terminal

device multiplexes the remaining uplink grant resources according to the priority for the each logical channel to multiplex the remaining uplink grant resources.

[0079] In the embodiment of the present application, optionally, the method further includes: the terminal device receives priority indication information transmitted by the network device, where the priority indication information is used for the terminal device to determine the priority for the each logical channel to multiplex the remaining uplink grant resources;

[0080] where, in S230, the terminal device determines a priority for each channel of the target logical channel to multiplex the remaining uplink grant resources include: the terminal device determines the priority that the each channel multiplexes the remaining uplink grant resources according to the priority indication information.

[0081] In the embodiment of the present application, optionally, the priority indication information is also used for the terminal device to determine priorities that different data packets in the each logical channel multiplex the remaining uplink grant resources, and the method further includes:

[0082] the terminal device determines the priorities that different data packets in the each logical channel multiplex the remaining uplink resources according to the priority indication information;

[0083] where, in S230, the terminal device multiplexes the remaining uplink grant resources according to the priority for the each logical channel to multiplex the remaining uplink grant resources include: the terminal device multiplexes the remaining uplink grant resources according to the priority for the each logical channel to multiplex the remaining uplink grant resources and the priorities that different data packets in the each logical channel multiplex the remaining uplink grant resources.

[0084] In the embodiment of the present application, optionally, the priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a service type of data that can be transmitted by a data radio bearer DRB corresponding to the each logical channel; or,

[0085] the priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a parameter configured by high layer signaling; or,

[0086] the priority indication information is used for indicating the priority for the each logical channel to multiplex the remaining uplink grant resources.

[0087] In the embodiment of the present application, optionally, the parameter configured by the high layer signaling includes at least one of the following parameters: a priority level, a prioritized bit rate PBR and a bucket size duration BSD.

[0088] The method for multiplexing uplink grant resources according to the embodiment of the present application is described in detail with reference to FIG. 1 to FIG. 4, and the network device according to the embodiment of the present application will be described with reference to FIG. 5, as shown in FIG. 5, a network device 10 includes:

[0089] a processing module 11, configured to determine control information, where the control information includes uplink grant resources information and multiplexing manner information, where the uplink grant resources information is used for indicating uplink grant resources configured by the network device for a terminal device, the multiplexing manner information is used for indicating a multiplexing manner of remaining uplink grant resources, and the remaining uplink grant resources are uplink grant resources in the uplink grant resources except a part of uplink grant resources used for carrying data in one or more logical channels corresponding to the uplink grant resources; and

[0090] a transceiving module 12, configured to transmit the control information to the terminal device.

[0091] As a result, the control information transmitted by the network device according to the embodiment of the present application to the terminal device includes multiplexing manner information, so that the terminal device can determine the multiplexing manner of the remaining uplink grant resources in the configured uplink grant resources according to the multiplexing manner information, and multiplex the remaining uplink grant resources according to the determined multiplexing manner. Therefore, the use efficiency of uplink grant resources can be improved.

[0092] In the embodiment of the present application, optionally, before the processing module 11 determines control information, the transceiving module 12 is further configured to: receive a resource scheduling request transmitted by the terminal device, where the resource scheduling request is used for indicating a data amount of data to be transmitted of the terminal device and a logical channel carrying the data to be transmitted; and

[0093] the processing module 11 is specifically configured to determine the uplink grant resources according to the data amount and a service feature of the logical channel carrying the data to be transmitted.

[0094] In the embodiment of the present application, optionally, the multiplexing manner includes at least one of the following manners: a global logical channel multiplexing manner,

a partial logical channel multiplexing manner and an undefined logical channel multiplexing manner.

[0095] In the embodiment of the present application, optionally, the transceiving module 12 is further configured to: transmit priority indication information to the terminal device, where the priority indication information is used for the terminal device to determine a priority for each logical channel of one or more target logical channels to multiplex the remaining uplink grant resources, where the target logical channel is a logical channel that can multiplex the remaining uplink grant resources.

[0096] In the embodiment of the present application, optionally, the priority indication information is also used for the terminal device to determine priorities that different data packets in the each logical channel multiplex the remaining uplink grant resources.

[0097] In the embodiment of the present application, optionally, the priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a service type of data that can be transmitted by a data radio bearer DRB corresponding to the each logical channel; or,

[0098] the priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a parameter configured by high layer signaling; or,

[0099] the priority indication information is used for indicating the priority for the each logical channel to multiplex the remaining uplink grant resources.

[0100] In the embodiment of the present application, optionally, the parameter configured by the high layer signaling includes at least one of the following parameters: a priority level, a prioritized bit rate PBR and a bucket size duration BSD.

[0101] The network device according to the embodiment of the present application may refer to the process of the method 100 corresponding to the embodiment of the present application, and respective units/modules in the network device and other operations and/or functions described above are respectively used to implement the corresponding processes in the method 100, which will not be repeated herein for the purpose of simplicity.

[0102] FIG. 6 is a schematic block diagram of a terminal device according to an embodiment of the present application, as shown in FIG. 6, a terminal device 20 includes:

[0103] a transceiving module 21, configured to receive control information transmitted by

a network device, where the control information includes uplink grant resources information, and the uplink grant resources information is used for indicating uplink grant resources configured by the network device for the terminal device;

5 [0104] a processing module 22, configured to determine a multiplexing manner of remaining uplink grant resources, where the remaining uplink grant resources are uplink grant resources in the uplink grant resources except a part of uplink grant resources used for carrying data in one or more logical channels corresponding to the uplink grant resources; and

[0105] the processing module 22, further configured to multiplex the remaining uplink grant resources according to the multiplexing manner.

10 [0106] As a result, control information received by the terminal device and transmitted by the network device according to the embodiment of the present application includes uplink grant resources information, the terminal device determines the uplink grant resources configured by the network device for the terminal device according to the uplink grant resources information, determines the multiplexing manner of the remaining uplink grant
15 resources in the uplink grant resources, and multiplexes the remaining uplink grant resources according to the multiplexing manner of the remaining uplink grant resources. Therefore, the use efficiency of uplink grant resources can be improved.

[0107] In the embodiment of the present application, optionally, the transceiving module 21 is further configured to:

20 [0108] *transmit a resource scheduling request to the network device before the transceiving module 21 receives the control information transmitted by the network device, where the resource scheduling request is used for indicating a data amount of data to be transmitted of the terminal device and a logical channel carrying the data to be transmitted.*

[0109] In the embodiment of the present application, optionally, the control information
25 includes multiplexing manner information, where the multiplexing manner information is used for indicating a multiplexing manner of the remaining uplink grant resources;

[0110] where, the processing module 22 is specifically configured to:

[0111] determine a multiplexing manner of the remaining uplink grant resources according to the multiplexing manner information.

30 [0112] In the embodiment of the present application, optionally, the multiplexing manner

includes at least one of the following manners: a global logical channel multiplexing manner, a partial logical channel multiplexing manner and an undefined logical channel multiplexing manner.

[0113] In the embodiment of the present application, optionally, the processing module 22 is specifically configured to:

[0114] determine one or more target logical channels according to the multiplexing manner, where the target logical channel is a logical channel that can multiplex the remaining uplink grant resources;

[0115] determine a priority for each logical channel of the target logical channel to multiplex the remaining uplink grant resources; and

[0116] multiplex the remaining uplink grant resources according to the priority for the each logical channel to multiplex the remaining uplink grant resources.

[0117] In the embodiment of the present application, optionally, the transceiving module 21 is further configured to: receive priority indication information transmitted by the network device, where the priority indication information is used for the terminal device to determine the priority for the each logical channel to multiplex the remaining uplink grant resources;

[0118] where, the processing module 22 is specifically configured to:

[0119] determine the priority for the each logical channel to multiplex the remaining uplink grant resources according to the priority indication information.

[0120] In the embodiment of the present application, optionally, the priority indication information is also used for the terminal device to determine priorities that different data packets in the each logical channel multiplex the remaining uplink grant resources, the processing module 22 is specifically configured to:

[0121] determine the priorities that different data packets in the each logical channel multiplex the remaining uplink resources according to the priority indication information;

[0122] multiplex the remaining uplink resources according to the priority for the each logical channel to multiplex the remaining uplink grant resources and the priorities that different data packets in the each logical channel multiplex the remaining uplink grant resources.

[0123] In the embodiment of the present application, optionally, the priority indication

information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a service type of data that can be transmitted by a data radio bearer DRB corresponding to the each logical channel; or,

5 **[0124]** the priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a parameter configured by high layer signaling; or,

[0125] the priority indication information is used for indicating the priority for the each logical channel to multiplex the remaining uplink grant resources.

10 **[0126]** In the embodiment of the present application, optionally, the parameter configured by the high layer signaling includes at least one of the following parameters: a priority level, a prioritized bit rate PBR and a bucket size duration BSD.

[0127] The terminal device according to the embodiment of the present application may refer to the process of the method 200 corresponding to the embodiment of the present application, and respective units/modules in the terminal device and other operations and/or functions described above are respectively used to implement the corresponding processes in the method 200, which will not be repeated herein for the purpose of simplicity.

[0128] FIG. 7 illustrates a network device according to another embodiment of the present application. As shown in FIG. 7, a network device 100 includes a processor 110 and a transceiver 120. The processor 110 and the transceiver 120 are connected to each other. Optionally, the network device 100 further includes a memory 130, wherein the memory 130 is connected to the processor 110. Where the processor 110, the memory 130, and the transceiver 120 can communicate with each other via an internal connection path. Where the processor 110 is configured to determine control information, and the control information includes uplink grant resources information and multiplexing manner information, where, the uplink grant resources information is used for indicating uplink grant resources configured by the network device for a terminal device, the multiplexing manner information is used for indicating a multiplexing manner of remaining uplink grant resources, and the remaining uplink grant resources are uplink grant resources in the uplink grant resources except a part of uplink grant resources used for carrying data in one or more logical channels corresponding to

the uplink grant resources; and the transceiver 120 is configured to transmit the control information to the terminal device.

[0129] As a result, the control information transmitted by the network device to the terminal device according to the embodiment of the present application includes multiplexing manner information, so that the terminal device can determine the multiplexing manner of the remaining uplink grant resources in the configured uplink grant resources according to the multiplexing manner information, and multiplex the remaining uplink grant resources according to the determined multiplexing manner. Therefore, the use efficiency of uplink grant resources can be improved.

[0130] The network device 100 according to the embodiment of the present application may refer to the network device 10 corresponding to the embodiment of the present application, and respective units/modules in the network device and other operations and/or functions described above are respectively used to implement the corresponding processes in the method 100, which will not be repeated herein for the purpose of simplicity.

[0131] FIG. 8 illustrate a schematic block diagram of a terminal device according to another embodiment of the present application, as shown in FIG. 8, a terminal device 200 includes: a processor 210 and a transceiver 220. The processor 210 and the transceiver 220 are connected to each other. Optionally, the terminal device 200 further includes a memory 230, where the memory 230 is connected to the processor 210. Where the processor 210, the memory 230, and the transceiver 220 communicate with each other via an internal connection path. Where the transceiver 220 is configured to receive control information transmitted by a network device, the control information includes uplink grant resources information, the uplink grant resources information is used for indicating uplink grant resources configured by the network device for the terminal device; the processor 210 is configured to determine a multiplexing manner of remaining uplink grant resources, where the remaining uplink grant resources are uplink grant resources in the uplink grant resources except a part of uplink grant resources used for carrying data in one or more logical channels corresponding to the uplink grant resources; and multiplex the remaining uplink grant resources according to the multiplexing manner.

[0132] As a result, the control information received by the terminal device and transmitted

by the network device according to the embodiment of the present application includes uplink grant resources information, the terminal device determines the uplink grant resources configured by the network device for the terminal device according to the uplink grant resources information, determines the multiplexing manner of the remaining uplink grant resources in the uplink grant resources, and multiplexes the remaining uplink grant resources according to the multiplexing manner of the remaining uplink grant resources. Therefore, the use efficiency of uplink grant resources can be improved.

[0133] The terminal device 200 according to the embodiment of the present application may refer to the terminal device 20 corresponding to the embodiment of the present application, and respective units/modules in the terminal device and other operations and/or functions described above are respectively used to implement the corresponding processes in the method 200, which will not be repeated herein for the purpose of simplicity.

[0134] It can be understood that the processor in the embodiment of the present application may be an integrated circuit chip with signal processing capability. The processor described above may be a general-purpose processor, a digital signal processor (Digital Signal Processor, “DSP” for short), an application specific integrated circuit (Application Specific Integrated Circuit, “ASIC” for short), a field programmable gate array (Field Programmable Gate Array, “FPGA”), or other programming logic devices, a discrete gate or transistor logic device, a discrete hardware component. The methods, steps, and logical block diagrams disclosed in the embodiment of the present application can be implemented or executed. The general purpose processor may be a microprocessor or the processor may also be any conventional processor or the like.

[0135] The memory in the embodiment of the present application may be a volatile memory or a non-volatile memory, or may include both volatile and non-volatile memories. Where the non-volatile memory may be a read-only memory (Read-Only Memory, ROM), a programmable read-only memory (Programmable ROM, PROM), an erasable programmable read-only memory (Erasable PROM, EPROM), or an electrically erase programmable read-only memory (Electrically EPROM, EEPROM) or a flash memory. The volatile memory may be a random access memory (Random Access Memory, RAM) that acts as an external cache. By way of example and not limitation, many forms of RAM may be used, such as a

static random access memory (Static RAM, SRAM), a dynamic random access memory (Dynamic RAM, DRAM), a synchronous dynamic random access memory (Synchronous DRAM, SDRAM), a double data rate synchronous dynamic random access memory (Double Data Rate SDRAM, DDR SDRAM), an enhanced synchronous dynamic random access memory (Enhanced SDRAM, ESDRAM), a synchlink dynamic random access memory (Synchlink DRAM, SLDRAM) and a direct rambus random access memory (Direct Rambus RAM, DR RAM). It should be noted that the memories of the systems and methods described herein are intended to include, without being limited to, those and any other suitable types of memory.

10 **[0136]** Those of ordinary skill in the art will appreciate that the units and algorithm steps of the various examples described in combination with the embodiments disclosed herein can be implemented in electronic hardware or a combination of computer software and electronic hardware. Whether those functions are performed in a manner of hardware or software depends on a specific application and design constraint of the technical solutions. A person
15 skilled in the art can use different methods to implement the described functions for each particular application, but such implementation should not be considered to go beyond the scope of the present application.

[0137] A person skilled in the art can clearly understand that for the convenience and simplicity of the description, the specific working process of the systems, the apparatuses and
20 the units described above can refer to the corresponding process in the foregoing method embodiments, and details will not be described herein again.

[0138] In the several embodiments provided by the present application, it should be understood that the disclosed systems, apparatuses, and methods may be implemented in other manners. For example, the apparatus embodiments described above are merely illustrative.
25 For example, the division of the units is only a logical function division. And in actual implementation, there may be other division manners, for example, multiple units or components may be combined or may be integrated into another system, or some features can be omitted or not be executed. In addition, the mutual coupling or direct coupling or communication connection shown or discussed may be indirect coupling or a communication
30 connection via some interfaces, apparatuses or units, and may be in an electrical, mechanical

or other form.

[0139] The units described as separate components may or may not be physically separated, and the components shown as units may or may not be physical units, that is, those components may be located in one place, or may be distributed to multiple network units.

5 Some or all of the units may be selected according to actual needs to achieve the purpose of the solutions of the present embodiment.

[0140] In addition, various functional units in the respective embodiments of the present application may be integrated into one processing unit, or the various units may exist physically separately, or two or more units may be integrated into one unit.

10 **[0141]** The functions may be stored in a computer readable storage medium if implemented in the form of a software functional unit and sold or used as a standalone product. Based on such understanding, the technical solutions of the present application essentially, or its portion contributing to the prior art, or a portion of the technical solutions, may be embodied in the form of a software product, where the software product is stored in a
15 storage medium including several instructions for causing a computer device (which may be a personal computer, a server, or a network device, etc.) to perform all or part of the steps of the methods described in the respective embodiments of the present application. The foregoing storage medium includes various mediums that can store program code, such as a U disk, a mobile hard disk, a read-only memory (ROM, Read-Only Memory), a random access memory
20 (RAM, Random Access Memory), a magnetic disk, or an optical disk, and the like.

[0142] The foregoing is only specific implementation of the present application, but the protection scope of the present application is not limited thereto, and any change or substitution that can be easily conceived by those skilled in the art within the technical scope disclosed by the present application should be covered within the protection scope of the
25 present application. Therefore, the protection scope of the present application should be subjected to the protection scope of the claims.

CLAIMS

1. A method for multiplexing uplink grant resources, comprising:
determining, by a network device, control information, wherein the control information comprises uplink grant resources information and multiplexing manner information, wherein,
5 the uplink grant resources information is used for indicating uplink grant resources configured by the network device for a terminal device, the multiplexing manner information is used for indicating a multiplexing manner of remaining uplink grant resources, wherein the remaining uplink grant resources are uplink grant resources in the uplink grant resources except a part of uplink grant resources used for carrying data in one or more logical channels corresponding to
10 the uplink grant resources; and
transmitting, by the network device, the control information to the terminal device.
2. The method according to claim 1, wherein, before the determining, by a network device, control information, the method further comprises:
receiving, by the network device, a resource scheduling request transmitted by the
15 terminal device, wherein the resource scheduling request is used for indicating a data amount of data to be transmitted of the terminal device and a logical channel carrying the data to be transmitted; and
determining, by the network device, the uplink grant resources according to the data amount and a service feature of the logical channel carrying the data to be transmitted.
- 20 3. The method according to claim 1 or 2, wherein, the multiplexing manner comprises at least one of the following manners: a global logical channel multiplexing manner, a partial logical channel multiplexing manner and an undefined logical channel multiplexing manner.
4. The method according to any one of claims 1 to 3, wherein, the method further comprises:
25 transmitting, by the network device, priority indication information to the terminal device, wherein the priority indication information is used for the terminal device to determine a priority for each logical channel of one or more target logical channels to multiplex the remaining uplink grant resources, and the target logical channel is a logical channel that can multiplex the remaining uplink grant resources.
- 30 5. The method according to claim 4, wherein, the priority indication information is also used for the terminal device to determine priorities that different data packets in the each logical channel multiplex the remaining uplink grant resources.

6. The method according to claim 4 or 5, wherein, the priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a service type of data that can be transmitted by a data radio bearer DRB corresponding to the each logical channel;

5 or,

the priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a parameter configured by high layer signaling; or,

10 the priority indication information is used for indicating the priority for the each logical channel to multiplex the remaining uplink grant resources.

7. The method according to claim 6, wherein, the parameter configured by the high layer signaling comprises at least one of the following parameters: a priority level, a prioritized bit rate PBR and a bucket size duration BSD.

8. A method for multiplexing uplink grant resources, comprising:

15 receiving, by a terminal device, control information transmitted by a network device, wherein the control information comprises uplink grant resources information, and the uplink grant resources information is used for indicating uplink grant resources configured by the network device for the terminal device;

20 determining, by the terminal device, a multiplexing manner of remaining uplink grant resources, wherein the remaining uplink grant resources are uplink grant resources in the uplink grant resources except a part of uplink grant resources used for carrying data in one or more logical channels corresponding to the uplink grant resources; and

multiplexing, by the terminal device, the remaining uplink grant resources according to the multiplexing manner.

25 9. The method according to claim 8, wherein, the method further comprises:

transmitting, by the terminal device, a resource scheduling request to the network device before receiving the control information, wherein the resource scheduling request is used for indicating a data amount of data to be transmitted of the terminal device and a logical channel carrying the data to be transmitted.

30 10. The method according to claim 8 or 9, wherein, the control information comprises multiplexing manner information, and the multiplexing manner information is used for indicating a multiplexing manner of the remaining uplink grant resources;

wherein, the determining, by the terminal device, a multiplexing manner of remaining uplink grant resources comprises:

determining, by the terminal device, a multiplexing manner of the remaining uplink grant resources according to the multiplexing manner information.

11. The method according to any one of claims 8 to 10, wherein, the multiplexing manner comprises at least one of the following manners: a global logical channel multiplexing manner, a partial logical channel multiplexing manner and an undefined logical channel multiplexing manner.

12. The method according to claim 11, wherein, the multiplexing, by the terminal device, the remaining uplink grant resources according to the multiplexing manner comprises:

determining, by the terminal device, one or more target logical channels according to the multiplexing manner, wherein the target logical channel is a logical channel that can multiplex the remaining uplink grant resources;

determining, by the terminal device, a priority for each logical channel of the target logical channel to multiplex the remaining uplink grant resources; and

multiplexing, by the terminal device, the remaining uplink grant resources according to the priority for the each logical channel to multiplex the remaining uplink grant resources.

13. The method according to claim 12, wherein, the method further comprises:

receiving, by the terminal device, priority indication information transmitted by the network device, wherein the priority indication information is used for the terminal device to determine the priority for the each logical channel to multiplex the remaining uplink grant resources;

wherein, the determining, by the terminal device, a priority for each channel of the target logical channel to multiplex the remaining uplink grant resources comprises:

determining, by the terminal device, the priority for the each logical channel to multiplex the remaining uplink grant resources according to the priority indication information.

14. The method according to claim 13, wherein, the priority indication information is also used for the terminal device to determine priorities that different data packets in the each logical channel multiplex the remaining uplink grant resources, and the method further comprises:

determining, by the terminal device, the priorities that different data packets in the each logical channel multiplex the remaining uplink resources according to the priority indication information;

wherein, the multiplexing, by the terminal device, the remaining uplink grant resources according to the priority for the each logical channel to multiplex the remaining uplink grant resources comprises:

multiplexing, by the terminal device, the remaining uplink grant resources according to the priority for the each logical channel to multiplex the remaining uplink grant resources and the priorities that different data packets in the each logical channel multiplex the remaining uplink grant resources.

5 15. The method according to claim 13 or 14, wherein, the priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a service type of data that can be transmitted by a data radio bearer DRB corresponding to the each logical channel; or,

10 the priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant resources according to a parameter configured by high layer signaling; or,

the priority indication information is used for indicating the priority for the each logical channel to multiplex the remaining uplink grant resources.

15 16. The method according to claim 15, wherein, the parameter configured by the high layer signaling comprises at least one of the following parameters: a priority level, a prioritized bit rate PBR and a bucket size duration BSD.

17. A network device, comprising:

20 a processing module, configured to determine control information, wherein the control information comprises uplink grant resources information and multiplexing manner information, wherein, the uplink grant resources information is used for indicating uplink grant resources configured by the network device for a terminal device, the multiplexing manner information is used for indicating a multiplexing manner of remaining uplink grant resources, and the remaining uplink grant resources are uplink grant resources in the uplink grant resources except a part of uplink grant resources used for carrying data in one or more logical channels corresponding to the uplink grant resources; and

a transceiving module, configured to transmit the control information to the terminal device.

30 18. The network device according to claim 17, wherein, before the processing module determines control information, the transceiving module is further configured to:

receive a resource scheduling request transmitted by the terminal device, wherein the resource scheduling request is used for indicating a data amount of data to be transmitted of the terminal device and a logical channel carrying the data to be transmitted; and

the processing module is specifically configured to determine the uplink grant resources according to the data amount and a service feature of the logical channel carrying the data to be transmitted.

19. The network device according to claim 17 or 18, wherein, the multiplexing manner
5 comprises at least one of the following manners: a global logical channel multiplexing manner, a partial logical channel multiplexing manner and an undefined logical channel multiplexing manner.

20. The network device according to any one of claims 17 to 19, wherein, the transceiving module is further configured to:

10 transmit priority indication information to the terminal device, wherein the priority indication information is used for the terminal device to determine a priority for each logical channel of one or more target logical channels to multiplex the remaining uplink grant resources, wherein the target logical channel is a logical channel that can multiplex the remaining uplink grant resources.

15 21. The network device according to claim 20, wherein, the priority indication information is also used for the terminal device to determine priorities that different data packets in the each logical channel multiplex the remaining uplink grant resources.

22. The network device according to claim 20 or 21, wherein, the priority indication information is used for indicating that the terminal device determines the priority for the each
20 logical channel to multiplex the remaining uplink grant resources according to a service type of data that can be transmitted by a data radio bearer DRB corresponding to the each logical channel; or,

the priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant
25 resources according to a parameter configured by high layer signaling; or,

the priority indication information is used for indicating the priority for the each logical channel to multiplex the remaining uplink grant resources.

23. The network device according to claim 22, wherein, the parameter configured by the high layer signaling comprises at least one of the following parameters: a priority level, a
30 prioritized bit rate PBR and a bucket size duration BSD.

24. A terminal device, comprising:

a transceiving module, configured to receive control information transmitted by a network device, wherein the control information comprises uplink grant resources

information, and the uplink grant resources information is used for indicating uplink grant resources configured by the network device for the terminal device;

a processing module, configured to determine a multiplexing manner of remaining uplink grant resources, wherein the remaining uplink grant resources are uplink grant resources in the uplink grant resources except a part of uplink grant resources used for carrying data in one or more logical channels corresponding to the uplink grant resources; and the processing module, further configured to multiplex the remaining uplink grant resources according to the multiplexing manner.

25. The terminal device according to claim 24, wherein, the transceiving module is further configured to:

transmit a resource scheduling request to the network device before the transceiving module receives the control information transmitted by the network device, wherein the resource scheduling request is used for indicating a data amount of data to be transmitted of the terminal device and a logical channel carrying the data to be transmitted.

26. The terminal device according to claim 24 or 25, wherein, the control information comprises multiplexing manner information, wherein the multiplexing manner information is used for indicating a multiplexing manner of the remaining uplink grant resources;

wherein, the processing module is specifically configured to:

determine a multiplexing manner of the remaining uplink grant resources according to the multiplexing manner information.

27. The terminal device according to any one of claims 24 to 26, wherein, the multiplexing manner comprises at least one of the following manners: a global logical channel multiplexing manner, a partial logical channel multiplexing manner and an undefined logical channel multiplexing manner.

28. The terminal device according to claim 27, wherein, the processing module is specifically configured to:

determine one or more target logical channels according to the multiplexing manner, wherein the target logical channel is a logical channel that can multiplex the remaining uplink grant resources;

determine a priority for each logical channel of the target logical channel to multiplex the remaining uplink grant resources; and

multiplex the remaining uplink grant resources according to the priority for the each logical channel to multiplex the remaining uplink grant resources.

29. The terminal device according to claim 28, wherein, the transceiving module is further configured to:

receive priority indication information transmitted by the network device, wherein the priority indication information is used for the terminal device to determine the priority for the
5 each logical channel to multiplex the remaining uplink grant resources;

wherein, the processing module is specifically configured to:

determine the priority for the each logical channel to multiplex the remaining uplink grant resources according to the priority indication information.

30. The terminal device according to claim 29, wherein, the priority indication
10 information is also used for the terminal device to determine priorities that different data packets in the each logical channel multiplex the remaining uplink grant resources, the processing module is specifically configured to:

determine the priorities that different data packets in the each logical channel multiplex the remaining uplink resources according to the priority indication information; and

15 multiplex the remaining uplink resources according to the priority for the each logical channel to multiplex the remaining uplink grant resources and the priorities that different data packets in the each logical channel multiplex the remaining uplink resources.

31. The terminal device according to claim 29 or 30, wherein, the priority indication information is used for indicating that the terminal device determines the priority for the each
20 logical channel to multiplex the remaining uplink grant resources according to a service type of data that can be transmitted by a data radio bearer DRB corresponding to the each logical channel; or,

the priority indication information is used for indicating that the terminal device determines the priority for the each logical channel to multiplex the remaining uplink grant
25 resources according to a parameter configured by high layer signaling; or,

the priority indication information is used for indicating the priority for the each logical channel to multiplex the remaining uplink grant resources.

32. The terminal device according to claim 31, wherein, the parameter configured by the high layer signaling comprises at least one of the following parameters: a priority level, a
30 prioritized bit rate PBR and a bucket size duration BSD.

1/5

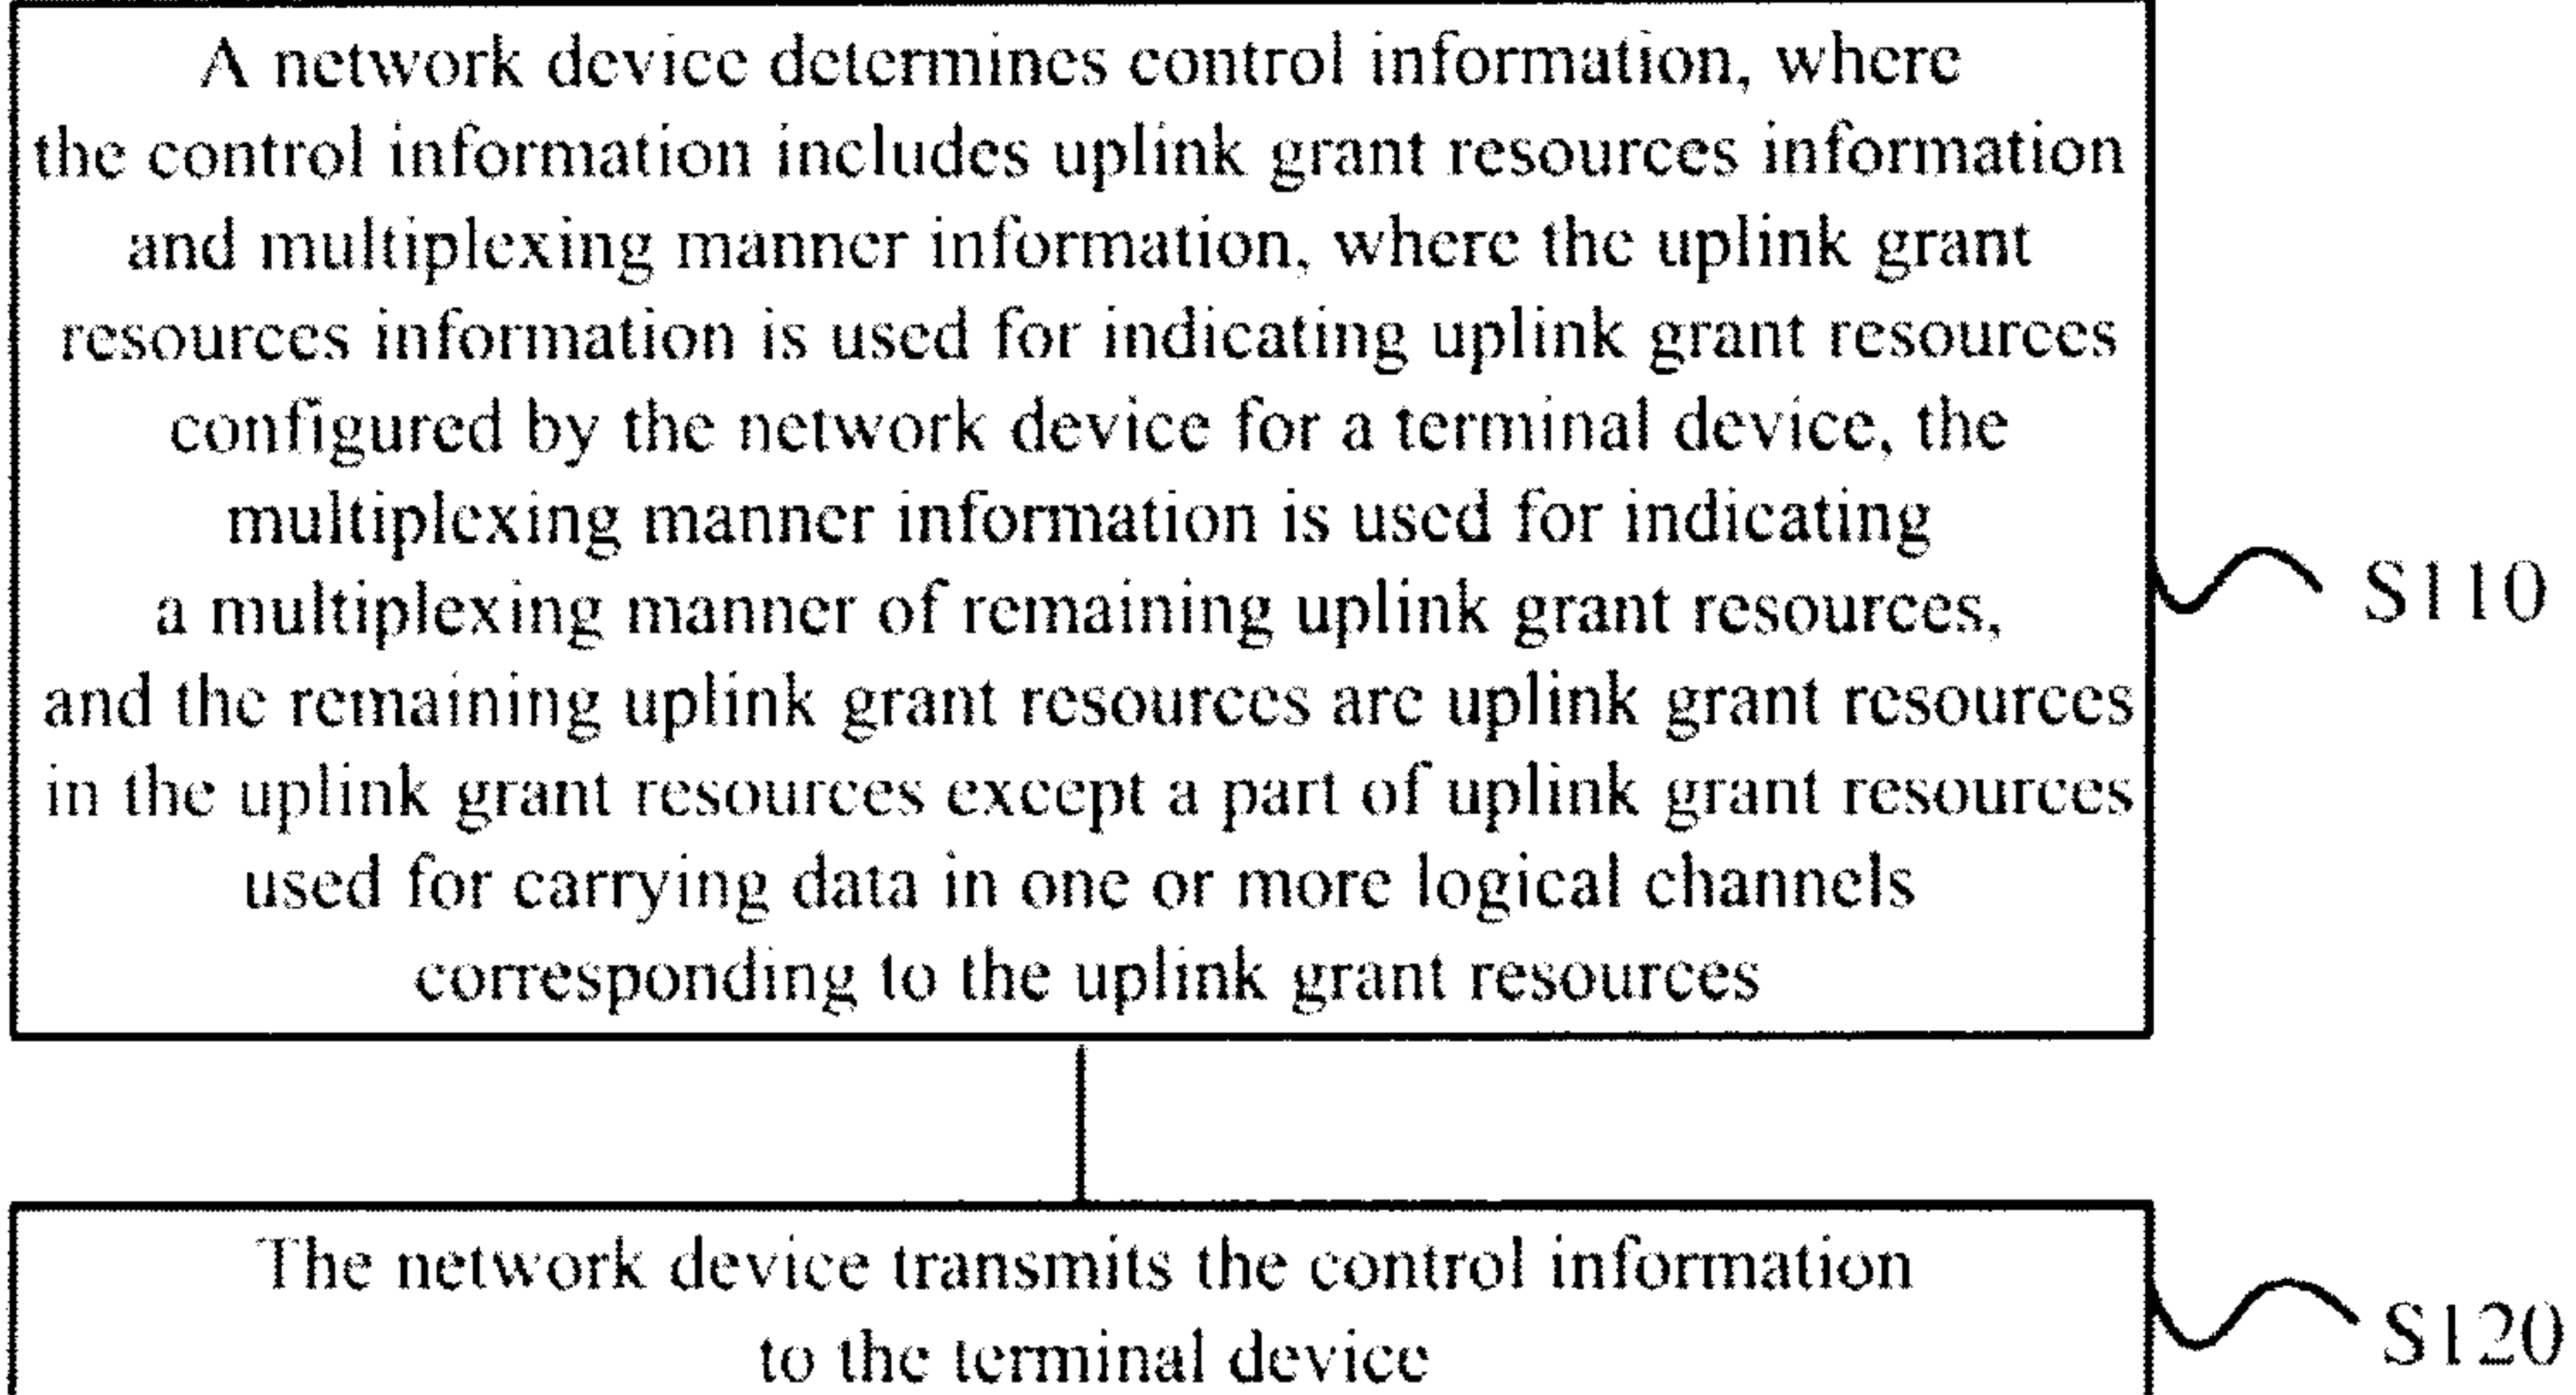
100

FIG. 1

2/5

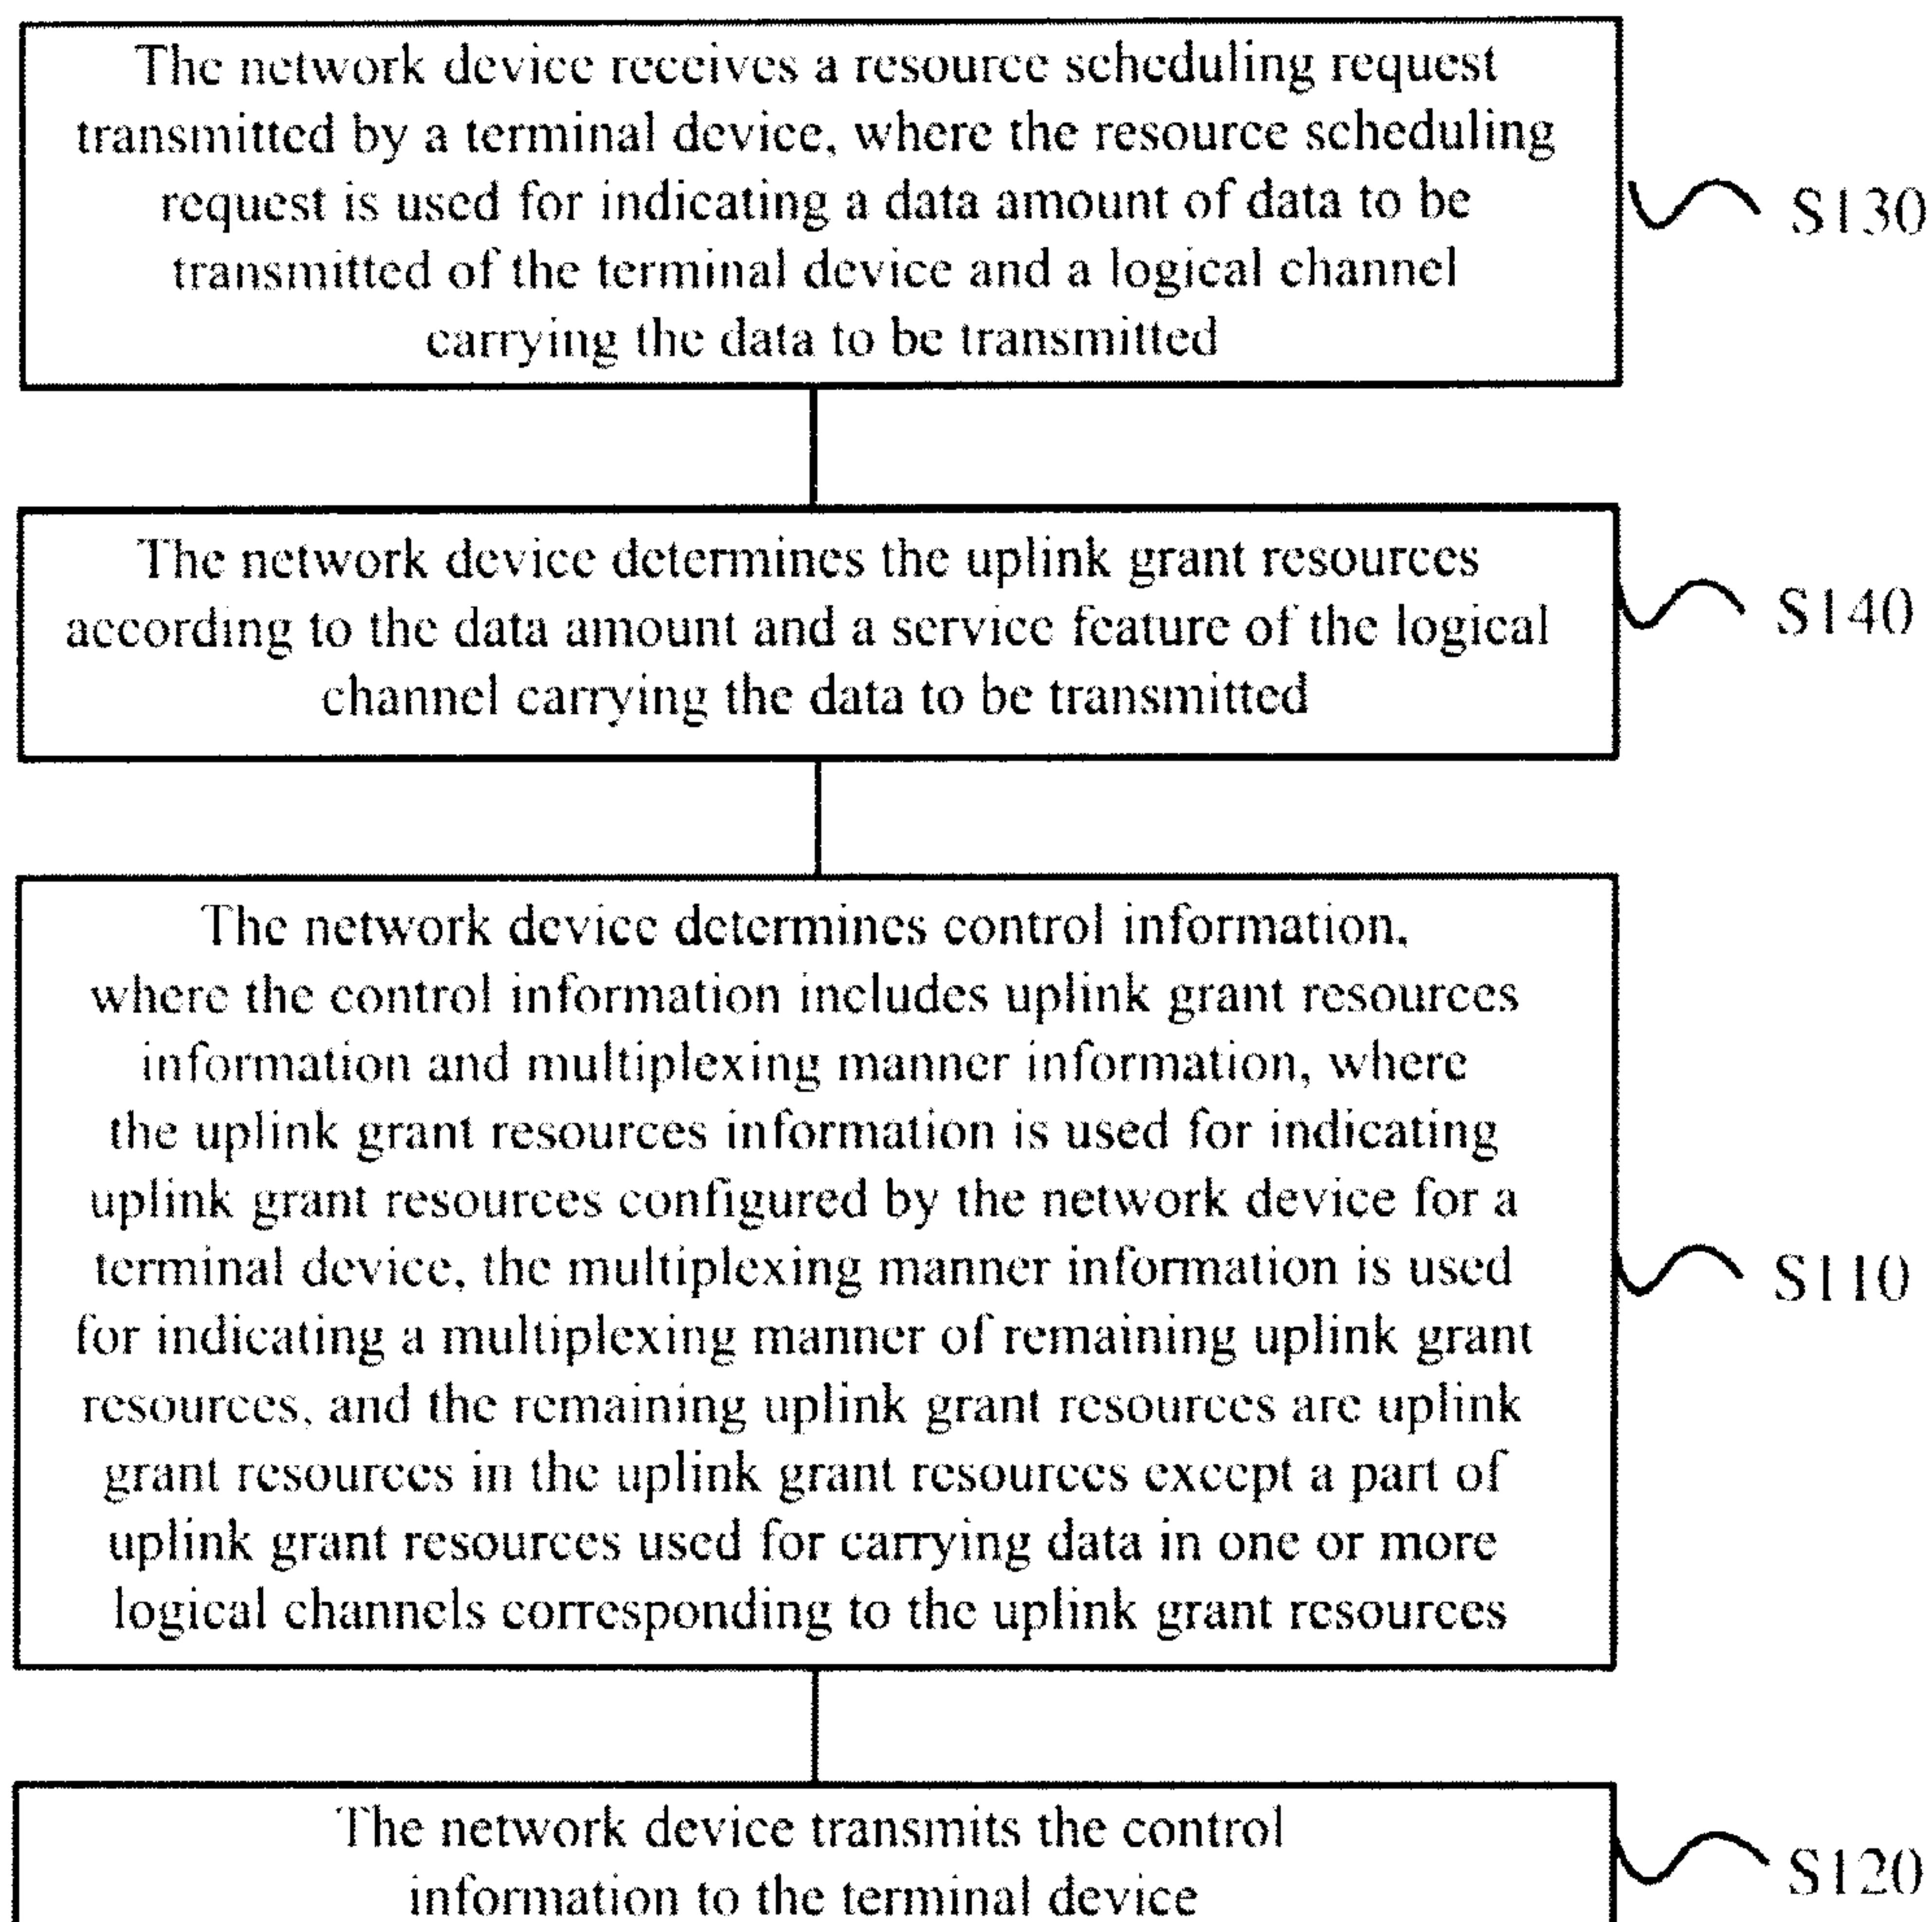
100

FIG. 2

3/5

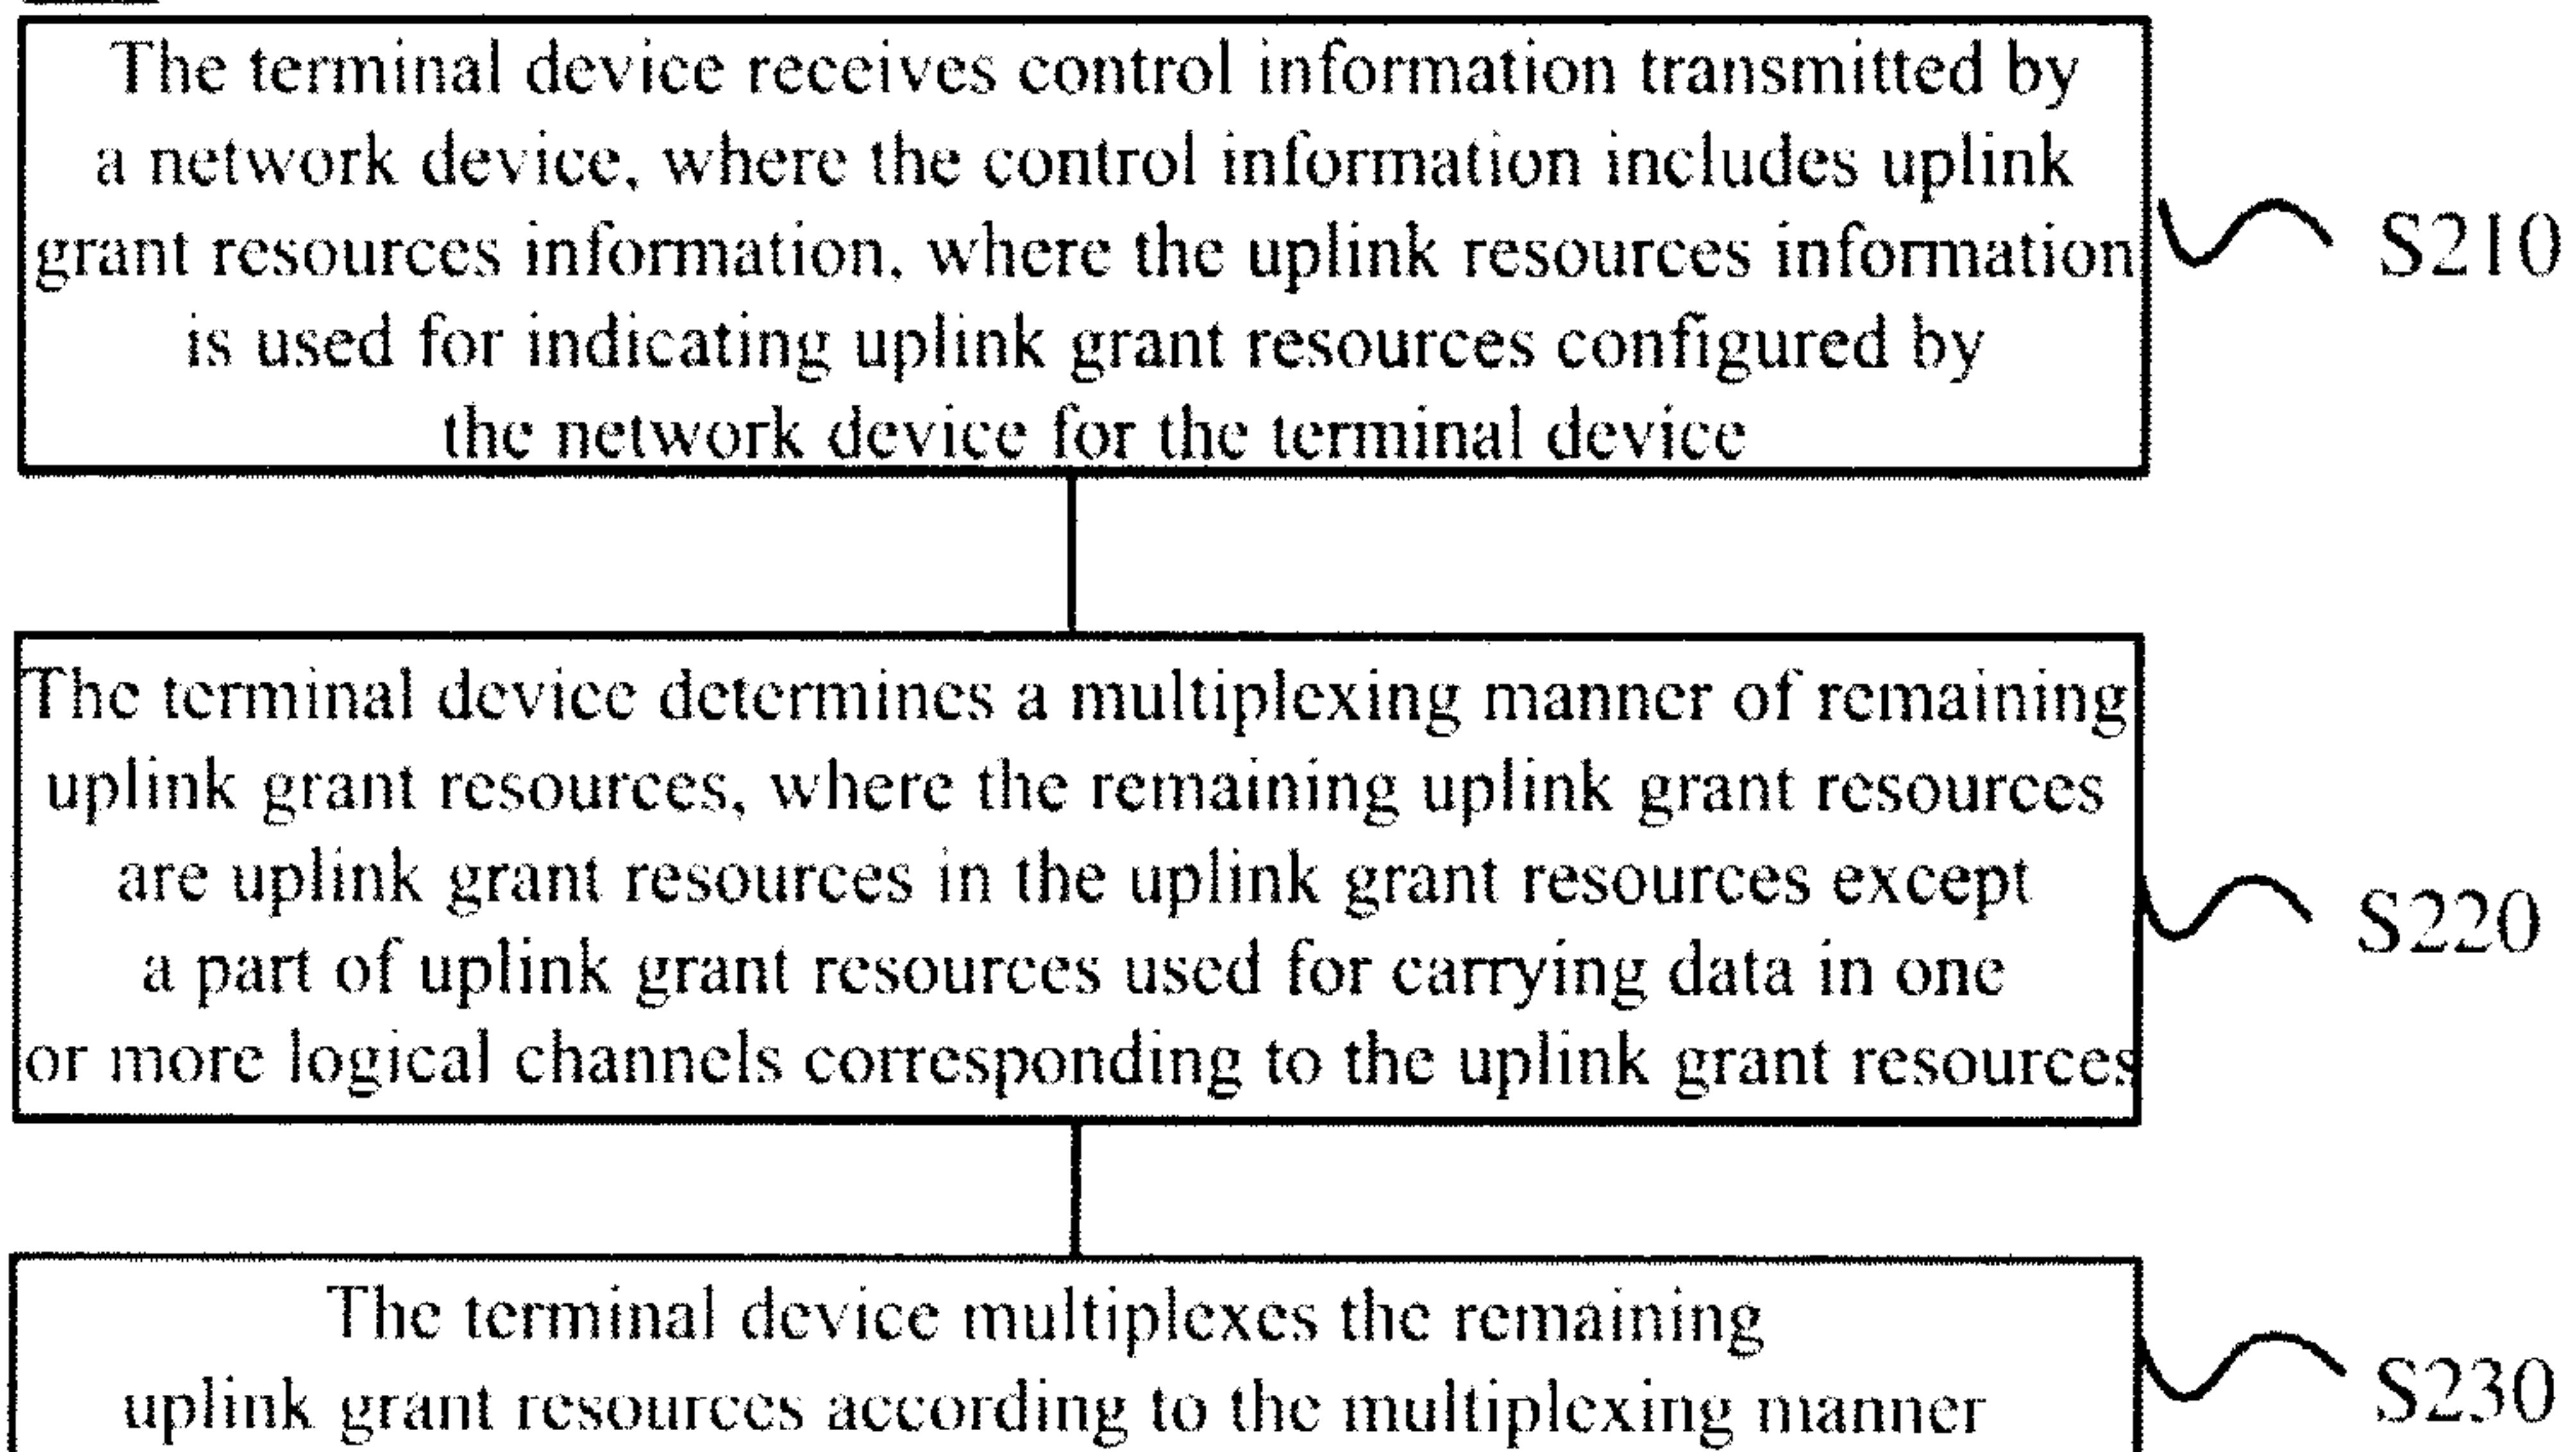
200

FIG. 3

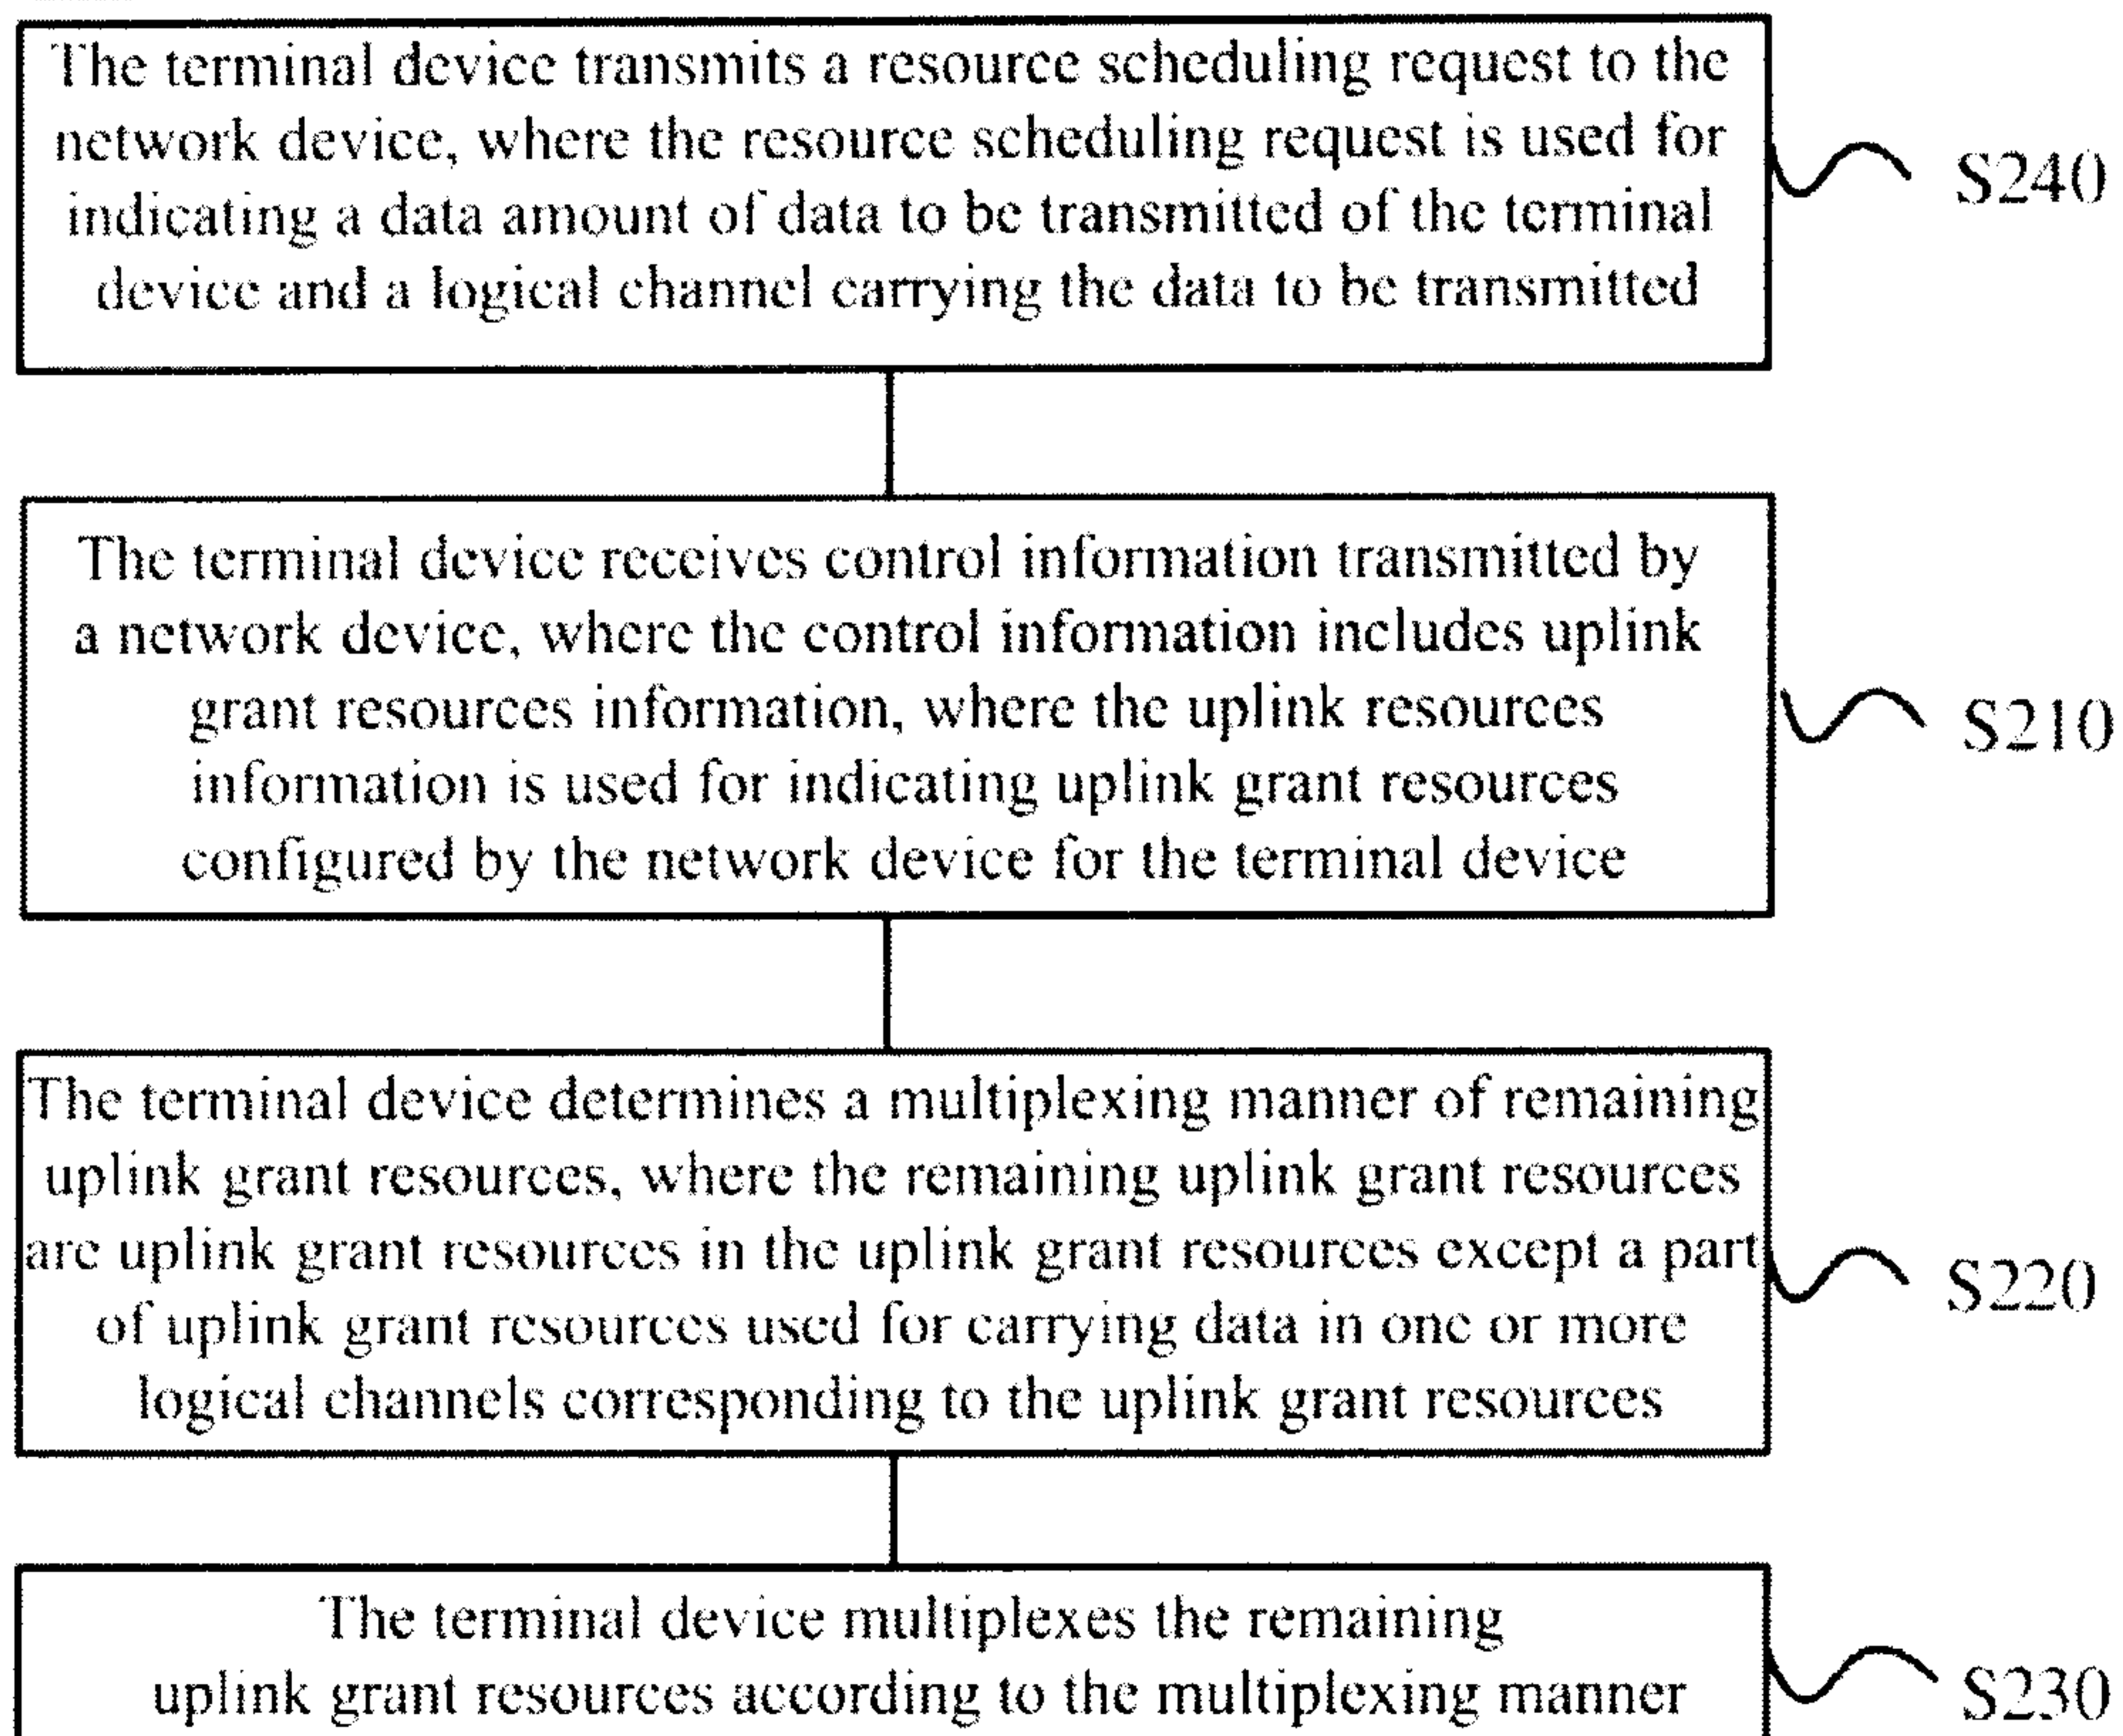
200

FIG. 4

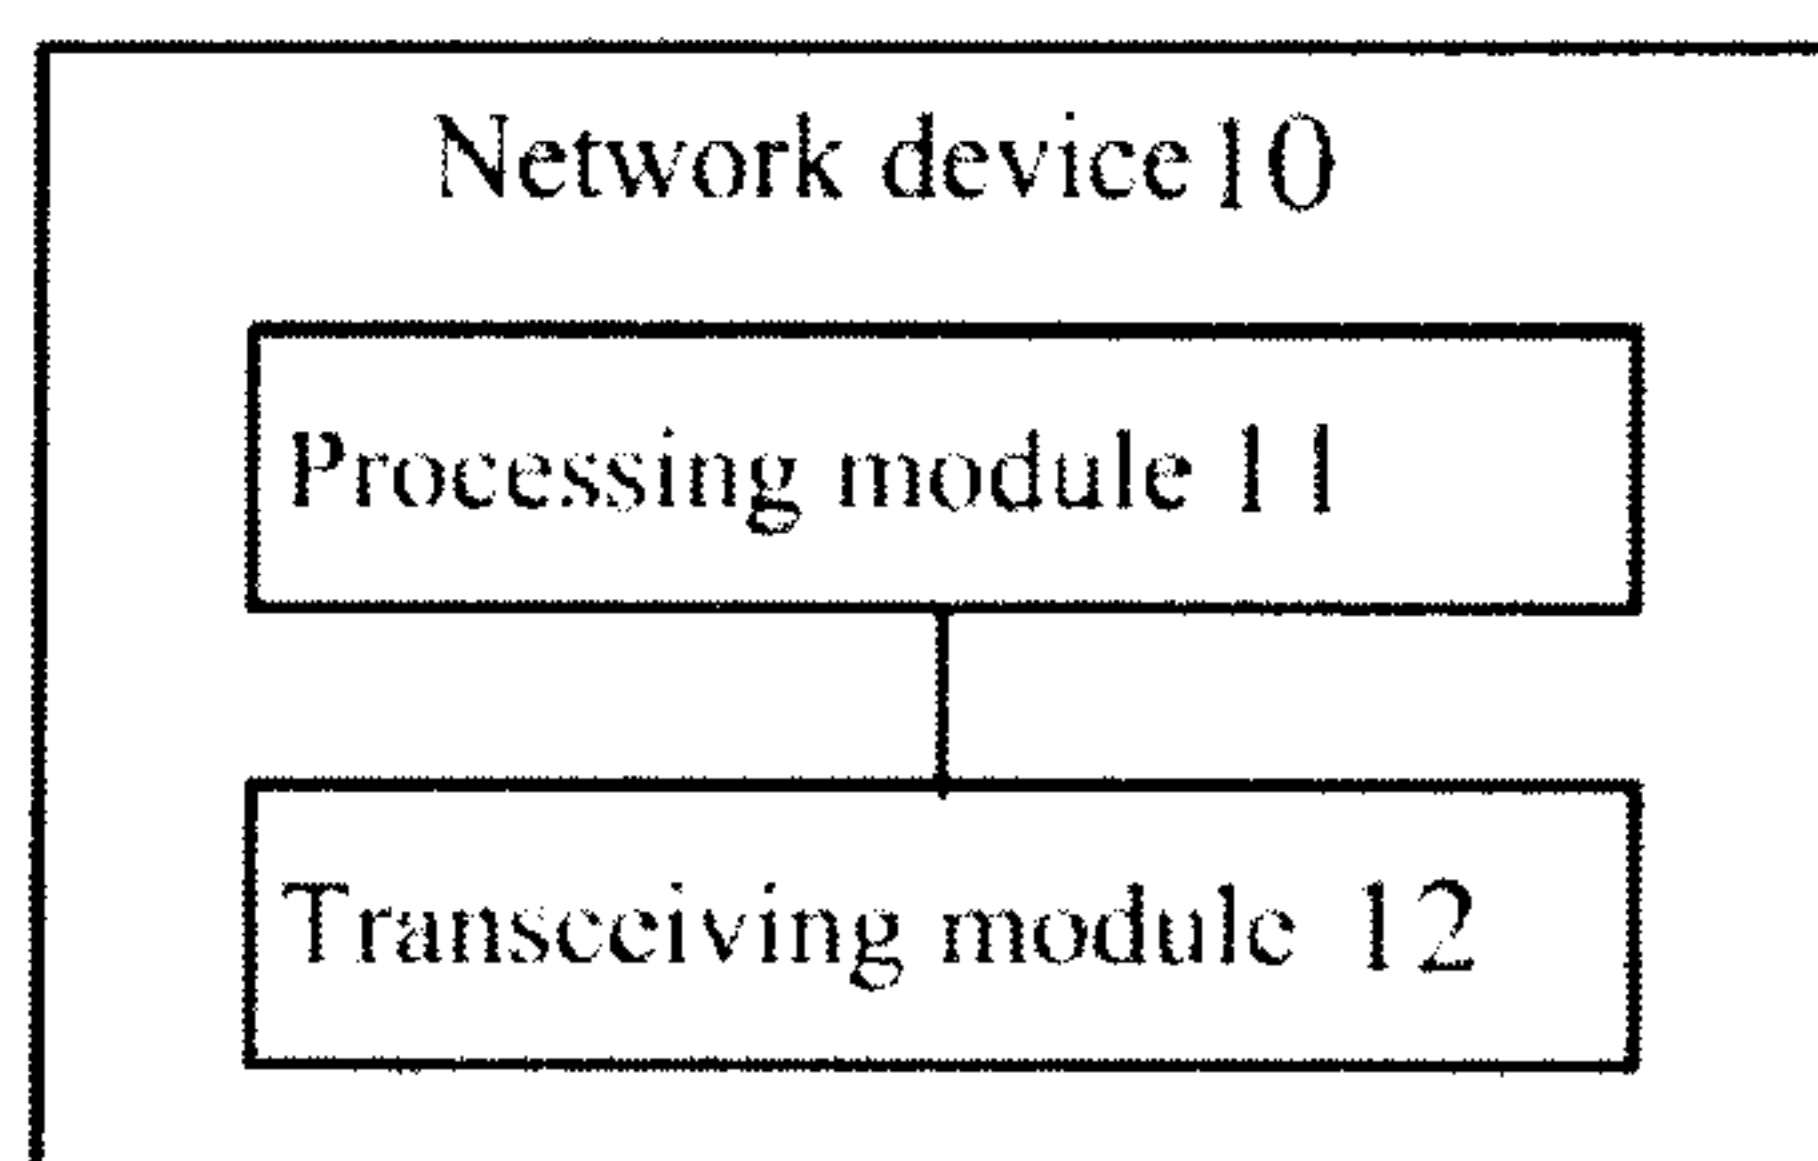


FIG. 5

5/5

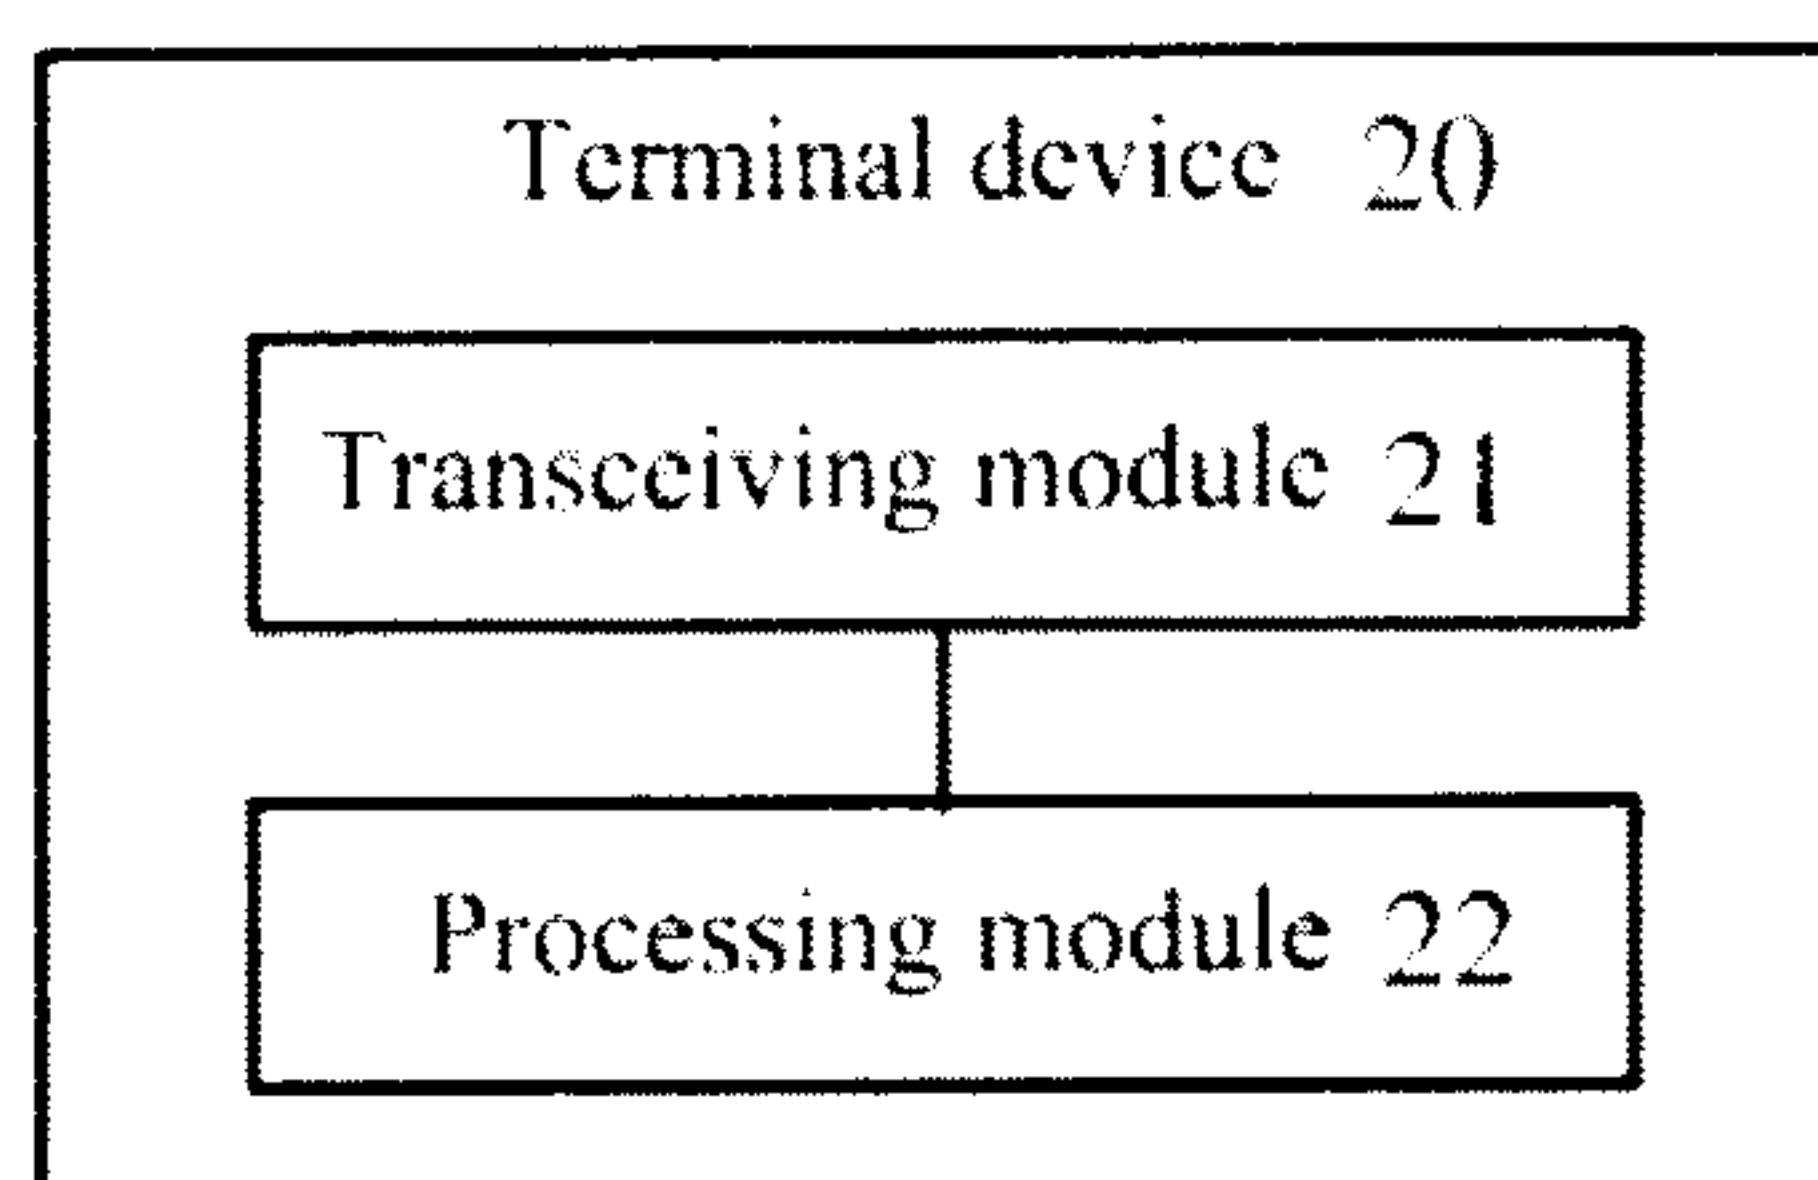


FIG. 6

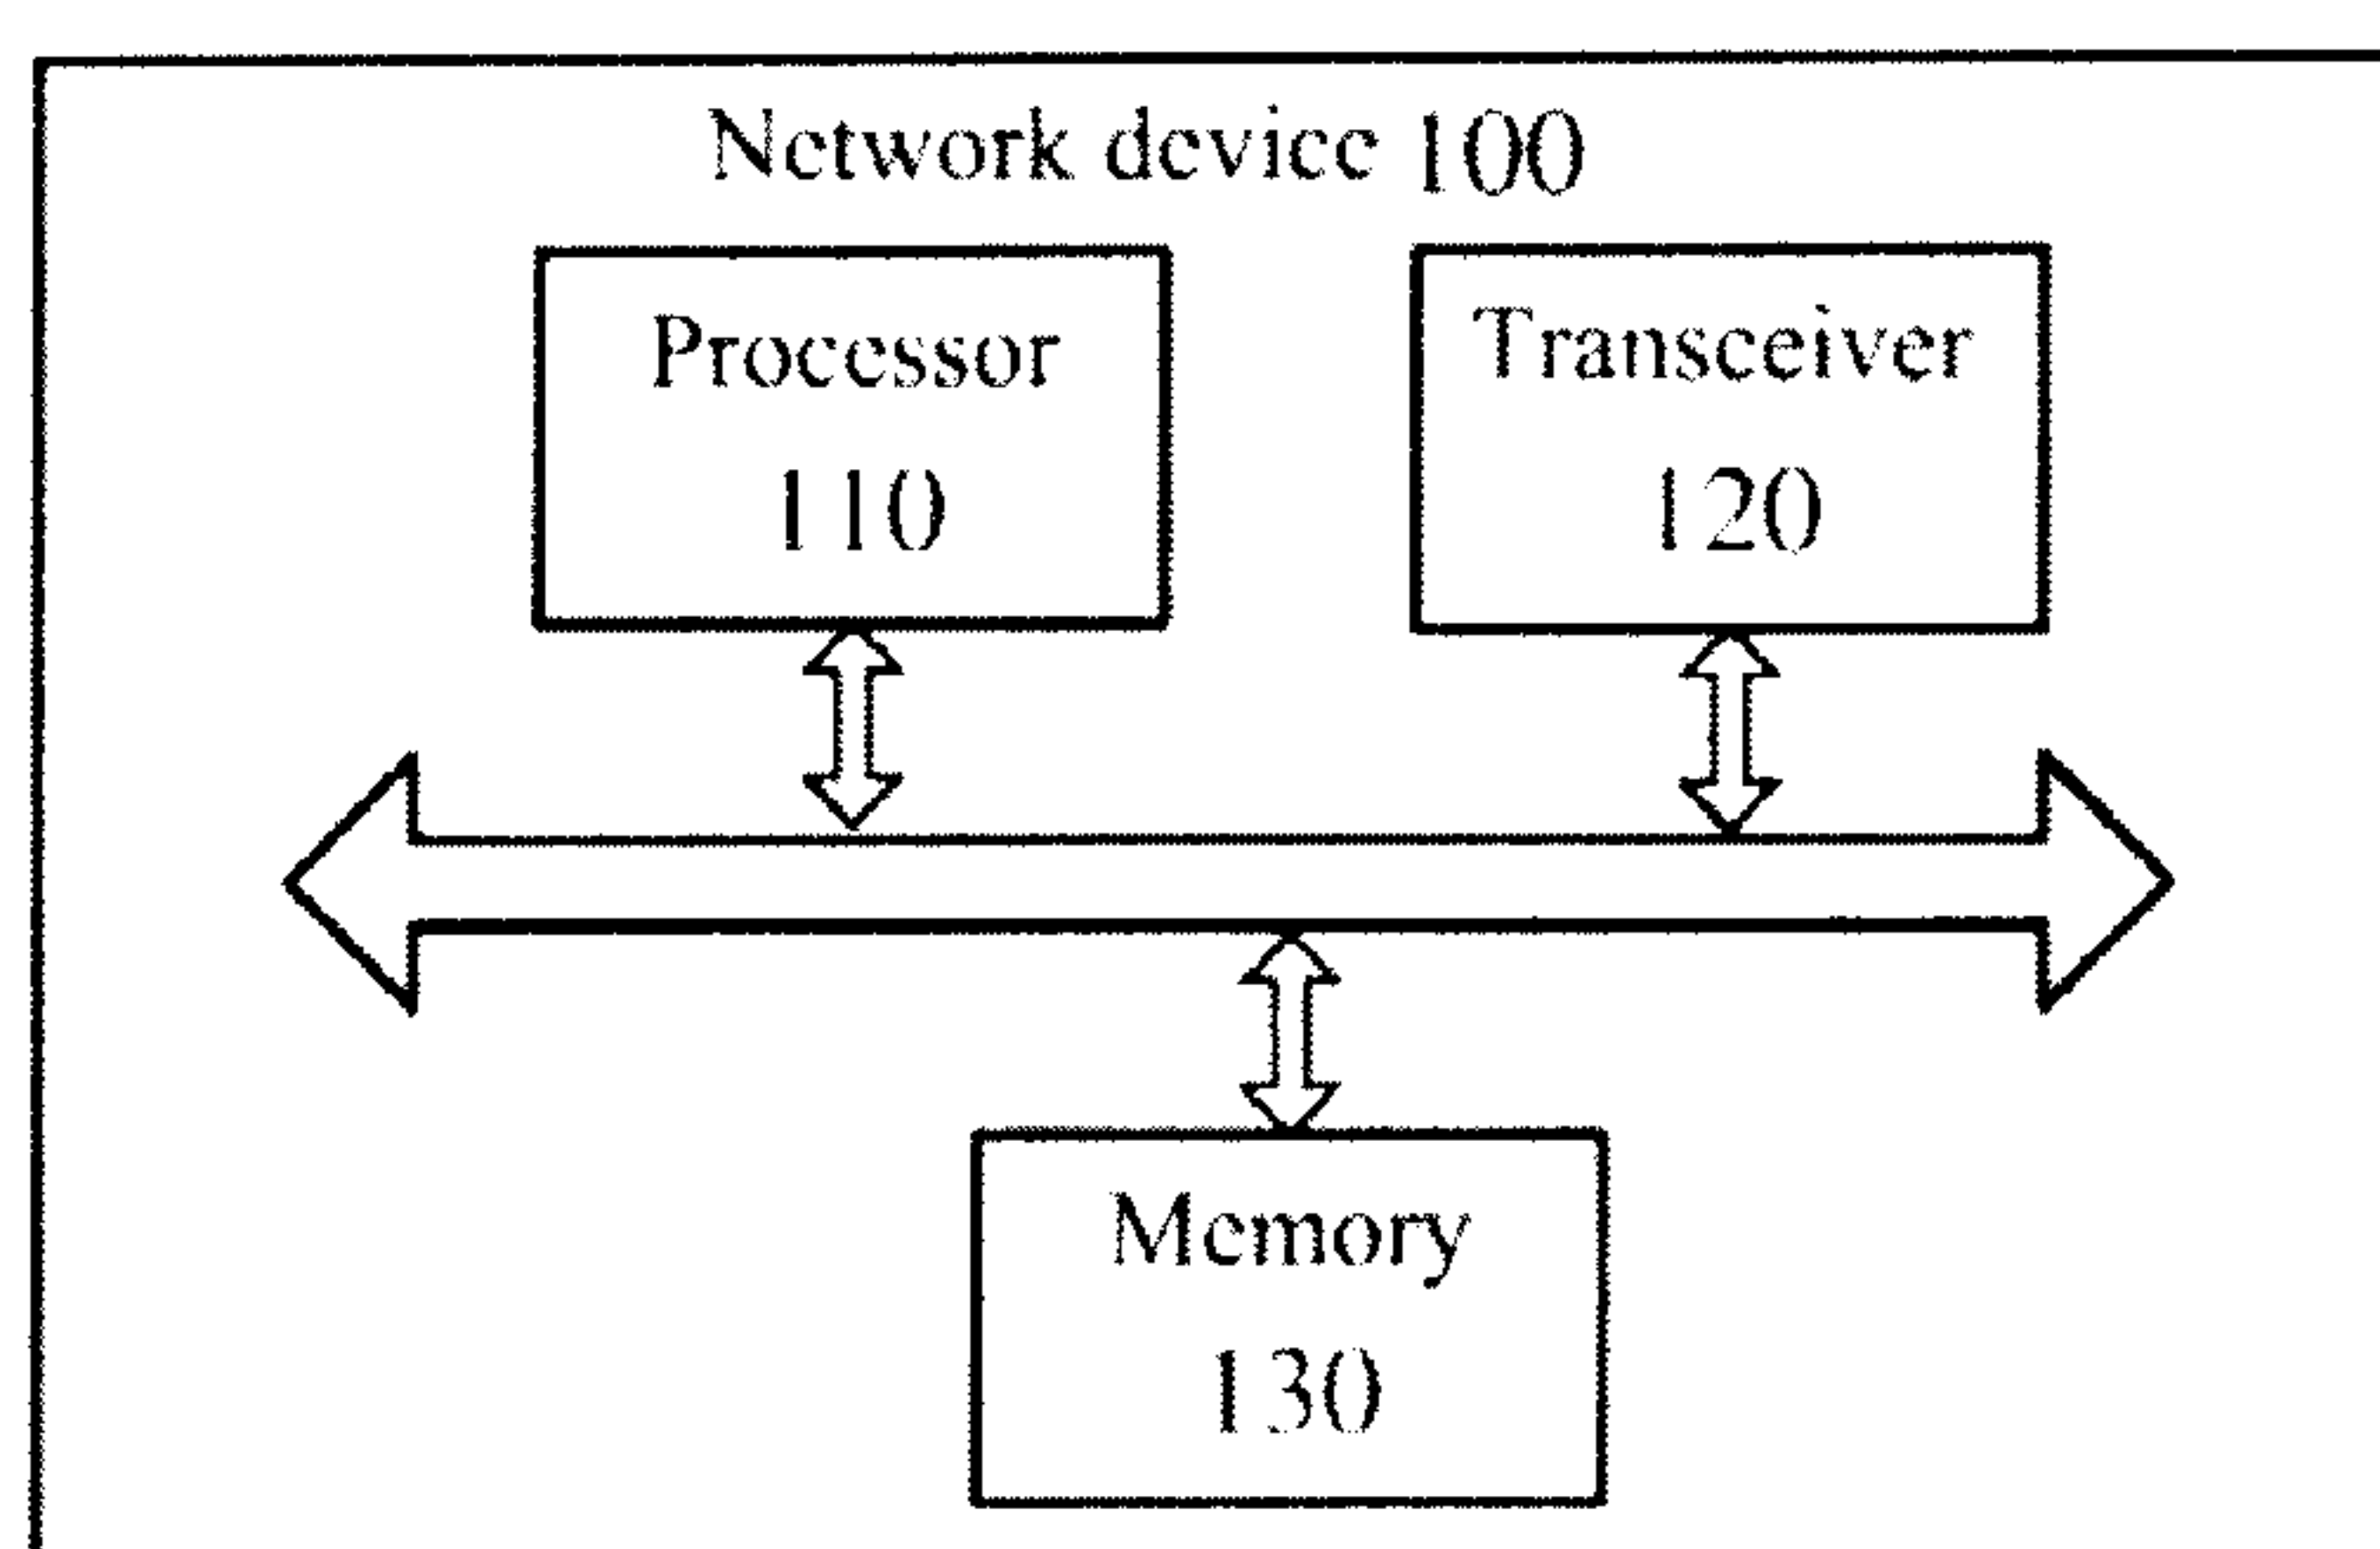


FIG. 7

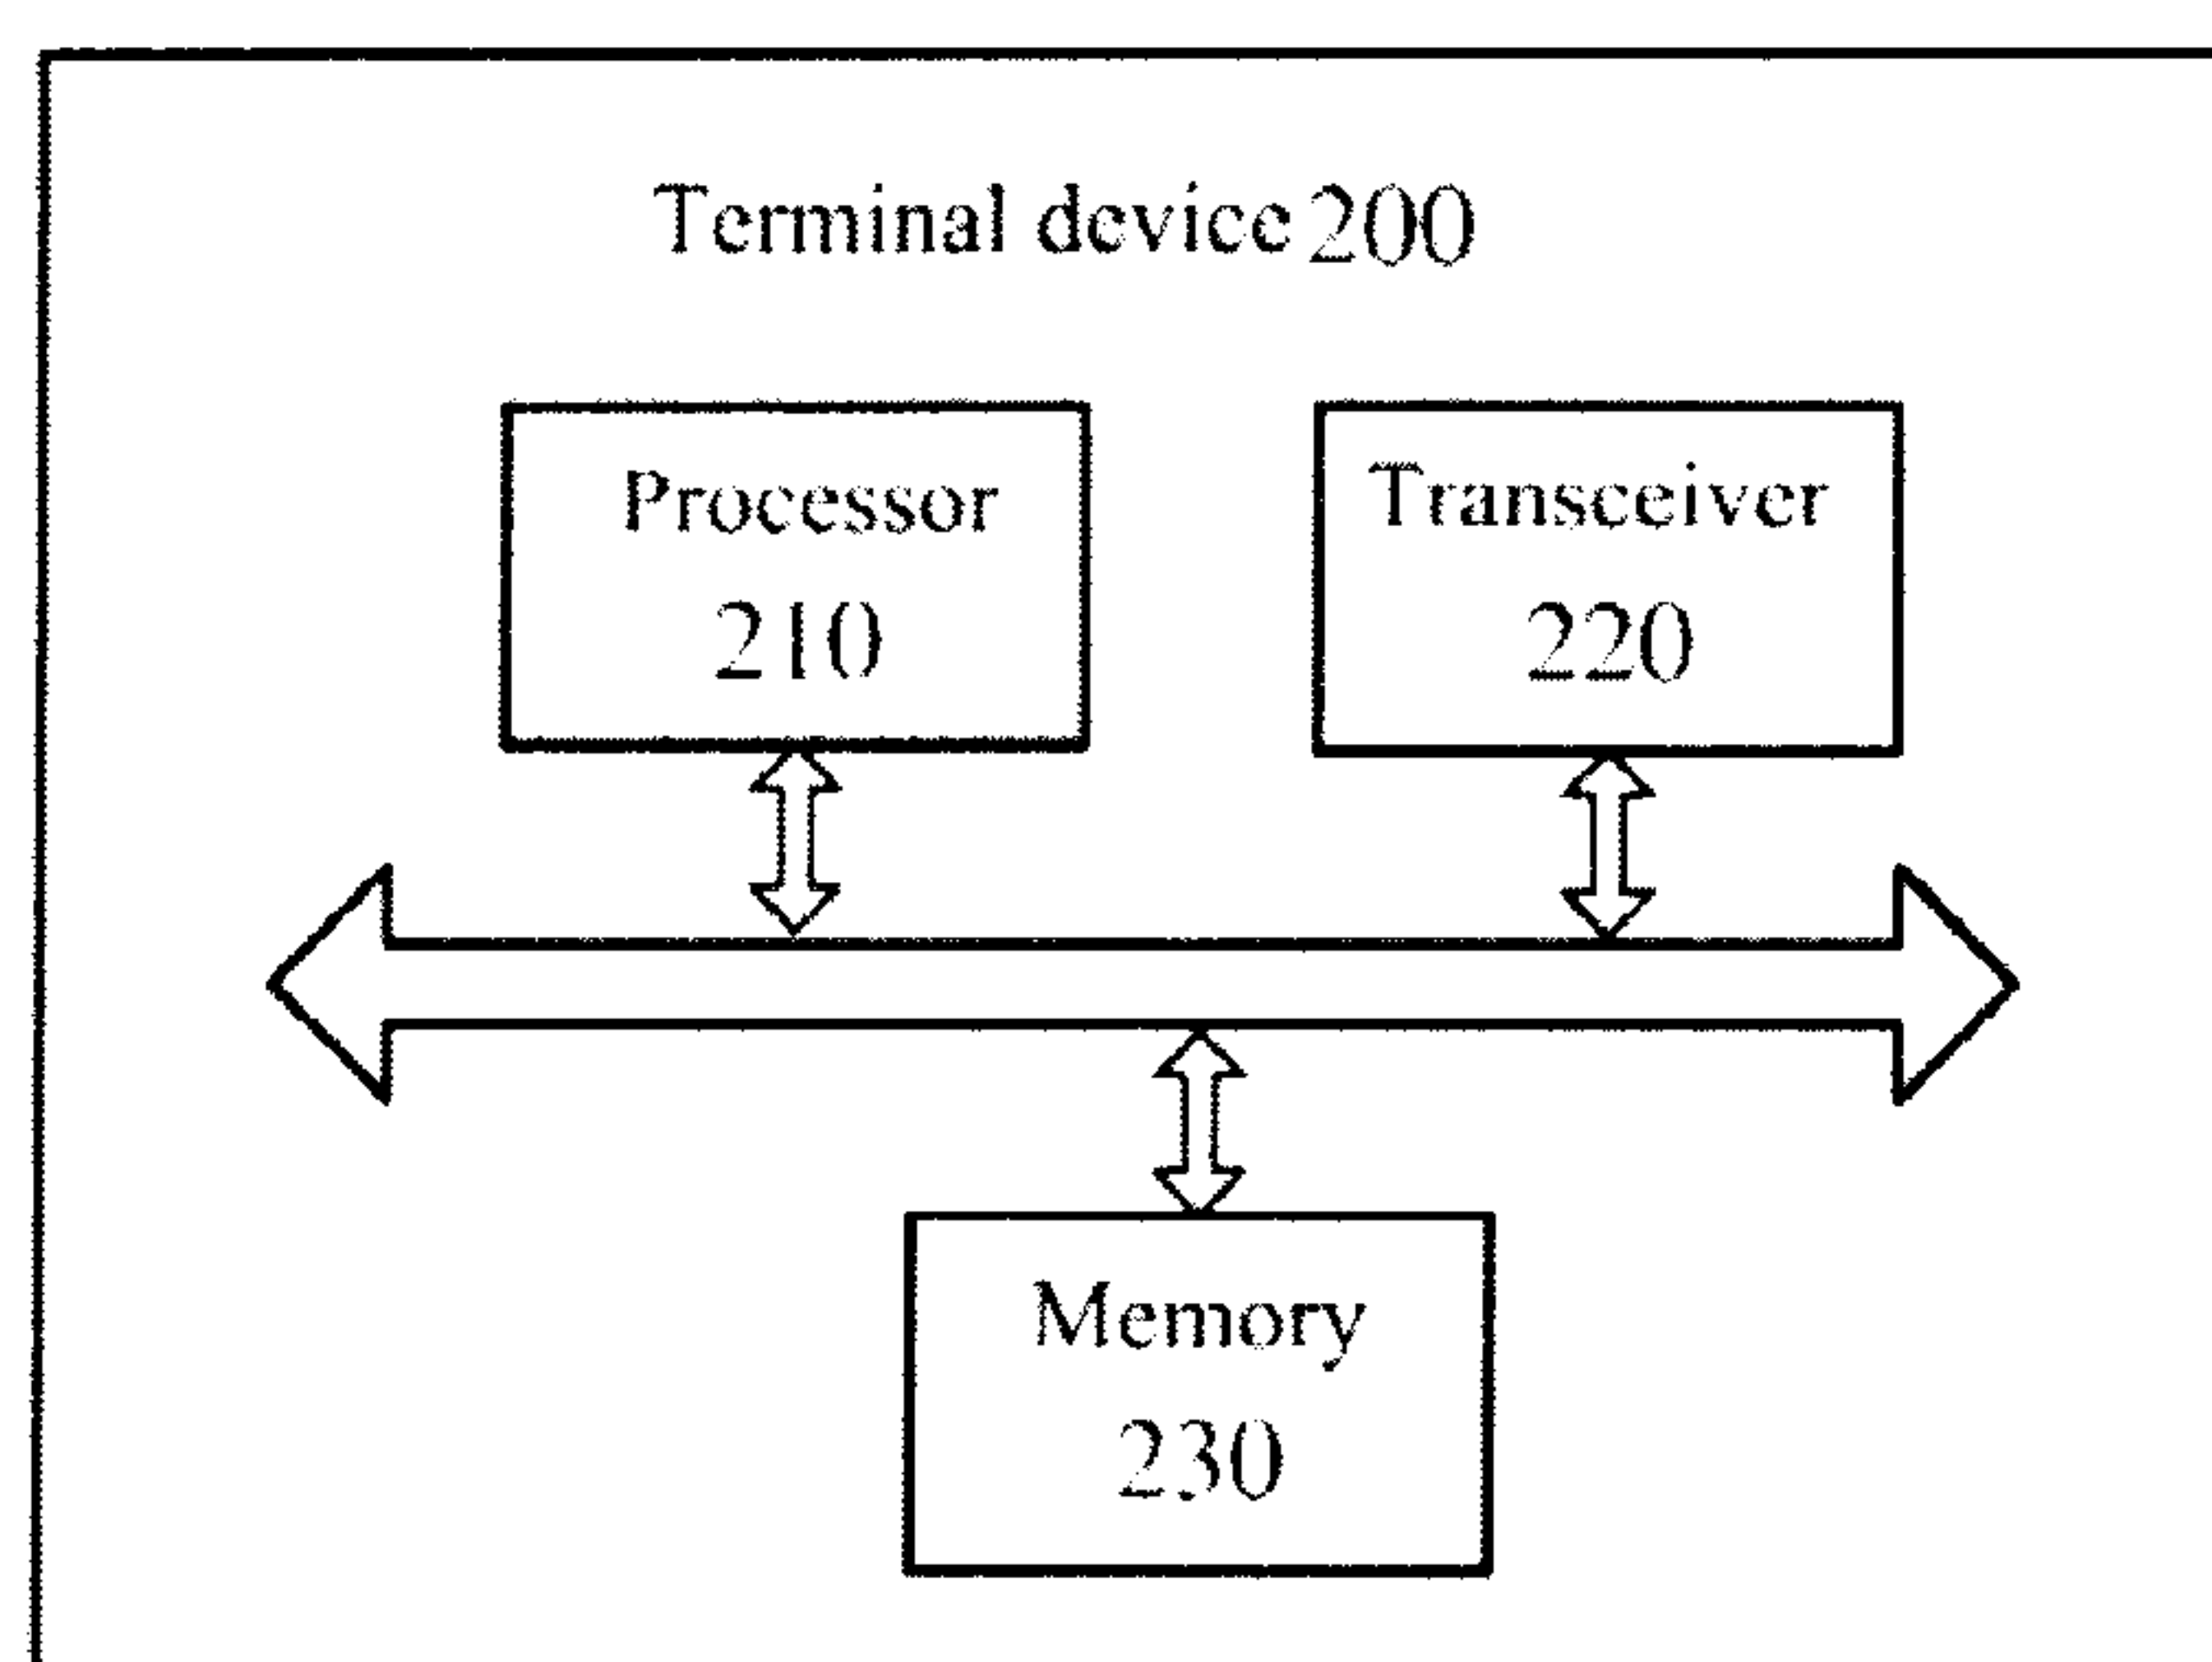


FIG. 8

网络设备确定控制信息，所述控制信息中包括上行授权资源信息和复用方式信息，其中，所述上行授权资源信息用于指示所述网络设备为终端设备配置的上行授权资源，所述复用方式信息用于指示剩余上行授权资源的复用方式，所述剩余上行授权资源为所述上行授权资源中除了用于承载与所述上行授权资源对应的逻辑信道中的数据的上行授权资源之外的上行授权资源

S110

网络设备向终端设备发送所述控制信息

S120

图1

S110 A network device determines control information, the control information comprising uplink authorization resource information and multiplexing mode information, wherein the uplink authorization resource information is used for indicating uplink authorization resources configured by the network device for a terminal device, the multiplexing mode information is used for indicating a multiplexing mode of remaining uplink authorization resources, and the remaining uplink authorization resources are uplink authorization resources other than the uplink authorization resource used for carrying data in a logical channel corresponding to the uplink authorization resource

S120 The network device sends the control information to the terminal device