



- (51) **International Patent Classification:**
E21B 21/10 (2006.01) *E21B 34/06* (2006.01)
- (21) **International Application Number:**
PCT/US2014/015041
- (22) **International Filing Date:**
6 February 2014 (06.02.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/760,817 6 February 2013 (06.02.2013) US
- (71) **Applicant:** **BAKER HUGHES INCORPORATED**
[US/US]; P.O. Box 4740, Houston, TX 77210 (US).
- (72) **Inventor:** **LEHR, Joerg**; Riethkamp 44, 29229 Celle (DE).
- (74) **Agent:** **CARSON, Matt, W.**; Baker Hughes Incorporated, Intellectual Property Counsel, P.O. Box 4740, Houston, TX 77210-4740 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

[Continued on next page]

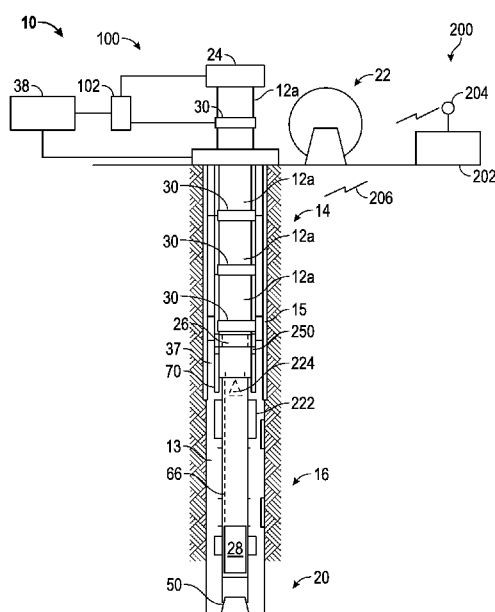
(54) **Title:** CONTINUOUS CIRCULATION AND COMMUNICATION DRILLING SYSTEM

FIG. 1

(57) **Abstract:** An apparatus for performing a wellbore operation includes a drill string having a rigid tubular section formed of a plurality of jointed tubulars and a plurality of valves positioned along the rigid tubular section. Each valve may have a radial valve controlling flow through a wall of the rigid tubular section and a signal relay device configured to convey information-encoded signals. Wellbore operations may be performed by transmitting signals using the signal relay devices.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

TITLE: **CONTINUOUS CIRCULATION AND
COMMUNICATION DRILLING SYSTEM**

INVENTOR(S): **LEHR, Joerg**

BACKGROUND OF THE DISCLOSURE

1. Field of the Disclosure

[0001] This disclosure relates generally to oilfield systems for managing wellbore pressure.

2. Background of the Art

[0002] To obtain hydrocarbons such as oil and gas, boreholes or wellbores are drilled by rotating a drill bit attached to the bottom of a drilling assembly (also referred to herein as a "Bottom Hole Assembly" or ("BHA")). The drilling assembly is attached to the bottom of a tubing, which is usually either a jointed rigid pipe or a relatively flexible spoolable tubing commonly referred to in the art as "coiled tubing." The string comprising the tubing and the drilling assembly is usually referred to as the "drill string." During drilling, wellbore pressure management may be used to control events such as pressure spikes and other undesirable conditions.

[0003] In aspects, the present disclosure provides enhanced methods and systems for managing wellbore pressure.

SUMMARY OF THE DISCLOSURE

[0004] In aspects, the present disclosure provides an apparatus for performing a wellbore operation. The apparatus may include a drill string having a rigid tubular section formed of a plurality of jointed tubulars and a plurality of flow diverters positioned along the rigid tubular section. Each flow diverter may have a radial valve controlling flow through a wall of the rigid tubular section and a signal relay device configured to convey information-encoded signals.

[0005] In aspects, the present disclosure also provides a method for

performing a wellbore operation using a drill string that includes jointed tubulars. The method may include adding a plurality of flow diverters to the drill string, wherein each flow diverter has: (i) a valve controlling radial flow through a wall of the drill string, and (ii) a signal relay device configured to relay signals; conveying the drill string along a wellbore; and transmitting signals along the drill string using the signal relay devices.

[0006] Examples of certain features of the disclosure have been summarized in order that the detailed description thereof that follows may be better understood and in order that the contributions they represent to the art may be appreciated. There are, of course, additional features of the disclosure that will be described hereinafter and which will form the subject of the claims appended hereto.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] For a detailed understanding of the present disclosure, reference should be made to the following detailed description of the embodiments, taken in conjunction with the accompanying drawings, in which like elements have been given like numerals, wherein:

FIG. 1 schematically illustrates an exemplary wellbore construction system made in accordance with one embodiment of the present disclosure;

FIG. 2 schematically illustrates a continuous circulation system that may be used with the **FIG. 1** system;

FIG. 3 schematically illustrates a flow diverter that may be used with the continuous circulation system of **FIG. 2**; and

FIG. 4 schematically illustrates a bore flow restriction device that may be used with the **FIG. 1** system.

DETAILED DESCRIPTION OF THE DISCLOSURE

[0008] As will be appreciated from the discussion below, aspects of the present disclosure provide a system for deep drilling (*e.g.*, tight pressure windows) and drilling into formations with changing formation pressure (*e.g.*, depleted zones). Systems according to the present disclosure provide ECD control (equivalent

circulating density control) for such situations. These systems may allow the exploration and production of deep high enthalpy geothermal energy due to the ability to manage tight pressure windows in deep crystalline rock.

[0009] Illustrative embodiments of the present disclosure use “real time” or near “real time” data acquisition to monitor pressure conditions in a well and implement corrective action when needed. The systems may use a drill string that includes one or more signal conveying devices that cooperate with a communication network to retrieve wellbore parameter information and transmit control signals to downhole well control equipment. In one embodiment, the signal conveying devices may be integrated into the flow diverters used with a continuous circulation system that circulates drilling fluid in the well. These and other embodiments are discussed in greater detail below.

[0010] Referring initially to **FIG. 1**, there is shown a system **10** in accordance with one embodiment of the present disclosure. The system **10** includes a drill string **11** and a bottomhole assembly (BHA) **20**. In one embodiment, the drill string **11** may be made up of a section of rigid tubulars **14** (*e.g.*, jointed tubular). In other embodiments, the drill string **11** may be made up of a rigid tubular section **14** and a non-rigid tubular string **16** (*e.g.*, coiled tubing). As used herein, the term rigid and non-rigid are used in the relative sense to indicate that the strings **14** and **16** exhibit different responses to an applied loading. For instance, an applied torque that a jointed tubular can readily transmit may cause coiled tubing to fail. In one sense, a non-rigid tubular may be a continuous tubular that may be coiled and uncoiled from a reel or drum (*i.e.*, ‘coilable’) **22** whereas a rigid tubular string may include segmented joints that may be manipulated by a top drive **24**. The system **10** may also include rotary power devices **26, 28** (*e.g.*, mud motors, electric motors, turbines for rotating one or more portions of the string **11**, etc.). Rotary power for the drill bit **50** may be generated by a motor **26** at a connection between the rigid string **14** and the non-rigid string **16**, a near bit motor **28**, and / or the surface top drive **24**.

[0011] Referring now to **FIG. 2**, the system **10** includes a continuous circulation system **100** (CCS **100**) that maintains continuous drill mud circulation in the drill string **11** as jointed connections are made up or broken in the rigid tubular

section **14**. The CCS **100** may include a flow diverter control device **32**, an arm **34**, a fluid line **36**, and a manifold **102**. During operation, the CCS **100** uses the manifold **102** to selectively direct drilling fluid to either the top drive **24** or the flow diverters **30** that interconnect the pipe stands **12a** of the rigid tubular section **14** of the drill string **11**.

[0012] For example, during drilling, the manifold **102** directs drilling fluid into the top drive **24**. To add a pipe stand **12a**, drilling is stopped and the arm **34** moves the flow diverter control device **32** into engagement with a flow diverter **30**. This engagement activates valves internal to the flow diverter **30** that block axial flow from top drive **24** and allow radial flow from the flow diverter control device **32**. Thereafter, the manifold **102** switches drilling fluid flow from the top drive **24** to the fluid line **36**, which flows drilling fluid from the source **38** to the flow diverter control device **32**. The flow diverter control device **32** supplies the flow diverter **30** with pressurized fluid. The top drive **24** (**FIG. 1**) and an upper pipe stand **12a** are now isolated from the drill string **11** and can be disconnected from the rigid string section **14**. Thus, drilling fluid is continuously supplied to the wellbore **13** even when the drill string **11** is not connected to the top drive **24**.

[0013] In other embodiments, the BHA **20** may include devices that enhance drilling efficiency or allow for directional drilling. For instance, the BHA **20** may include a thruster that applies a thrust to urge the drill bit **50** against a wellbore bottom. In this instance, the thrust functions as the weight-on-bit (WOB) that would often be created by the weight of the drill string. It should be appreciated that generating the WOB using the thruster reduces the compressive forces applied to the non-rigid string **16**. One or more stabilizers that may be selectively clamped to the wall may be configured to have thrust-bearing capabilities to take up the reaction forces caused by the thruster. Moreover, the thruster allows for drilling in non-vertical wellbore trajectories where there may be insufficient WOB to keep the drill bit **50** pressed against the wellbore bottom. Some embodiments of the BHA **20** may also include a steering device. Suitable steering arrangements may include, but are not limited to, bent subs, drilling motors with bent housings, selectively eccentric inflatable stabilizers, a pad-type steering devices that apply force to a wellbore wall,

“point the bit” steering systems, etc. As discussed previously, stabilizers **26** may be used to stabilize and strengthen the strings **14**, **16**.

[0014] Referring now to **FIG. 3**, the flow diverter **30** includes an upper end **110** and a lower end **112**. The flow diverter **30** may be fitted with flow control devices that allow fluid communication to the lower end **112** via either the upper end **110** or a radial / lateral opening. In one embodiment, the flow diverter **30** may include an upper circulation valve **114**, a lower circulation valve **116**, and an inlet **118**. The upper circulation valve **114** selectively blocks flow along a bore **120** connecting the upper and lower ends **110**, **112**. The lower circulation valve **116** selectively blocks flow between the bore **120** and the inlet **118**. The flow diverter control device **32** (**FIG. 2**) may include a valve actuator (not shown) that can shift the upper circulation valve **114** between an open and a closed position and a lower valve actuator (not shown) that can shift the lower circulation valve **116** between an open and a closed position. It should be appreciated that the CCS **100** has two separate fluid paths that can independently circulate drilling fluid into the drill string **11** (**FIG. 1**). The first fluid path is formed when the upper circulation valve **114** is open and the lower circulation valve **116** is closed. In this axial flow path, drilling fluid flows along the bore **120** from the upper end **110** to the lower end **112**. The second fluid path is formed when the upper circulation valve **114** is closed and the lower circulation valve **116** is open. In this radial or lateral flow path, the drilling fluid flows along from the line **36** (**FIG. 2**), across the inlet **118**, into the bore **120**, and down to the lower end **112**.

[0015] The flow diverter **30** may also be configured to convey signals along the wellbore **13** (**FIG. 1**). The signals may be conveyed in either the uphole or downhole direction. The signals may be encoded with information for monitoring downhole pressure conditions and activating wellbore equipment used to manage one or more pressure parameters. In one embodiment, the flow diverter **30** may include a short-hop telemetry module that includes a signal relay device **60** energized by a power source **62**. The signal relay device **60** may be embedded in the flow diverter **30** or fixed to the flow diverter **30** in any other suitable manner. The signal relay device **60** includes a suitable transceiver for receiving and transmitting data signals.

For example, the signal relay device **60** can include an antenna arrangement through which the electromagnetic signals are sent and received through a short hop communication link. One non-limiting embodiment may include radio frequency (RF) signals. The signal relay device **60** is a component of a two-way telemetry system that can transmit signals (data and/or control) to the surface and/or downhole. In an exemplary short-hop telemetry system, data is transmitted from one relay point to an immediately adjacent relay point, or a relay point some distance away. In other embodiments, other waves may be used to transmit signals, *e.g.*, acoustical waves, pressure pulses, etc.

[0016] Referring back to **FIG. 1**, a communication system **200** uses the signal relay devices **60** (**FIG. 3**) as part of a communication link with downhole equipment positioned along the drill string **11** (**FIG. 1**). Additionally or alternatively, the signal relay devices may be included in wellbore equipment, such as a casing **15** (**FIG. 1**). Illustrative wellbore equipment, include, but are not limited to, casings, liners, casing collars, casing shoes, devices embedded in the formation, conduits (*e.g.*, hydraulic tubing, electrical cables, pipes, etc.). The downhole communication link also includes a signal carrier **66** disposed along the non-rigid carrier **16**. The signal carrier **66** may be metal wire, optical fibers, customized cement or any other suitable carrier for conveying information-containing signals. The signal carrier **66** may be embedded in the wall of the non-rigid string **16** or disposed in any wellbore equipment at the surface or downhole. The signal carrier **66** may also be fixed inside or outside of the non-rigid string **16**. The signals may be transmitted between the signal carrier **66** and the signal relay devices **60** using a suitably configured connector **70**. The connector **70** may form a physical connection between the rigid string **14** and the non-rigid string **16** and also house electronics, communication modules and processing equipment to exchange signals between the carrier **66** and the signal relay devices **60**.

[0017] In some embodiments, signal exchange speed and bandwidth can be enhanced by continuous system analysis and consequent shift to the best fit configuration channel selection by the system (pre-programmed and autonomous) and the use of Ultimate Radio System Extension Lines (URSEL). An illustrative URSEL system may be already installed at the rig site and/or installed into the wellbore. For

example, a signal carrier such as a fiber optic wire may be embedded in the cement used to set casing **15**. The wellbore construction equipped with signal exchange equipment/modules as mentioned may use the embedded signal carrier to transmit and receive information-bearing signals. In embodiments, radio over fiber (RoF) technology may be used to transmit information. RoF technology modulates light by radio signal and transmits the modulated light over an optical fiber. Thus, RF signals may be converted to light signals that are conveyed over fiber optic wires for a distance and then converted back to RF signals.

[0018] At the surface, the communication system **200** includes a controller **202** in signal communication with the signal relay devices **60**. The controller **202** may include suitable equipment such as a transceiver **204** to wirelessly communicate with the signal relay devices **60** using EM or RF waves **206**. This system **200** allows continuous communication while drilling and making and breaking jointed connections. The same RF transmitter or transceiver might be used for rig side and down hole transmission of the signals to reduce the complexity of the used equipment. Signal shape and strength might be adjusted depending on operational environment only.

[0019] The communication system **200** may be used to exchange information with the sensors and devices at the BHA **20** or positioned elsewhere on the string **11**. Illustrative sensors include, but are not limited to, sensors for estimating: annulus pressure, drill string bore pressure, flow rate, near-bit direction (*e.g.*, BHA azimuth and inclination, BHA coordinates, etc.), temperature, vibration/dynamics, RPM, weight on bit, whirl, radial displacement, stick-slip, torque, shock, strain, stress, bending moment, bit bounce, axial thrust, friction and radial thrust. Illustrative devices include, but are not limited to, the following: one or memory modules and a battery pack module to store and provide back-up electric power, an information processing device that processes the data collected by the sensors, and a bidirectional data communication and power module ("BCPM") that transmits control signals between the BHA **20** and the surface as well as supplies electrical power to the BHA **20**. The BHA **20** may also include processors programmed with instructions that can generate command signals to operate other downhole wellbore equipment. The

commands may be generated using the measurements from downhole sensors such as pressure sensors.

[0020] Based on information obtained using the communication system **200**, the system **10** may be used to control out-of-norm wellbore conditions using well control equipment positioned in the wellbore **13**. The well control equipment may include an annulus flow restriction device **222** that hydraulically isolates one or more sections of a wellbore by selectively blocking fluid flow in the annulus **37**, a bore flow restriction device **224** that selectively blocks fluid flow along a bore of the drill string **11**, and a bypass valve **250**.

[0021] The annulus flow restriction device **222** may be positioned along an uphole section of a non-rigid string **16** or anywhere along the drill string **11**. In one embodiment, the annulus flow restriction device **222** may form a continuous circumferential seal against a wellbore wall that controls flow in the well annulus **37**. The terms seals, packers and valves are used herein interchangeably to refer to flow control devices that can selectively control flow across a fluid path by increasing or decreasing a cross-sectional flow area. The control can include providing substantially unrestricted flow, substantially blocked flow, and providing an intermediate flow regime. The intermediate flow regimes are often referred to as "choking" or "throttling," which can vary pressure in the annulus downhole of the annulus flow restriction device **222**. The fluid barrier provided by these devices can be "zero leakage" or allow some controlled fluid leakage. In some embodiments, the seals and valves may include suitable electronics in order to be responsive to control signals. Suitable flow control devices include packer-type devices, expandable seals, solenoid operated valves, hydraulically actuated devices, and electrically activated devices.

[0022] Referring to **FIG. 1**, the bore flow restriction device **224** may be at the uphole end of a non-rigid string **16**. Alternatively or additionally, the bore flow restriction device **222** may be positioned in the rigid section **14** of the drill string **11**. Referring now to **FIG. 4**, the bore flow restriction device **224** may include a flow path **226**, a sealing member **228**, a closure member **230**, a biasing member **232**, and a signal responsive actuator **234**. The sealing member **228** and the closure member **230** may be complementary in shape such that engagement forms a fluid-tight seal along

the flow path **226**. The biasing member **232** is configured to bias the closure member **230** toward and against the sealing member **230**. In one embodiment, the biasing member **232** may include spring members (*e.g.*, disk springs or coil springs). The spring force of the biasing member **232** may be selected such that a preset value or range of flow rates or pressure will overcome the spring force and keep the closure member **230** in the open, unsealed position. A drop in flow rate or pressure below the range allows the biasing member **232** to urge the closure member **230** into sealing engagement with the sealing member **228** (the closed position). Thus, the bore flow restriction device **22** may be configured to close in response to an interruption in fluid flow and / or a backflow condition. A backflow condition may arise with the bore pressure downhole of the bore flow restriction device **224** is greater than the uphole bore pressure.

[0023] The signal responsive actuator **234** allows the bore flow restriction device **224** to be remotely actuated with a control signal. The signal may be transmitted from the surface and / or from a device located in the wellbore **13** (*e.g.*, the BHA **20**). For instance, the controller **202** (**FIG. 1**) may transmit a control signal to instruct the bore flow restriction device **224** to open, close, or shift to an intermediate position. The actuator **234** may be a hydraulic, electric, or mechanical device that can shift the closure member **230** into engagement with the sealing member **228** in response to a control signal. The actuator **234** may include suitable electronics to process the control signals and initiate the desired actions. Like the annular flow restriction device **222**, the bore flow restriction device **224** may either completely seal the bore or partially block fluid flow in the bore.

[0024] The bypass valve **230** is configured to direct flow between the annulus **37** and the bore of the drill string **13**. Like the flow restriction devices **222**, **224**, the bypass valve **230** may include an actuator **234** that can shift the bypass valve **230** between an open position, a closed position, and / or an intermediate position. The actuator **234** may include suitable electronics to receive and process the control signals and to initiate the desired actions.

[0025] Referring now to **FIGS. 1-4**, exemplary modes of use of the system **10** will be discussed. To begin, the non-rigid string **16** may be used to convey the BHA

20 into the wellbore **13**. It should be noted that the drill string **11** does not require the non-rigid string **16**. However, use of the non-rigid string **16** may reduce the number of pipe stands **12a** and flow diverters **30** required to reach a desired target depth. When desired, the rigid string **14** may be connected to the non-rigid string **16** with the connector **70**. Thereafter, the flow diverters **30** may be used to interconnect the sections of pipe **12a** used to form the rigid string **14**. As successive pipe joints **12a** are added to the rigid string **14**, the CCS **100** maintains a continuous flow of drilling fluid along the drill string **11**. Thus, the pressure applied to the formation remains relatively constant. During drilling with the BHA **20**, the drill bit **50** may be rotated by one or more of the downhole motor **28**, the rotary power motor **26** positioned at the connector **70**, and the top drive **24**.

[0026] As drilling progresses, pressure sensors in the BHA **20** and elsewhere measure ambient wellbore pressure. These pressure measurements are transmitted uphole via the signal carrier **66** in the non-rigid string **16**. The connector **70** receives the signals from the carrier **66** and generates corresponding wireless signals that may be received and transmitted by the signal relay devices **60** in the flow diverters **30**. The wireless signals “hop” from one flow diverter **30** to the next until the signals are near the surface. When the wireless signals are at or near the surface, the antenna **204** receives these wireless signals and conveys the signals to the controller **202**. Thus, in this manner, pressure information may be transmitted from a downhole location to the surface. It should be understood that non-pressure related information may also be transmitted in this manner.

[0027] It should be appreciated that the flow of pressure information is not interrupted when pipe **12a** is added to or removed from the drill string **11**. Specifically, because the data is transmitted wirelessly, breaks in physical connections along the drill string **11** will not affect signal transmission between the signal relays **60** and the controller **202**.

[0028] In some instances, the received pressure information may be used to optimize the wellbore pressure. For example, to maintain the pressure applied to formation within a specified window (e.g., below fracture pressure and above pore pressure), the controller **202** may transmit control signals using the communication

system **200** to the annular flow restriction device **222**, the bore flow restriction device **224**, and / or the bypass valve **250**. In response, the flow restriction devices **222**, **224** may “throttle” or “choke” fluid flow in the annulus and bore, respectively. The bypass valve **250** may divert a selected amount of drilling fluid from the drill string bore into the annulus. These types of flow control adjustment can increase and decrease fluid pressure in the annulus **37** and / or the bore of the drill string **11** as needed.

[0029] Because pressure information is being continuously transmitted by the communication system **200**, pressure adjustments may be done in real time or near-real time. Therefore, deep drilling situations that have tight pressure windows and formations with changing formation pressure may be managed more efficiently because wellbore pressure management devices can be rapidly and accurately adjusted. Additionally, this enhanced control may enable drilling to be performed while the well is in an underbalanced pressure condition. In many instances, drilling in an underbalanced condition yields enhanced rates of penetration.

[0030] In other instances, the pressure information may indicate that corrective action may be needed to contain an undesirable condition. For example, the pressure information received may indicate that a potential “kick,” or pressure spike. One exemplary response may include the controller **202** transmitting a control signal using the communication system **200** to the annular flow restriction device **222**. In response, the flow restriction device **222** may radially expand and seal against the adjacent wellbore wall. Thus, the annulus of the wellbore **13** downhole of the flow restriction device **222** may hydraulically isolated from the remainder of the wellbore **13**. Additionally or alternatively, the controller **202** may send a control signal to the bore flow restriction device **224**. In response, the bore flow restriction device **224** may seal the bore of the drill string **11**. Thus, the bore of the drill string **11** downhole of the flow restriction device **224** may hydraulically isolated. The actuation of either or both of the flow restriction devices **222**, **224** in this manner may isolate the downhole section of the wellbore **13** and thereby arrest the pressure kick.

[0031] After the wellbore has been isolated, remedial action may be taken such as bleeding off the pressure kick, increasing mud weight, etc. In other instances,

it may be desired to isolate the wellbore either temporarily or permanently. Isolating the wellbore may be done by leaving the entire drill string **11** in the wellbore **13**. Alternatively, the rigid string **14** may be disconnected from the non-rigid string **16** and pulled out the wellbore **13**. Thus, the wellbore **13** is isolated by the non-rigid string **16** and the flow restriction devices **222**, **224**.

[0032] While the above modes have used surface initiated actions, it should be understood that the BHA **20** may use one or more downhole controllers that are programmed to also monitor pressure conditions, determine whether an undesirable condition exists, and transmit the necessary control signals to the flow restriction devices **222**, **224**, bypass valve **250**, and / or other equipment. These actions may be taken autonomously or semi-autonomously.

[0033] As discussed above, the string **11** may be used for drilling the wellbore **13**. Also, the string **11** may be used for non-drilling activities such as casing installation, liner installation, casing / liner expansion, well perforation, fracturing, gravel packing, acid washing, tool installation or removal, etc. In such configurations, the drill bit **50** may not be present.

[0034] While the foregoing disclosure is directed to the one mode embodiments of the disclosure, various modifications will be apparent to those skilled in the art. It is intended that all variations within the scope of the appended claims be embraced by the foregoing disclosure.

THE CLAIMS**WHAT IS CLAIMED IS:**

1. An apparatus for performing a wellbore operation, comprising:
 - a drill string configured to be disposed in a wellbore, the drill string including a rigid tubular section formed of a plurality of jointed tubulars; and
 - a plurality of flow diverters positioned along the rigid tubular section, each flow diverter having:
 - a radial valve controlling flow through a wall of the rigid tubular section; and
 - a signal relay device configured to convey information-encoded signals.
2. The apparatus of claim 1, further comprising a continuous circulation device having at least a first fluid path in fluid communication with a top drive and a second fluid path, wherein the at least one valve of each flow diverter is configured to selectively couple to the second fluid path.
3. The apparatus of claim 2, wherein the continuous circulation includes:
 - a fluid line receiving a drilling fluid from a drilling fluid source; and
 - a manifold connected to the fluid line, the manifold selectively flowing the drilling fluid to the first and the second flow paths.
4. The apparatus of claim 1, wherein each flow diverter includes a second valve configured to selectively block flow along an axial bore of the drill string.
5. The apparatus of claim 1, wherein each signal relay device is configured to transmit and receive electromagnetic signals.
6. The apparatus of claim 1, wherein the communication system includes a surface controller configured to one of: (i) transmit information into the wellbore via

the signal relay device, and (ii) receive information from the wellbore via the signal relay device.

7. The apparatus of claim 1, further comprising a flow restrictor connected to the drill string, the flow restrictor having a variable outer diameter for selectively restricting flow along an annulus of a wellbore.

8. The apparatus of claim 7, further comprising a flow bypass selectively flowing a fluid between a bore of the drill string and a wellbore annulus, the flow bypass and the adjustable flow restrictor cooperating to control a pressure in a selected section of the wellbore.

9. The apparatus of claim 1, wherein the drill string including a non-rigid tubular section formed of a continuous tubular.

10. The apparatus of claim 9, wherein the communication device includes a data carrier positioned along the non-rigid tubular section, wherein the data carrier is one of (i) a metal conductor, and (ii) an optical fiber, and wherein the data carrier is positioned at one of (i) outside of the non-rigid string, (ii) inside the non-rigid string, and (iii) embedded in a wall of the non-rigid string.

11. The apparatus of claim 1, further comprising a communication system positioned at a surface location, the communication system including an antennae in signal communication with a radio extension line disposed in the wellbore.

12. A method for performing a wellbore operation using a drill string that includes jointed tubulars, comprising:

- adding a plurality of flow diverters to the drill string, wherein each flow diverter has: (i) a valve controlling radial flow through a wall of the drill string, and (ii) a signal relay device configured to relay signals;
- conveying the drill string along a wellbore; and
- transmitting signals along the drill string using the signal relay devices.

13. The method of claim 12, further comprising:
 - continuously circulating a drilling fluid through the drill string using the flow diverters.
14. The method of claim 12, further comprising:
 - estimating a pressure parameter at a selected location in the wellbore; and
 - controlling a pressure at the selected location using the estimated pressure parameter.
15. The method of claim 14, wherein the drill string includes a drill bit, and further comprising:
 - drilling the wellbore using the drill bit while maintaining an underbalanced condition at the drill bit.
16. The method of claim 15, further comprising maintaining the underbalanced condition at the drill bit while maintaining at least an at-balanced condition at a second location in the wellbore.
17. The method of claim 14, wherein the pressure is controlled by one of: (i) adjusting a size of a cross-sectional flow path along a wellbore annulus, (ii) diverting fluid flow from a bore of the drill string to the wellbore annulus, and (iii) diverting flow from the wellbore annulus to the bore of the drill string.
18. The method of claim 12, wherein the drill string including a non-rigid tubular section formed of a continuous tubular.
19. The method of claim 18, wherein the signals are conveyed along the continuous tubular using a data carrier, wherein the data carrier is one of (i) a metal conductor, and (ii) an optical fiber, and wherein the data carrier is positioned at one of (i) outside of the non-rigid string, (ii) inside the non-rigid string, and (iii) embedded in a wall of the non-rigid string.

20. The method of claim 12, further comprising circulating a drilling fluid into an annulus of a wellbore, and returning the drilling fluid to the surface via a bore of the drill string.

1/3

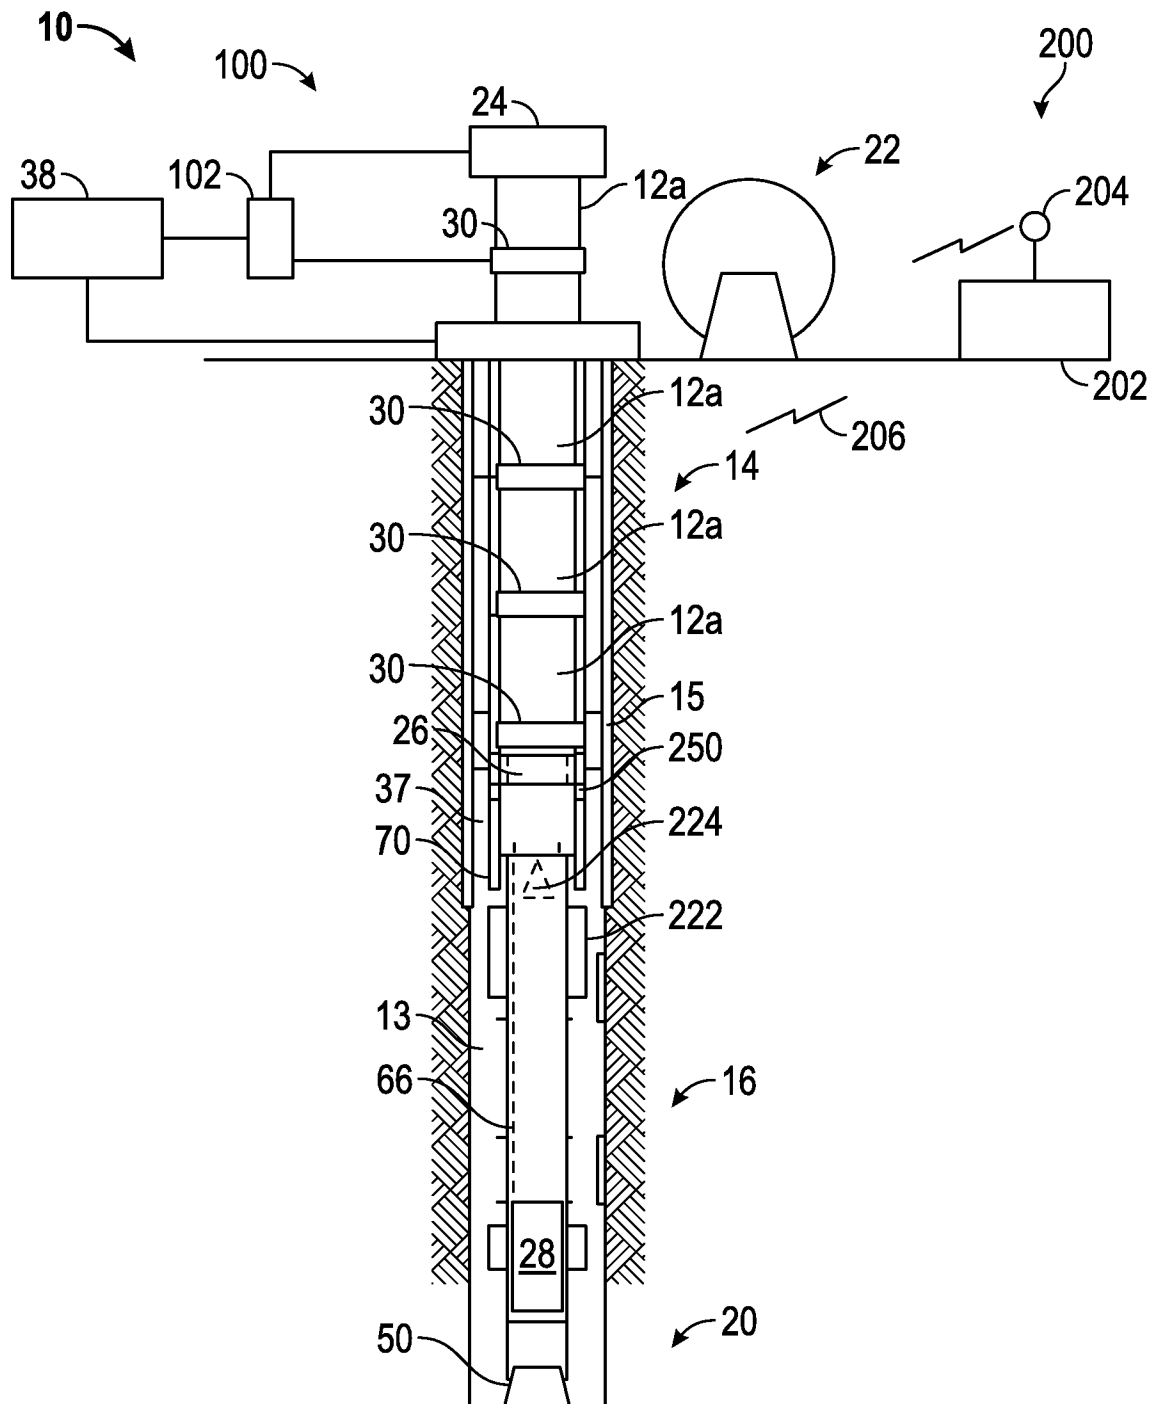


FIG. 1

2/3

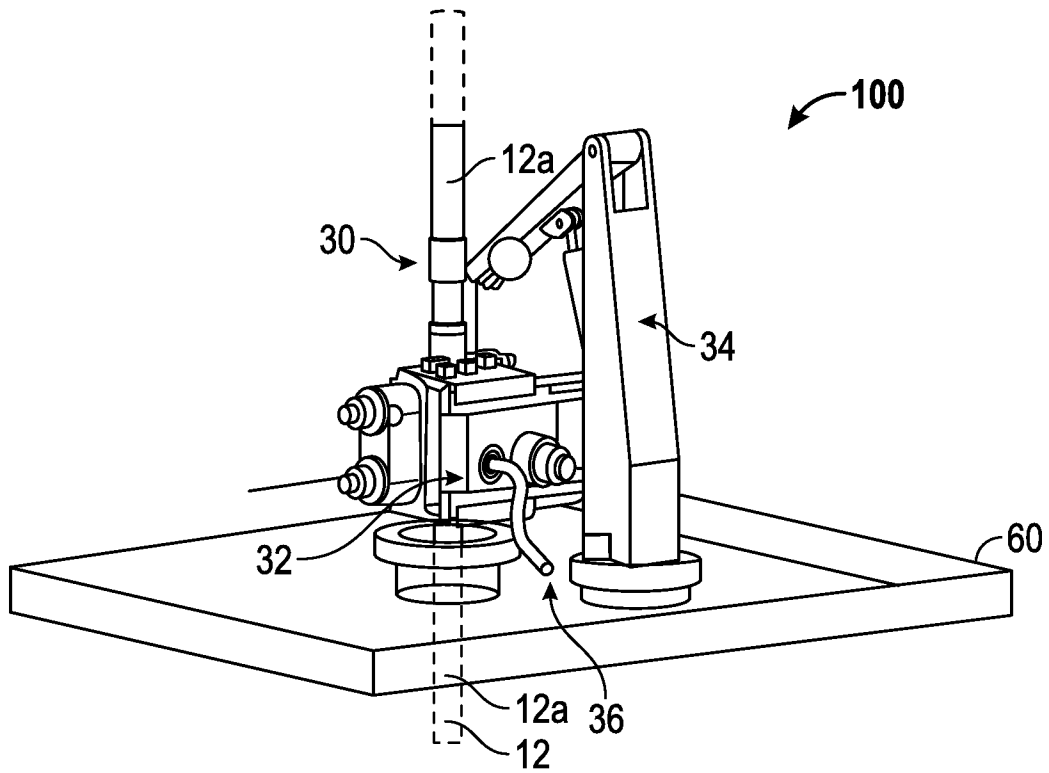


FIG. 2

30 →

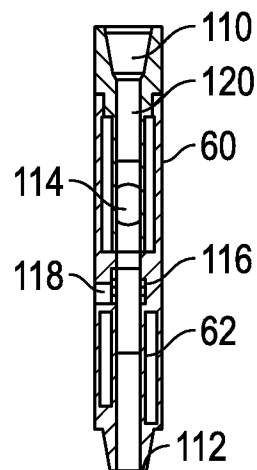


FIG. 3

3/3

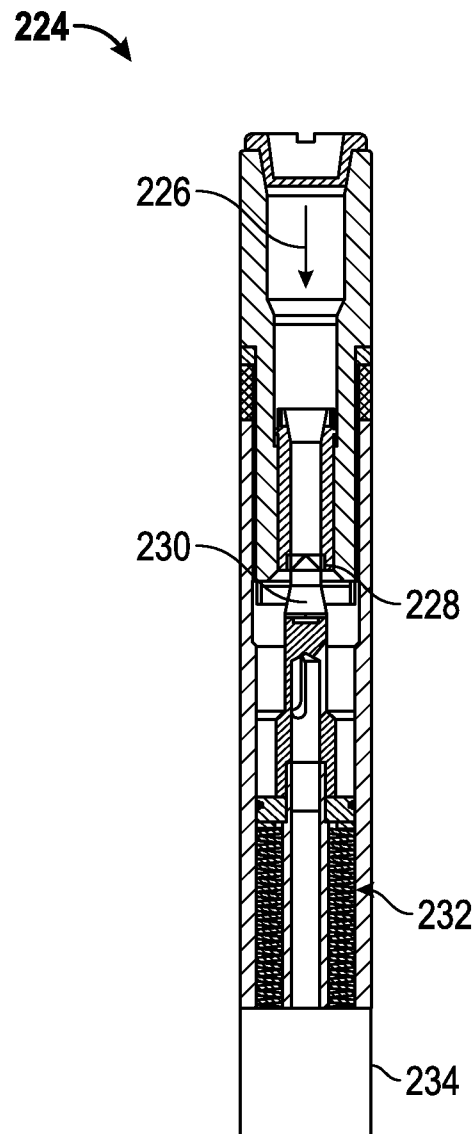


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/015041**A. CLASSIFICATION OF SUBJECT MATTER****E21B 21/10(2006.01)i, E21B 34/06(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 21/10; E21B 43/12; E21B 4/02; E21B 34/06; E21B 7/12; F16K 17/06; E21B 43/00; E21B 43/16; E21B 34/14; E21B 21/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: drill string, diverter, valve, circulation, restrictor, and communication system

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2012-0205122 A1 (PETER et al.) 16 August 2012 See paragraphs [0014]–[0024], [0032]–[0040] and figures 1A–3.	1–20
Y	US 2012-0181043 A1 (PATEL, DINESH) 19 July 2012 See paragraphs [0032]–[0040] and figures 9–10.	1–20
A	US 2009-0114393 A1 (SHARMA et al.) 07 May 2009 See claims 10–18 and figures 1–3.	1–20
A	US 2003-0066650 A1 (FONTANA et al.) 10 April 2003 See claims 41–47 and figure 1.	1–20
A	US 4768598 A (REINHARDT, PAUL A.) 06 September 1988 See abstract and claims 1–2.	1–20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

02 June 2014 (02.06.2014)

Date of mailing of the international search report

03 June 2014 (03.06.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

LEE, Jong Kyung

Telephone No. +82-42-481-3360



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/015041

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012-0205122 A1	16/08/2012	WO 2012-109562 A2 WO 2012-109562 A3	16/08/2012 22/11/2012
US 2012-0181043 A1	19/07/2012	GB 201200347 D0 GB 2487292 A NO 20120019 A	22/02/2012 18/07/2012 16/07/2012
US 2009-0114393 A1	07/05/2009	US 8066071 B2	29/11/2011
US 2003-0066650 A1	10/04/2003	AU 1999-49910 A1 AU 1999-50012 A1 AU 2005-255028 A1 AU 2009-285695 A1 CA 2459723 A1 CA 2459723 C CA 2480187 A1 CA 2480187 C CA 2560461 A1 CA 2560461 C CA 2570378 A1 CA 2570378 C CA 2572240 A1 CA 2572240 C CA 2579647 A1 CA 2579647 C CA 2600843 A1 CA 2600843 C CA 2612111 A1 CA 2623231 A1 CA 2623231 C CA 2734977 A1 CA 2734977 C CN 101310090 A CN 102177306 A EP 1926883 A1 EP 1926883 B1 EP 2326788 A2 EP 2326788 B1 EP 2420645 A2 EP 2420645 A3 EP 2450525 A2 EP 2450525 A3 EP 2450525 B1 GB 2356657 A GB 2357102 A GB 2379947 A GB 2405654 A GB 2416559 A GB 2419622 A	07/02/2000 07/02/2000 29/12/2005 04/03/2010 27/03/2003 19/02/2008 02/03/2005 18/11/2008 13/10/2005 01/06/2010 29/12/2005 19/10/2010 02/02/2006 28/09/2010 16/03/2006 31/08/2010 21/09/2006 21/06/2011 28/12/2006 05/04/2007 19/04/2011 04/03/2010 29/10/2013 19/11/2008 07/09/2011 04/06/2008 22/05/2013 01/06/2011 11/12/2013 22/02/2012 18/07/2012 09/05/2012 20/06/2012 04/12/2013 30/05/2001 13/06/2001 26/03/2003 09/03/2005 01/02/2006 03/05/2006

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/015041

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		GB 2422165 A	19/07/2006
		GB 2427639 A	03/01/2007
		GB 2429475 A	28/02/2007
		GB 2429485 A	28/02/2007
		GB 2430960 A	11/04/2007
		GB 2433765 A	04/07/2007
		GB 2434607 A	01/08/2007
		GB 2440452 A	30/01/2008
		GB 2441927 A	19/03/2008
		GB 2470859 A	08/12/2010
		US 2002-0092655 A1	18/07/2002
		US 2003-0098181 A1	29/05/2003
		US 2004-0069504 A1	15/04/2004
		US 2004-0112642 A1	17/06/2004
		US 2004-0124008 A1	01/07/2004
		US 2004-0206548 A1	21/10/2004
		US 2004-0256161 A1	23/12/2004
		US 2005-0039905 A1	24/02/2005
		US 2005-0098349 A1	12/05/2005
		US 2005-0183892 A1	25/08/2005
		US 2005-0194143 A1	08/09/2005
		US 2005-0274547 A1	15/12/2005
		US 2006-0065402 A9	30/03/2006
		US 2006-0070771 A1	06/04/2006
		US 2006-0124352 A1	15/06/2006
		US 2007-0007041 A1	11/01/2007
		US 2007-0045006 A1	01/03/2007
		US 2007-0068704 A1	29/03/2007
		US 2007-0079995 A1	12/04/2007
		US 2008-0149393 A1	26/06/2008
		US 2008-0223575 A1	18/09/2008
		US 2010-0051350 A1	04/03/2010
		US 2011-0168448 A9	14/07/2011
		US 6415877 B1	09/07/2002
		US 6648081 B2	18/11/2003
		US 6854532 B2	15/02/2005
		US 6957698 B2	25/10/2005
		US 6981561 B2	03/01/2006
		US 7096975 B2	29/08/2006
		US 7114581 B2	03/10/2006
		US 7174975 B2	13/02/2007
		US 7178609 B2	20/02/2007
		US 7270185 B2	18/09/2007
		US 7316274 B2	08/01/2008
		US 7353887 B2	08/04/2008
		US 7395882 B2	08/07/2008
		US 7624818 B2	01/12/2009
		US 7721822 B2	25/05/2010
		US 7748475 B2	06/07/2010
		US 7757784 B2	20/07/2010

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/015041

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 7806203 B2	05/10/2010
		US 7954570 B2	07/06/2011
		US 8006785 B2	30/08/2011
		US 8011450 B2	06/09/2011
		US 8146683 B2	03/04/2012
		WO 00-03600 A2	27/01/2000
		WO 00-03600 A3	20/07/2000
		WO 00-04269 A2	27/01/2000
		WO 00-04269 A3	20/04/2000
		WO 03-025336 A1	27/03/2003
		WO 2005-001237 A1	06/01/2005
		WO 2005-080742 A1	01/09/2005
		WO 2005-095751 A1	13/10/2005
		WO 2005-124091 A1	29/12/2005
		WO 2006-012186 A1	02/02/2006
		WO 2006-029379 A1	16/03/2006
		WO 2006-099362 A1	21/09/2006
		WO 2006-138565 A1	28/12/2006
		WO 2007-038208 A1	05/04/2007
		WO 2010-025313 A2	04/03/2010
		WO 2010-025313 A3	29/04/2010
		WO 2010-025313 A4	17/06/2010
US 4768598 A	06/09/1988	None	