



(86) Date de dépôt PCT/PCT Filing Date: 1992/03/05

(87) Date publication PCT/PCT Publication Date: 1992/09/17

(45) Date de délivrance/Issue Date: 2002/12/03

(85) Entrée phase nationale/National Entry: 1993/09/07

(86) N° demande PCT/PCT Application No.: US 1992/001706

(87) N° publication PCT/PCT Publication No.: 1992/015262

(30) Priorité/Priority: 1991/03/06 (665,343) US

(51) Cl.Int.⁵/Int.Cl.⁵ A61F 5/01, A41H 37/00


(72) Inventeur/Inventor:
MCVICKER, HENRY J., US

(73) Propriétaire/Owner:
MCVICKER, HENRY J., US

(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : DISPOSITIF ORTHOPEDIQUE MOULE PAR INJECTION; METHODE

(54) Title: INJECTION-MOLDED ORTHOPEDIC DEVICE AND METHOD

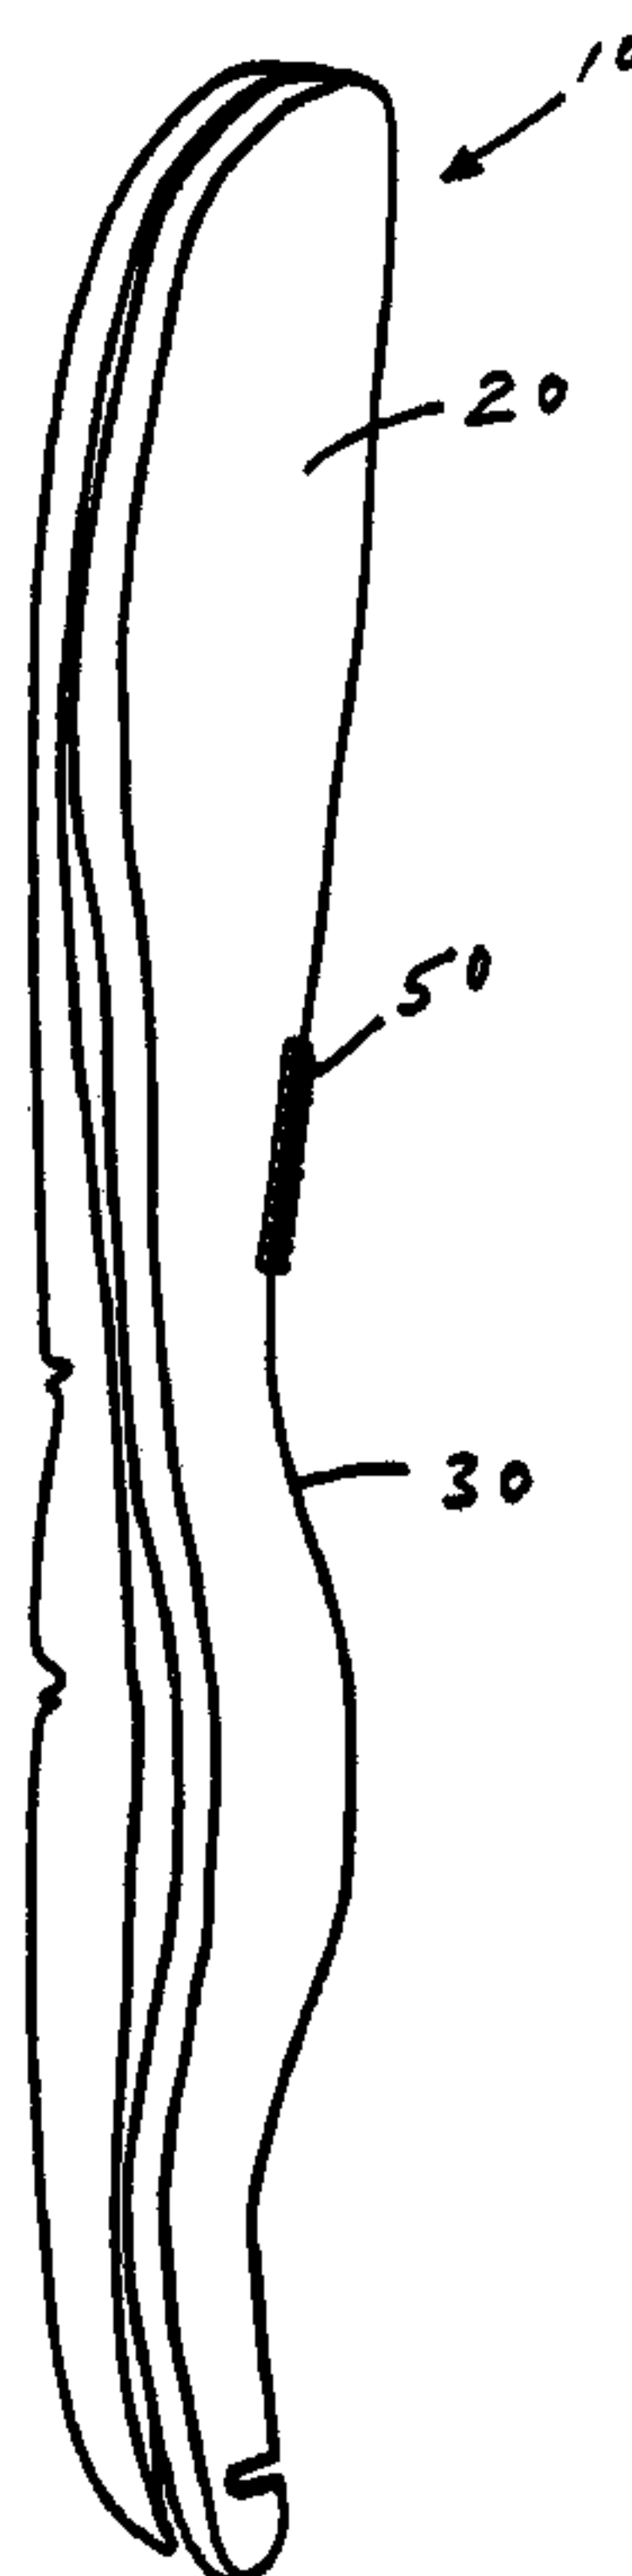

(57) Abrégé/Abstract:

An injection-molded thermoplastic device having a field of injection-molded hooks integrally formed in predetermined areas on the device during the injection-molding of the device for releasable attachment to a strap with loops.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : A61F 5/00, A23G 1/22 A41H 37/00	A1	(11) International Publication Number: WO 92/15262 (43) International Publication Date: 17 September 1992 (17.09.92)
2105679 (21) International Application Number: PCT/US92/01706 (22) International Filing Date: 5 March 1992 (05.03.92) (30) Priority data: 665,343 6 March 1991 (06.03.91) US (71) Applicant: AIRCAST, INC. [US/US]; 92 River Road, Summit, NJ 07902-0709 (US). (72) Inventor: McVICKER, Henry, J. ; 51 Buxton Place, Chatham, NJ 07928 (US). (74) Agents: SANDLER, Ronald, A. et al.; Jones, Day, Reavis & Pogue, 77 West Wacker Drive, Chicago, IL 60601-1692 (US).		(81) Designated States: AT (European patent), BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB, GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), MC (European patent), NL (European patent), SE (European patent). Published <i>With international search report.</i> <i>With amended claims.</i> ART. 19

(54) Title: INJECTION-MOLDED ORTHOPEDIC DEVICE AND METHOD

(57) Abstract

An injection-molded thermoplastic device having a field of injection-molded hooks integrally formed in predetermined areas on the device during the injection-molding of the device for releasable attachment to a strap with loops.

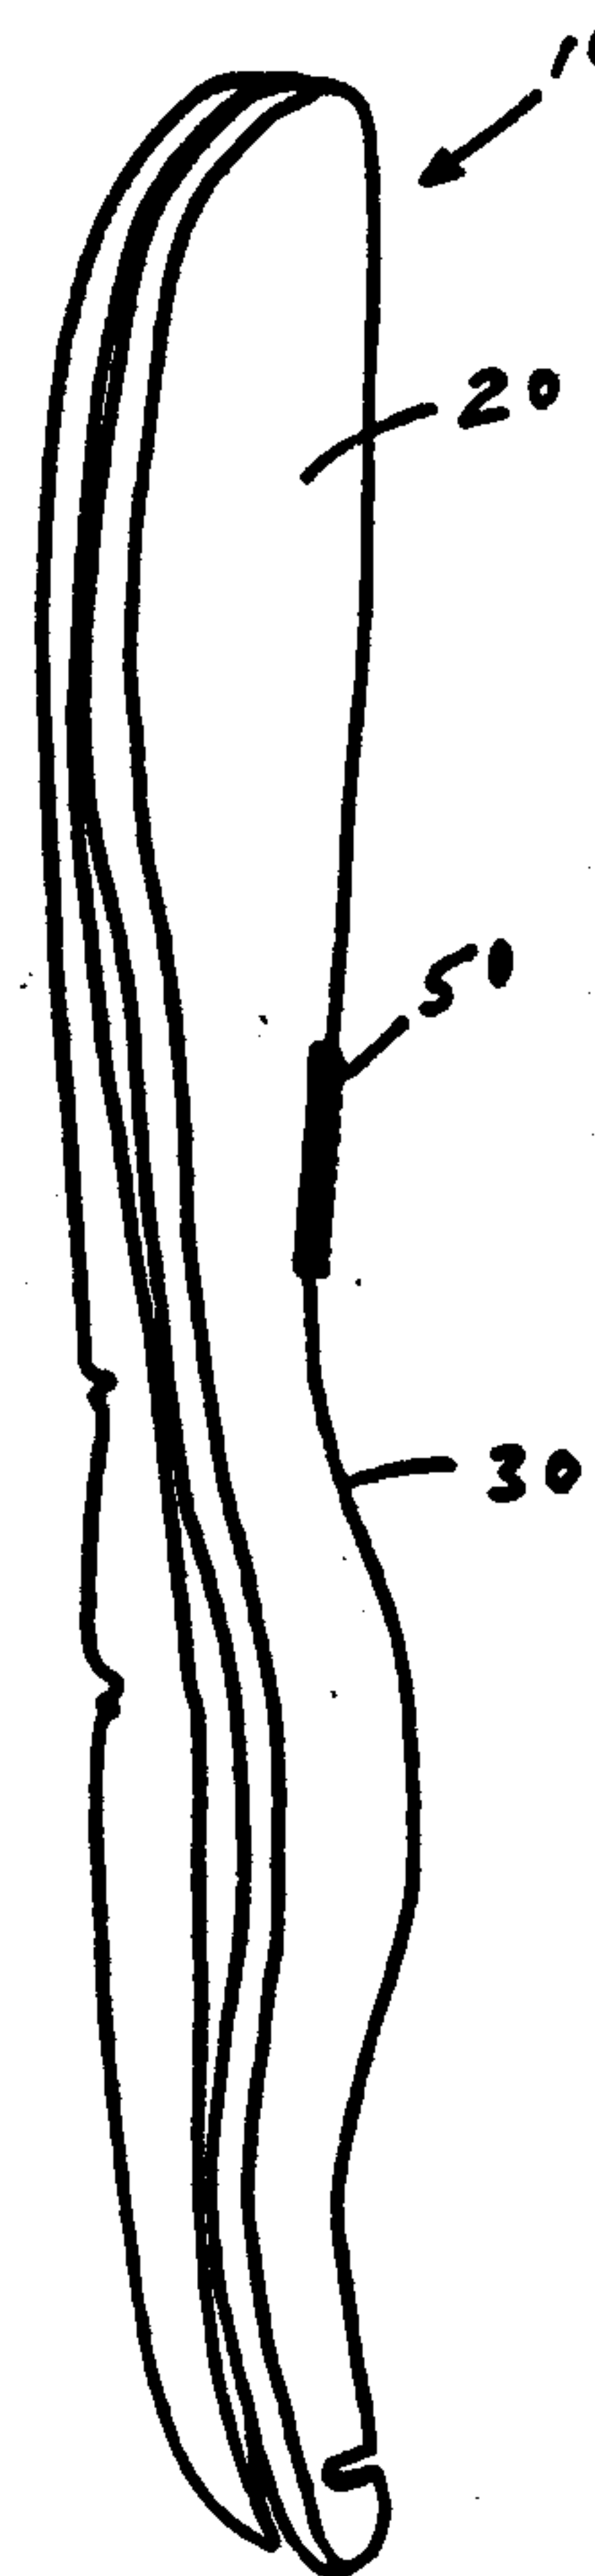

• 2105679

-1-

5

DESCRIPTION

"Injection - Molded Orthopedic Device & Method"

10

TECHNICAL FIELD

This invention relates to an injection-molded thermoplastic orthopedic device and a method of making same. In particular, the invention relates to a method of
15 injection-molding a thermoplastic orthopedic device wherein at least one wall of the device has an integrally-formed field of hooks formed during the injection-molding of the orthopedic device to receive a strap loop in releasably attaching engagement in order to
20 secure the orthopedic device generally to the circumferential contour of the lower part of the leg and ankle.

25

30

2105679

-2-

BACKGROUND OF THE INVENTION

5 In the management of certain injuries to the lower extremities, such as fractures of the tibia and fibula, malleolar fractures, or severe ankle sprains, it is common to completely immobilize the lower extremity (following open or closed reduction in the case of fractures) by use of the well-known molded plaster or resin cast.

10 After the injured extremity has become stable, however, it has been found that recovery may be effected more rapidly by gradually and progressively permitting the extremity to bear weight and undergo other permitted exercises. Thus, for example, during a second stage of management, a walking heel may be attached to a long
15 plaster cast, or the latter replaced by a shorter unit, or by a walking cast specifically adapted to facilitate such maneuvers.

One form of walking cast commercially available under the trademark AIRCAST is described in U.S. Patent
20 No. 3,955,565. Additional types of orthopedic devices which permit substantially normal plantoflexion and dorsoflexion movements of the ankle but limit inversion and eversion, thus stabilizing the ankle, are also commercially available such as those described in U.S.
25 Patent No. 4,280,489.

In order to maintain such orthopedic devices in proper fitting engagement about the lower extremity, a pair of longitudinally-spaced, circumferentially extending fastener straps with loops, generally available under the
30 trademark VELCRO, are usually adapted to cooperate with first and second surfaces having circumferentially-spaced fastener hooks.

The fastening material sold under the trademark VELCRO generally comprises two components. Each component has a

2105679

-3-

flexible backing material having a surface thereon. One surface is comprised of the resilient hooks, while the other is comprised of a short-pile, looped fabric. As the two fastening surfaces are pressed together, the hooks
5 releasably engage the loops, thus releasably holding the fastening materials together. The fastening surfaces are separated by pulling them apart with sufficient force to cause the resilient hooks to straighten sufficiently to come out of engagement with the loops.

10 Previously, VELCRO-fastener hooks were secured by conventional methods to the exterior surface of orthopedic devices. The strap loops were then adapted to matingly engage the corresponding hooks so that the strap loops could be drawn and tensioned snugly against the exterior
15 of the orthopedic device for placement next to the lower leg or ankle. Various other methods for attaching the hooks to the orthopedic device have been utilized in the past as well. All such prior conventional methods, however, provided for the hooks to be attached to the
20 orthopedic device after the orthopedic device was molded and formed. The present invention, however, allows the hooks to be injection-molded as an integrally-formed part of the orthopedic device.

Typically, the prior fastening hooks were manufactured
25 attached to the surface of orthopedic devices and other devices by the use of adhesives, ultrasonic welding, stitching or through the use of continuous extrusion molding. Such former methods of manufacturing and attaching the hooks and loop fastening materials have been
30 described in U.S. Patents Nos. 4,814,036, 4,470,857, and 4,726,975. Improvements to the traditional, adhesive, ultrasonic welding or stitching methods have occurred through advancements in the overall process of molding the fastener material strips by extrusion molding techniques,

2105679

-4-

such as those disclosed in U.S. Patents Nos. 4,814,036, 4,563,380, 4,872,243 and 4,794,028.

5 All of the prior methods of attaching the hooks to various devices, including orthopedic devices, have required the use of extensive labor in the process of either cutting and applying the hooks to the previously formed orthopedic device or through the use of extrusion molding.

10 As the use of VELCRO-type hooks and loop fasteners has increased, however, the industry has sought less labor intensive and costly methods of manufacturing and attaching these hooks.

15 The present invention eliminates many of the disadvantages inherent with such prior labor-intensive and material-expensive processes of extrusion molding, adhesive and stitching by integrally forming the hooks with the orthopedic device during the injection-molding process. The present invention thereby eliminates the separate step of attaching the hooks during production.

20

SUMMARY OF THE INVENTION

25 The present invention relates to an injection-molded thermoplastic orthopedic device and method of making same. In particular, the orthopedic device includes at least one wall having an arcuate transverse cross-sectional shape sufficient to conform generally to the circumferential contour of the inner or outer side of the lower leg and ankle. The orthopedic device normally
30 has at least one strap of material having loops therein attached to at least one wall of the orthopedic device for holding the wall against the lower leg and ankle and has a field of injection-molded hooks integrally formed on a predetermined area of at least one wall of the orthopedic

- 5 -

device during the injection-molding process for receiving the strap loops in a releasably attached engagement.

5 The hooks of the present invention have a reduced radius from that of prior hooks and a changed geometry for promoting ejection during the injection-molding process, yet still maintain the desired fastening function. In the preferred embodiment of the invention, the hooks comprise
10 spaced rows of hooks with adjacent rows of hooks facing in the opposite directions.

 The thermoplastic material, preferably polypropylene, used for injection-molding the integrally-formed hooks has a memory sufficient to cause the hooks to return
15 substantially to their original position after being removed from the mold, and yet has sufficient flexibility to allow the hooks to bend during removal from the mold and during engagement and release with the attached strap loops.

20 The present invention also relates to a method of forming an orthopedic device conforming generally to the lower leg and ankle and held in place by at least one strip of material having loops thereon. The method preferably comprises the steps of (1) injection-molding the orthopedic
25 device and (2) simultaneously integrally forming a field of hooks in at least one predetermined area on the device during the injection-molding process for receiving the strap loops in releasably attaching engagement.

 In another aspect of the invention there is provided a
30 thermoplastic device having hooks which are adapted to be releasably attachable to at least one associated cooperative loop-bearing member. The device comprises at least one essentially rigid wall portion, and on the wall portion, there is a field of hooks on a predetermined area
35 thereof for cooperation in use with the loop-bearing members. The predetermined area is substantially less than the total area of the wall portion. The invention is characterised in that the device is a one-piece

- 5a -

injection-molded device formed of a thermoplastic material having a memory sufficient to cause the hooks to return substantially to their original position after being removed from the mold and sufficient flexibility to allow the hooks to bend during removal from the mold and during release of the attached loop-bearing members. The device is obtained by an injection molding process in which the wall portion and hooks are simultaneously and integrally formed. The hooks have a geometry of a radius and a length permitting ejection thereof from the mold during the injection-molding process as well as having an effective fastening function.

In another aspect of the invention, there is provided a method of forming a thermoplastic device having hooks which are adapted to be releasably attachable to at least one associated cooperative loop-bearing member, and at least one essentially rigid wall portion. The method comprises the steps of: injection-molding the thermoplastic device in a mold; and simultaneously integrally forming a field of the hooks in at least one predetermined area on the wall portion during the injection-molding, thereby the hooks being formed to have a geometry of a radius and a length permitting ejection thereof from the molds during injection-molding process as well as having an effective fastening function, the device being formed of a thermoplastic material having a memory sufficient to cause the hooks to return substantially to their original position after being removed from the mold and sufficient flexibility to allow the hooks to bend during removal from the mold and during release of the attached loop-bearing members, and the predetermined area of the wall portion being substantially less than the total area of the wall portion.

In another aspect of the invention, there is provided a mold apparatus for use in an injection-molding machine which comprises a mold for forming a unitary relatively rigid thermoplastic device and a recess being provided in at least one predetermined area of the mold. There is

- 5b -

further provided means in the recess for simultaneously and integrally forming a field of injection-molded hooks during
5 the injection molding of the device. The field of hooks has a length and a width, the field comprising hooks interspersed in both the length and the width of the field and the hooks adapted for releasable attachment to an associated cooperative loop-bearing member. The means
10 having a plurality of hook-shaped cavities and being in unitary assembly during the injection molding of the device, and the means being maintained in unitary assembly during the removal of the injection-molded device having integrally formed hooks from the mold apparatus.

2105679

-6-

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects of the present invention will be more fully understood in conjunction with the detailed description and the accompanying drawings in which like
5 numerals represent like elements and in which:

FIG. 1 is a front view of the orthopedic device;

FIG. 2 is a side view of the orthopedic device;

FIG. 3 is a schematic representation of the prior
10 art hook design;

FIG. 4 is a schematic representation of the hook design in the present invention before injection-molding;

FIG. 5 is a schematic representation of the hook
15 of the present invention after injection-molding;

FIG. 6 is a plan view of a single plate of the hooks of the present invention;

FIG. 7 is a schematic showing the layout of the alternated hook plates and spacers utilized in the
20 insert in the injection-molding process;

FIG. 8 is a schematic representation of the end view of the mold showing the alternating layers of hook plates and spacers and the direction of the hooks in adjacent rows.

FIG. 9 is a perspective view illustrating the
25 alternating hook direction in alternate rows;

FIG. 10 is a schematic representation of a mold block for an injection-molding machine for forming the device with an integrally formed field of hooks; and

FIG. 11A and FIG. 11B are schematic
30 representations of the insert for use in the mold block for integrally forming the field of hooks.

2105679

-7-

DETAILED DESCRIPTION OF THE DRAWINGS

While the novel field of hooks disclosed hereafter could be used with any injection-molded device, it will be described herein as used with an orthopedic device, but it is to be understood that the invention is not to be so limited.

Turning now to FIG. 1, a front view of the orthopedic device 10 of the present invention, which, in its preferred form, comprises an ankle brace. The orthopedic device 10 is normally fitted about the lower leg and ankle of a human to provide support thereto. Orthopedic device 10 comprises a portion or wall 20 generally of a one-piece construction. The wall 20 extends longitudinally and has an arcuate transverse cross-sectional shape 30 sufficient to conform generally to the circumferential contour of the lower leg and ankle. In addition, the width of each wall 20 portion gradually tapers from a minimum, where it fits below the ankle, to a maximum at approximately the halfway point of its longitudinal extent and then extends at a substantially constant width to the remotely extending upper edge thereof.

In order to maintain the orthopedic device 10 in proper fitting engagement about the lower extremity, at least one longitudinally spaced, circumferentially extending strap loop 40 is provided. Preferably, the strap is of the well-known woven fabric construction sold under the trademark VELCRO and is adapted to cooperate with the circumferentially spaced hooks 50 having the novel type hooks thereon with the hooks being formed in predetermined areas of the orthopedic device 10 during the injection-molding process.

Although the formed field of hooks may be located in any position during the injection-molding process, as

2105679

-8-

shown in FIG. 1, with respect to strap loop 40, one end of the strap loop is adapted to releasably engage the hooks 50 so that the strap loop 40 may then be drawn and tensioned snugly against the exterior of the wall 20 in a circumferential manner, to provide support to the lower leg and ankle.

Turning to FIG. 2, a side view of the orthopedic device 10 therein shows more clearly that the hooks 50 are integrally formed with the orthopedic device 10 during the injection-molding process. The hooks 50 may be integrally formed with the wall 20 at any predetermined area, including the arcuate area 30.

Turning now to FIG. 3, therein is a schematic representation of traditional VELCRO hooks 60 used in conventional attachments to prior orthopedic devices. The prior VELCRO hook 60, shown in FIG. 3, or a part of a large number of hooks on a predetermined surface area, in the past was either glued or stitched to the orthopedic device 10. Later, VELCRO became available with an adhesive backing, making it possible to peel off a liner paper from the predetermined surface area of hooks and stick it to the orthopedic shell. Additionally, such devices have been manufactured utilizing extrusion molding processes. The prior VELCRO hooks 60, as shown in FIG. 3, have a more downwardly extending area 70 than the hooks of the present invention. In addition, hook 60 has a larger radius and different geometry than that of the present invention.

FIG. 4 discloses the improved hooks 80 utilized in the orthopedic devices 10 of the present invention. The modified hooks 80 of FIG. 4 have a reduced radius and a different geometry than prior hook 60 in order to promote the ejection of the hooks during the injection-molding process yet still end up with a part that provides the desired fastening function.

Note that the exiting area 85 of hook 80 in FIG. 4 is less than that of area 70 of hook 60 in FIG. 3. It will be understood that the hook 80 of the present invention momentarily straightens after injection molding and then returns to the shape shown in FIG. 5. The hooks 80 of the present invention are made of a material that, during the injection-molding process, is supple enough to bend, yet tenacious enough to snap back and regain its molded shape. Any rigid or brittle materials would not allow the hooks 80 to bend and snap back during the injection-molding process. Such rigid or brittle materials would simply break off. On the other hand, too soft a material would lack the structural rigidity required for the hooks 80 to function as a fastener. During the injection-molding process, it is necessary for the hooks 80 to momentarily partially straighten out as the part is being pushed off the mold. In less than one second, the hooks spring back to their molded curved shape. Some deformation of the hooks 80, however, is inevitable due to the stresses occurring during ejection while the material is still hot.

In the preferred embodiment of the invention, the hooks are molded from a polypropylene. The preferred polypropylene consists of an unfilled polyester blend that is 50% homopolymer and 50% copolymer having a melt-flow index from 150° to 175°C and a flex modulus from 130,000 to 200,000 psi. One such homopolymer with the correct physical characteristics is commercially available from Shell Corporation having part No. 5820. One such copolymer having the physical characteristics is commercially available from the Shell Corporation as part No. 7522.

FIGS. 6, 7 and 8 illustrate the plates utilized to form the hooks 80 during the injection-molding process. FIG. 6 shows that the hooks 80 are cut in each of the

CANCELLED

-9-

Note that the exiting area 85 of hook 80 in FIG. 4 is less than that of area 70 of hook 60 in FIG. 3. As illustrated in FIG. 5, it can be seen that the hook 80 of the present invention momentarily straightens after
5 injection molding. The hooks 80 of the present invention are made of a material that, during the injection-molding process, is supple enough to bend, yet tenacious enough to snap back and regain its molded shape. Any rigid or brittle materials would not allow the hooks 80 to bend and
10 snap back during the injection-molding process. Such rigid or brittle materials would simply break off. On the other hand, too soft a material would lack the structural rigidity required for the hooks 80 to function as a fastener. During the injection-molding process, it is
15 necessary for the hooks 80 to momentarily partially straighten out as the part is being pushed off the mold. In less than one second, the hooks spring back to their molded curved shape. Some deformation of the hooks 80, however, is inevitable due to the stresses occurring
20 during ejection while the material is still hot.

In the preferred embodiment of the invention, the hooks are molded from a polypropylene. The preferred polypropylene consists of an unfilled polyester blend that is 50% homopolymer and 50% copolymer having a melt-flow
25 index from 150° to 175°C and a flex modulus from 130,000 to 200,000 psi. One such homopolymer with the correct physical characteristics is commercially available from Shell Corporation having part No. 5820. One such copolymer having the physical characteristics is
30 commercially available from the Shell Corporation as part No. 7522.

FIGS. 6, 7 and 8 illustrate the plates utilized to form the hooks 80 during the injection-molding process. FIG. 6 shows that the hooks 80 are cut in each of the

CANCELLED

2105679

stacked plates 90. FIG. 6 further illustrates that a series of hooks 80 are utilized in the mold. FIG. 7 illustrates that the plates 90 containing the hooks 80 are alternated with plates 100 normally called spacers. The plates have a width of approximately 0.0156 inches and the spacers have a width of approximately 0.0312 inches. The height, h, of the spacers and plates shown in the example in FIG. 7 is illustrated in the chart associated with FIG. 7. As illustrated in FIG. 8, the hook plates 90 are separated by the spacers 100 and alternated in direction to create a more aggressive matrix than if all the hooks 80 faced the same way. Spacing of the plates 90 and 100 also allows the extraneous gases to escape during the injection-molding process. These plates may be adjusted in length as shown in FIG. 7 to produce the hooks on a curved surface such as surface 30 in FIGS. 1 and 2. FIG. 9 is a perspective view of the novel field of hooks illustrating the alternating hook direction in alternate rows of plates 90.

A schematic representation of a mold block for an injection-molding machine is illustrated in FIG. 10. The mold block is in two sections, 102 and 104. Each of the blocks 102 and 104 has one half 106 and 108 of the shape of the orthopedic device shown in FIG. 1. The blocks 102 and 104 are brought together in liquid tight relationship in a well-known manner and the liquid plastic is injected into the cavity formed by sections 102 and 104 under pressure through orifice 110 to fill every portion of the cavity including the hook areas 80 in each plate 90.

A recess 112 is formed in the mold block for receiving an insert 114, shown in FIG. 11A schematically, and which has the plates 90 and spacers 100 with the design and function described earlier. The plates may be adjusted in height and curvature with respect to each other to form any desired curved shape as shown in FIG. 11B.

-11-

Thus, there has been disclosed a novel orthopedic device and method for making the same wherein the orthopedic device has a field of injection-molded hooks integrally formed in any predetermined area on the device to receive loops on a strap for releasably engaging the straps. The field of hooks comprises spaced rows of hooks with adjacent rows of hooks facing in opposite directions. The novel hooks have a radius such that the shear force required to release the attached strap loops is substantially greater than the tension force required to release the strap loops. The thermoplastic material used for injection-molding the integrally-formed hooks, preferably polypropylene, has a memory sufficient to cause the hooks to return substantially to their original positions after being removed from the mold and sufficient flexibility to allow the hooks to bend during removal from the mold and during release of the attached strap loops. The polypropylene is an unfilled polyester blend of 50% homopolymer and 50% copolymer having a melt flow index from 150°C to 175°C and a flex modular from 130,000 to 200,000 psi. The novel method comprises the steps of injection-molding a plastic device and simultaneously integrally forming a field of hooks in at least one predetermined area on the device during the injection molding.

The novel apparatus for use in an injection-molding machine and disclosed herein comprises an injection mold for forming a thermoplastic device, a recess in at least one predetermined area of the mold and an insert in the recess for simultaneously and integrally forming a field of injection-molded hooks which can be used as attachment hooks.

The foregoing specification describes only the embodiment of the invention shown and/or described. Other

2105679

-12-

embodiments may be articulated as well. The terms and expressions used, therefore, serve only to describe the invention by example and not to limit the invention. It is expected that others will perceive differences which, while different from the foregoing, do not depart from the scope of the invention herein described and claimed. In particular, any of the specific constructional elements described may be replaced by any other known element having equivalent function.

10

15

20

25

30

- 13 -

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A thermoplastic device having hooks which are adapted
5 to be releasably attachable to at least one associated
cooperative loop-bearing member, the device comprising:
at least one essentially rigid wall portion, there
being on said wall portion,
a field of hooks on a predetermined area thereof for
10 cooperation in use with said loop-bearing members,
said predetermined area being substantially less than
the total area of the wall portion,
characterised in that the device is a one-piece
injection-molded device formed of a thermoplastic material
15 having a memory sufficient to cause the hooks to return
substantially to their original position after being
removed from the mold and sufficient flexibility to allow
the hooks to bend during removal from the mold and during
release of the attached loop-bearing members,
20 said device being obtained by an injection molding
process in which the wall portion and hooks are
simultaneously and integrally formed, and
said hooks having a geometry of a radius and a length
permitting ejection thereof from the mold during the
25 injection-molding process as well as having an effective
fastening function.
2. A device in accordance with claim 1 wherein the field
of hooks comprises spaced rows of hooks with adjacent rows
30 of hooks facing in opposition directions.
3. A device in accordance with claim 1 or claim 2,
wherein the hooks have a radius such that the shear force
required to release the attached loop-bearing members is
35 substantially greater than the tension force required to
release the loop-bearing members.

- 14 -

4. A device in accordance with any one of claims 1 to 3 wherein the thermoplastic material is a polypropylene.

5. A device in accordance with claim 4 wherein the
5 polypropylene is an unfilled blend of 50% homopolymer and 50% copolymer having a melting temperature from 150°C to 175°C and a flex modulus from 130,000 to 200,000 psi (896×10^6 to 1379×10^6 Pa).

10 6. A device as in any one of claims 1 to 5 wherein the device is an orthopaedic device.

7. A device as in claim 6 further comprising:
said wall portion having an arcuate transverse cross-
15 sectional shape sufficient to conform generally to the circumferential contour of the inner and outer side of a lower leg and ankle; and
said associated cooperative loop-bearing members
releasably engaging the field of hooks to hold the wall
20 against the inner or outer side of the lower leg and ankle.

8. A device in accordance with claim 7 wherein the field of hooks is integrally formed on the arcuate shape.

25 9. A method of forming a thermoplastic device having hooks which are adapted to be releasably attachable to at least one associated cooperative loop-bearing member, and at least one essentially rigid wall portion, comprising the steps of:
30 injection-molding the thermoplastic device in a mold; and simultaneously integrally forming a field of said hooks in at least one predetermined area on the wall portion during the injection-molding, thereby said hooks being formed to have a geometry of a radius and a length
35 permitting ejection thereof from the molds during injection-molding process as well as having an effective fastening function,

- 15 -

said device being formed of a thermoplastic material having a memory sufficient to cause the hooks to return substantially to their original position after being removed from the mold and sufficient flexibility to allow the hooks to bend during removal from the mold and during release of the attached loop-bearing members, and

said predetermined area of the wall portion being substantially less than the total area of the wall portion.

10 10. A method in accordance with claim 9 wherein the step of forming the field of hooks further comprises the step of injection-molding the field of hooks in spaced rows with adjacent rows of hooks facing in opposition directions.

15 11. A method in accordance with claim 9 or claim 10 wherein the step of forming the field of hooks further comprises the step of forming each of the hooks with a radius such that the shear force required to release the attached loop-bearing members is substantially greater than
20 the tension force to release the loop-bearing members.

12. A method in accordance with any one of claims 9 to 11 wherein the thermoplastic material used during the injection-molding step is polypropylene.

25 13. A method in accordance with claim 12 wherein the polypropylene is an unfilled blend of 50% homopolymer and 50% copolymer having a melting temperature from 150°C to 175°C and a flex modulus from 130,000 to 200,000 psi (896 x
30 10^6 to 1379 x 10^6 Pa).

14. A method as in any one of claims 9 to 13 wherein the injection-molding step comprises injection-molding a thermoplastic orthopaedic device.

35 15. A method as in claim 14 further including: the steps of forming the orthopaedic device with an arcuate cross-

- 16 -

sectional shape to conform generally to the circumferential contour of the inner and outer side of a lower leg and ankle.

5 16. A method as in claim 15 further including the step of integrally forming the field of hooks on the arcuate shape.

10 17. A method in accordance with claim 9 wherein the forming of the field of hooks further comprises the steps of:

forming arcuate sections on an injection-molded thermoplastic device to conform generally to the circumferential contour of the inner or outer side of a lower leg and ankle; and

integrally forming the field of hooks on any desired portion of the thermoplastic device, including the arcuate sections.

20 18. A mold apparatus for use in an injection-molding machine comprising:

a mold for forming a unitary relatively rigid thermoplastic device, a recess being provided in at least one predetermined area of the mold; and

25 means in the recess for simultaneously and integrally forming a field of injection-molded hooks during the injection molding of the device,

said field of hooks having a length and a width, said field comprising hooks interspersed in both the length and the width of the field,

30 said hooks adapted for releasable attachment to an associated cooperative loop-bearing member,

said means having a plurality of hook-shaped cavities and being in unitary assembly during the injection molding of the device, and said means being maintained in unitary assembly during the removal of said injection-molded device having integrally formed hooks from said mold apparatus.

- 17 -

19. The apparatus as in claim 18 wherein the means in the recess for forming the injection-molded hooks further comprises:

5 a series of individual plates each having a row of hook-shaped cavities in an edge thereof; and

spacers separating adjacent plates and alternate plates having hook shaped cavities formed in opposite directions such that the field of hooks has alternate rows of hooks facing in opposite directions.

10

20. The apparatus as in claim 19 wherein the plates and spacers are adjusted to form a field of hooks arcuate in shape that conforms to an arcuate surface on the device.

15 21. The apparatus of claim 18 wherein said hook-shaped cavities are in spaced rows, said hook-shaped cavities each define at least one hook tip, and wherein at least some hook tips in a row face in a direction different from at least some hook tips in an adjacent row.

20

22. The apparatus of claim 21 wherein said hook-shaped cavities define single-tip hooks.

2105679

1/3

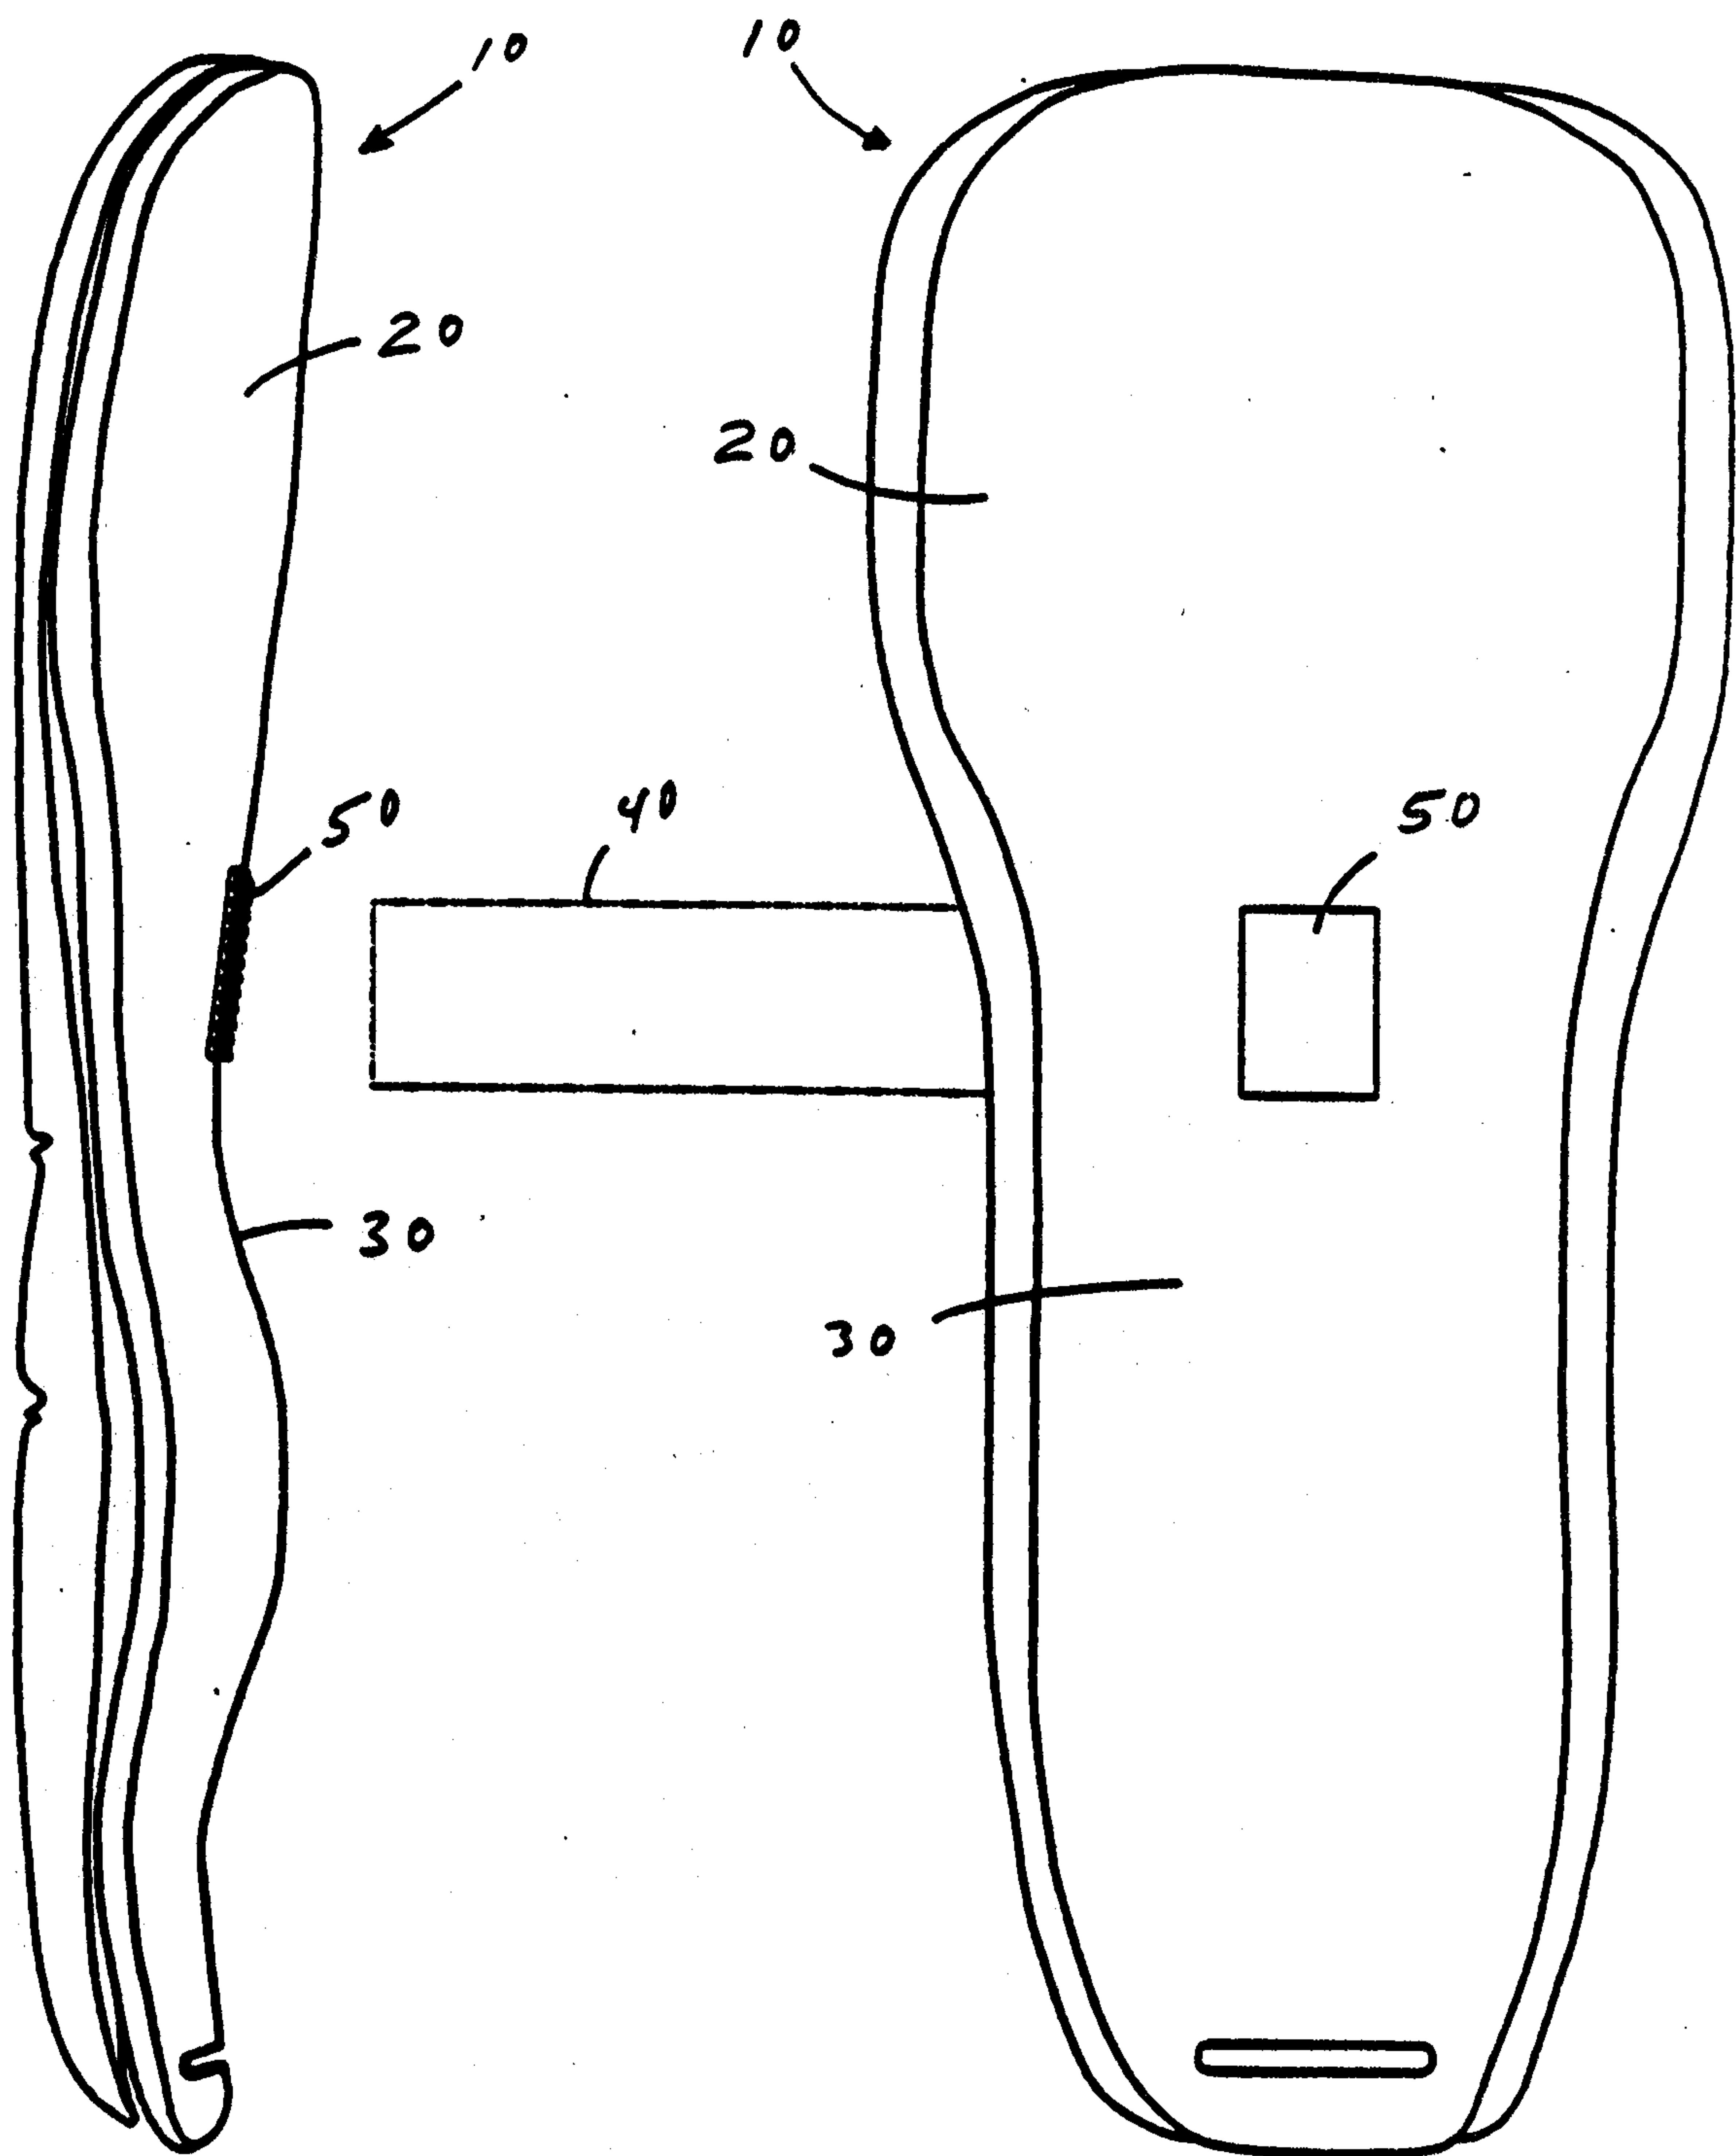


Fig. 2

Fig. 1

2105679

2/3

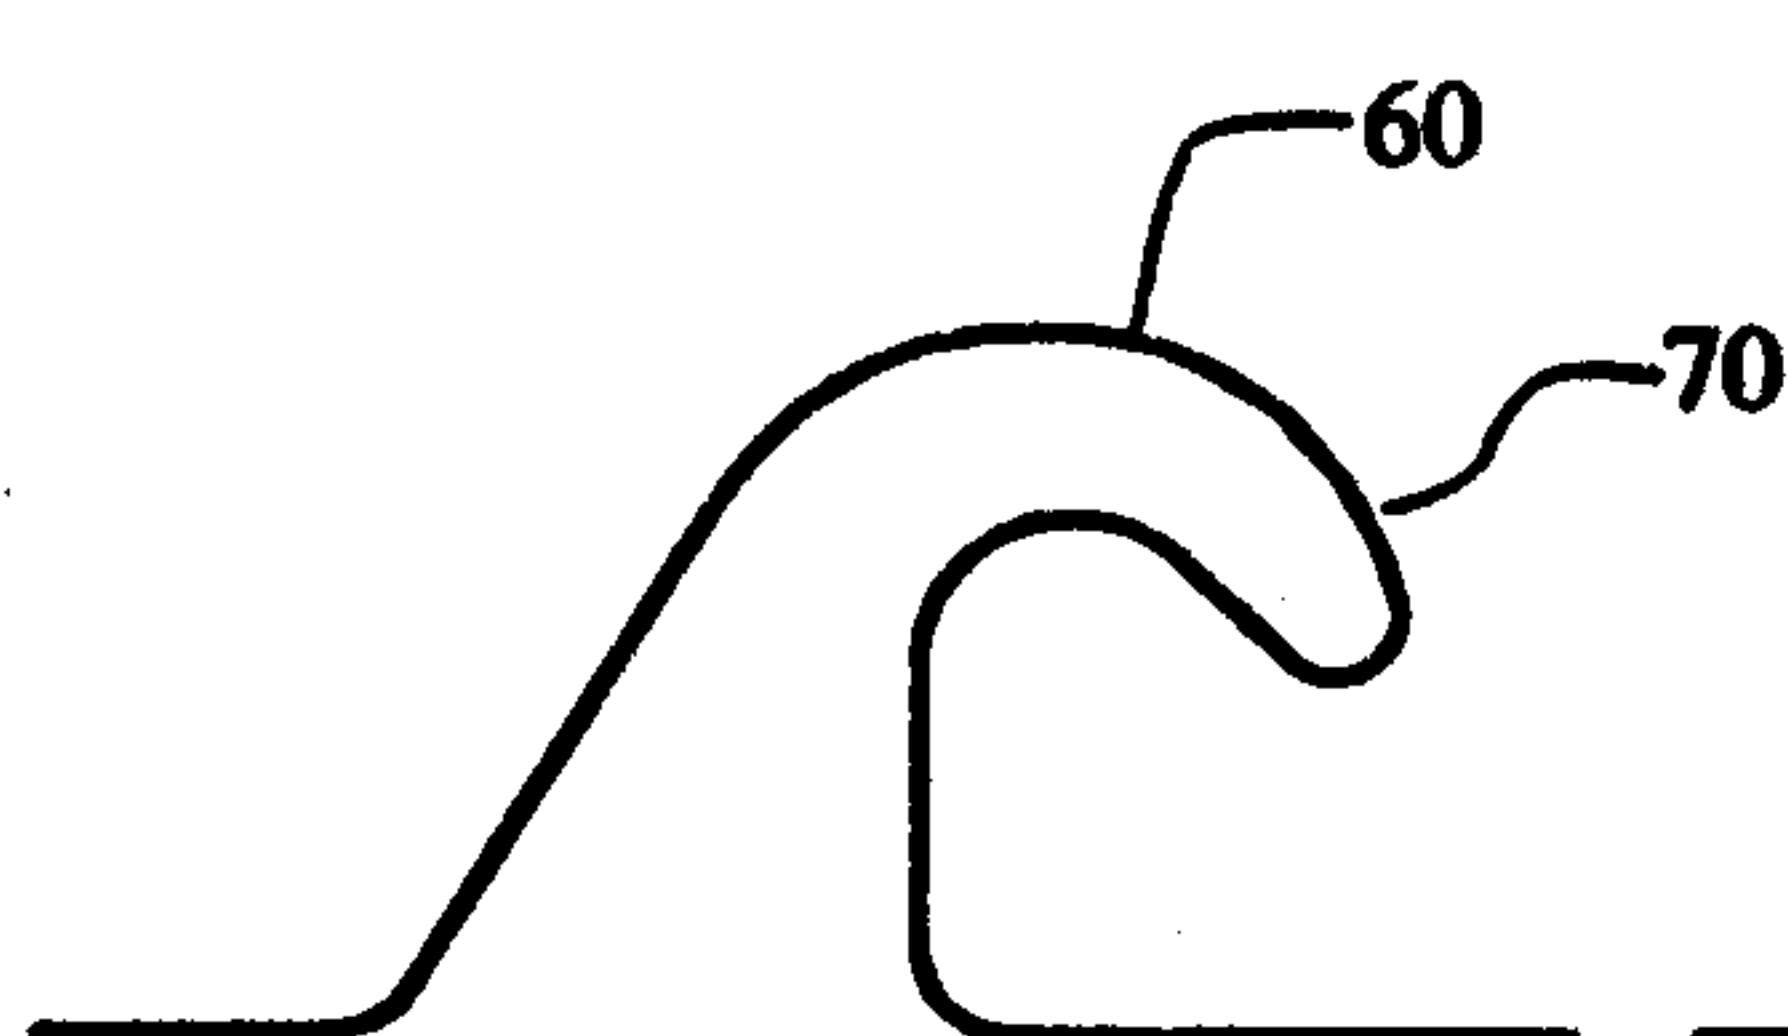


Fig. 3

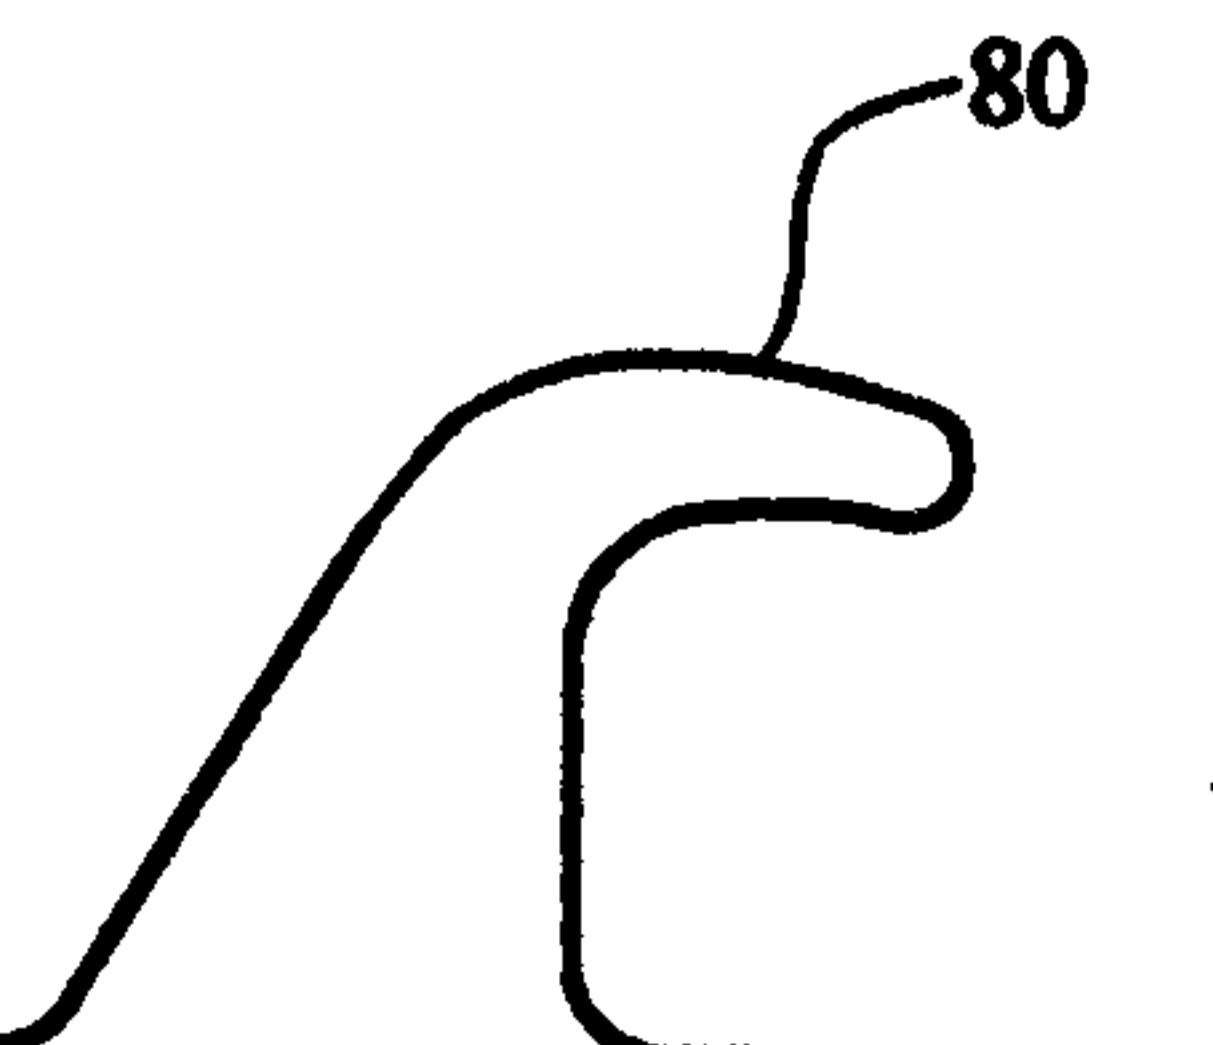


Fig. 5

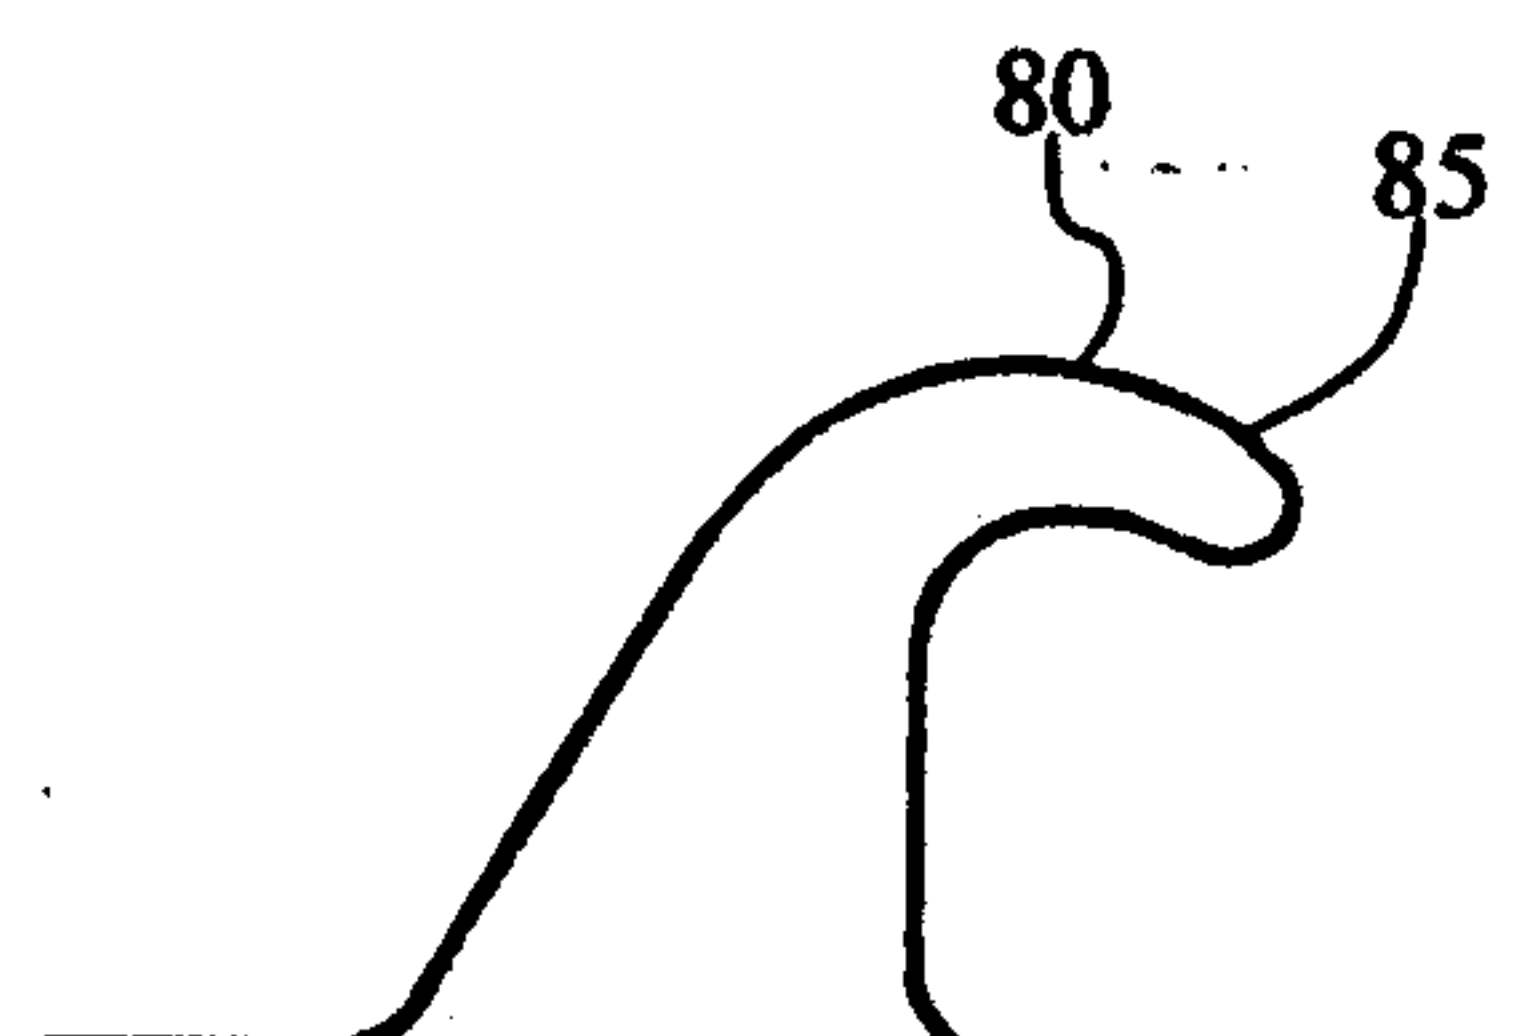


Fig. 4

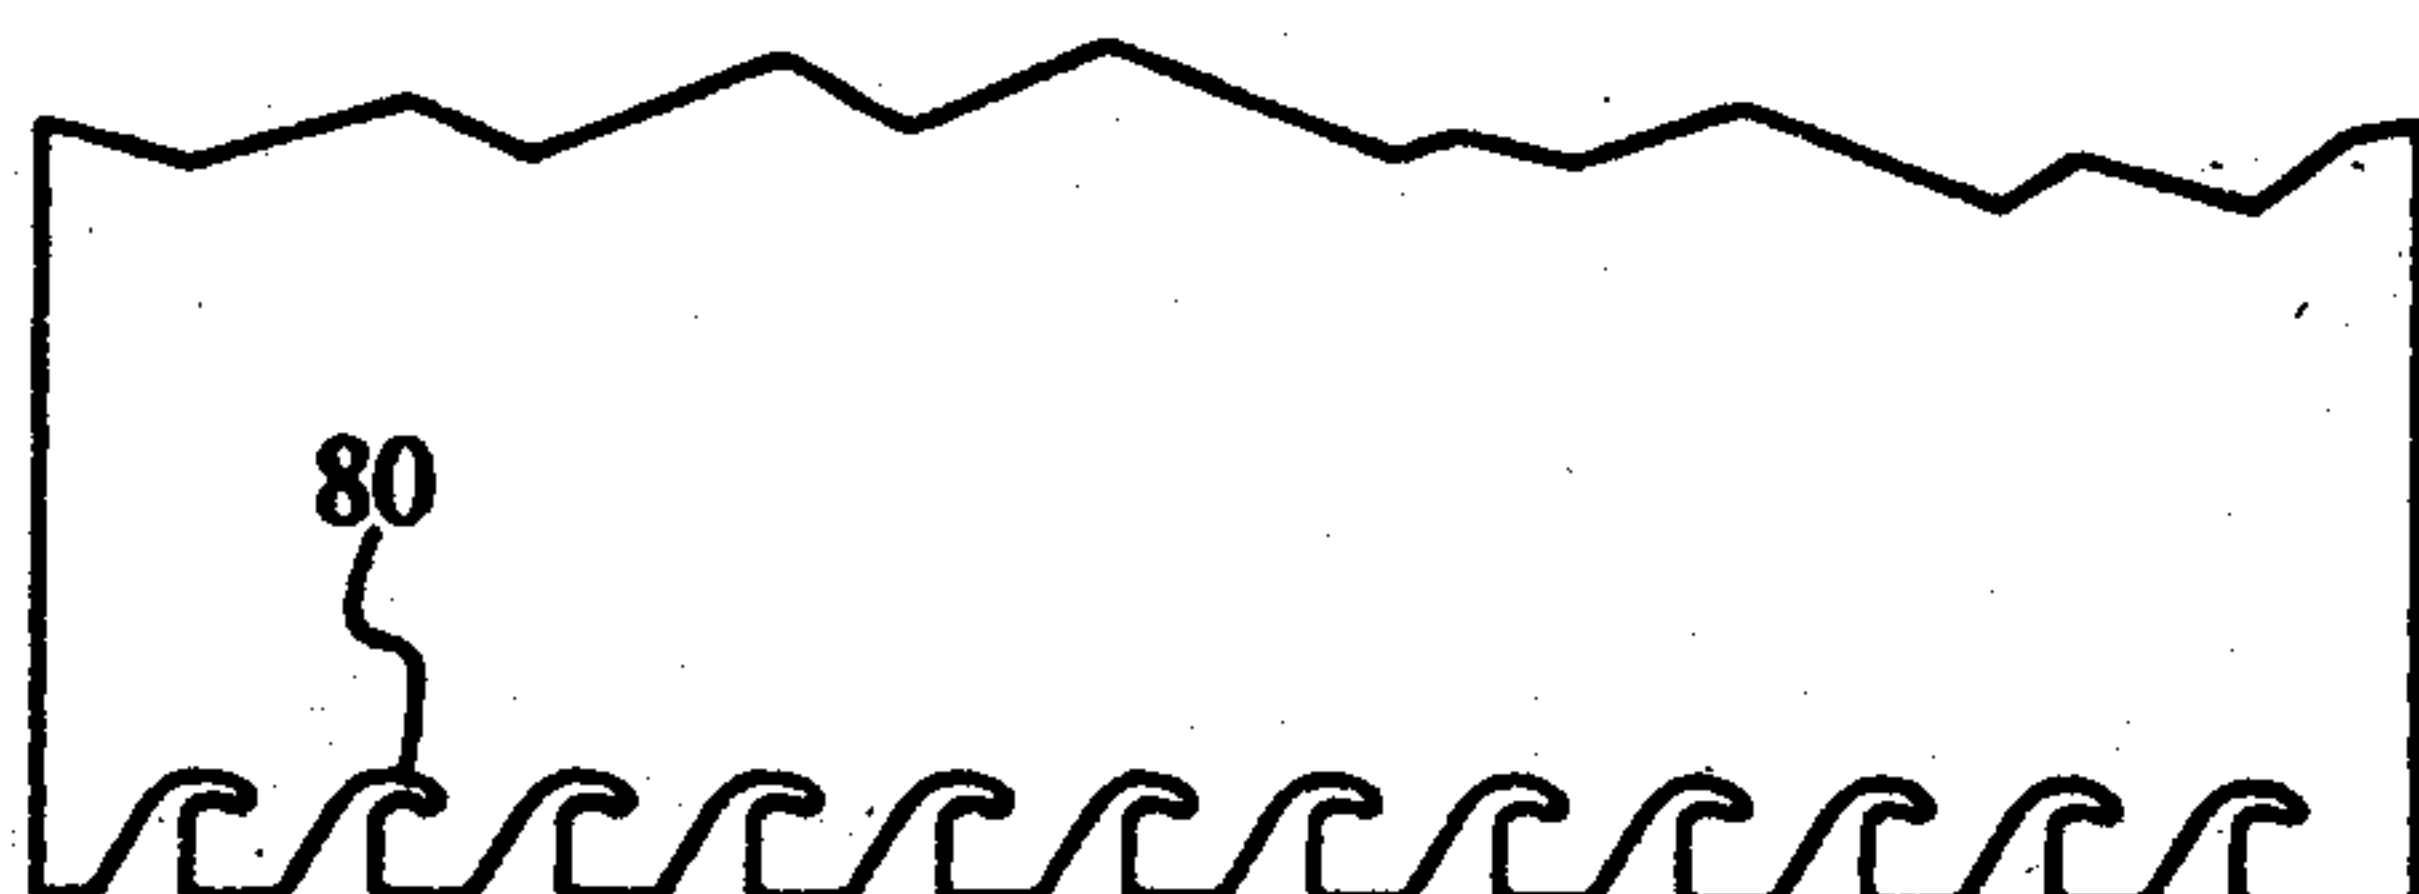


Fig. 6

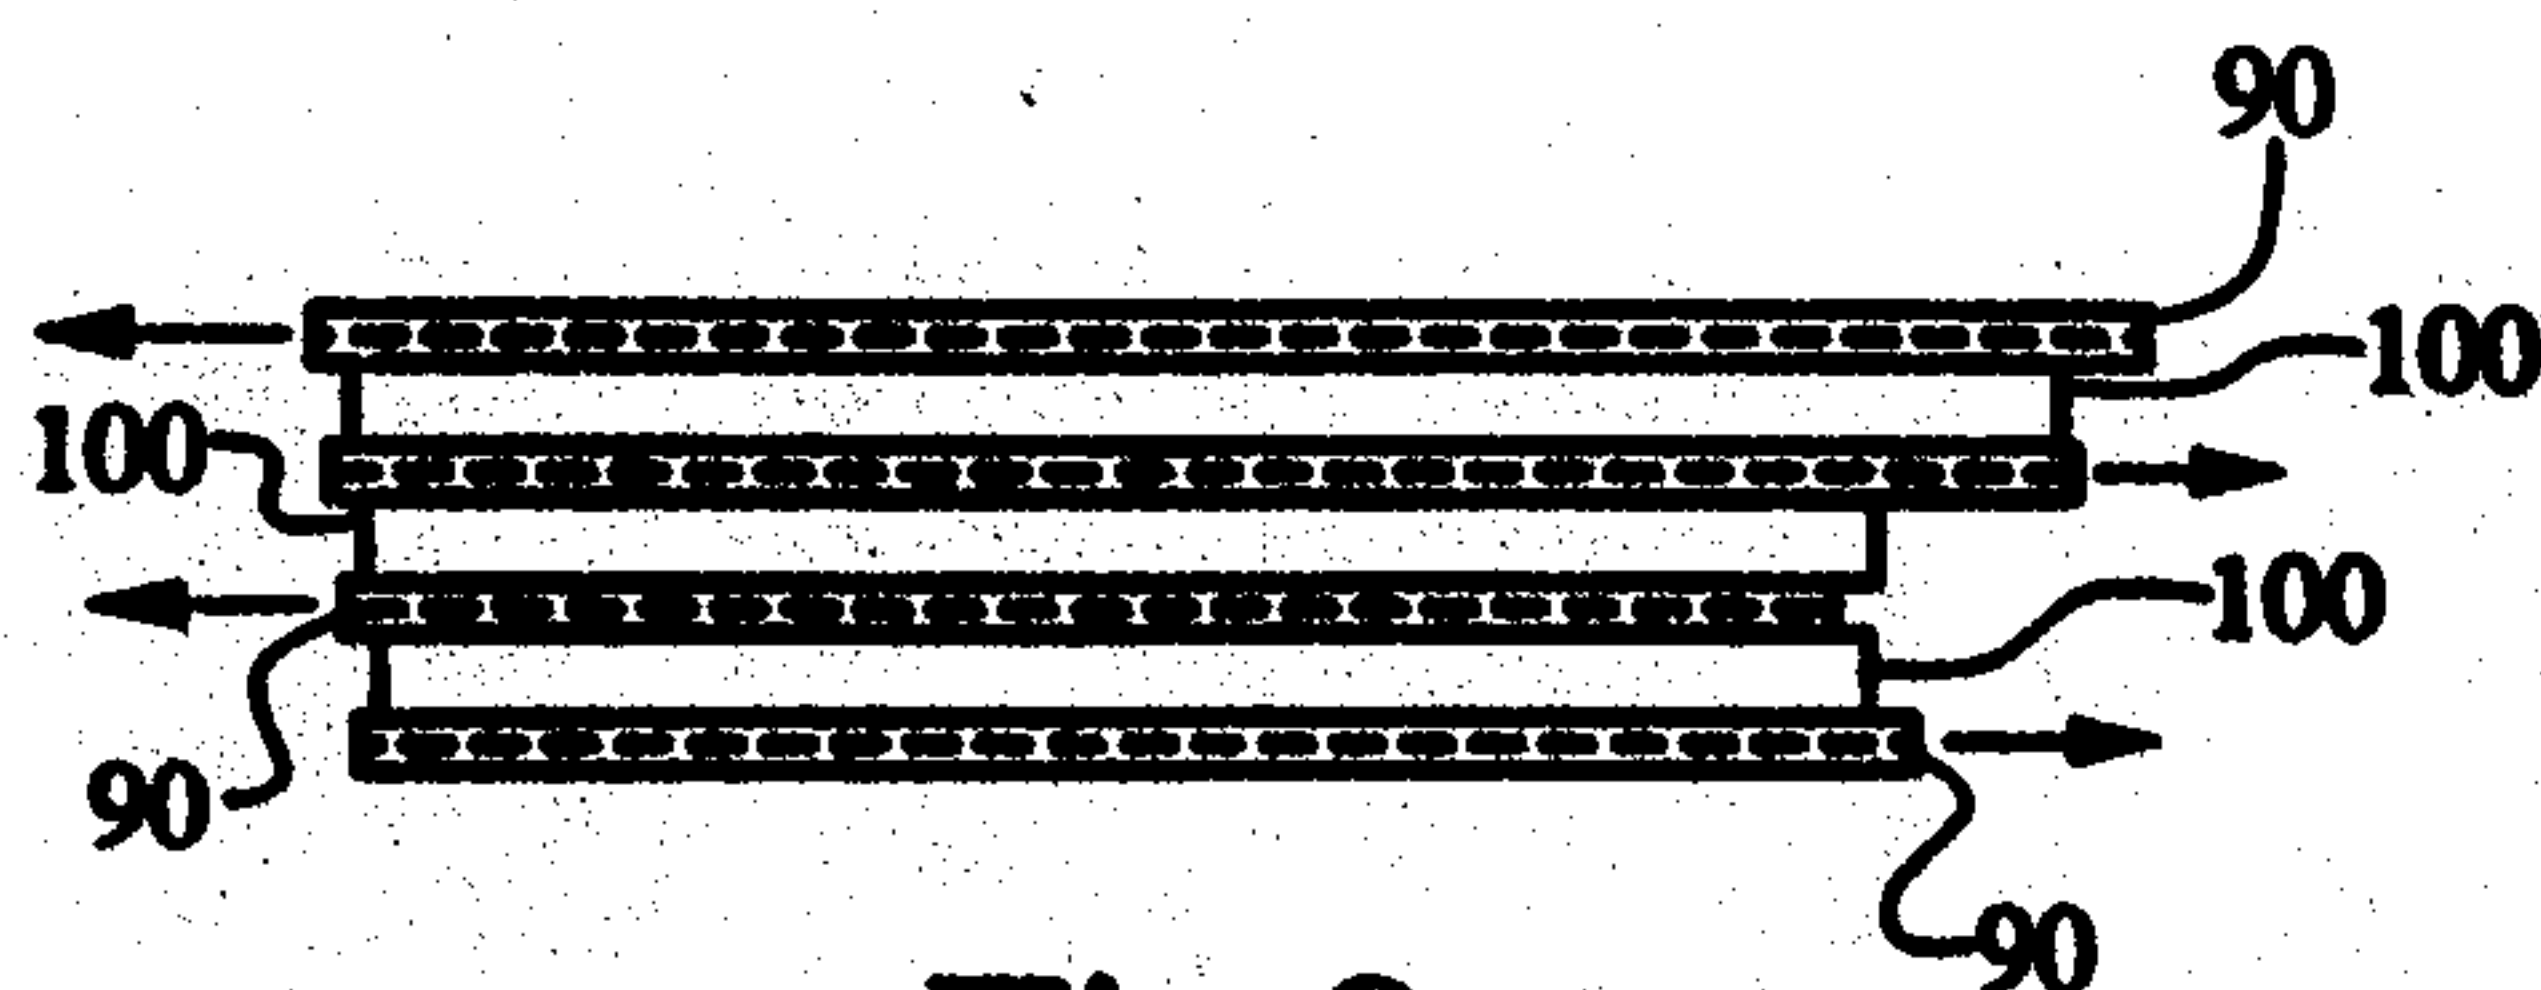


Fig. 8

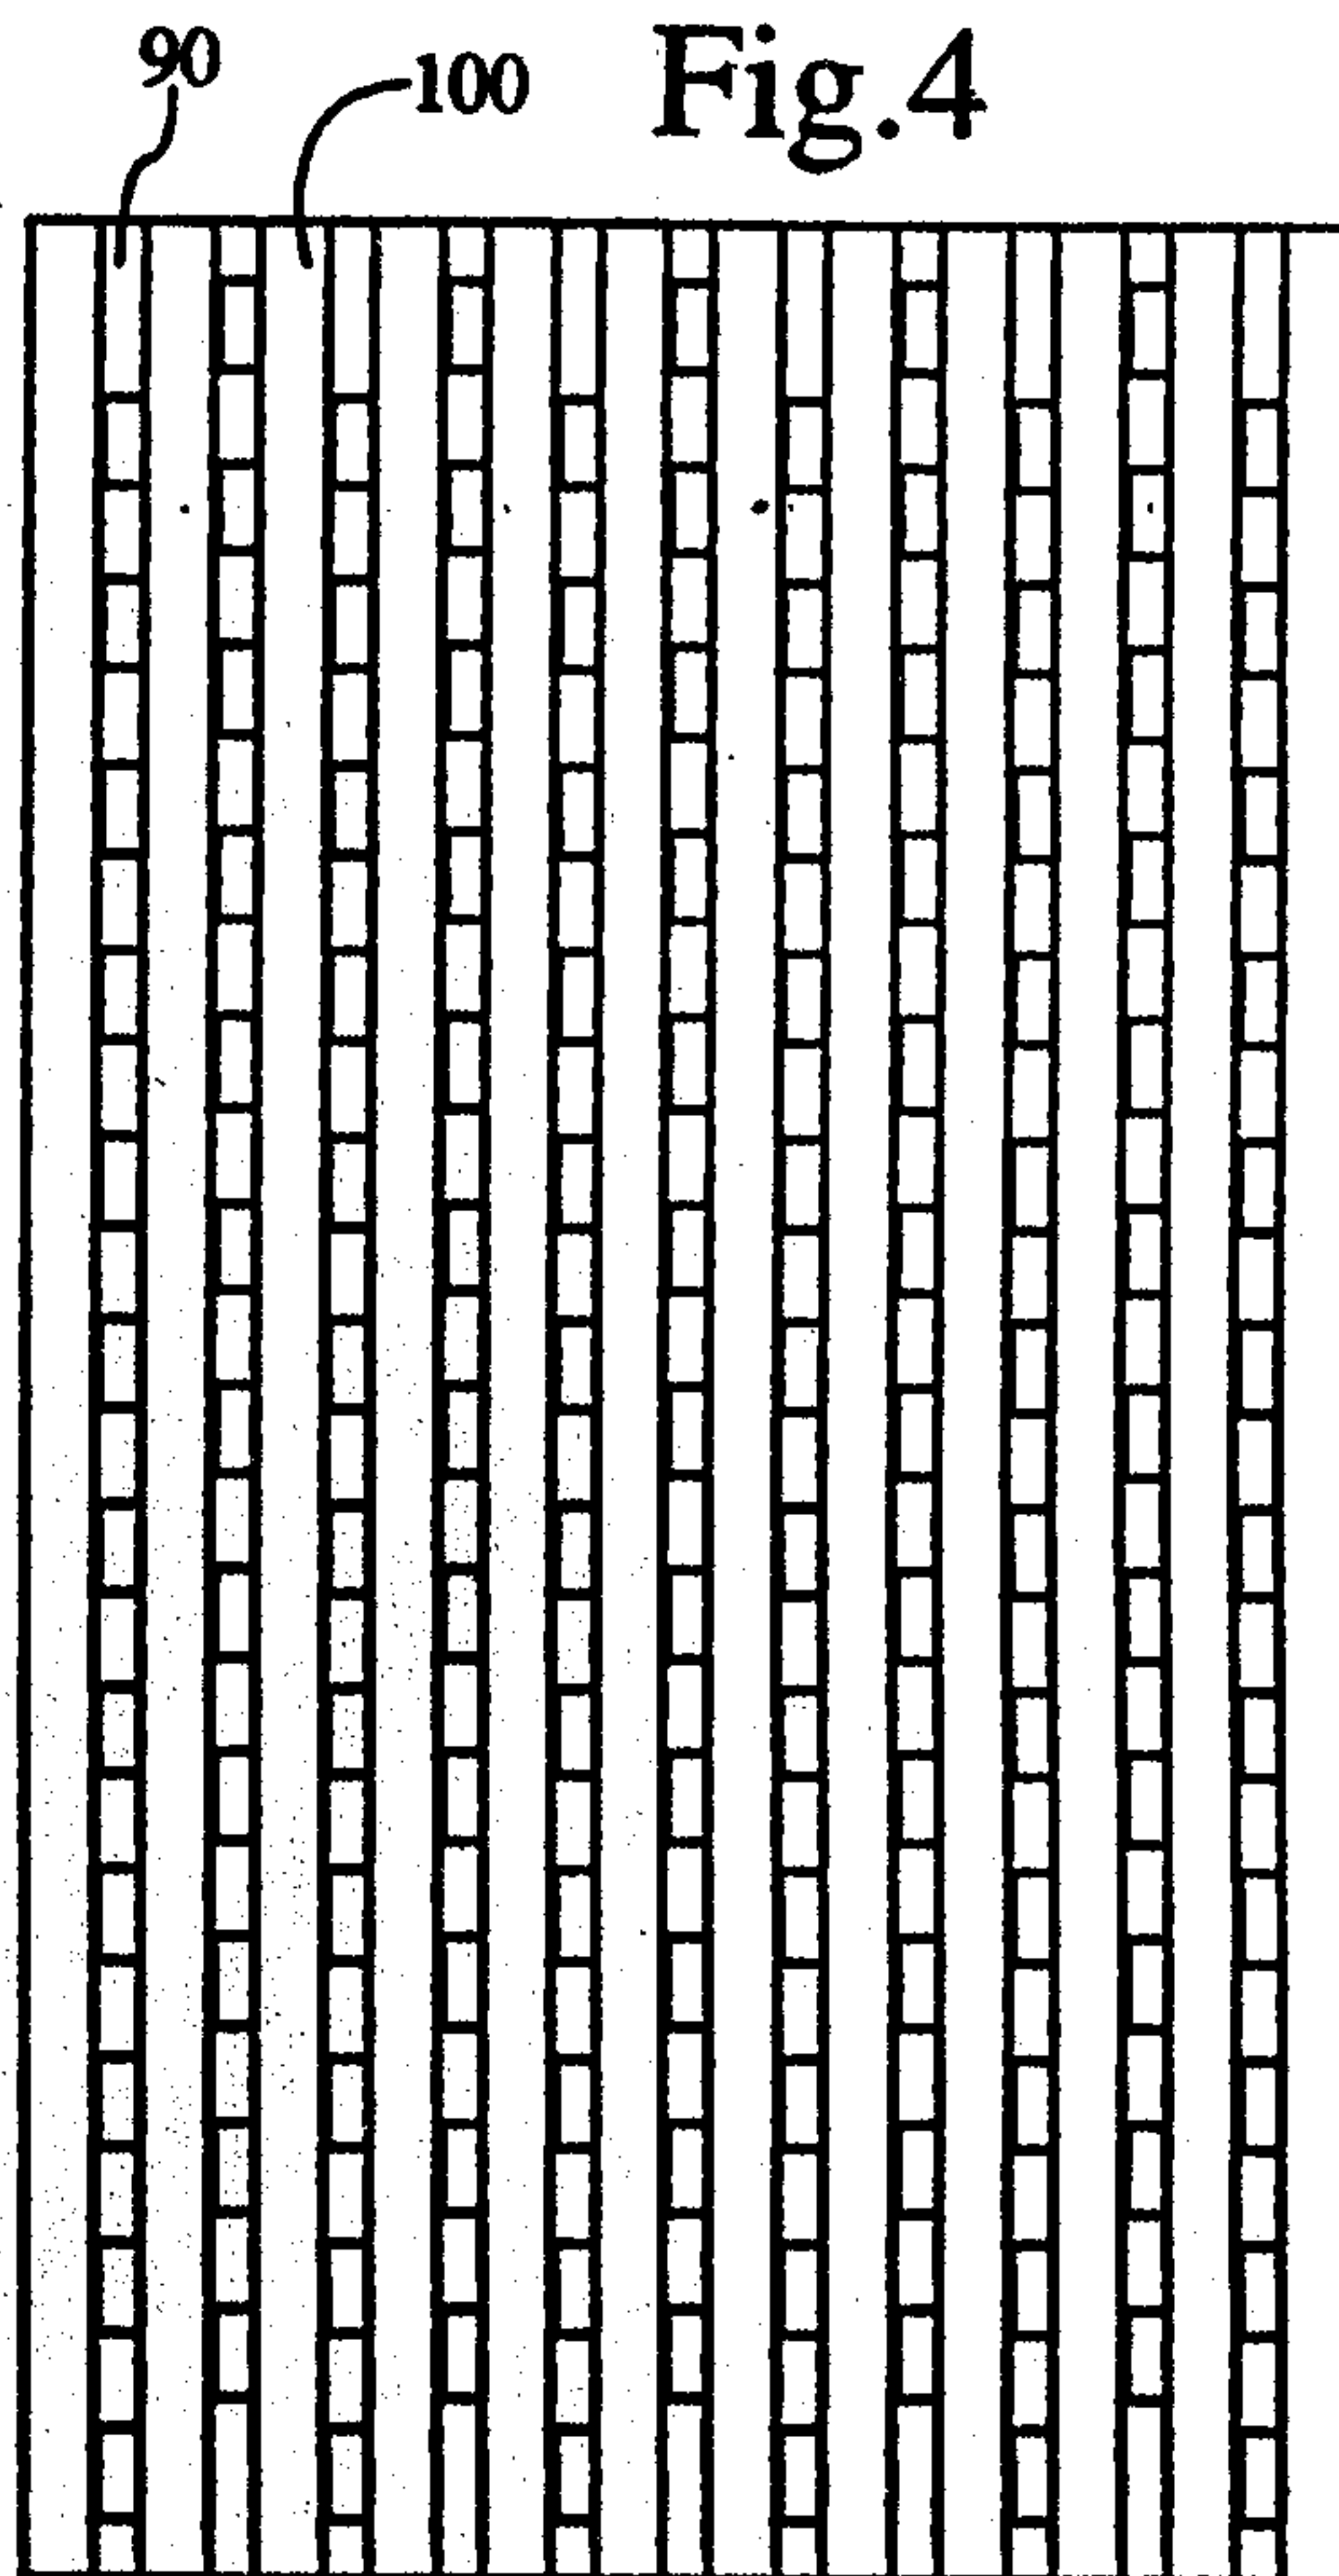


Fig. 7


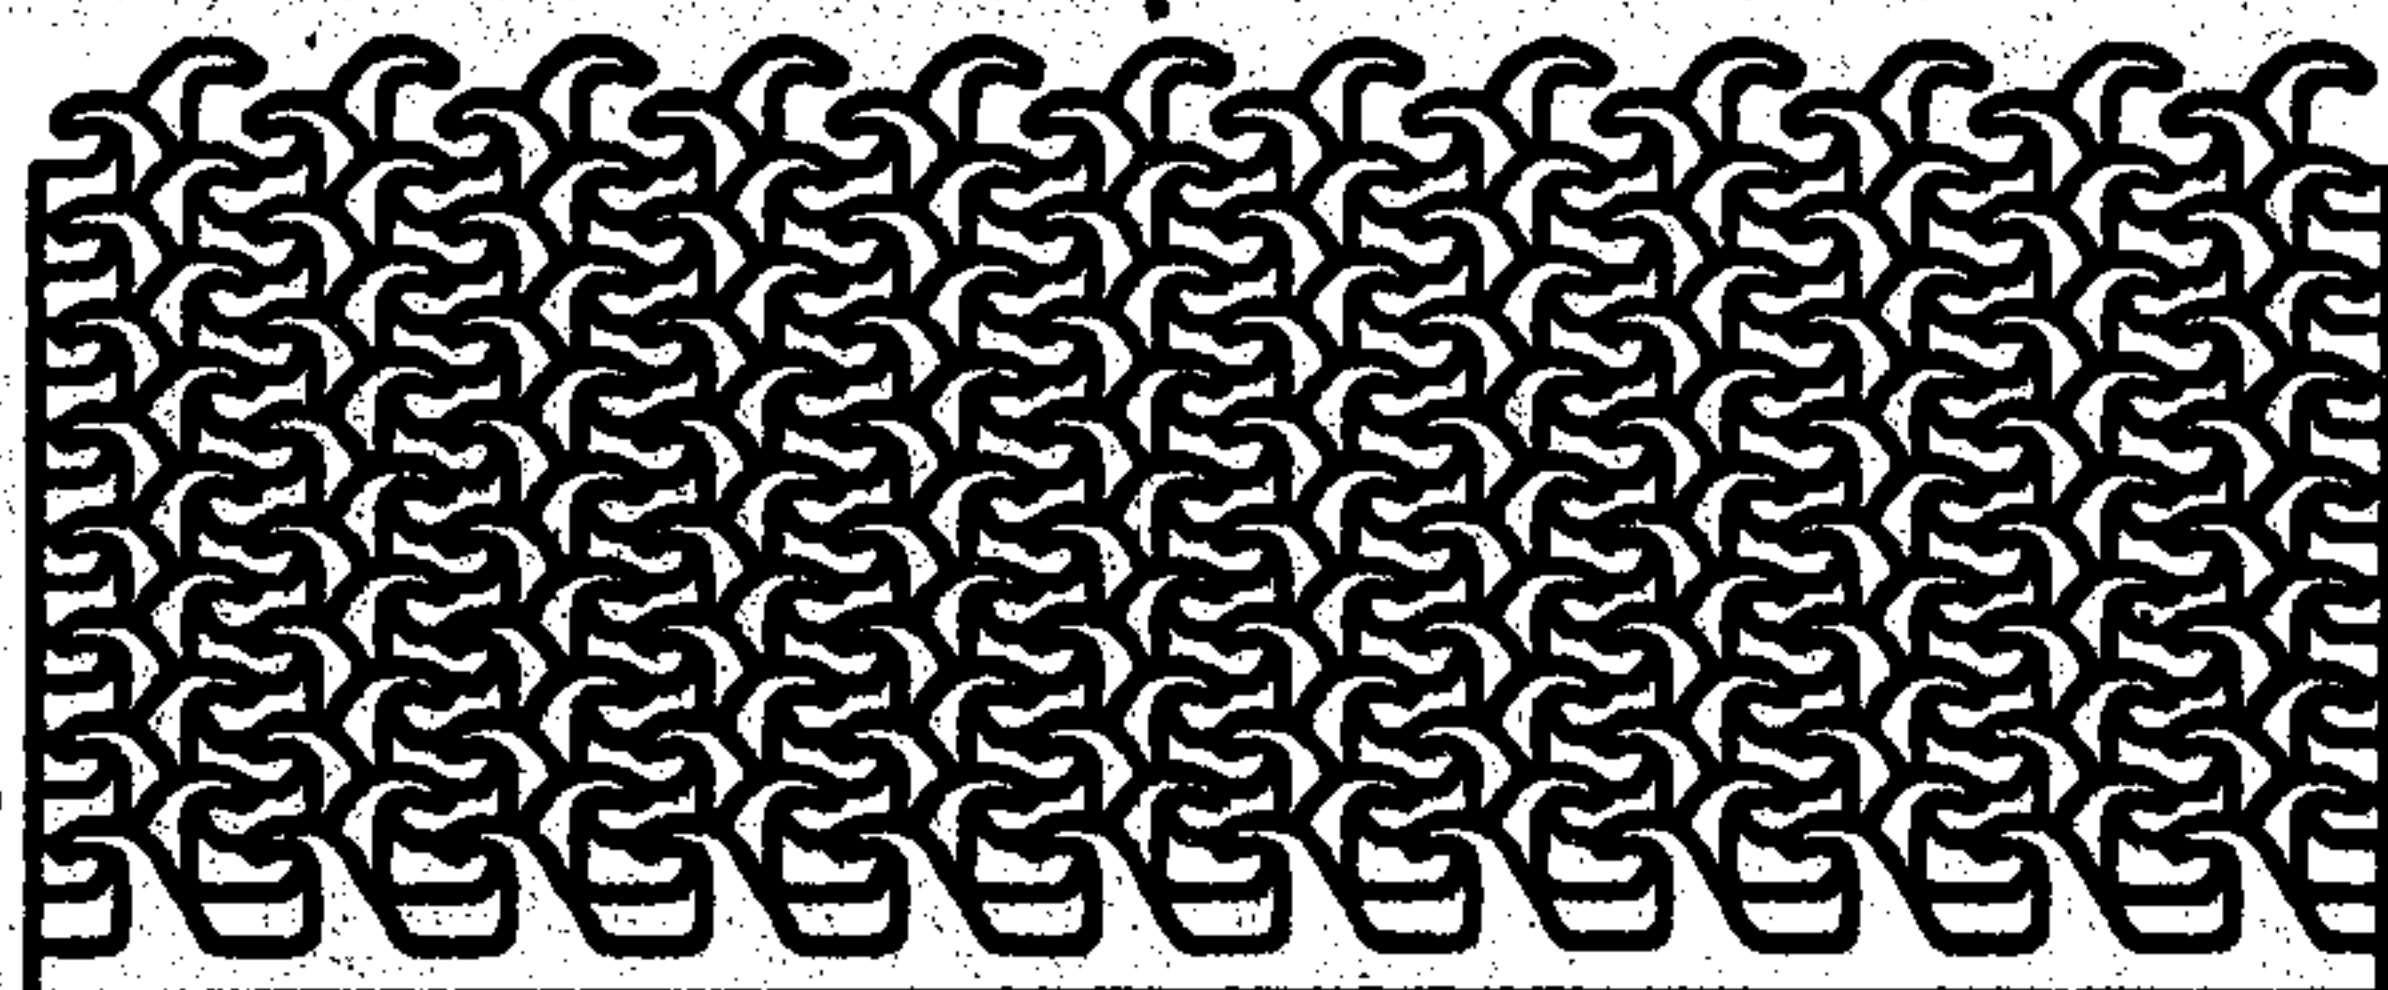


Fig. 9

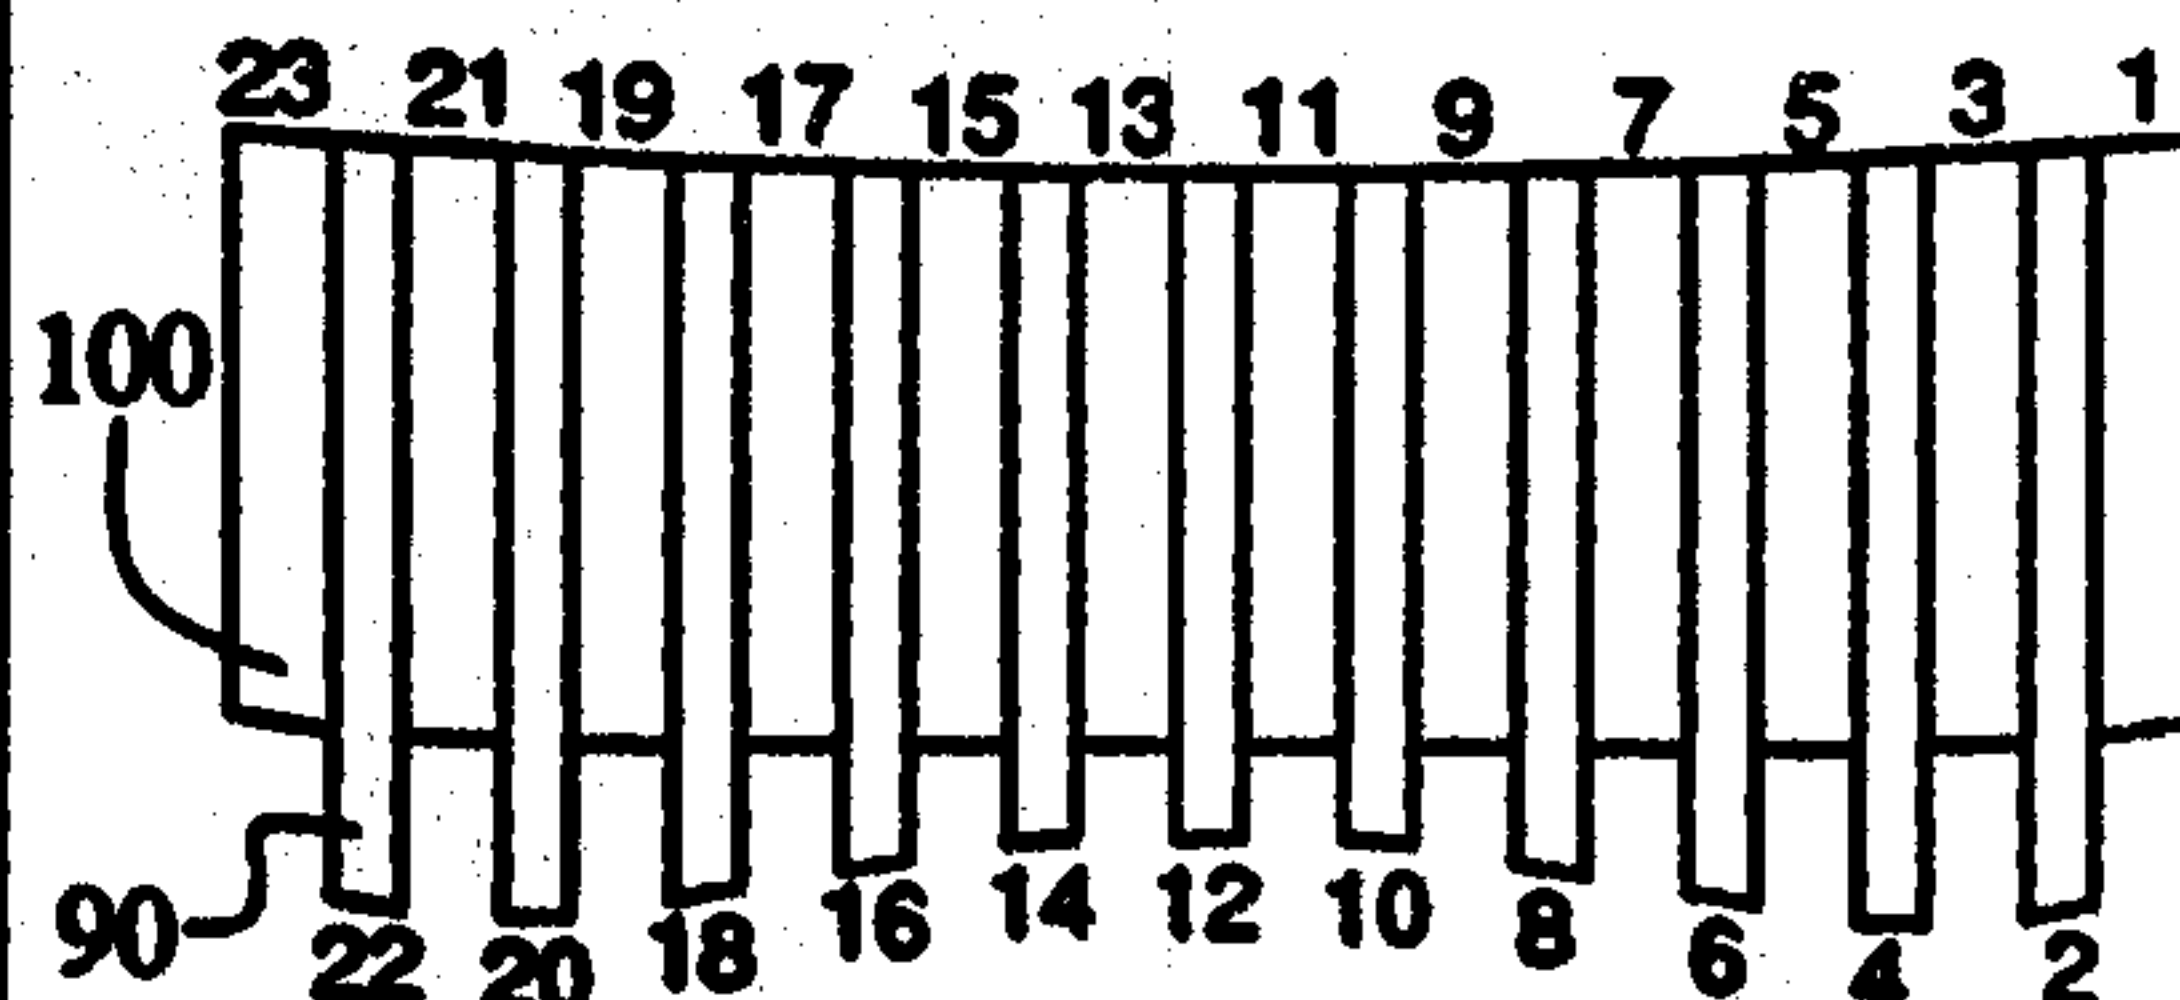

SPACERS	
NO.	H
1 & 23	.0014
3 & 21	.0053
5 & 19	.0083
7 & 17	.0106
9 & 15	.0121
11 & 13	.0129

HOOKS	
NO.	H
2 & 22	.0034
4 & 20	.0069
6 & 18	.0086
8 & 16	.0115
10 & 14	.0126
12	.013

2105679

3/3

