

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 January 2010 (07.01.2010)


(10) International Publication Number  
**WO 2010/002407 A1**

(51) International Patent Classification:  
*G06F 15/16* (2006.01)  
(21) International Application Number:  
PCT/US2008/069021  
(22) International Filing Date:  
2 July 2008 (02.07.2008)  
(25) Filing Language: English  
(26) Publication Language: English  
(71) Applicant (for all designated States except US):  
**HEWLETT-PACKARD DEVELOPMENT COMPAN-  
NY, L.P.** [US/US]; 11445 Compaq Center Drive West,  
Houston, TX 77070 (US).

(72) Inventors; and  
(75) Inventors/Applicants (for US only): **MCJILTON,  
Charles, M.** [US/US]; 1341 Lupine Ct., Longmont, Col-  
orado 80503 (US). **CESARIO, Paul, M.** [US/US]; 3404  
E. Harmony Rd., Ft. Collins, Colorado 80528-9544 (US).  
**HAINES, Matthew, D.** [US/US]; 3404 E. Harmony Rd.,  
Ft. Collins, Colorado 80528-9544 (US). **PETERSON,  
Eric** [US/US]; 3404 E. Harmony Rd., Ft. Collins, Col-  
orado 80528-9544 (US).  
(74) Agents: **HARTNETT, Clare, T.** et al.; Hewlett-Packard  
Company, Intellectual Property Administration, P.O Box  
272400, Mail Stop 35, Fort Collins, Colorado  
80527-2400 (US).  
(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,

[Continued on next page]

(54) Title: PERFORMING ADMINISTRATIVE TASKS ASSOCIATED WITH A NETWORK-ATTACHED STORAGE SYS-  
TEM AT A CLIENT

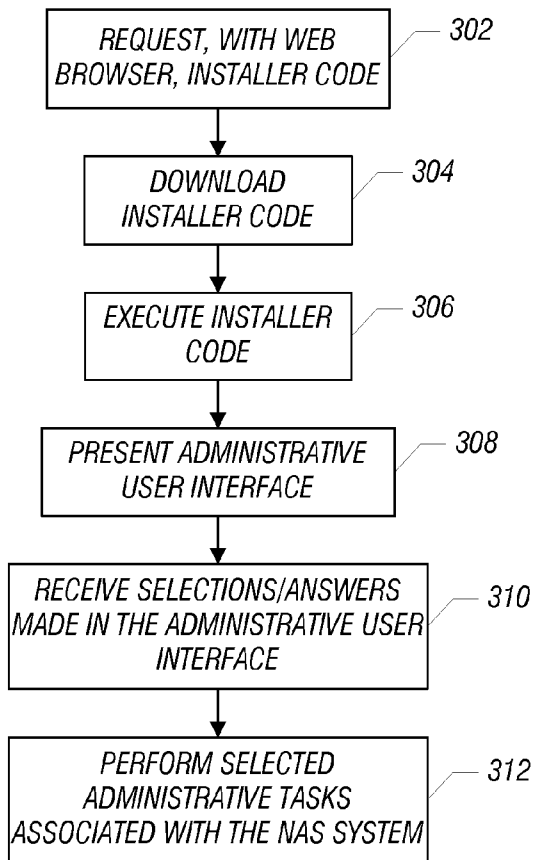

(57) Abstract: Installer code is received from a network attached storage (NAS) system at a client device. The installer code executing at the client device performs a selected subset of administrative tasks at the client device, where the administrative tasks are tasks associated with the NAS system.

**FIG. 3**

WO 2010/002407 A1

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

**(84) Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

**Published:**

- with international search report (Art. 21(3))

- 1 -

Performing Administrative Tasks Associated  
With A Network-Attached Storage System At A Client

Background

[0001] A network-attached storage (NAS) system is a system that can be attached to a network and that is specifically designed for data storage. Software residing on the NAS system usually provides functionality that is specific to data storage. Typically, the software on the NAS system does not include higher-level software such as database system management software, or other application software not specific to data storage.

[0002] Since a NAS system is typically dedicated to providing data storage, data storage performance can be enhanced since the NAS system does not have to be responsible for performing other types of processing. A NAS system is connected to a network to allow for host systems to access the NAS system. Moreover, a NAS system provides file-level data storage, rather than block-based data storage.

[0003] An enterprise (*e.g.*, company, educational facility, government entity) can often have a large number of client devices (*e.g.*, computers) that have to be configured to access NAS systems. Traditionally, a client install compact disk (CD) is provided to each client device to load NAS-related software onto the client device. Also, to properly install the NAS-related software, a network administrator typically has to perform the software installation. In a large enterprise that can have users located at many different geographic locations, installing NAS-related software at the client devices and setting up the client devices for NAS access can be time consuming and inefficient. Moreover, when installing NAS-related software, typically all software components on the client install CD are loaded onto the client device. Some of the software components loaded may never be used by a particular user, and therefore, installing such software components would be wasteful of resources at the client device.

Brief Description Of The Drawings

[0004] Some embodiments of the invention are described, by way of example, with respect to the following figures:

- 2 -

Fig. 1A is a block diagram of an exemplary arrangement including a network-attached storage (NAS) system that is accessible by client devices, in accordance with an embodiment;

Fig. 1B is a block diagram of another exemplary arrangement in which an embodiment of the invention can be incorporated;

Fig. 2 is a block diagram of components in a client device, according to an embodiment; and

Fig. 3 is a flow diagram of a process of performing administrative tasks associated with the NAS system at a client device, according to an embodiment.

#### Detailed Description

[0005] In accordance with some embodiments, a technique or mechanism is provided to enable efficient performance, at a client device, of administrative tasks associated with a network-attached storage (NAS) system. A NAS system refers to a file-level based storage system that has software (including an operating system and other software) that provides functionality related to data storage and data access, as well as functionality related to management of such data storage/access. The NAS system is connected to a network, such as a local area network (LAN), wide area network (WAN), or other type of network to enable client devices to access the NAS system. The operating system provided on a NAS system is typically a reduced functionality operating system (such as an embedded operating system) that enables file transfer (storage of files or access of files). Various operating systems have been specifically designed for use on NAS systems; each such operating system is referred to as a NAS OS.

[0006] To enhance performance of selected administrative tasks associated with a NAS system at a client device, the NAS system is provided with installer code that can be downloaded by a client device through a web browser. The NAS system has a web interface that allows for convenient access by a web browser of the client device. The installer code, once downloaded and executed at the client device, then is able to present a user interface, such as a graphical user interface (GUI), with various menu items and fields to allow a user to select administrative tasks associated with the NAS system to perform. In one example, a

- 3 -

series of questions can be provided in the GUI that the user can answer. Based on the answers provided by the user and/or based on other selections made by the user at the client device, the installer code at the client device will then perform selected administrative tasks.

[0007] The selected administrative tasks include setting up a user account at the NAS system, downloading selected software components (such as less than all of the software components associated with the NAS system) at the client, setting up shared folders at the NAS system, synchronizing user information between the client device and the NAS system, and so forth.

[0008] Fig. 1A illustrates an exemplary arrangement that includes a NAS system 100 connected to a network 102 (*e.g.*, LAN, WAN, etc.). Also connected to the network 102 are client devices 104, where the client devices 104 can be computers (desktop or notebook computers), personal digital assistants (PDAs), network appliances, and so forth. Although depicted as a single network, it is noted that network 102 can actually include multiple networks in some implementations. In fact, the network 102 can represent a collection of networks, with client devices connected to such collection of networks possibly located geographically far apart from each other. For example, Fig. 1B shows client devices 104A and 104B connected over a wired home network 158 and through a router 152 to a server 150, which can contain the NAS system 100 of Fig. 1A. A client device 104C is connected by a wireless link 154 to the router 152. Also, client devices 104D are connected over the Internet 156 and through the router 152 to the server 150.

[0009] The NAS system 100 of Fig. 1A includes a NAS device 106 (sometimes referred to as a NAS head) that is accessed by a client device 104 for storing or retrieving data contained in one or more storage devices 108 connected to the NAS device 106. The storage devices 108 can be disk-based storage devices or other types of storage devices.

[0010] The NAS device 106 contains a central processing unit (CPU) 110 and memory 112. In accordance with some embodiments, the memory 112 stores installer code 114 that can be downloaded to a client device 104 through a web interface 116 in the NAS device 106. For example, a user at the client device can simply type in a uniform resource locator (URL) at the client device to allow a web page containing a link to the installer code 114 to be presented at the client device 104. The memory 112 can be the local temporary or volatile

- 4 -

memory of the NAS device 106. Alternatively, instead of the installer code 114 being stored in the memory 112, the installer code 114 can be stored in one of the storage devices 108.

[0011] The NAS device 106 also includes a NAS OS 118, which as explained above, is a reduced functionality operating system with less features than a full-feature operating system such as a network operating system (NOS). Also, the NAS device 106 includes a file-based protocol module 120 to provide file-level access of data contained in the storage devices 108. File-level access of data refers to the storage or retrieval of data one file at a time; this is contrasted with block-level access of data in which data is stored or retrieved a block at a time, where a block can be smaller than or larger than a file. Examples of the file-based protocol module 120 include an NFS (network file system) module, CIFS (common Internet file system) module, SMB (server message block) module, or others.

[0012] As further depicted in Fig. 1A, a client device 104 includes a web browser 122 that is executable on a CPU 124 of the client device 104. The CPU 124 is connected to a memory 126 of the client device 104, where the memory 126 can be used to store installer code 114A downloaded from the NAS device 106. The other client devices 104 can include similar components.

[0013] By using the web browser 122, a convenient mechanism is provided to a user to request the installer code 114 of the NAS system 100 to allow such installer code 114 to be downloaded from the NAS system 100 to the client device 104. The installer code 114 can be an ActiveX component, where ActiveX is a technology developed by Microsoft Corporation. ActiveX controls (which are software modules) can be downloaded from a server computer and executed on a client computer outside of a web browser. Alternatively, instead of being an ActiveX component, the installer code 114 can be a Java applet, or some other type of code that can be downloaded from a server to client for execution on the client.

[0014] Fig. 2 shows execution of the installer code 114A on the CPU 124 of the client device 104. When executed, the installer code 114A presents a GUI screen 202 in a display device 200 of the client device 104. The GUI screen 202 can actually be presented in the web browser 122 user interface (not shown in Fig. 2). The GUI screen 202 can include control icons and/or menus 204, and fields 206 containing questions that can be answered by a user. The control icons and/or menus 204 allow a user to select one or more administrative

- 5 -

tasks to perform with respect to the NAS system 100. The fields containing questions 206 presented in the GUI screen 202 can be in response to activation of one or more of the control icons and/or menus 204. Selections made at the control icons and/or menus 204, as well as answers responsive to the fields containing questions 206, can be stored as user selections/answers 208 in the memory 112 of the client device 104.

[0015] Also, other user information 210 can be stored in the memory 112, where such other user information can include user account information (*e.g.*, account name and password) that was entered by the user when logging into the client device 104. Other types of user information 210 can include, as examples, user profile information, user preferences, and so forth.

[0016] In accordance with some embodiments, synchronization of the user information 210 can be performed between the client device 104 and the NAS system 100. For example, synchronizing the user information 210 allows an account to be set up at the NAS system 100 such that private information associated with the particular user can be protected at the NAS system 100. Private user information protected by user account information can be accessed only by a client device at which the corresponding user has logged in. By synchronizing such user information 210, the user would not have to re-enter account information to set up the user account at the NAS system 100, which enhances convenience to the user.

[0017] Also, based on the user selections/answers 208 at the client device 104, the installer code 114A can perform selected administrative tasks relating to the user selections/answers 208. Note that the selected administrative tasks performed can include a subset (less than all) of all possible administrative tasks associated with the NAS system 100.

[0018] Examples of the administrative tasks include setting up a user account at the NAS system, installing a subset of software components on the client (such as installing a backup software component to perform backup from the client device 104 to the NAS system 100, a control software component to manage the NAS system 100, and other software components); setting up shared folders at the NAS system 100 to allow multiple users to access data contained in the shared folders; changing or setting up a security setting for the client device 104 at the NAS system; setting up one or more firewall ports at the NAS system 100; and so forth. Changing the security setting can involve reducing the security setting of

- 6 -

one or more files such that more users can access such file(s) at the NAS system 100, or increasing the security setting of one or more files. Setting up a firewall port refers to establishing firewall protection for a particular port of the NAS system 100 to prevent unauthorized access of that port.

[0019] Fig. 3 is a flow diagram that depicts various tasks performed at a client device 104 according to an embodiment. The client device 104 can request (at 302), with the web browser 122 (Fig. 1A), the installer code 114 contained in the NAS system 100. For example, the user can enter the URL of the website associated with the web interface 116 (Fig. 1A) of the NAS system 100, and a web page containing a link to the installer code 114 can be displayed. The user at the client device can click on the displayed link to cause download of the installer code 114 to the client device 104.

[0020] In response to the user request, the installer code 114 is downloaded (at 304) to the client device 104. The installer code is then executed (at 306) at the client device 104. The executed installer code presents an administrative user interface (such as the GUI screen 202 of Fig. 2). Selections made by the user in the administrative user interface, as well as answers provided to questions posed by the administrative user interface, are received (at 310) in the client device 104. Based on the received selections/answers, the installer code is able to perform selected administrative tasks associated with the NAS system 100.

[0021] In an alternative embodiment, it is possible that when the user makes the request to the NAS system 100 for the installer code 114, information about the user as well as information regarding the client device 104 is provided to the NAS system 100. Based on such information, the NAS system 100 can generate a recommendation, which can be downloaded with the installer code and displayed to the user in the administrative user interface, of what tasks should be performed by the user. This recommendation from the NAS system 100 can be used as a guide on selections to be made in response to answers provided by the installer code.

[0022] If later the user desires to change the selections that were previously made, the user can activate a "change" control element (which can be one of the control icons or menus 204 presented in the GUI screen 202 of Fig. 2) to cause management software to be executed.



- 7 -

The management software can display the selections previously made by the user, and can provide fields to enable the user to make changes to any of such selections.

[0023] In some embodiments, updates of the installer code are also possible. In one example, whenever the NAS system 100 determines that an installer code similarly sent to a client device has changed, the NAS system 100 can send a notification that updated installer code is available. For example, the NAS system 100 can send an e-mail to the user. The user can then request download of the updated version of the installer code. Alternatively, an automated update feature can be provided, where the client device is able to automatically detect or be notified of updates to the installer code (similar to update notifications provided with operating systems such as WINDOWS<sup>®</sup> operating systems from Microsoft).

[0024] Instructions of software described above (including the installer code 114/114A, web browser 122, NAS OS 118, file-based protocol module 120, etc. of Fig. 1A) are loaded for execution on a processor (such as one or more CPUs 110 or 124 in Fig. 1A). The processor includes microprocessors, microcontrollers, processor modules or subsystems (including one or more microprocessors or microcontrollers), or other control or computing devices. A “processor” can refer to a single component or to plural components.

[0025] Data and instructions (of the software) are stored in respective storage devices, which are implemented as one or more computer-readable or computer-usable storage media. The storage media include different forms of memory including semiconductor memory devices such as dynamic or static random access memories (DRAMs or SRAMs), erasable and programmable read-only memories (EPROMs), electrically erasable and programmable read-only memories (EEPROMs) and flash memories; magnetic disks such as fixed, floppy and removable disks; other magnetic media including tape; and optical media such as compact disks (CDs) or digital video disks (DVDs). Note that the instructions of the software discussed above can be provided on one computer-readable or computer-usable storage medium, or alternatively, can be provided on multiple computer-readable or computer-usable storage media distributed in a large system having possibly plural nodes. Such computer-readable or computer-usable storage medium or media is (are) considered to be part of an article (or article of manufacture). An article or article of manufacture can refer to any manufactured single component or multiple components.

- 8 -

[0026] In the foregoing description, numerous details are set forth to provide an understanding of the present invention. However, it will be understood by those skilled in the art that the present invention may be practiced without these details. While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art will appreciate numerous modifications and variations therefrom. It is intended that the appended claims cover such modifications and variations as fall within the true spirit and scope of the invention.

What is claimed is:

1. A method comprising:  
receiving, from a network-attached storage (NAS) system, installer code at a client device; and  
performing, by the installer code executing at the client device, a selected subset of administrative tasks at the client device, wherein the administrative tasks are tasks associated with the NAS system.
2. The method of claim 1, wherein receiving the installer code at the client comprises a web browser at the client receiving the installer code from a web interface at the NAS system.
3. The method of claim 1, wherein performing the selected subset of administrative tasks comprises setting up a user account at the NAS system.
4. The method of claim 1, wherein performing the selected subset of administrative tasks comprises installing a subset of software components relating to the NAS system on the client device.
5. The method of claim 4, wherein installing the subset of the software components on the client device comprises installing a backup software component to perform file backup from the client device to the NAS system.
6. The method of claim 4, wherein installing the subset of the software components comprises installing a control software component to manage the NAS system.
7. The method of claim 1, wherein performing the selected subset of administrative tasks comprises at least one of: (1) setting up one or more firewall ports at the NAS system, (2) changing a security setting at the NAS system, or (3) setting up shared folders at the NAS system.

- 10 -

8. The method of claim 1, wherein receiving the installer code comprises receiving one of an ActiveX code and a Java applet.
9. The method of claim 1, wherein performing the selected subset of administrative tasks comprises synchronizing user information from the client device to the NAS system.
10. A system comprising:
  - a client device; and
  - a network-attached storage (NAS) system coupled to the client device, the NAS system containing installer code,
    - wherein the client device is configured to download the installer code from the NAS system to the client device, and
    - wherein the installer code is executable in the client device to perform a selected subset of administrative tasks relating to the NAS system.
11. The system of claim 10, wherein the client device has a web browser, and wherein the web browser is configured to download the installer code to the client device.
12. The system of claim 11, wherein the NAS system has a web interface that is accessible by the web browser to download the installer code.
13. The system of claim 10, wherein the selected subset of administrative tasks performed by the installer code at the client device comprises installation of a selected subset of NAS-related software components on the client device.
14. A computer-readable storage medium containing instructions that when executed cause a computer to:
  - send a request to a network-attached storage (NAS) system, wherein the NAS system contains installer code;
  - download the installer code from the NAS system to the computer; and
  - execute the installer code to perform a selected subset of administrative tasks related to the NAS system.

15. The computer-readable storage medium of claim 14, wherein the instructions when executed cause the computer to further:
- submit first information relating to a user and the computer to the NAS system; and
  - receive second information based on the first information regarding tasks recommended by the NAS system to be performed at the computer.

1/4

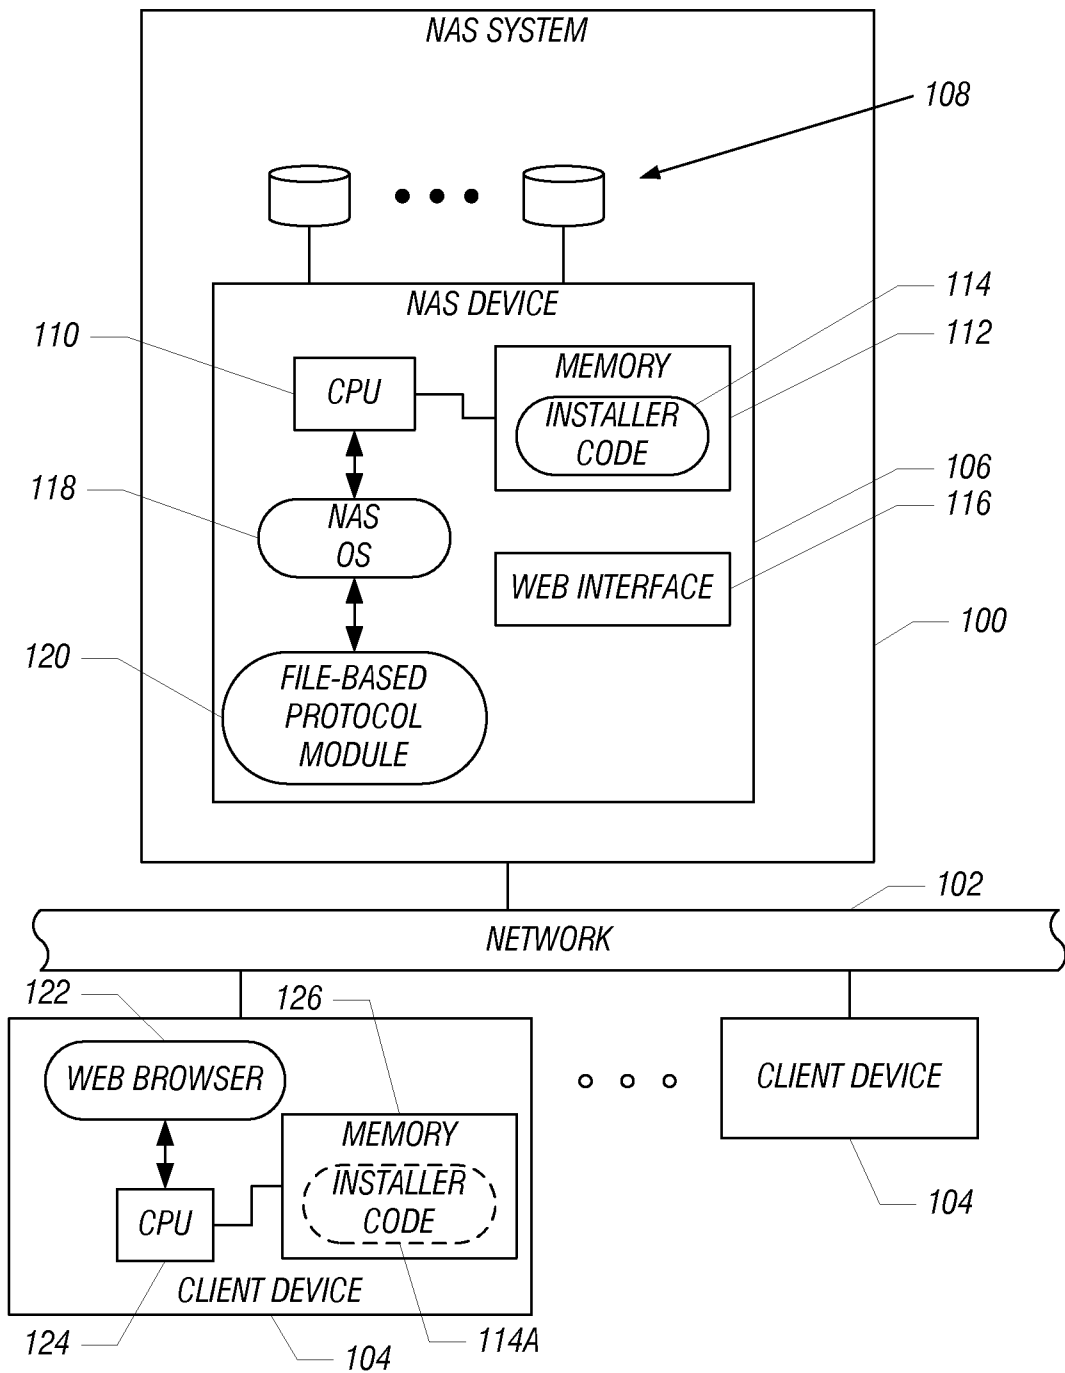


FIG. 1A


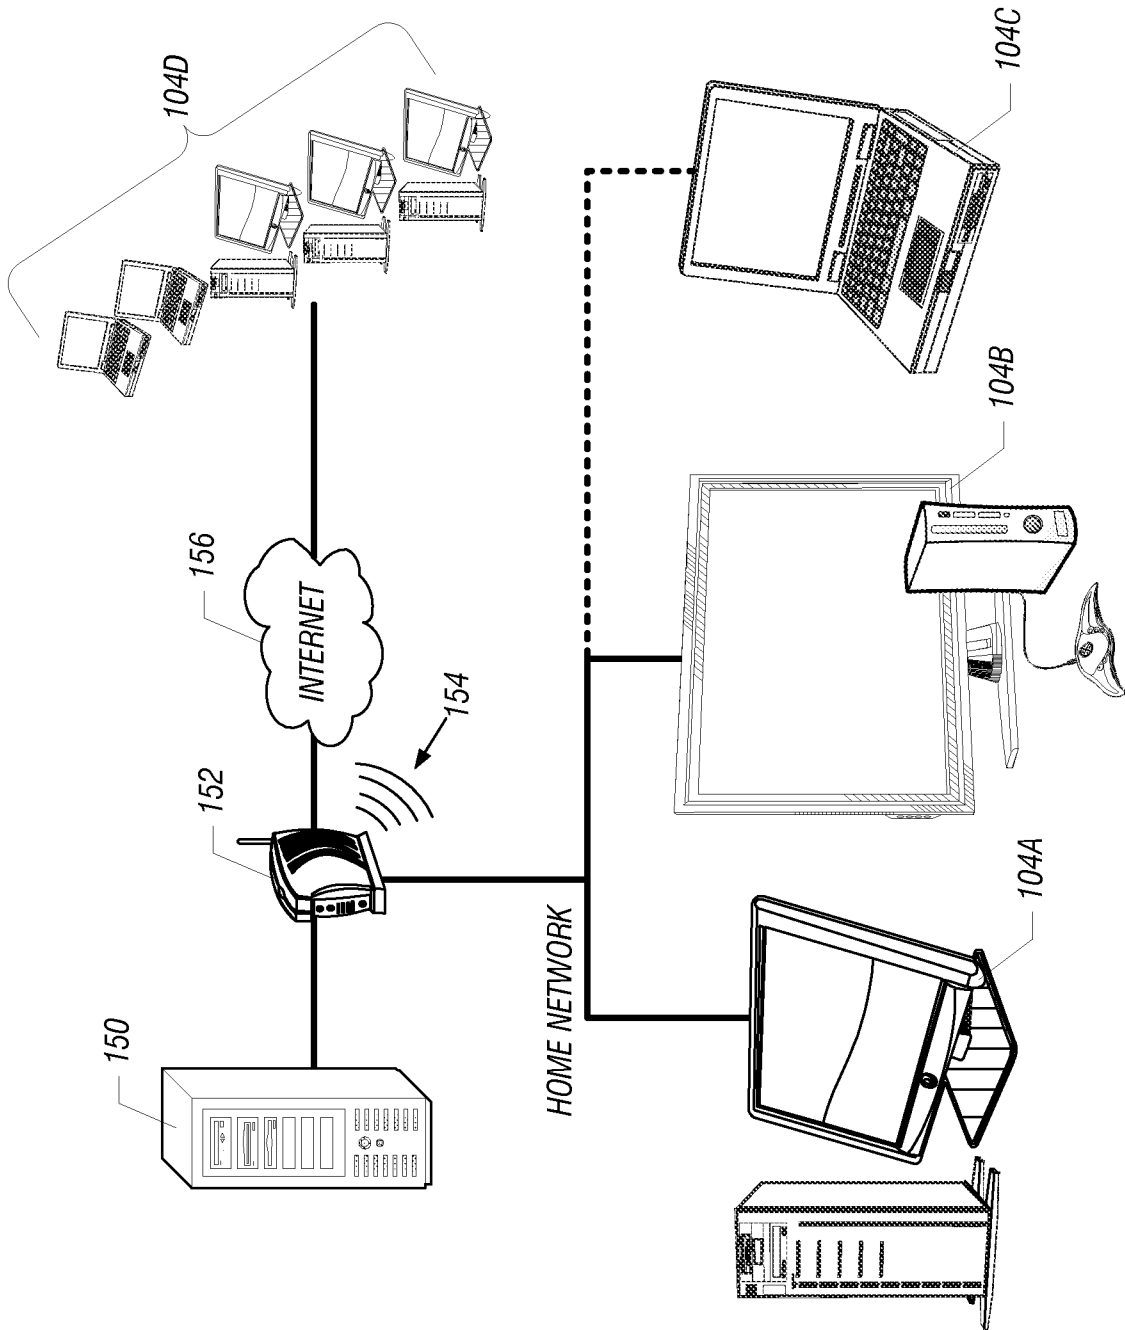


FIG. 1B



**FIG. 2**

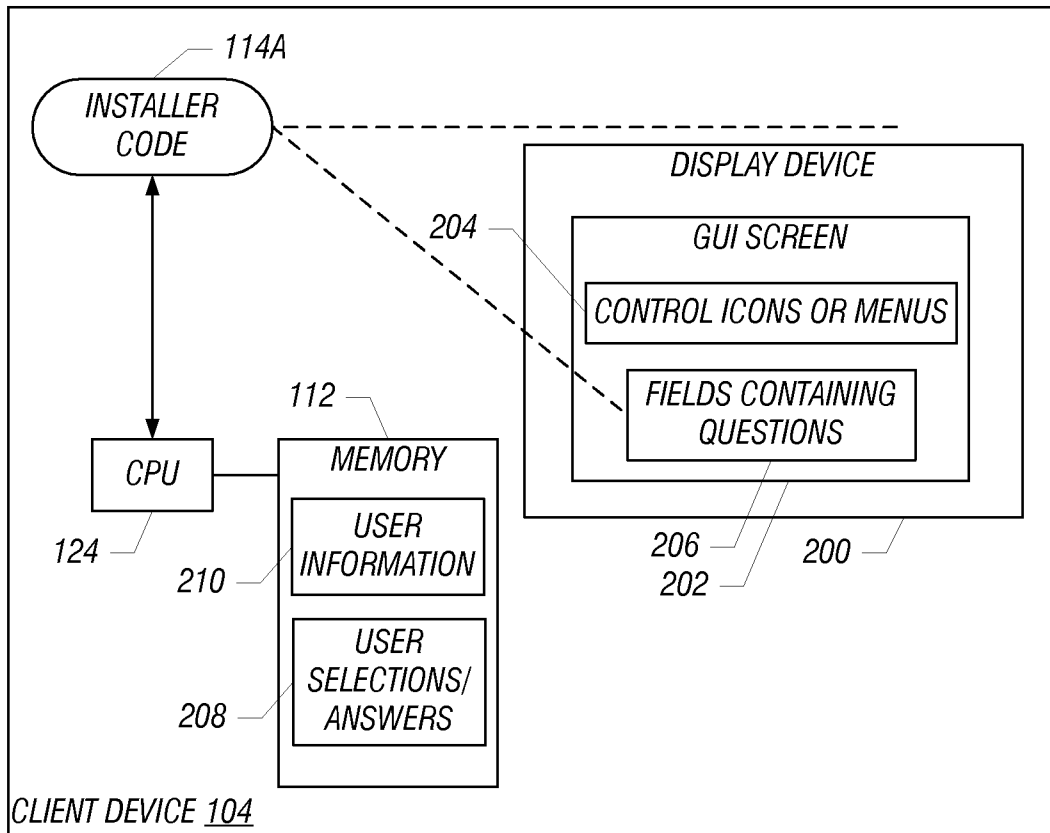

4/4

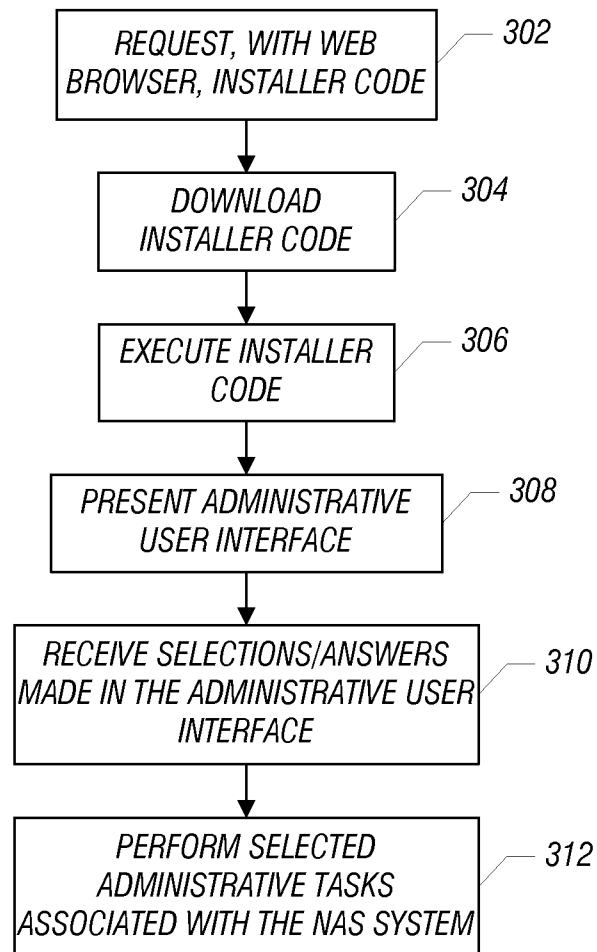


FIG. 3

**A. CLASSIFICATION OF SUBJECT MATTER****G06F 15/16(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC: G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Utility Models and applications for Utility Models since 1975

Japanese Utility Models and applications for Utility Models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKIPASS, DELPHION, ESPACENET &amp; Keywords : NAS, installer, download, and similar terms.

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	KR 10-2008-0010329 A (NVIDIA CORPORATION) 30.01.2008 See the abstract, claims 1-10, pages 5-6.	1-15
Y	KR 10-2005-0029705 A (MICROSOFT CORP.) 28.03.2005 See the abstract, claims 1-9, pages 7-8.	1-15
A	KR 10-2008-0007132 A (SAMSUNG ELECTRONICS CO., LTD.) 17.01.2008 See the abstract, claims 12-24.	1-15
A	KR 10-2006-0095061 A (NHN CORPORATION) 30.08.2006 See the abstract.	1-15

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

30 JANUARY 2009 (30.01.2009)

Date of mailing of the international search report

**30 JANUARY 2009 (30.01.2009)**

Name and mailing address of the ISA/KR

Korean Intellectual Property Office  
Government Complex-Daejeon, 139 Seonsa-ro, Seo-gu,  
Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

KIM, Hyun Soo

Telephone No. 82-42-481-8594



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2008/069021**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
KR 10-2008-0010329 A	30.01.2008	CN 101166116	23.04.2008
		JP 2008-112433	15.05.2008
KR 10-2005-0029705 A	28.03.2005	AU 2004-208743 A1	07.04.2005
		BR 0404280 A	24.05.2005
		CA 2482082 A1	22.03.2005
		CN 1811706 A	02.08.2006
		EP 1662384 A2	31.05.2006
		JP 2005-100401 A	14.04.2005
		RU 2004128233 A	10.03.2006
		US 2005-0066324 A1	24.03.2005
KR 10-2008-0007132 A	17.01.2008	US 2008/0216066 A1	04.09.2008
KR 10-2006-0095061 A	30.08.2006	JP 2008-532136 A	14.08.2008
		WO 2006-090974 A1	31.08.2006