

(51) International Patent Classification:
H04W 24/04 (2009.01)(21) International Application Number:
PCT/EP2012/057084(22) International Filing Date:
18 April 2012 (18.04.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11290191.3 19 April 2011 (19.04.2011) EP(71) Applicant (for all designated States except US): **ALCATEL LUCENT** [FR/FR]; 3 avenue Octave Gréard, F-75007 Paris (FR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LANDAIS, Bruno** [FR/FR]; Alcatel-Lucent France, 4 rue Louis de Broglie, BP 50444, F-22304 Lannion (FR).(74) Agent: **EL MANOUNI, Josiane**; Alcatel-Lucent International, 32 avenue Kléber, F-92700 Colombes (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: RESTORATION OF MOBILE TERMINATING CS SERVICES IN CASE OF FAILURE OF A PS CORE NETWORK ENTITY IN A MOBILE COMMUNICATION SYSTEM

Fig 3 - MME restoration for CS services

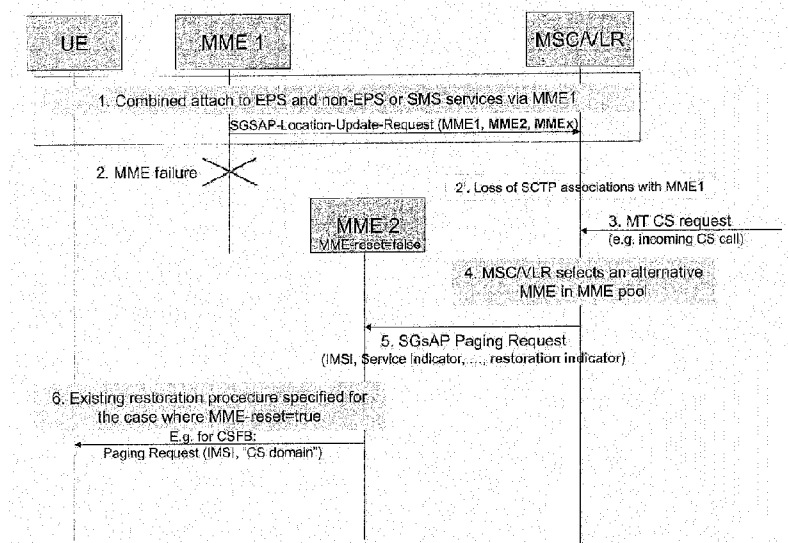

(57) Abstract: In an embodiment, a method for restoration of MT (Mobile Terminating) CS services in case of failure of a PS Core Network CN entity, referred to as original CN entity, originally identified as to be contacted for a paging request towards a User Equipment UE for said MT CS services, in a mobile communication system, comprises a step of: - providing that an alternative CN entity is contacted instead of said original CN entity, and that said alternative CN entity is forced to accept said paging request even if said UE is unknown to said alternative CN entity.

RESTORATION OF MOBILE TERMINATING CS SERVICES IN CASE OF FAILURE OF A PS CORE NETWORK ENTITY IN A MOBILE COMMUNICATION SYSTEM

5 The present invention generally relates to mobile communication networks and systems.

Detailed descriptions of mobile communication networks and systems can be found in the literature, such as in particular in Technical Specifications published by standardization bodies such as for example 3GPP (3rd Generation Partnership

10 Project).

In such systems, a mobile terminal (or User Equipment UE) has access via a Radio Access Network (RAN) to a Core Network (CN) providing mobile communication services.

Examples of systems, such as for example 3GPP systems, include: 2G-GSM,
15 3G-UMTS, 3G-LTE-EPS (Evolved Packet System).

For example, an architecture for EPS is recalled in figure 1 taken from 3GPP TS 23.401. EPS Core Network comprises a PS (Packet-Switched) domain called EPC (Evolved Packet Core). EPC comprises entities such as in particular MME (Mobility Management Entity) in charge of control plane functions such as in particular mobility
20 management and paging procedure for MT (Mobile Terminating) services towards UEs in idle mode. In EPS, CS (Circuit-Switched) services (such as for example voice services or other services such as SMS (Short Message Service)) can be delivered as IP-based services, via PS domain EPC providing IP connectivity to an operator's IP network (for example IMS network).

25 On the contrary, in systems such as GSM or UMTS (not specifically illustrated), CS services (such as for example voice services or other services such as SMS (Short Message Service)) are delivered via CS (Circuit-Switched) domain. CS domain comprises entities such as in particular MSC/VLR or MSC Server/VLR) in charge of control plane functions such as in particular mobility management and
30 paging procedure for MT (Mobile Terminating) services towards UEs in idle mode.

New functionalities may be introduced to allow reuse of already deployed CS infrastructures co-existing with newly deployed EPS infrastructures.

An example of such new functionalities is the functionality called CSFB (CS Fallback) and/or SMS over SGs in EPS, specified in particular in 3GPP TS 23.272. EPS architecture for CSFB and/or SMS over SGs in EPS is recalled in figure 2 taken from 3GPP TS 23.272.

5 The CSFB and/or SMS over SGs in EPS functionality uses SGs interface mechanisms between MSC/VLR (or MSC Server/VLR) in CS domain and MME in EPC supporting such functionality. SGs interface is specified in particular in 3GPP TS 29.118.

SGs is the reference point between MME and MSC/VLR (or MSC Server/VLR).

10 The SGs reference point is used for the mobility management and paging procedures between EPS and CS domain. The SGs reference point is also used for SMS delivery.

As recognized by the inventor and as will be described with more detail later in the description, there is a need to improve the delivery of MT (Mobile Terminating) CS services, in particular when the CSFB and/or SMS over SGs in EPS functionality is
15 used. More generally, there is a need to improve end-user experience, or quality of service as perceived by end-users, in such systems, such that the deployment of LTE/EPC does not impair the delivery of MT (Mobile Terminating) CS services.

Embodiments of the present invention in particular address such needs.

These and other objects are achieved, in one aspect, by a method for
20 restoration of MT (Mobile Terminating) CS services in case of failure of a PS Core Network CN entity, referred to as original CN entity, originally identified as to be contacted for a paging request towards a User Equipment UE for said MT CS services, in a mobile communication system.

In an embodiment, said method comprises a step of:

25 - providing that an alternative CN entity is contacted instead of said original CN entity, and that said alternative CN entity is forced to accept said paging request even if said UE is unknown to said alternative CN entity.

These and other objects are achieved, in other aspects, by CN entities for performing such method, such as in particular MME and MSC/VLR (or MSC
30 Server/VLR) supporting the CSFB and/or SMS over SGs in EPS functionality.

Some embodiments of apparatus and/or methods in accordance with embodiments of the present invention are now described, by way of example only, and with reference to the accompanying drawings, in which:

- Figure 1 is intended to recall an example of EPS architecture,
- Figure 2 is intended to recall an example of architecture for CS fallback and/or SMS over SGs in EPS,
- Figure 3 is intended to illustrate an example of a method according to an embodiment of the present invention, for example in a system supporting CS fallback and/or SMS over SGs in EPS.

In the following, embodiments of the present invention will more particularly be described, by way of example, for the case of a system supporting the CSFB and/or SMS over SGs in EPS functionality. However, the present invention is not limited to such case.

With the deployment of LTE in mobile networks, there is the risk that mobile terminated CS services (e.g. CS calls, SMS, Mobile termination Location request) can not be successfully delivered to the subscriber for a long period (up to the periodic Tracking Area Update timer e.g. 1 hour) after an MME failure without restart or a long MME failure. In comparison, CS terminated services can be delivered without any delay prior to the introduction of LTE.

A UE under LTE that requires support of CS or/and SMS services performs a combined attach procedure to attach for both EPS and non-EPS services (i.e. CS services), or both EPS services and "SMS only" services, and a combined tracking area update procedure to update the registration of the actual tracking area (see 3GPP TS 23.401 and TS 24.301). During those procedures, the serving MME initiates a location update for non-EPS services procedure towards the MSC providing the CS or/and SMS services, thereby establishing an SGs association between the MME and MSC (see 3GPP TS 23.272 and TS 29.118). Upon receipt of a subsequent CS terminated service (e.g. MT CS call or SMS), the MSC sends an SGs Paging Request message to the serving MME with a "CS call indicator" or an "SMS indicator" which triggers a CS Fallback procedure or SMS transfer via LTE (see 3GPP TS 23.272 and TS 29.118).

Restoration procedures are defined in 3GPP TS 29.118 (see in particular clause 5.1.3) to maintain mobile terminated CS services (e.g. CS call or SMS) when an MME fails but restarts. They essentially rely on the principle that MME accepts SGs-paging request received for unknown UEs for a certain period after the MME restart whose duration typically covers the largest tracking area update timer assigned to UEs. During that period, the MME sets a system-wide parameter MME-reset to true. After that period, the MME sets the MME-reset parameter to false and stops accepting SGs paging request for unknown UEs.

But if the MME fails without restart, or if the MME fails for a long duration, it is no longer possible for the MSC to page the UE via the MME. Since UEs in idle mode are not aware of the MME failure until they need to send some uplink data or signaling (e.g. periodic Tracking Area Update), they remain under LTE but can not receive any more mobile terminated services.

Embodiments of the present invention in particular enable to solve such problem or avoid such drawbacks.

5 Embodiments of the present invention provide that the network continues to deliver CS services to UEs via an alternative MME in the MME pool where the UE is located. It is recalled that an MME pool comprises several MMEs serving a same area called pool area.

10 In an embodiment, following steps may be provided:

1. During normal operations, the (original) MME may signal to the MSC/VLR(s) the identities of alternative MME(s) within the MME pool. Alternatively, the MSC/VLR may be pre-configured with the set of MME identities pertaining to the same MME pool.

15 2. Upon receipt of mobile terminated services (e.g. CS call), the MSC/VLR may select one of these alternative MMEs if it detects that the (original) MME serving the UE is no longer in service (e.g. by detecting that there is no more SCTP associations in service with that (original) MME), and may send a SGs paging request to this (single) alternative MME with a new 'restoration indicator' parameter in the message to force the receiving (alternative) MME to accept the SGs paging request and to proceed with the CSFB or SMS procedure even if the UE (i.e. IMSI) is unknown to this MME and even if the MME has not restarted recently (i.e. even in the 'MME-reset = false' state).

25 3. Upon receipt of such a request including the new 'restoration indicator' flag, the (alternative) MME may proceed with the existing restoration procedure specified in 3GPP TS 29.118 clause 5.1.3 for the case where the MME has restarted recently (i.e. for the case where MME-reset = true).

30 Note: without the above-mentioned new 'restoration indicator' flag, MMEs would reject SGs paging request (as per existing specification) for unknown UEs to avoid that multiple MMEs page the UE if the VLR broadcasts the SGs paging request to multiple MMEs after an MSC/VLR restart.

35 In other embodiments, following steps may be provided, for example as illustrated in figure 3.

40 During normal operations, the (original) MME, noted MME 1, signals to the MSC/VLR with which it has SGs association(s) the identities of alternative MME(s) within the MME pool (such as MME2, MMEx as illustrated). The (original) MME may e.g. send those MMEs identities under the form of additional MME names sent in existing SGs signaling message, e.g. in the SGsAP Location Update Request (as illustrated at step 1) or SGsAP Reset Indication message. Alternatively, the MSC/VLR may be pre-configured with the set of MME identities pertaining to the same MME pool.

45

As specified in TS 29.118 clause 6, SCTP (see IETF RFC 4960) is defined as the transport layer of SGsAP messages. Semi-permanent SCTP associations shall be established between the MME and VLR, i.e. the SCTP associations shall remain up

under normal circumstances. The MME shall establish the SCTP association. Transport network redundancy may be achieved by SCTP multi-homing between two end-points, of which one or both is assigned with multiple IP addresses. MME and VLR shall support a configuration with a single SCTP association per MME/VLR pair.

- 5 Configurations with multiple SCTP endpoints per MME/VLR pair may be supported.

If the original MME fails (as illustrated at step 2), the MSC/VLR may detect such failure, e.g. by detecting that there is no more SCTP associations in service with the (original) MME, as illustrated at step 2'.

10

Upon receipt of mobile terminated services (e.g. CS call) as illustrated at step 3, if the MSC/VLR detects a failure of the (original) MME (i.e. MME via which the UE was registered to non EPS or SMS services), the MSC/VLR may, as illustrated at step 4, select one alternative MME (noted MME 2) among the list of MMEs previously received from the failed MME, and may, as illustrated at step 5, send an SGs paging request to this (single) alternative MME (via one of the SCTP associations in service with that MME), including a new 'restoration indicator' parameter in the message.

15

- 20 The receiving MME (alternative) may, as illustrated at step 6, process an SGsAP Paging Request with the new 'restoration indicator' flag set, like specified today in TS 29.118 clause 5.1.3 for the case where it has restarted recently, but regardless of its own 'MME reset' value, i.e. as follows:

25

If the Service indicator information element in the SGsAP-PAGING-REQUEST message indicates "CS call indicator", the MME shall handle the paging request as follows:

- c) If the UE is not known and regardless of the "MME-Reset" restoration indicator at the MME, the MME shall handle the paging request as follows:

30

- if the MME only supports "SMS only", the MME shall return an SGsAP-PAGING-REJECT message to the VLR indicating in the SGs cause information element "Mobile terminating CS fallback call rejected by the user";

35

- if the SGsAP-PAGING-REQUEST message includes the Location area identifier information element, the MME shall page the UE in all the tracking areas served by the MME that can be mapped to the location area indicated in the Location area identifier information element; or

40

- if the SGsAP-PAGING-REQUEST message does not include the Location area identifier information element, the MME may page in all the tracking areas served by the MME, or the tracking areas served by the MME and by the VLR.

If the Service indicator information element in the SGsAP-PAGING-REQUEST message indicates "SMS indicator", the MME shall handle the paging request as follows:

45

- c) If the UE is not known and regardless of the "MME-Reset" restoration indicator at the MME, the MME shall handle the paging request as follows:

- if the SGsAP-PAGING-REQUEST message includes the Location area identifier information element, the MME shall page the UE in all the tracking areas served by the MME that can be mapped to the location area indicated in the Location area identifier information element; or
- 5 - if the SGsAP-PAGING-REQUEST message does not include the Location area identifier information element, the MME may page in all the tracking areas served by the MME, or the tracking areas served by the MME and by the VLR.

10 The paging procedure initiated by the MME for CS Fallback to A/Gb or Iu mode is further specified in 3GPP TS 24.301 clause 5.6.2.3. The paging message includes a UE Paging Identity set to the UE's IMSI (or UE's S-TMSI if that identity has been stored in non-volatile memory) and a CN domain indicator set to "CS" in order to indicate that this is paging for CS fallback. The MME may then follow CS Fallback call flows specified in 3GPP TS 23.272 e.g. clause 6.6 or 7.4. To be noted that the

15 restarted or alternative MME won't be able to integrity protect NAS signaling sent to the UE but that the EMM entity in the UEs shall accept a SERVICE REJECT (with an EMM cause other than #25) without integrity protection (see 3GPP TS 24.301 clause 4.4.4.2) typically for those kinds of network restoration scenarios.

- 20 For SMS over SGs, the receiving MME may either:
- follow the paging procedure for SMS (3GPP TS 24.301, clause 5.6.2.4) if the MME can retrieve the S-TMSI and security parameters (required to protect the NAS signaling for SMS transfer over LTE), e.g. if such parameters are stored in non-volatile memory; or
 - 25 - page the UE with IMSI (and CN domain indicator set to "PS") to force UEs (in idle mode) to re-attach to EPC. This would lead the UE to re-attach to any MME in the pool (not necessarily the same MME), which would lead to restore an SGs association between likely (but not necessarily either) the same MSC and the new MME. From that point in time, subsequent SMS will succeed. The on-going SMS
 - 30 transfer will fail (paging timer will expire in the original MSC), but the existing SMS procedures (SMS alert) allows to resume the SMS transfer after the new combined attach procedure.

35 In one aspect, there is provided a method for restoration of MT (Mobile Terminating) CS services in case of failure of a PS Core Network CN entity, referred to as original CN entity, originally identified as to be contacted for a paging request towards a User Equipment UE for said MT CS services, in a mobile communication system.

40 Various embodiments are provided, which can be used alone or in combination (according to various combinations).

 In an embodiment, said method comprises a step of:

- providing that an alternative CN entity is contacted instead of said original CN entity, and that said alternative CN entity is forced to accept said paging request even if said UE is unknown to said alternative CN entity.

In an embodiment, said method comprises a step of:

- 5 - providing that said alternative CN entity is forced to perform a restoration procedure as if the alternative CN entity were restarting after a failure, even if the alternative CN entity is not restarting after a failure.

In an embodiment, said original and alternative CN entity belong to a pool of CN entities serving a same area.

- 10 In another aspect, there is provided a method for restoration in case of failure of a Mobility Management Entity MME in Evolved Packet System EPS, referred to as original MME, originally identified by a MSC/VLR in CS domain having an SGs association with said original MME for an UE, as to be contacted for a paging request for MT CS services delivery to said UE, in a system supporting CS Fallback and/or
15 SMS over SGs in EPS.

Various embodiments are provided, which can be used alone or in combination (according to various combinations).

In an embodiment, said method comprises a step of:

- 20 - providing that an alternative MME is contacted instead of said original MME, and that said alternative MME is forced to accept said paging request even if said UE is unknown to said alternative MME.

In an embodiment, said method comprises a step of:

- 25 - providing that said alternative MME is forced to handle said paging request as if the MME-Reset parameter at the alternative MME were set to true, even if the MME-Reset parameter at the alternative MME is set to false.

In an embodiment, said method comprises a step of:

- during normal operation, the original MME signalling to the MSC/VLR identity information of at least one alternative MME.

In an embodiment, said method comprises a step of:

- 30 - during normal operation, the original MME signalling to the MSC/VLR, in an SGSAP-Location-Update-Request, identity information of at least one alternative MME.

In an embodiment, said method comprises a step of:

- during normal operation, the original MME signalling to the MSC/VLR, in an SGSAP-Reset-Indication message, identity information of at least one alternative MME.

In an embodiment, said method comprises a step of:

- 5 - pre-configuring the MSC/VLR with identity information of at least one alternative MME.

In an embodiment, said method comprises a step of:

- the MSC/VLR detecting a failure of the original MME by detecting that there is no more SCTP association in service with that MME.

- 10 In an embodiment, said method comprises a step of:

- upon reception of a request for MT CS services delivery to said UE, in case of failure of the original MME, the MSC/VLR selecting an alternative MME and sending an SGSAP Paging Request to the selected alternative MME.

In an embodiment, said method comprises a step of:

- 15 - upon reception of a request for MT CS services delivery to said UE, in case of failure of the original MME, the MSC/VLR selecting an alternative MME and sending an SGSAP-Paging-Request to the selected alternative MME, said SGSAP-Paging-Request containing a restoration indicator flag forcing the alternative MME to accept said Paging Request.

- 20 In an embodiment, said method comprises a step of:

- upon reception of an SGSAP-Paging-Request containing a restoration indicator flag forcing the alternative MME to accept said Paging Request, the alternative MME handling said Paging Request as if the MME-Reset parameter at the alternative MME were set to true, even if the MME-Reset parameter at the alternative
25 MME is set to false.

In an embodiment, said method comprises a step of:

- upon reception of an SGSAP-Paging-Request containing a restoration indicator flag forcing the alternative MME to accept said Paging Request, the alternative MME handling the paging request such that, regardless of the state of the
30 MME-Reset parameter at the alternative MME :

- if the SGSAP-Paging-Request message includes a Location Area Identifier information element, the MME pages the UE in all the Tracking Areas served by the MME that can be mapped to the

Location Area indicated in the Location Area Identifier information element; or

- if the SGsAP-Paging-Request message does not include the Location Area Identifier information element, the MME may page in all the Tracking Areas served by the MME, or the Tracking Areas served by the MME and by the VLR.

Other aspects relate to CN entities comprising means for performing such method(s), such as in particular MME and MSC/VLR (or MSC Server/VLR) supporting the CSFB and/or SMS over SGs in EPS functionality.

In an embodiment, there is provided a Core Network entity for a mobile communication system, comprising means for performing such method(s).

In an embodiment, there is provided a Mobility Management Entity MME supporting CS Fallback and/or SMS over SGs in EPS, comprising means for acting as an original MME, and means for acting as an alternative MME, according to such method(s).

In an embodiment, there is provided a MSC/VLR or MSC Server/VLR supporting CS Fallback and/or SMS over SGs in EPS, comprising means for performing such method(s).

The detailed implementation of the above-mentioned means does not raise any special problem for a person skilled in the art, and therefore such means do not need to be more fully disclosed than has been made above, by their function, for a person skilled in the art.

A person of skill in the art would readily recognize that steps of various above-described methods can be performed by programmed computers. Herein, some embodiments are also intended to cover program storage devices, e.g., digital data storage media, which are machine or computer readable and encode machine-executable or computer-executable programs of instructions, wherein said instructions perform some or all of the steps of said above-described methods. The program storage devices may be, e.g., digital memories, magnetic storage media such as a magnetic disks and magnetic tapes, hard drives, or optically readable digital data storage media. The embodiments are also intended to cover computers programmed to perform said steps of the above-described methods.

CLAIMS

1. A method for restoration of MT (Mobile Terminating) CS services in case of failure of a PS Core Network CN entity, referred to as original CN entity, originally identified as to be contacted for a paging request towards a User Equipment UE for said MT CS services, in a mobile communication system, said method comprising a step of:

- providing that an alternative CN entity is contacted instead of said original CN entity, and that said alternative CN entity is forced to accept said paging request even if said UE is unknown to said alternative CN entity.

2. A method according to claim 1, comprising a step of:

- providing that said alternative CN entity is forced to perform a restoration procedure as if the alternative CN entity were restarting after a failure, even if the alternative CN entity is not restarting after a failure.

3. A method according to claim 1 or 2, wherein said original and alternative CN entity belong to a pool of CN entities serving a same area.

4. A method according to any of claims 1 to 3, for restoration in case of failure of a Mobility Management Entity MME in Evolved Packet System EPS, referred to as original MME, originally identified by a MSC/VLR in CS domain having an SGs association with said original MME for said UE, as to be contacted for a paging request for MT CS services delivery to said UE, in a system supporting CS Fallback and/or SMS over SGs in EPS, said method comprising a step of:

- providing that an alternative MME is contacted instead of said original MME, and that said alternative MME is forced to accept said paging request even if said UE is unknown to said alternative MME.

5. A method according to claim 4, comprising a step of:

- providing that said alternative MME is forced to handle said paging request as if the MME-Reset parameter at the alternative MME were set to true, even if the MME-Reset parameter at the alternative MME is set to false.

6. A method according to claim 4 or 5, comprising a step of:

- during normal operation, the original MME signalling to the MSC/VLR identity information of at least one alternative MME.

5

7. A method according to any of claims 4 to 6, comprising a step of:

- during normal operation, the original MME signalling to the MSC/VLR, in an SGSAP-Location-Update-Request, identity information of at least one alternative MME.

10

8. A method according to any of claims 4 to 7, comprising a step of:

- during normal operation, the original MME signalling to the MSC/VLR, in an SGSAP-Reset-Indication message, identity information of at least one alternative MME.

15

9. A method according to any of claims 4 to 8, comprising a step of:

- pre-configuring the MSC/VLR with identity information of at least one alternative MME.

20

10. A method according to any of claims 4 to 9, comprising a step of:

- the MSC/VLR detecting a failure of the original MME by detecting that there is no more SCTP association in service with that MME.

11. A method according to any of claims 4 to 10, comprising a step of:

25

- upon reception of a request for MT CS services delivery to said UE, in case of failure of the original MME, the MSC/VLR selecting an alternative MME and sending an SGSAP Paging Request to the selected alternative MME.

12. A method according to any of claims 4 to 11, comprising a step of:

30

- upon reception of a request for MT CS services delivery to said UE, in case of failure of the original MME, the MSC/VLR selecting an alternative MME and sending an SGSAP-Paging-Request to the selected alternative MME, said SGSAP-

Paging-Request containing a restoration indicator flag forcing the alternative MME to accept said Paging Request.

13. A method according to any of claims 4 to 12, comprising a step of:

- 5 - upon reception of an SGSAP-Paging-Request containing a restoration indicator flag forcing the alternative MME to accept said Paging Request, the alternative MME handling said Paging Request as if the MME-Reset parameter at the alternative MME were set to true, even if the MME-Reset parameter at the alternative MME is set to false.

10

14. A method according to any of claims 4 to 13, comprising a step of:

- upon reception of an SGSAP-Paging-Request containing a restoration indicator flag forcing the alternative MME to accept said Paging Request, the alternative MME handling the paging request such that, regardless of the state of the
- 15 MME-Reset parameter at the alternative MME :

- if the SGSAP-Paging-Request message includes a Location Area Identifier information element, the MME pages the UE in all the Tracking Areas served by the MME that can be mapped to the Location Area indicated in the Location Area Identifier information element; or
- if the SGSAP-Paging-Request message does not include the Location Area Identifier information element, the MME may page in all the Tracking Areas served by the MME, or the Tracking Areas served by the MME and by the VLR.

20

25

15. A Core Network entity for a mobile communication system, comprising means for performing a method according to any of claims 1 to 3.

16. A Mobility Management Entity MME supporting CS Fallback and/or SMS

30 over SGs in EPS, comprising means for acting as an original MME, and means for acting as an alternative MME, according to any of claims 4 to 14.

17. A MSC/VLR or MSC Server/VLR supporting CS Fallback and/or SMS over SGs in EPS, comprising means for performing a method according to any of claims 4 to 14.

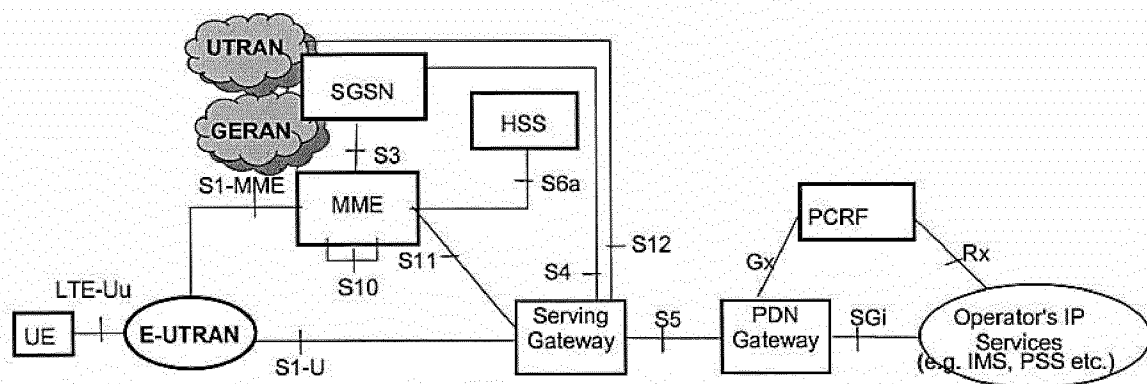


FIG.1


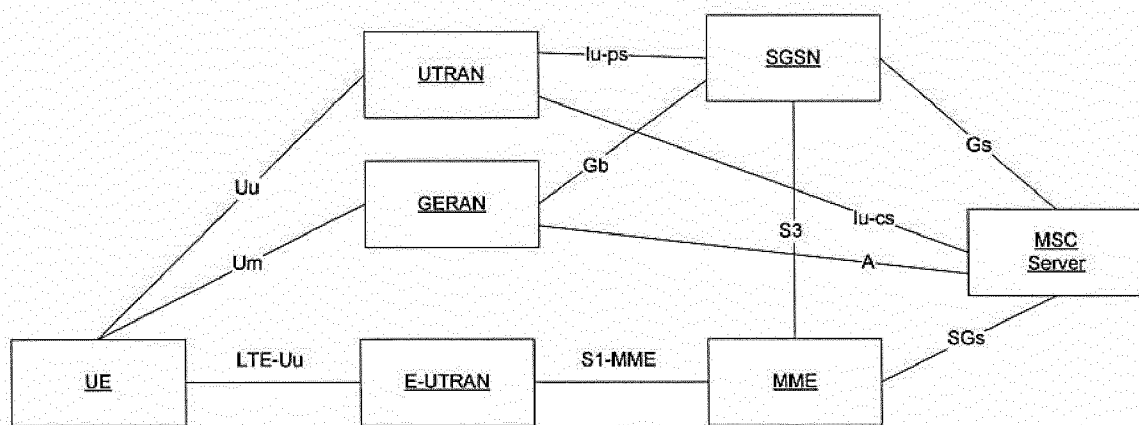


FIG.2

Fig 3 - MME restoration for CS services

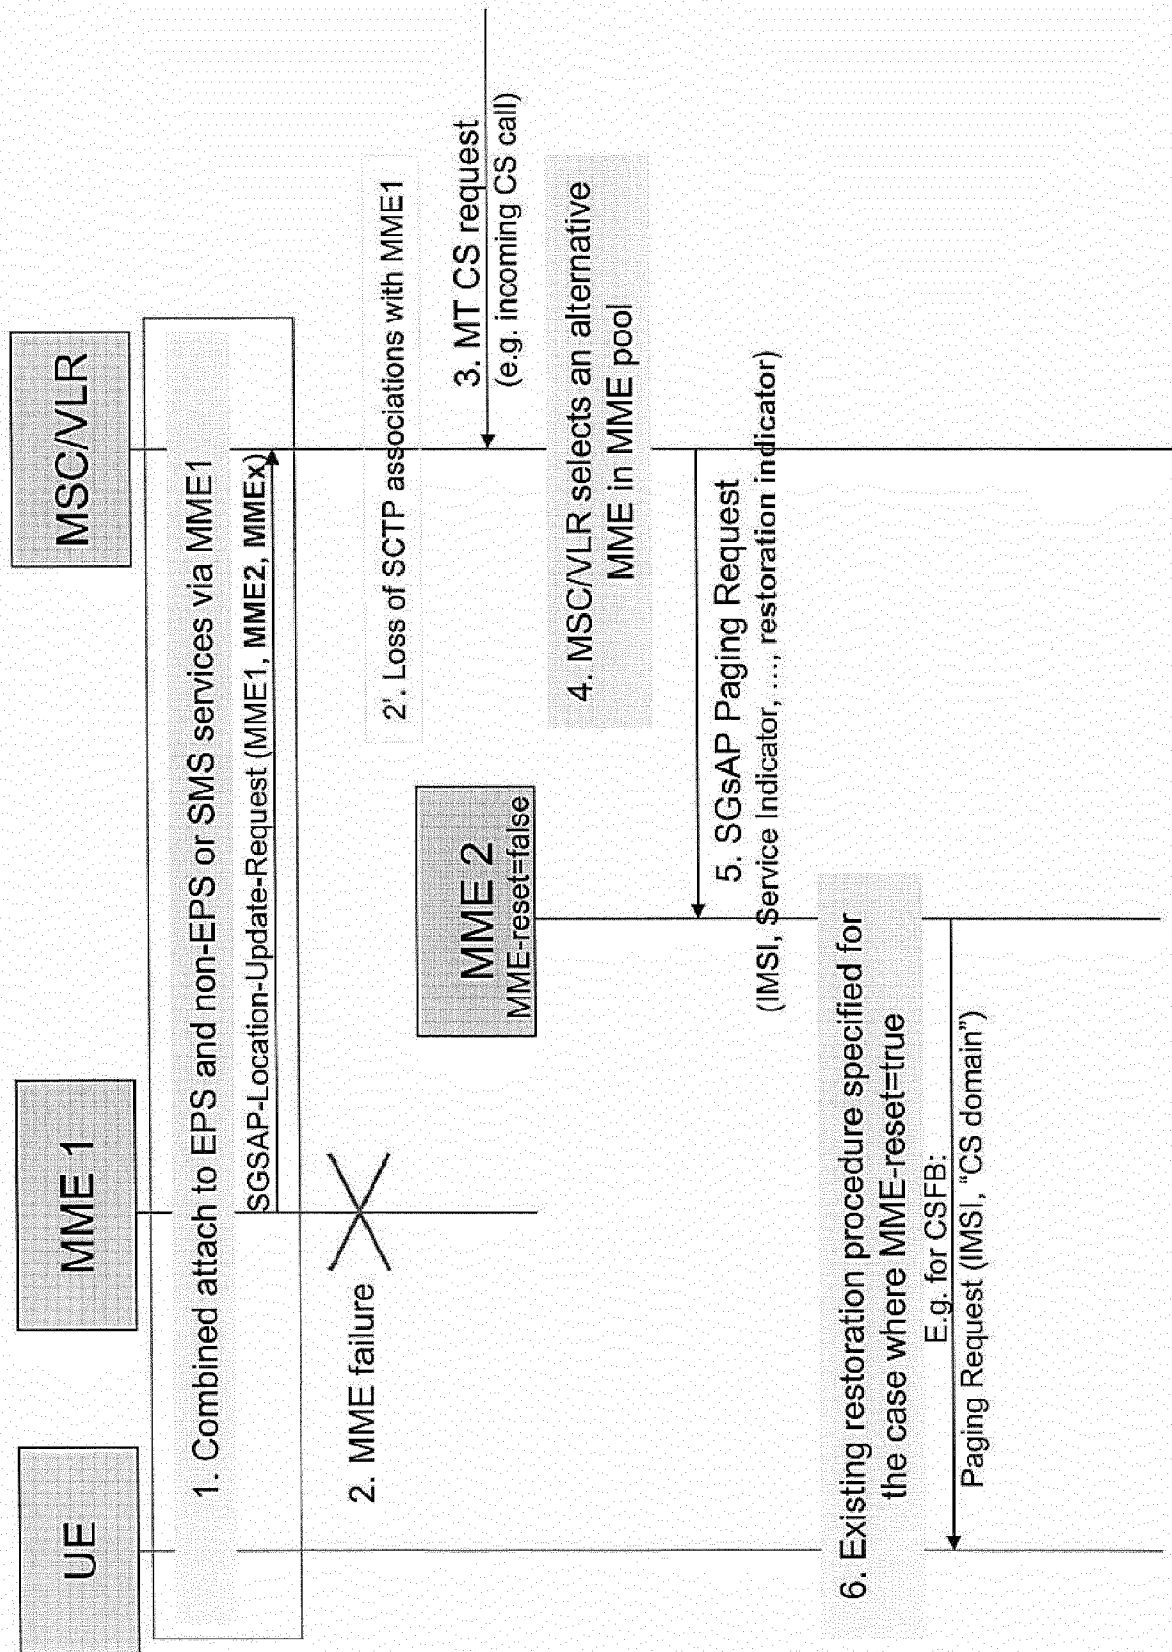

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/057084

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04W24/04
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2010/302937 A1 (HU YING [CN] ET AL) 2 December 2010 (2010-12-02) abstract paragraph [0042] - paragraph [0074] figure 5	1-17
A	----- "Universal Mobile Telecommunications System (UMTS); LTE; Mobility Management Entity (MME) Visitor Location Register (VLR) SGs interface specification (3GPP TS 29.118 version 10.3.0 Release 10)", TECHNICAL SPECIFICATION, EUROPEAN TELECOMMUNICATIONS STANDARDS INSTITUTE (ETSI), 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS ; FRANCE, vol. 3GPP CT 1, no. V10.3.0, 1 April 2011 (2011-04-01), XP014065064, paragraph [5.1.3] - paragraph [05.2] ----- -/-	1-17



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 May 2012

Date of mailing of the international search report

06/06/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Lombardi, Giuseppe

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/057084

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2009/238143 A1 (MUKHERJEE RAJAT P [US] ET AL) 24 September 2009 (2009-09-24) abstract paragraph [0064] - paragraph [0069] paragraph [0082] - paragraph [0086] -----	1-17
A	US 2010/220656 A1 (RAMANKUTTY RAJESH [US] ET AL) 2 September 2010 (2010-09-02) the whole document -----	1-17
T	ALCATEL-LUCENT ET AL: "Restoration of CS services after MME failure w/o restart", 3GPP DRAFT; C4-111420, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. CT WG4, no. Tallinn; 20110509, 17 May 2011 (2011-05-17), XP050485169, the whole document -----	1-17

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/057084

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010302937	A1	02-12-2010	CN 101222765 A 16-07-2008
			EP 2247039 A1 03-11-2010
			US 2010302937 A1 02-12-2010
			WO 2009094916 A1 06-08-2009

US 2009238143	A1	24-09-2009	AR 071032 A1 19-05-2010
			CN 101978736 A 16-02-2011
			CN 201499311 U 02-06-2010
			EP 2272278 A1 12-01-2011
			JP 2011160462 A 18-08-2011
			JP 2011520312 A 14-07-2011
			KR 20100126818 A 02-12-2010
			TW M365027 U 11-09-2009
			TW 201004422 A 16-01-2010
			US 2009238143 A1 24-09-2009
			WO 2009117588 A1 24-09-2009

US 2010220656	A1	02-09-2010	NONE
