




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B41J 2/05, 2/145, 2/175	A1	(11) International Publication Number: WO 99/34980 (43) International Publication Date: 15 July 1999 (15.07.99)
(21) International Application Number: PCT/US99/00311 (22) International Filing Date: 7 January 1999 (07.01.99) (30) Priority Data: 09/004,234 8 January 1998 (08.01.98) US (71) Applicant: LEXMARK INTERNATIONAL, INC. [US/US]; 740 West New Circle Road, Lexington, KY 40550 (US). (72) Inventors: POWERS, James, H.; 4772 Rhema Way, Lexington, KY 40514 (US). SRINIVASAN, Sudarsan; 3900 Crosby Drive #905, Lexington, KY 40515 (US). (74) Agent: McARDLE, John, J., Jr.; Lexmark International, Inc., 740 West New Circle Road, Lexington, KY 40550 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: NOZZLE ARRAY FOR PRINthead

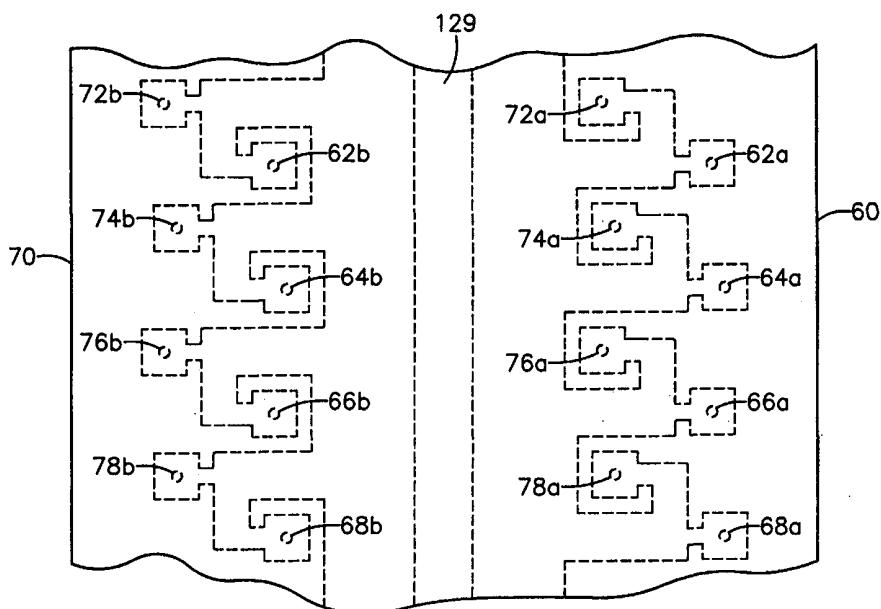

(57) Abstract

The invention relates to a nozzle plate (18) for an inkjet printer including a first nozzle array (51) having a plurality of nozzles (52a, 54a, 56a, 58a – 62a, 64a, 66a, 68a), each of which is positioned to correspond to a desired print location, with the print location of each of the nozzles of the first array (51) being different from one another; and a second nozzle array (61) having a plurality of nozzles (52b, 54b, 56b, 58b – 62b, 64b, 66b, 68b), each of which is positioned to correspond to a desired print location, with the print location of each of the nozzles of the second array (61) corresponding to one of the print locations of the first array (51) such that the first and second arrays each have one nozzle corresponding to each desired print location and a single ink flow path feeds ink to adjacent nozzles in each array.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

NOZZLE ARRAY FOR PRINthead

FIELD OF THE INVENTION

This invention relates generally to printheads for inkjet print cartridges. More particularly, this invention relates to nozzle plates and to the arrangement of
5 nozzle holes and ink flow features on nozzle plates of printheads.

BACKGROUND OF THE INVENTION

Thermal inkjet printers utilize print cartridges having printheads for directing ink droplets onto a medium, such as paper, in patterns corresponding to the indicia to be printed on the paper. In general, ink is directed from a reservoir
10 via flow paths to orifices or nozzles for release onto the paper. Heaters are provided adjacent the nozzles for heating ink supplied to the nozzles to vaporize a component in the ink in order to propel droplets of ink through the nozzle holes to provide a dot of ink on the paper. During a printing operation the print head is moved relative to the paper and ink droplets are released in patterns corresponding
15 to the indicia to be printed by electronically controlling the heaters to selectively operate only the heaters corresponding to nozzles through which ink is to be ejected for a given position of the printhead relative to the paper.

Given the foregoing, it will be appreciated that failure of ink to be ejected from even one nozzle, such as may result from heater failure or nozzle clogging,
20 can detrimentally affect printer performance and print quality.

Accordingly it is an object of the present invention to provide an improved inkjet printhead.

Another object of the present invention is to provide a printhead which offers enhanced performance as compared to conventional printheads.

25 A further object of the present invention is to provide a printhead of the character described having an improved nozzle and heater array.

Still another object of the present invention is to provide a printhead of the character described which provides similar ink flow paths to each nozzle location.

An additional object of the present invention is to provide a printhead of the character described having improved reliability.

SUMMARY OF THE INVENTION

5 Having regard to the foregoing and other objects, the present invention is directed to an inkjet printhead having at least two ink ejection nozzles for each print location.

 According to the invention, a nozzle plate for an inkjet printer is provided having a first nozzle array having a plurality of nozzles, with each nozzle
10 positioned to correspond to a desired print location, with the print location of each of the nozzles of the first nozzle array being different from one another; and a second nozzle array having a plurality of nozzles, each nozzle of the second nozzle array being positioned to correspond to a desired print location, with the print location of each of the nozzles of the second array corresponding to one of
15 the print locations of the first nozzle array such that the first and second nozzle arrays each have a nozzle corresponding to each desired print location so that at least two nozzles are provided for each print location and a single ink flow path is provided for flow of ink to each of a pair of nozzles in the first and second nozzle arrays.

20 In another aspect, the invention is directed to a nozzle plate for an inkjet printer having at least two nozzle arrays, with each array having a nozzle corresponding to a common print location and at least two nozzles in each array adjacent a single flow path for flow of ink to the nozzles.

 In yet another aspect, the invention is directed to an inkjet printhead
25 assembly for use with an inkjet printer. In a preferred embodiment, the printhead assembly includes an ink reservoir, and a printhead attached to the reservoir.

 The printhead includes a plurality of nozzles for releasing ink from the printhead toward a medium to be printed, the nozzles being positioned at locations relative to the printhead corresponding to a plurality of desired print locations, and

a plurality of resistance heater elements powered by electric signals generated by a printer controller. Each of the heaters is positioned adjacent to and operatively associated with a nozzle for heating ink for release by the associated nozzle in response to an electrical signal received from the printer controller.

5 A plurality of ink chambers are provided in flow communication with the reservoir and an associated nozzle for receiving ink to be heated, with a single flow path being provided for flowably directing ink from the ink reservoir to at least two adjacent ink chambers, wherein at least two nozzles and their associated heaters, chambers and flowpaths are provided for each print location.

10 The printhead is operated to alternatively release ink from only one nozzle of the nozzles in the first and second arrays corresponding to a given print location at a time. As will be appreciated, this provides a redundancy feature which tends to reduce the effect caused by malfunction of a nozzle.

 For example, nozzle malfunction, that is, the partial or total failure of ink to
15 be ejected through a given nozzle hole may result from various causes including, but not limited to, clogging of a nozzle, heater failure, or restrictions or clogging of the flow path feeding the nozzle. Failure of ink to release as desired reduces or eliminates the release of ink directed toward the paper to be printed for a given print location and thus often results in a reduction in the print quality.

20 In accordance with the invention, a redundancy feature is provided by providing a printhead having at least two nozzles (and associated heaters) for each print location which operate by alternating between the at least two nozzles such that the effect of an improperly operating heater and/or ink flow problems to or from a nozzle are significantly reduced.

25

BRIEF DESCRIPTION OF THE DRAWINGS

Further advantages of the invention will become apparent by reference to the detailed description of preferred embodiments when considered in conjunction with the following drawings, which are not to scale so as to better show the detail,

in which like reference numerals denote like elements throughout the several views, and wherein:

Fig. 1 is a perspective view of an inkjet cartridge having a printhead in accordance with a preferred embodiment of the invention.

5 Fig. 2 is an enlarged top plan view of a portion of a printhead for a printer according to the invention.

Fig. 3 is a bottom plan view of a printhead for a printer according to the invention.

10 Fig. 4 is an enlarged partial cross-sectional view of a nozzle plate and heater assembly for a printhead according to the invention.

Fig. 5 is an enlarged partial bottom plan view of a nozzle plate for a printhead according to the invention.

Fig. 5a is an enlarged partial top view of a nozzle plate according to the invention.

15 Fig. 5b is an enlarged partial top view of another nozzle plate according to the invention.

Fig. 6 is an enlarged view of a portion of the nozzle plate of Fig. 5.

DETAILED DESCRIPTION OF THE INVENTION

20 Referring now to the figures, there is depicted in Fig. 1 a print cartridge 10 in accordance with a preferred embodiment of the invention for use with inkjet printers. The cartridge 10 includes a printhead assembly 12 located above an ink reservoir 14 provided by a generally hollow plastic body containing ink or a foam insert saturated with ink.

25 The printhead assembly 12 is preferably located on an upper portion of a nosepiece 16 of the body 14 for transferring ink from the ink reservoir 14 onto a medium to be printed, such as paper, in patterns representing the desired indicia. As used herein, the term "ink" will be understood to refer generally to inks, dyes and the like commonly used for inkjet printers.

With additional reference to Figs. 2 and 3, the printhead 12 preferably includes a nozzle plate or member 18 attached to a silicon substrate or member 20 as by use of an adhesive, with the silicon member being in electrical communication with a plurality of electrically conductive traces 22 provided on a back surface 24 of a polymer tape strip 26. A preferred adhesive used for
5 attaching the nozzle plate 18 to the substrate 20 is a B-stageable thermal cure resin including, but not limited to phenolic resins, resorcinol resins, urea resins, epoxy resins, ethylene-urea resins, furane resins, polyurethane resins and silicon resins. The thickness of the adhesive layer ranges from about 1 to about 25 microns.

10 The nozzle member 18 is preferably provided by a polyimide polymer tape composite material with an adhesive layer on one side thereof, the composite material having a total thickness ranging from about 15 to about 200 microns, with such composite materials being generally referred to as "Coverlay" in the industry. Suitable composite materials include materials available from DuPont
15 Corporation of Wilmington, Delaware under the trade name PYRALUX and from Rogers Corporation of Chandler, Arizona under the trade name R-FLEX. However, it will be understood that the provision of nozzle holes and heaters as described herein in accordance with the present invention is not limited to use with the described nozzle plate materials but is applicable to nozzle plates of
20 virtually any material including, but not limited to, metal and metal coated plastic.

Each trace 22 preferably terminates at a contact pad 22a and each pad 22a extends through to an outer surface 32 of the tape 26 for contacting electrical contacts of the inkjet printer to conduct output signals from the printer to heater elements provided on or part of the silicon member 20. The traces 22 may be
25 provided on the tape as by plating processes and/or photo lithographic etching. The tape/electrical trace structure is referred to generally in the art as a "TAB" strip, which is an acronym for Tape Automated Bonding.

The silicon member 20 is hidden from view in the assembled printhead and is attached to nozzle member 18 in a removed area or cutout portion 28 of the tape
30 26 such that an outwardly facing surface 30 of the nozzle member is generally

flush with and parallel to a front surface 32 of the tape 26 for directing ink onto the medium to be printed via a plurality of nozzle holes 34 in flow communication with the ink reservoir 14. The nozzle holes 34 are preferably substantially circular, elliptical, square or rectangular in cross section (FIG. 2) along an axis
5 parallel to a plane defined by the nozzle member 18.

TAB bonds or wires 35 electrically connect the traces 22 to the silicon member 20 to enable electrical signals to be conducted from the printer to the silicon member for selective activation of the heaters during a printing operation. Thus, the heaters 36 (FIG. 4) are electrically coupled to the conductive traces 22
10 via the TAB bonds 35 and electrically coupled between the TAB bonds 35 and the contact pads 22a for energization thereof in accordance with commands from the printer. In this regard, a demultiplexer 44 (FIG. 3) is preferably provided on the silicon member 20 for demultiplexing incoming electrical signals and distributing them to the heaters 36.

15 With reference to FIG. 4, the silicon member 20 is preferably a generally rectangular portion of a silicon substrate of the type commonly used in the manufacture of print heads. A plurality of thin film resistors or heaters 36 are preferably provided on the silicon member 20, with one such heater 36 being located adjacent each one of the nozzle holes 34 for vaporizing ink for ejection
20 through the nozzle holes 34. In this regard, each heater 36 is preferably located adjacent a bubble chamber 38 associated with each nozzle hole 34 for heating ink conducted into the chamber 38 via a channel 40 from the ink reservoir 14 to vaporize ink in the chamber and eject it out the nozzle hole 34 for condensing into an ink droplet 42 which strikes the medium to be printed at a desired location
25 thereon. The amount of ink ejected from each chamber 38 is related to the size and shape of the nozzle hole 34.

The nozzle hole 34 preferably has a length L of from about 10 to about 100 μm and may have tapered walls moving from bubble chamber 38 to the top surface of the nozzle member 18, the entrance opening n being preferably from
30 about 5 to about 80 μm in width and the exit opening n' being from about 5 to

about 80 μm in width. Each bubble chamber 38 and channel 40, one each of which feeds a nozzle, is sized to provide a desired amount of ink to each nozzle, which volume is preferably from about 1 pl to about 200 pl. In this regard, each bubble chamber 38 preferably has a volume of from about 1 pl to about 400 pl and
5 each channel 40 preferably has a flow area of from about 20 μm^2 to about 1000 μm^2 .

The silicon member 20 has a size typically ranging from about 2 to about 3 millimeters wide with a length ranging from about 6 to about 12 millimeters long and from about 0.3 to about 1.2 millimeters, most preferably from about 0.5 to
10 about 0.8 mm in thickness. The printhead 12 may contain one, two, three or more silicon members 20 and nozzle members 18, however, for purposes of simplifying the description, the printhead assembly will be described as containing only one silicon member 20 and associated nozzle member 18.

The ink travels generally by gravity and capillary action from the reservoir
15 14 around the perimeter of the silicon member 20 or through a central via 129 (FIG. 5b) in the silicon member 20 into the channel 40 for passage into the bubble chamber 38. The relatively small size of the nozzle hole 34 maintains the ink within the chamber 38 until activation of the associated heaters which vaporizes a volatile component in the ink to substantially void the chamber after which the
20 chamber 38 refills with ink as by capillary action.

As will be noted, the lower wall of the bubble chamber 38 and the channel 40 associated with each nozzle hole 34 is provided by the adjacent substantially planar surface 45 of the silicon member. The topographic features of the chambers 38 and the channel 40 are provided by the shape and configuration of a
25 lower surface 46 of the nozzle member 18 which is attached by means of an adhesive layer 47 to the surface 45 of the silicon member 20. The flow features of the nozzle member 18, which include the nozzle holes 34, bubble chambers 38 and channels 40 are preferably formed in the composite material of the nozzle member 18 by laser ablating the material using a mask to provide configuration as
30 shown in Figs. 5 and 6.

Accordingly, and with reference to Figs. 5-6, the lower surface 46 of the nozzle member 18 is preferably configured to provide at least two nozzle holes and associated heaters for each print location. The term "print location" will be understood to refer to the location of an ink dot or droplet position on a paper to be printed. Conventionally, one nozzle is provided for each print location with sufficient nozzles provided to enable printing of pixel or ink-dot patterns corresponding to virtually any character or image. Thus, failure of a single nozzle can detrimentally affect the printed image.

In accordance with the present invention, there is provided a print head having at least two nozzles for each print location each nozzle of the at least two nozzles being alternatively activated such that the effect of the failure of a single nozzle for a print location on the quality of the printed image may be reduced. As will be appreciated, this provides a redundancy feature heretofore unavailable which reduces the effect of a failed nozzle or heater. As used herein, the terminology "alternatively activated" refers to the sequencing associated with ejecting ink from the nozzles of a pair by which the nozzles are activated one after the other or one nozzle may be activated two or more times concurrently before the other nozzle is activated.

The individual nozzle holes 34 and heaters 36 are independently numbered as shown in drawing FIGS. 5-6, with the nozzle holes and heaters of each print location bearing the same integer but with the suffix "a" or "b" to represent their plurality. Accordingly, in a preferred embodiment, the nozzle member 18 is formed to provide a nozzle array 51 positioned adjacent side edge 60 of the silicon member 20 and a nozzle array 61 positioned adjacent side edge 70 of the silicon member 18 (Fig. 5).

Nozzle array 51 includes two rows of nozzles, one row comprising nozzles 52a, 54a, 56a, 58a, and the other row comprising nozzles 62a, 64a, 66a, and 68a. Nozzle array 61 includes two rows of nozzles, one row comprising nozzles 52b, 54b, 56b, 58b, and the other row comprising nozzles 62b, 64b, 66b, and 68b. As will be seen, an imaginary line may be drawn to intersect at least two nozzles for a

given print location, e.g., intersecting line M drawn between the center of nozzles 54a and 54b, which nozzles represent the same print location.

With reference now to FIG. 5a, it will be noted that the nozzles of the array 51 are arranged in two rows, one row having nozzles 52a, 54a, 56a and 58a, and the other row having nozzles 62a, 64a, 66a and 68a. Array 61 is similarly configured as to the "b" suffix of the corresponding nozzles in array 51. As noted previously, the "a" and "b" suffixed nozzles of common-integereed nozzles, e.g., nozzles 52a and 52b, correspond to the same print location and provide a redundancy feature which reduces the effect of the failure of a nozzle or heater at a print location. This is accomplished in a preferred embodiment by alternating between the redundant nozzles (a and b) during a printing sequence.

Heater 72a is positioned below nozzle 52a and heater 72b is positioned below nozzle 52b as shown in Fig. 5a. Likewise, heaters 74a-74b, 76a-76b, 78a-78b are positioned below each of the redundant nozzles 54a-54b, 56a-56b, 58a-58b, respectively; and heaters 82a-82b, 84a-84b, 86a-86b, 88a-88b are positioned below each of the redundant nozzles 62a-62b, 64a-64b, 66a-66b, 68a-68b, respectively. As will be appreciated, the printhead preferably includes more than the eight described nozzle/heater combinations and, in a preferred embodiment includes from about 20 to about 20,000 nozzle/heater combinations per array, most preferably from about 20 to about 2,000, with the members of each redundant nozzle being provided in separate arrays. In this regard, it is contemplated that at least two arrays be provided. Further arrays may be included to provide even further redundancy, with each array having a nozzle/heater combination for each print location.

As noted previously, the features of the nozzle member 18, such as the nozzle holes 34, bubble chambers 38 and channels 40 are preferably formed as by laser ablating a polymeric material to provide configuration as shown in FIGS 5-6. A preferred method for forming the nozzle holes, bubble chambers and channels is described in copending U.S. Patent Application Serial No. _____, filed concurrently herewith and entitled METHOD FOR MAKING NOZZLE

ARRAY FOR PRINthead, which application is incorporated herein by reference in its entirety and assigned to Lexmark International, Inc., the assignee of the present application.

In this regard, the nozzle member 18 is preferably configured to provide a
5 barrier wall for each nozzle location which is shaped to provide a suitable bubble chamber 38 and channel 40 for flow of ink to the nozzle. For example, nozzle member 18 has formed thereon barrier wall 92a for nozzle 52a and barrier wall 92b for nozzle 52b. Likewise, barrier walls 94a-94b, 96a-96b, 98a-98b are provided for nozzles 54a-54b, 56a-56b, 58a-58b, respectively, and barrier walls
10 102a-102b, 104a-104b, 106a-106b, 108a-108b are provided for nozzles 62a-62b, 64a-64b, 66a-66b, 68a-68b. Barrier walls 52a-58a and 62b-68b are substantially identical to one another and barrier walls 102a-108a and 92b-98b are substantially identical to one another. Accordingly, and for the sake of clarity, only representative ones of the barrier walls will be described, it being understood that
15 the additional barrier walls are of like construction.

To facilitate the supplying of ink to the nozzles in a desired manner and to reduce interference from the operation of adjacent nozzles, it is preferred that the adjacent nozzles of an array having a common ink flow channel be spaced apart a distance R (Fig. 6) corresponding to from about 2 to about 20 heater widths, a
20 "heater width" being from about 10 to about 80 μm , such that the nozzles of adjacent rows are spaced apart by a distance of from about 20 to about 1000 μm . . In addition, for a printer having a resolution of 600 dpi, it is preferred that each nozzle be longitudinally staggered a distance S of from about 40 μm to about 400 μm relative to adjacent nozzles in the same row and latitudinally staggered a
25 distance T of from about 42 μm to about 84 μm relative to adjacent nozzles of the other row.

In addition, it is preferred that the channels or flow paths to the bubble chambers of the nozzles closest to the edges 60 and 70 (Fig. 5) of the silicon member, that is, channels 112a-112b, 114a-114b, 116a-116b, 118a-118b which
30 supply ink to the bubble chambers of nozzles 52(a)-58(a) and 62(b)-68(b),

respectively, face away from the adjacent edge while channels 122a-122b, 124a-124b, 126a-126b, 128a-128b which supply ink to the bubble chambers of the nozzles farther from the edges 60 and 70, that is, nozzles 62(a)-68(a) and 52(b) to 58(b), face toward the adjacent edge. For a silicon member having a central ink
5 via 129, the orientation of the channels for the bubble chambers for each nozzle is reversed as shown in Fig. 5b.

As may be appreciated, this orientation of the channels provides a single flow path for flowing ink to adjacent nozzles, with the flow path to each nozzle of each adjacent nozzle being of substantially the same length. Thus, with reference
10 to FIG. 6, it is noted that flowpath F1 represents a single flowpath or channel which feeds adjacent nozzles 58a and 68a in array 51, and that the length and area of F1 to nozzle 68a and to nozzle 58a as measured from the edge 60 of the silicon member is substantially the same. Likewise, flowpath F2 feeds nozzles 66a and 56a, it being preferred that F1 and F2 provide substantially the same ink flow
15 characteristics. In this regard, the flow path to each nozzle is preferably from about 40 μm to about 300 μm and most preferably about 85 μm , with the variance between the flowpaths ranging about $\pm 20\%$.

Without being bound by theory, and for the purpose of example, it has been observed that the following parameters associated with the positioning and
20 sizing of the barriers and channels may effect the flow of ink to the nozzles:

parameter	description
a	bubble chamber width
b	bubble chamber length
c	width of the smallest repeating element
v	length of the bubble chamber entry region
h	wall thickness of barrier nearest the edge of heater chip
w	width of the bubble chamber entry region

Preferred ranges for these parameters are as follows for a printer resolution of 600 dpi and a silicon member having a length of about 14.5 mm, a width of about 0.4 mm and having 2 arrays spaced apart about 804 μm , with 304 nozzles per array.

Parameter	dimension (μm)
a	42 ∇ 10
b	42 ∇ 10
c	42 $\frac{1}{3}$
v	20 ∇ 10
h	10 ∇ 5
w	20 ∇ 10

Accordingly, a significant advantage of the invention relates to the provision of at least two nozzle/heater pairs for each print location. This enables a heretofore unavailable redundancy feature which reduces the detrimental effect of an impaired or failed heater/nozzle. For example, during operation of the printhead, a signal may be received to activate the heater for a desired print location. In the event this heater has failed or its associated nozzle is clogged or otherwise malfunctioning, there will be a lack of ink on the paper to be printed due to the problem with the heater/nozzle. However, due to the redundancy of the heater elements and nozzles for the printhead of the invention, this lack of ink will only occur during every other print cycle for the desired location, since the corresponding heater/nozzle pair will be activated during the next activation of the

instant print location. For example, nozzle/heater 52a/72a and nozzle/heater 52b/72b each correspond to the same print location, but are operated alternatively when the print location is activated such that the effect of failure of one of the pair is reduced.

- 5 While specific embodiments of the invention have been described with particularity above, it will be appreciated that the invention is equally applicable to different adaptations well known to those skilled in the art.

CLAIMS

1. An inkjet printhead assembly for use with an inkjet printer, the printhead assembly comprising:

an ink reservoir, and

5 a printhead attached to the reservoir, said printhead containing a plurality of nozzles on a nozzle plate for releasing ink from the printhead toward a medium to be printed, the nozzles being positioned at locations relative to the printhead corresponding to a plurality of desired print locations;

a plurality of resistance heater elements powered by electric signals
10 generated by a printer controller, each of the heaters being positioned adjacent to and operatively associated with a nozzle for heating ink for release by the associated nozzle in response to an electrical signal received from the printer controller;

a plurality of ink chambers in flow communication with the
15 reservoir and an associated nozzle for receiving ink to be heated;

a single flow path for flowably directing ink from the ink reservoir to at least two adjacent ink chambers,

wherein at least two nozzles and their associated heaters, chambers and flowpaths are provided for each print location.

Claim 2. The printhead assembly of Claim 1, wherein each flowpath has a length of from about 10 to about 400 μm .

Claim 3. The printhead assembly of Claim 1, wherein the printhead is operable for each of the print locations by alternatively activating the heaters of each print location.

Claim 4. The printhead assembly of Claim 1, wherein at least one of the nozzles is circular in cross-section along an axis parallel to a plane defined by the nozzle plate.

Claim 5. The printhead assembly of Claim 1, wherein at least one of the nozzles is square in cross-section along an axis parallel to a plane defined by the nozzle plate.

Claim 6. The printhead assembly of Claim 1, wherein the printhead includes from about 20 to about 20,000 nozzles.

Claim 7. The printhead assembly of Claim 1, wherein the printhead includes nozzles for from about 10 to about 10,000 print locations.

Claim 8. The printhead assembly of Claim 1, wherein the nozzles are arranged in spaced apart arrays, with each array containing a nozzle for each print location.

Claim 9. The printhead assembly of Claim 7, wherein each array contains from about 10 to about 10,000 nozzles.

Claim 10. The printhead assembly of Claim 9, wherein each array contains at least two adjacent rows of nozzles, with the nozzles of one row being spaced apart from the nozzles of the other row by a distance of from about 20 to about 1000 μm .

Claim 11. The printhead assembly of Claim 10, wherein each nozzle of each row is staggered relative to the nozzle immediately adjacent to it in the same row.

Claim 12. A printhead assembly for an inkjet printer, comprising:
an ink reservoir and

a printhead attached to the reservoir containing ink ejection means
operatively associated with the ink reservoir for selectively ejecting ink from the
5 printhead in patterns corresponding to indicia to be printed by the printer, the ink
ejection means comprising

a silicon substrate having a plurality of electrically
activatable heater elements for heating ink;

a nozzle plate attached to the silicon substrate and having a
10 plurality of nozzles, one each of which is located adjacent one of the heater
elements on the substrate for releasing ink heated by the heating elements from
the printhead at desired print locations, said nozzle plate having at least two arrays
of nozzles, each array containing a nozzle for a single print location and each
array containing a single flow path for at least two adjacent nozzles for flow of
15 ink from the ink reservoir to the adjacent nozzles.

Claim 13. The printhead assembly of Claim 12, wherein the printhead is
operable for each of the print locations by alternatively activating the heaters of
each print location.

Claim 14. The printhead assembly of Claim 12, wherein at least one of
the nozzles for a print location is rectangular in cross section along an axis parallel
to a plane defined by the nozzle plate.

Claim 15. The printhead assembly of Claim 12, wherein the printhead
includes from about 20 to about 20,000 nozzles.

Claim 16. The printhead assembly of Claim 12, wherein the nozzle
plate comprises a polyamide polymer and the nozzles are formed by laser ablation
of the polyamide polymer.

Claim 17. The printhead assembly of Claim 12, wherein the nozzles for each print location are in horizontal alignment and are spaced apart a distance of from about 20 to about 1000 μm .

Claim 18. A nozzle plate for an inkjet printer, the nozzle plate comprising a first nozzle array having a plurality of nozzles in at least two rows of nozzles, each of which is positioned to correspond to a desired print location, with the print location of each of the nozzles of the first nozzle array being different
5 from one another; and a second nozzle array having a plurality of nozzles in at least two rows of nozzles, each nozzle of the second nozzle array being positioned to correspond to a desired print location, with the print location of each of the nozzles of the second array corresponding to one of the print locations of the first nozzle array such that the first and second nozzle arrays each have at least one
10 nozzle corresponding to each desired print location so that at least two nozzles are provided for each print location and a single ink flow path for flow of ink to at least two adjacent nozzles in the two rows of nozzles of each array.

Claim 19. The nozzle plate of Claim 18, wherein at least one of the arrays of nozzles comprises nozzles having rectangular cross sections along an axis parallel to a plane defined by the nozzle plate.

Claim 20. The nozzle plate of Claim 18, wherein the nozzle plate includes from about 20 to about 20,000 nozzles.

Claim 21. The nozzle plate of Claim 18, wherein the nozzle plate comprises a polyamide polymer and the nozzles are formed by laser ablation of the polyamide polymer.

Claim 22. The nozzle plate of Claim 18, wherein the nozzles for each print location are in horizontally alignment and are spaced apart a distance of from about 20 to about 1000 μm .

Claim 23. A nozzle plate for an inkjet printer, the nozzle plate having at least two nozzle arrays, with each array having a nozzle corresponding to a common print location and at least two nozzles in each array adjacent a single flow path for flow of ink to the nozzles.

24. The nozzle plate of Claim 23, wherein each nozzle array includes from about 10 to about 10,000 nozzles.

25. The nozzle plate of Claim 23, wherein the nozzle plate comprises a polyamide polymer and the nozzles are formed by laser ablation of the polyamide polymer.

26. The nozzle plate of Claim 23, wherein the nozzles are square in cross section along an axis parallel to a plane defined by the nozzle plate.

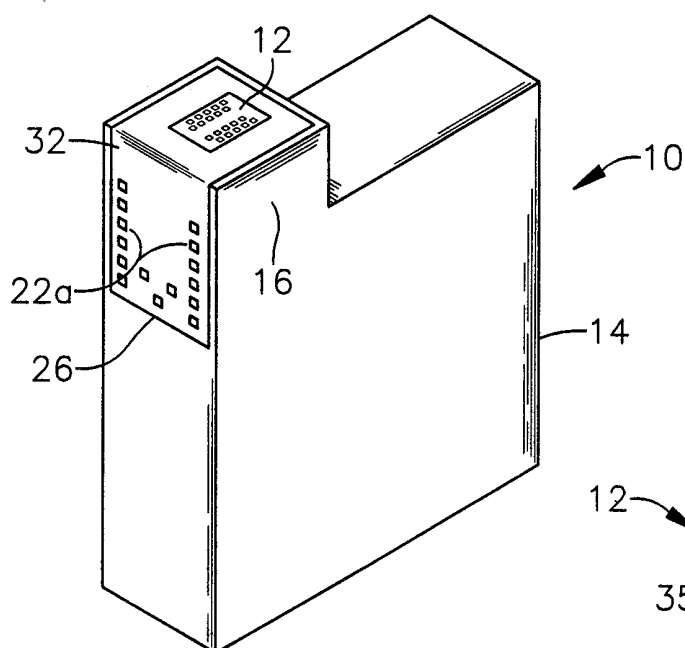


Fig. 1

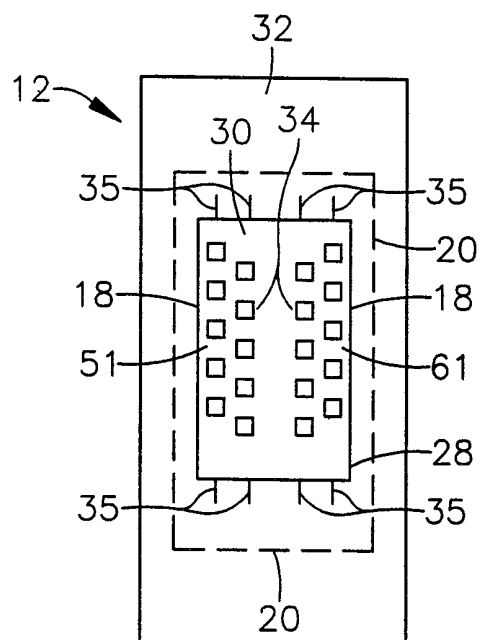


Fig. 2

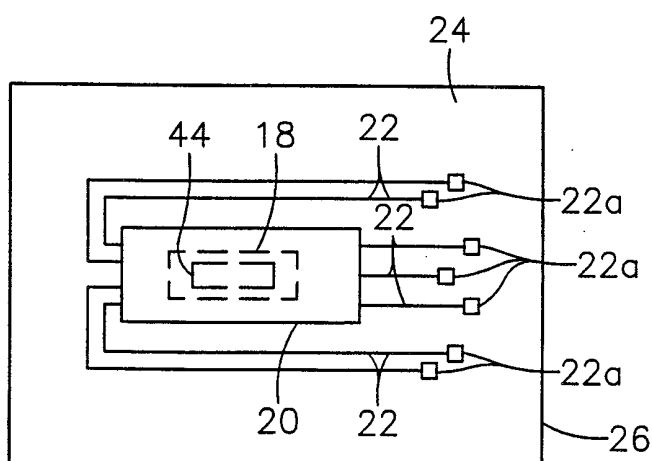


Fig. 3

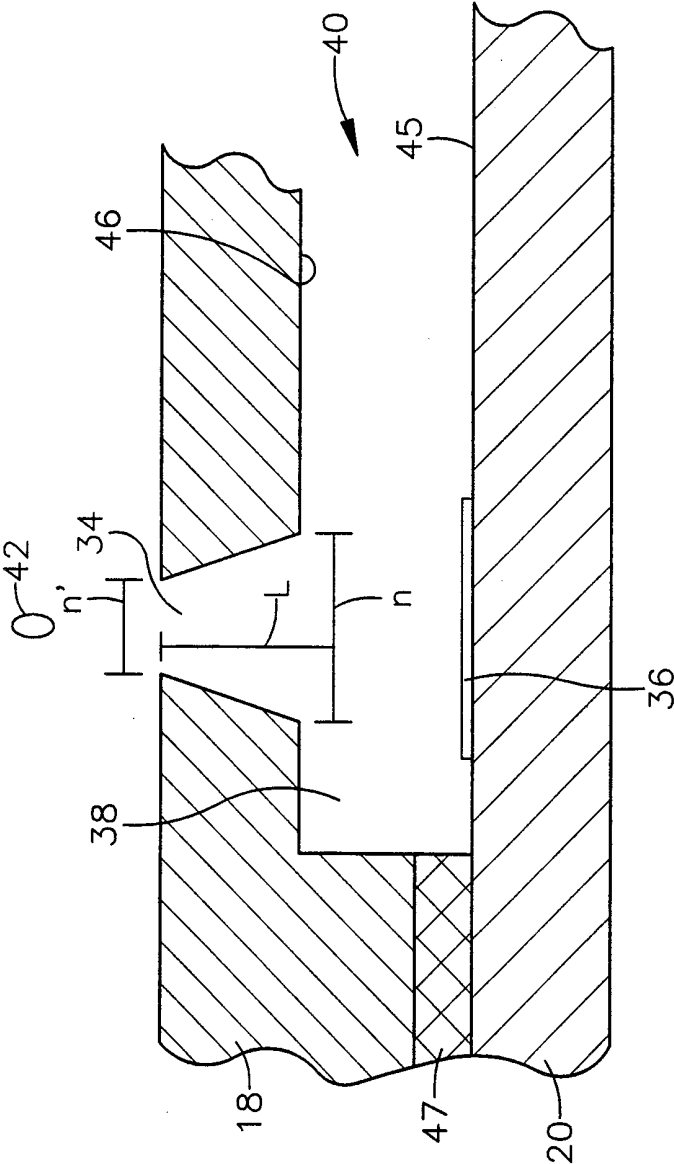


Fig. 4

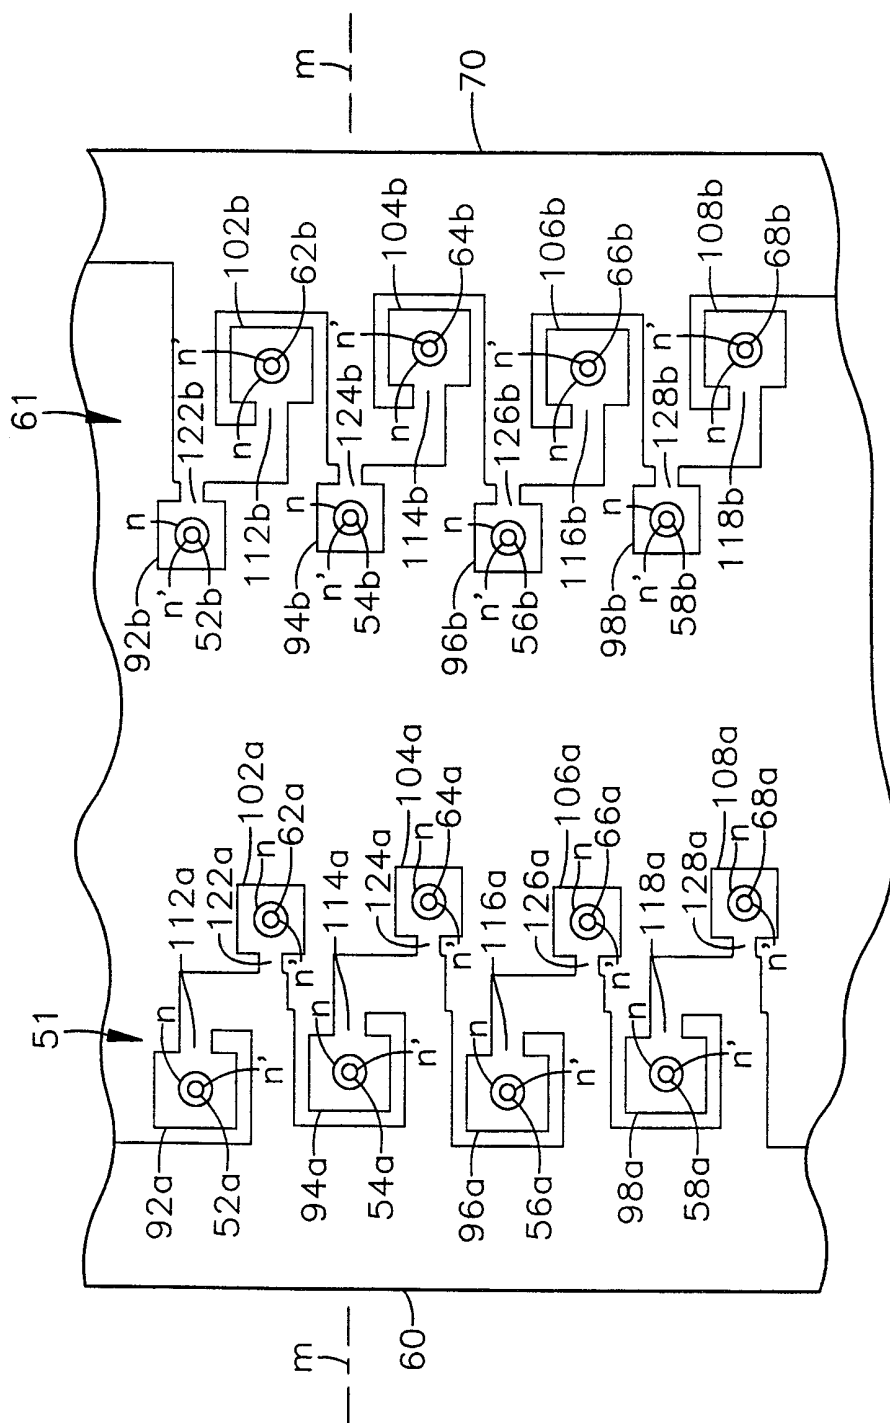


Fig. 5

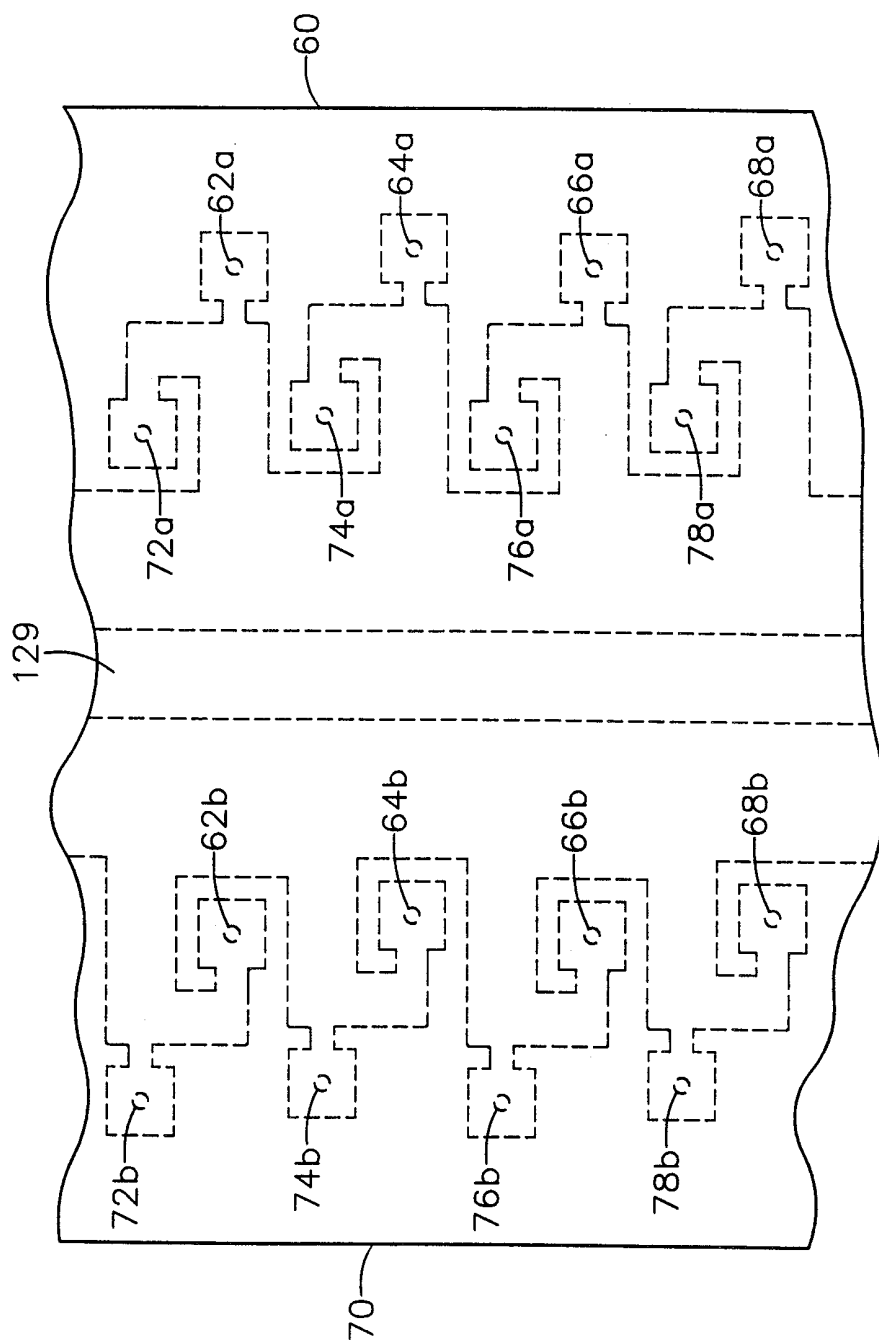


Fig. 5B

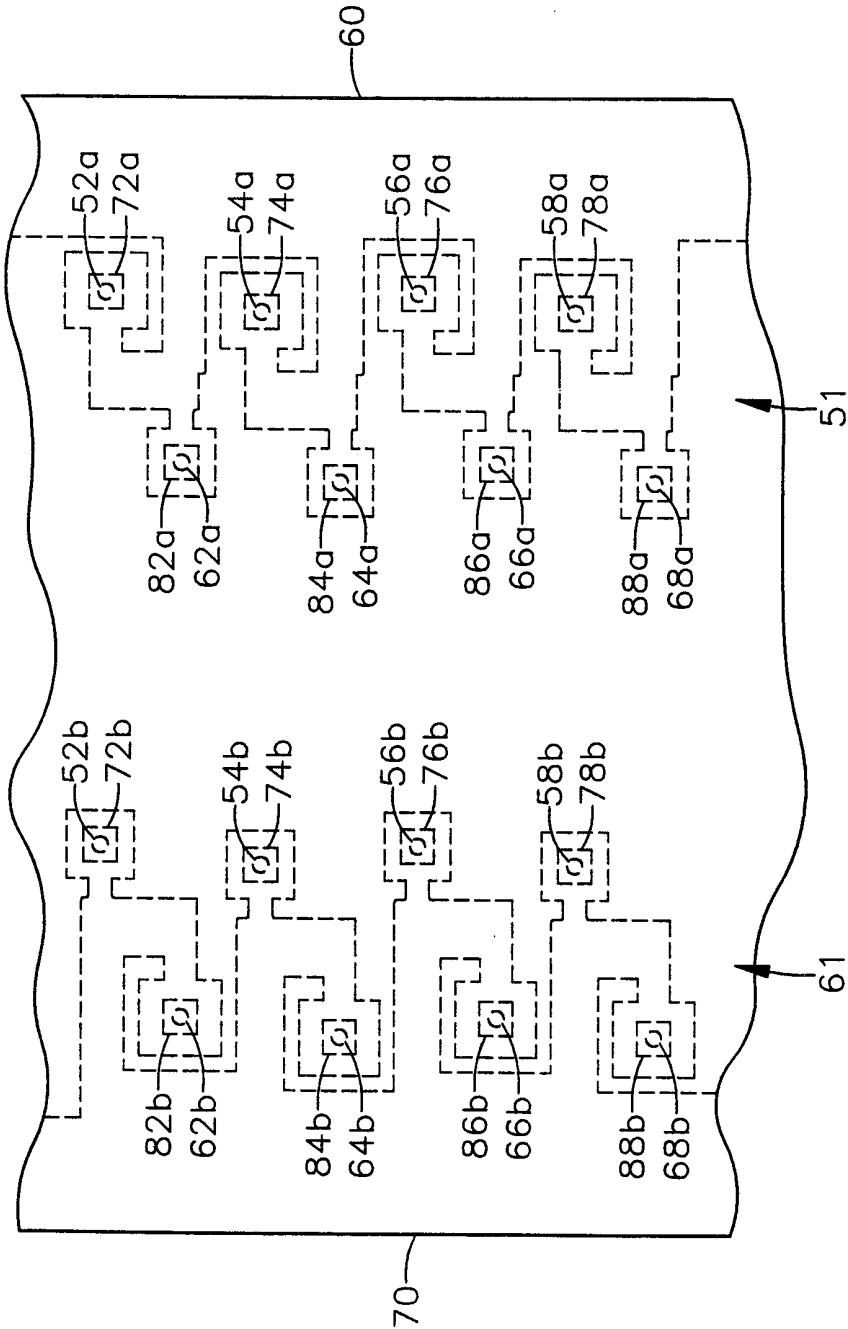


Fig. 5A

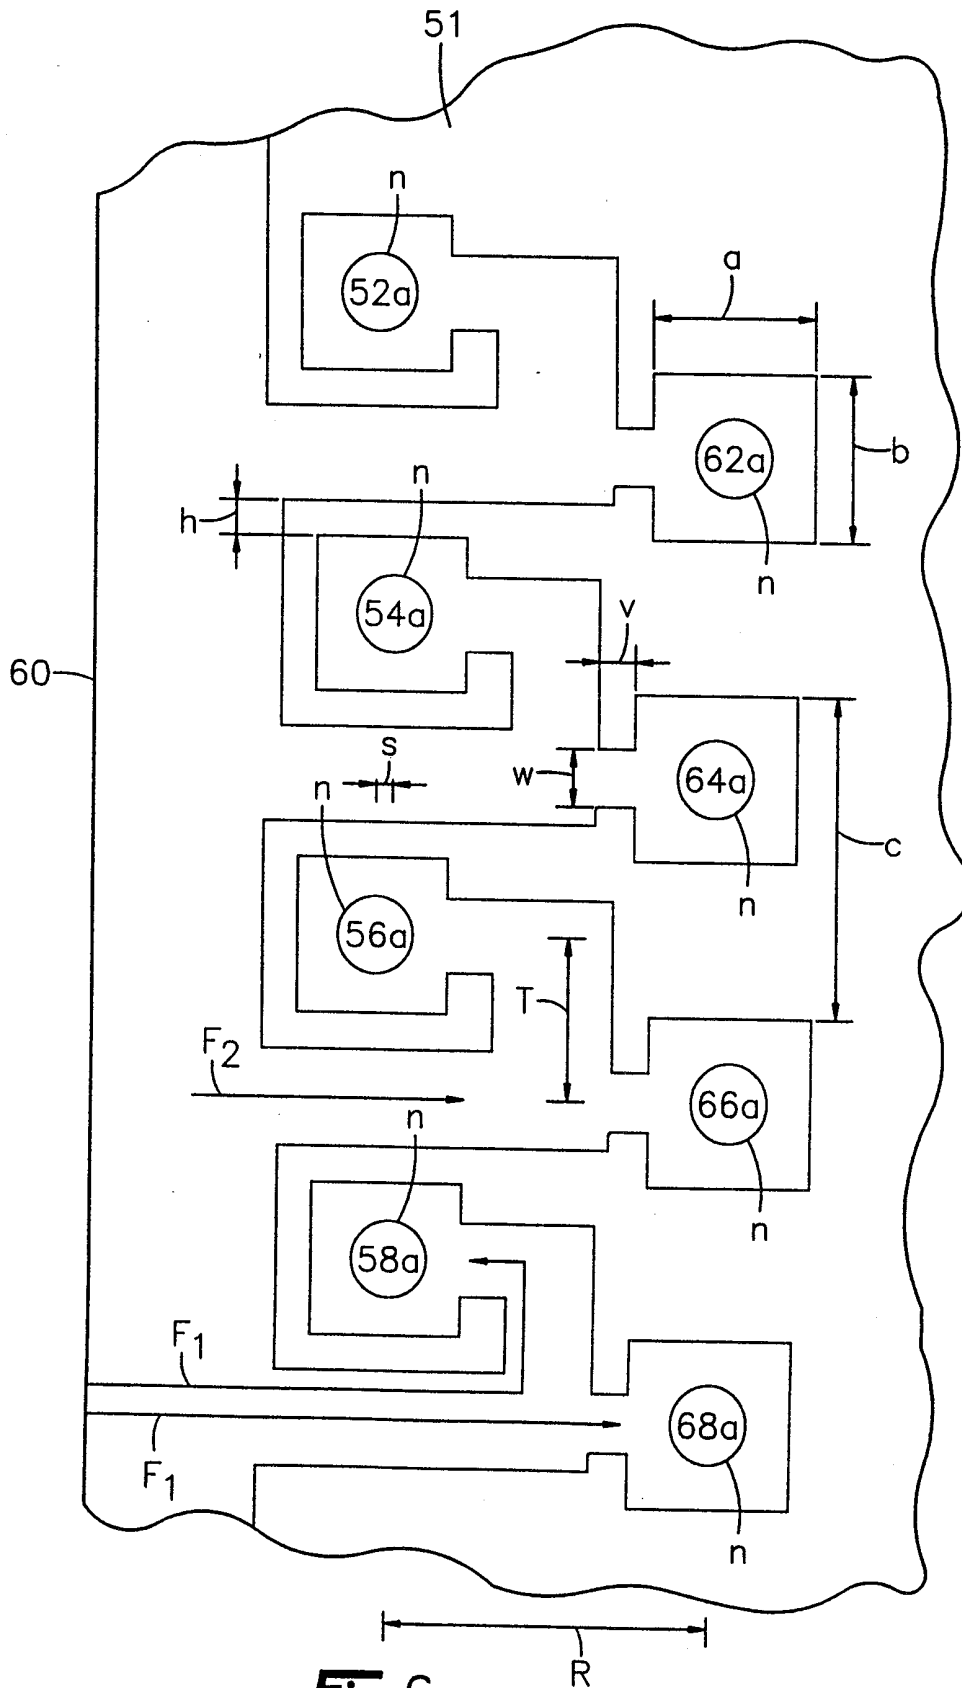


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/00311

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :B41J 2/05, 2/145, 2/175

US CL :347/65, 40

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 347/65, 40, 63, 41,47

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4,550,326 A (Allen et al) 29 OCTOBER 1985, (29/10/85) ALL	4,5,14,19, 26
Y	US 4,675,692 A (Goshima et al) 23 JUNE 1987, (23/06/87) Figures 16 A,B, col.5 lines 16-41.	3,13
Y,P	US 4,683,481 A (Johnson) 28 JULY 1998, (28/07/98) figures 3A,B.	1-26
Y	US 4,791,440 A (Eldridge et al) 13 DECEMBER 1988, (13/12/98) Figures 3 & 4.	1-26
Y	US 5,198,834 A (Childers et al) 30 MARCH 1993, (30/03/93) col.5 lines 40-43.	6,7,9-11, 15,17,20, 22,24

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A document defining the general state of the art which is not considered to be of particular relevance	*X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E earlier document published on or after the international filing date	*Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G document member of the same patent family
*O document referring to an oral disclosure, use, exhibition or other means	
*P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 17 FEBRUARY 1999	Date of mailing of the international search report 25 FEB 1999
---	---

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231
Facsimile No. (703) 305-3230

Authorized officer

Joseph Hartary

Telephone No. (703) 308-3124

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/00311

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,508,725 A (Goto et al) 16 APRIL 1996, (16/04/96) col.6 lines 1-22.	16,21,25
Y	US 5,519,423 A (Moritz et al) 21 MAY 1996, (21/05/96) Figure 3, LS.	2