

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 July 2008 (17.07.2008)

PCT

(10) International Publication Number
WO 2008/086009 A1

(51) International Patent Classification:
B03D 1/00 (2006.01) **C02F 1/24** (2006.01)

(21) International Application Number:
PCT/US2008/000322

(22) International Filing Date: 9 January 2008 (09.01.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/879,429 9 January 2007 (09.01.2007) US

(71) Applicant (for all designated States except US): **CAMBRIDGE WATER TECHNOLOGY, INC.**; 810 Memorial Drive, 3rd Floor, Cambridge, MA 02139 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WECHSLER, Ionel** [US/US]; 10 Royce Road, Framingham, MA 01701 (US). **MARSTON, Peter, G.** [US/US]; 7 Leslie Road, Ipswich, MA 01938 (US).

(74) Agents: **COLEMAN, Roy, J.** et al.; Iandiorio, Teska And Coleman, 260 Bear Hill Road, Waltham, MA 02451 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: A SYSTEM AND METHOD FOR REMOVING DISSOLVED CONTAMINANTS, PARTICULATE CONTAMINANTS, AND OIL CONTAMINANTS FROM INDUSTRIAL WASTE WATER

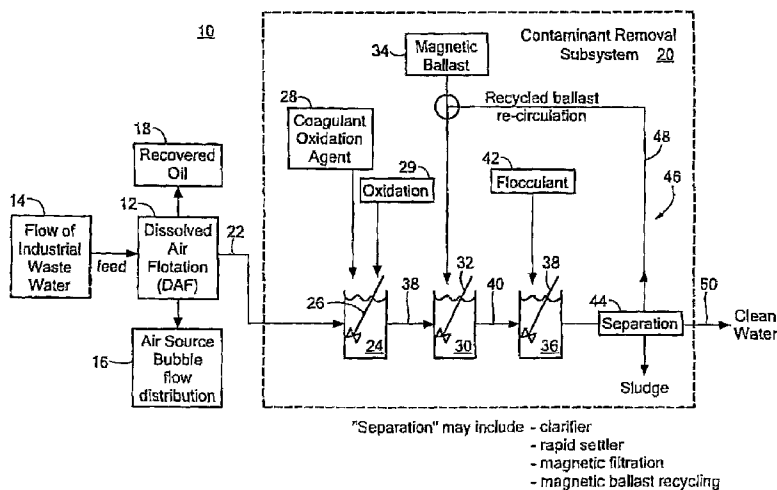

(57) Abstract: A system for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water, the system including a gas flotation and primary oil contaminant removal subsystem including a tank for receiving a flow of the industrial waste water and a flow of gaseous microspheres, wherein the gaseous microspheres combine with oil droplets in the waste water to form flocs which float to the surface and are removed to provide processed waste water with the majority of the oil contaminants removed, and a contaminant removal subsystem for removing dissolved contaminants, particulate contaminants, and any remaining oil contaminants from the processed waste water.

A SYSTEM AND METHOD FOR REMOVING DISSOLVED
CONTAMINANTS, PARTICULATE CONTAMINANTS, AND OIL
CONTAMINANTS FROM INDUSTRIAL WASTE WATER

RELATED APPLICATIONS

This application claims benefit of and priority to provisional patent application Serial No. 60/879,429, filed January 9, 2007, incorporated by reference herein.

FIELD OF THE INVENTION

This invention relates to a system and method for removing dissolved contaminants, particulate contaminants and oil contaminants from industrial waste water.

BACKGROUND OF THE INVENTION

The oil industry produces large amounts of waste water during exploration and production of petroleum. It has been estimated that approximately 800 gallons of water are used for the production of a barrel of oil of which approximately 80% is used for cooling in the refinery process. Oil wastes are classified depending on their origin, e.g., from oil production or from oil refining. Waste water from oil production is generally a mixture of drilling muds, salt water, free and emulsified oil and natural gas. Waste water from oil refineries includes, *inter alia*, free and emulsified oils from leaks, spills, and other sources. The combined refinery wastes or spills may contain crude oil and various fractions thereof, dissolved or suspended mineral and organic compounds discharged in liquors and sludges in various stages of processing.

Cleaning of industrial waste water from oil production and oil refining is important for both environmental and industry purposes. There are many

conventional processes for cleaning oil industrial waste water which include, for example, gravity separation, floatation, filtration, chemical treatments, electro-chemical treatments, biochemical treatments, and the like. These systems are typically large, inefficient, and expensive to operate. The only known process which can achieve a final effluent with less than 5 p.p.m. oil contaminants is membrane filtration. However, membrane filtration is expensive and difficult to operate because the membranes quickly foul.

BRIEF SUMMARY OF THE INVENTION

It is therefore an object of this invention to provide a system and method for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water.

It is a further object of this invention to provide such a system and method which removes dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water generated by oil production and oil refining processes.

It is a further object of this invention to provide such a system and method which removes dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water to an acceptable level required by the Environmental Protection Agency (EPA).

It is a further object of this invention to provide such a system and method which produces a final effluent which can be reused by oil production and oil refining processes.

It is a further object of this invention to provide such a system and method which provides a final effluent with less than 5 p.p.m. of oil contaminants.

It is a further object of this invention to provide such a system and method which provides a final effluent with less than 5 p.p.m. of particulate contaminants.

It is a further object of this invention to provide such a system and method which utilizes less space.

It is a further object of this invention to provide such a system and method which eliminates the problems associated with using membranes.

It is a further object of this invention to provide such a system and method which reduces costs.

It is a further object of this invention to provide such a system and method which recycles weighting agents.

It is a further object of this invention to provide such a system and method which is more effective.

The subject invention, however, in other embodiments, need not achieve all these objectives and the claims hereof should not be limited to structures or methods capable of achieving these objectives.

This invention features a system for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water, the system including a gas floatation and primary oil contaminant removal subsystem including a tank for receiving a flow of the industrial waste water and a flow of gaseous microspheres, wherein the gaseous microspheres combine with oil droplets in the waste water to form flocs which float to the surface and are removed to provide processed waste water with the majority of the oil contaminants removed, and a contaminant removal subsystem for removing dissolved contaminants, particulate contaminants, and any remaining oil contaminants from the processed waste water.

In a preferred embodiment, the gas floatation and primary oil contaminant

removal subsystem may further include a floc removal subsystem for removing the flocs from the surface of the waste water. The subsystem may include a skimmer. The system may include a cooling subsystem for reducing the temperature of the waste water to an appropriate temperature for use with a desired flocculant. The system may further include a buffer tank for regulating the flow of waste water and removing coarse particulates in the waste water. The contaminant removal subsystem may include a coagulation mixing tank for receiving the processed waste water and introducing and mixing a coagulant with the processed waste water to precipitate the dissolved contaminants and form flocs of the precipitated dissolved contaminants and of the particulate contaminants. The system may further include a weighting agent mixing tank for receiving the processed waste water from the coagulation mixing tank and introducing and mixing a weighting agent with the processed waste water. The system may further include a flocculation subsystem for receiving the processed waste water from the weighting agent mixing tank and introducing and mixing a flocculant to form large flocs of the weighting agent and the microflocs of the particulate contaminants and/or large flocs of the weighting agent and the precipitated dissolved contaminants and/or large flocs of the weighting agent and any remaining oil particulates and/or large flocs of the weighting agent and any other particulates present in the waste water. The system may further include a separation subsystem for separating the large flocs from the processed waste water to form a clear effluent. The system may further include an oxidation subsystem for introducing an oxidation agent to the processed waste water for changing the electrical charges on one or more of the particulate contaminants and/or the oil contaminants. Oxidation agent may include hydrogen peroxide. The weighting agent may include magnetite. The weighting agent may include coal fines. The separation subsystem may include a clarifier. The

separation subsystem may include a rapid settler. The separation subsystem may include hydrocyclone. The system may further include a weighting agent recovery subsystem for recovering the weighting agent. The weighting agent recovery system may include a high shear mixer subsystem. The weighting agent recovery subsystem may include a high gradient magnetic filter for removing fine magnetized weighting agents from the clear effluent. The weighting agent recovery subsystem may include a wet drum magnetic separator. The system may further include a recycling subsystem for recycling the weighting agent to the weighting agent mixing tank. The system may further include a re-circulation system for re-circulating sludge formed from large flocs of the weighting agent and the microflocs of the particulate contaminants and/or large flocs of the weighting agent and the precipitated dissolved contaminants and/or large flocs of the weighting agent and any remaining oil particulates and/or large flocs of the weighting agent and any other particulates present in the waste water. The flocculation subsystem may include a static mixer and/or a mixing tank. The oxidation subsystem may include a static mixer. The separation subsystem may include a skimmer disposed inside the clarifier for coalescing the oil contained in the processed waste water and driving the coalesced oil particulates to the surface of the clarifier. The clear effluent may have less than about 5 p.p.m. of oil contaminants, dissolved contaminants, and particulate contaminants.

The invention may also feature a system for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water, the system including a gas floatation and primary oil contaminate removal subsystem including a tank for receiving a flow of the industrial waste water and a flow of gaseous microspheres, wherein the gaseous microspheres combine with oil droplets in the waste water to form flocs which float to the surface and are removed to provide

processed waste water with the majority of the oil contaminants removed, a cooling subsystem for reducing the temperature of the waste water to an appropriate temperature for use with a desired flocculant, and a contaminant removal subsystem for receiving the waste water from the gas floatation subsystem for removing dissolved contaminants, particulate contaminants, and any remaining oil contaminants from the processed waste water.

The invention further features a system for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water, the system including a gas floatation and primary oil removal subsystem including a tank for receiving a flow of industrial waste water and a flow of gaseous microspheres, wherein the gaseous microspheres combine with oil droplets in the waste water to form flocs which float to the surface and are removed to provide processed waste water with the majority of the oil contaminants removed, a buffer tank for regulating the flow of oily waste water and removing coarse particulates in the waste water, and a contaminant removal subsystem for receiving the waste water from the gas floatation subsystem for removing dissolved contaminants, particulate contaminants, and any remaining oil contaminants from the processed waste water.

The invention further features a system for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water, the system including a gas floatation and primary oil removal subsystem including a tank for receiving a flow of the industrial waste water and a flow of gaseous microspheres, wherein the gaseous microspheres combine with oil droplets in the waste water to form flocs which float to the surface and are removed to provide processed waste water with the majority of the oil contaminants removed, a cooling subsystem for reducing the temperature of the waste water to an appropriate temperature for use with a desired

flocculant, a buffer tank for regulating the flow of waste water and removing coarse particulates in the oily waste water, and a contaminant removal subsystem for receiving the waste water from the gas floatation subsystem for removing dissolved contaminants, particulate contaminants, and any remaining oil contaminants from the processed waste water.

This invention further features a system for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water, the system including a gas floatation and primary oil removal subsystem including a tank for receiving a flow of the industrial waste water and a flow of gaseous microspheres, wherein the gaseous microspheres combine with oil droplets in the waste water to form flocs which float to the surface and are removed to provide processed waste water with the majority of the oil contaminants removed, a cooling tank for reducing the temperature of the waste water to an appropriate temperature for use with a desired flocculant, a buffer tank for regulating the flow of waste water and removing coarse particulates in the oily waste water, and a contaminant removal subsystem for removing dissolved contaminants, particulate contaminants, and any remaining oil contaminants from the processed waste water. The contaminant removal subsystem includes a coagulation mixing tank for receiving the processed waste water and introducing and mixing a coagulant with the waste water to form microflocs of the particulate contaminants and to precipitate the dissolved contaminants. A weighting agent mixing tank receives the processed waste water from the coagulation mixing tank and introduces and mixing a weighting agent with the processed waste water, a flocculation mixing tank receives the processed waste water from the weighting agent mixing tank and introduces and mixes a flocculant to form large flocs of the weighting

agent and the microflocs of the particulate contaminants and/or large flocs of the weighting agent and the precipitated dissolved contaminants and/or large flocs of the weighting agent and remaining oil particulates and/or large flocs of the weighting agent and any other particulates present in the waste water. A separation subsystem separates the large flocs from the processed waste water to form a clear effluent.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

Other objects, features and advantages will occur to those skilled in the art from the following description of a preferred embodiment and the accompanying drawings, in which:

Fig. 1 is a schematic block diagram of one embodiment of the system for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water of this invention;

Fig. 2 is a schematic block diagram of the system shown in Fig. 1 incorporating a cooling subsystem in accordance with one embodiment of this invention;

Fig. 3 is a schematic block diagram of another embodiment of the system shown in Fig. 2 utilizing coal fines as a weighting agent in accordance with this invention;

Fig. 4 is a schematic block diagram of another embodiment of the system shown in Figs. 1-3 incorporating a buffer subsystem and also showing the primary components of one embodiment of the contaminant removal subsystem;

Fig. 5 is a schematic block diagram of yet another embodiment of the system for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water of this invention; and

Fig. 6 is a schematic side view of one embodiment of a clarifier and oil skimmer that may be employed with the system shown in Figs. 1-5.

DETAILED DESCRIPTION OF THE INVENTION

Aside from the preferred embodiment or embodiments disclosed below, this invention is capable of other embodiments and of being practiced or being carried out in various ways. Thus, it is to be understood that the invention is not limited in its application to the details of construction and the arrangements of components set forth in the following description or illustrated in the drawings. If only one embodiment is described herein, the claims hereof are not to be limited to that embodiment. Moreover, the claims hereof are not to be read restrictively unless there is clear and convincing evidence manifesting a certain exclusion, restriction, or disclaimer.

As discussed in the Background section above, conventional processes for cleaning oil industry waste water, such as gravity separation, floatation, filtration, chemical treatments, electrochemical treatments, biochemical treatments, and the like, are inefficient, large, expensive to operate, and typically incapable of producing a final effluent with less than 5 p.p.m. of oil and/or particulate contaminants. Although membrane filtration systems can produce a final effluent with less than 5 p.p.m. of oil contaminants, these systems are expensive and difficult to operate because the membrane filter quickly fouls.

In contrast, system 10, Fig. 1, for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water of this invention includes gas floatation and primary oil contaminant removal subsystem 12 which receives flow of industrial waste water 14, e.g., from oil production processes, oil refining processes, and the like. Subsystem 12, e.g., a dissolved air floatation

(DAF) subsystem, receives flow of gaseous microspheres 16, e.g., from an air source with a bubble flow distribution subsystem. The flow of gaseous microspheres 16 combines with oil droplets in flow of industrial wastewater 14 in subsystem 12.

When oil is in an emulsified state, it exists as a colloidal suspension. When oil is in a free state, it is present as micro-droplets. The micro-droplets, when suspended in waste water, possess negative charge surfaces which creates repulsive forces between the droplets. The gaseous microspheres from flow of gaseous microspheres 16 are positively charged and are attracted to the oil droplets. The interaction of gaseous microspheres 16 with the oil droplets in industrial waste water 14 forms flocs. The flocs of the oil micro-droplets and the gaseous microspheres float to the surface of the waste water and are removed as recovered oil 18, e.g., with a skimmer or similar type device. This removes the majority of oil contaminants from the industrial waste water and is output as processed waste water by line 22.

Contaminant removal subsystem 20 receives the processed waste water from subsystem 12 by line 22 and removes dissolved contaminants, particulate contaminants, and any remaining oil contaminants from the processed waste water by line 22 to provide a final clear effluent by line 50 which preferably has a concentration of oil contaminants, particulate contaminants, and dissolved contaminants which are less than about 5 p.p.m. each, as discussed in detail below.

In one embodiment, contaminant removal subsystem 20 includes coagulation mixing tank 24 with mixer 26 which receives the processed waste water from subsystem 12, by line 22 and introduces coagulant 28, e.g., aluminum, FeCl_3 , PAC (polyaluminum chloride), and the like, to tank 24. Mixer 26 mixes the coagulant and the processed waste water to precipitate the dissolved contaminants in the waste water and form microflocs of precipitated dissolved contaminants and particulates.

Contaminant removal subsystem 20 also preferably includes weighting agent mixing tank 30 with mixer 32 which receives the processed waste water from coagulation mixing tank 24 by line 34 and introduces weighting agent or magnetic ballast 34, e.g., magnetite or similar type weighting agents known to those skilled in the art. Mixer 32 mixes the weighting agent 34 with the processed waste water in tank 30. As known by those skilled in the art, the weighting agent provides for rapid settling of flocs, as discussed below.

Subsystem 20 preferably includes flocculation mixing tank 36 which receives the processed waste water from weighting agent mixing tank 30 by line 40 and introduces flocculant 42. Mixer 38 mixes flocculant 42 with the processed waste water in tank 36 to form large flocs of the weighting agent and the microflocs of the particulate contaminants and/or large flocs of the weighting agent and the precipitated dissolved contaminants and/or large flocs of the weighting agent and any remaining oil particulates and/or large flocs of any other particulates present in the processed waste water received by line 40. The flocculant, e.g., a polymer, has an electrical charge (anionic or cationic) which attracts the weighting agent, the microflocs of the particulate contaminants, the precipitated dissolved contaminants, any remaining oil particulates, and any other particulates present in the waste water to form the large flocs which are separated using separation subsystem 44. The weighting agent provides for rapid settling of the flocs separation subsystem 44.

Separation subsystem 44 separates the large flocs of the weighting agent and the microflocs of the particulate, large flocs of the weighting agent and the precipitated dissolved contaminants and/or large flocs of the weighting agent and any remaining oil particulates and/or large flocs of any other particulates present in the processed waste water to provide a clear effluent on line 50, e.g., a final effluent

having less than 5 p.p.m. each of oil contaminants, and particulate contaminants. As known to those skilled in the art, separation subsystem 44 may include a clarifier, a rapid settler, or a hydrocyclone.

In one design, system 10 may include recycling and re-circulating subsystem 46 which recovers and recycles weighting agent or magnetic ballast 34 from the processed waste water in separation subsystem 40 by line 48 and also re-circulates the sludge of the large flocs of the weighting agent and contaminants by line 48 (discussed below).

In one embodiment, system 10 includes an oxidation subsystem 29 for introducing an oxidation agent, e.g., hydrogen peroxide or similar oxidation agent known to those skilled in the art, to the processed water in coagulation mixing tank 24 in order to change the electrical charges of one or more of the particulate contaminants and/or the oil contaminants in the waste water and to improve the formation of flocs. Additional examples of contaminant removal subsystem 20 are disclosed in U.S. Patent No. 6,099,738 by the inventors hereof, incorporated by reference herein.

The result is system 10 for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water of this invention effectively and efficiently removes dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water. e.g., generated from oil production and/or oil refining processes. System 10 provides a final clean effluent, preferably having a level of oil contaminants and particulate contaminants less than about 5 p.p.m. each. Such a level is an acceptable level required by the EPA and can be reused by oil production and/or oil refining processes. Moreover, system 10 does not require the use of any membranes or filters, thus the problems associated therewith

are eliminated. System 10 is less expensive and utilizes less space than conventional industrial waste water cleaning systems. The ability to recycle the weight agents further decreases processing costs.

In one embodiment, system 10', Fig. 2, where like parts have been given like numbers, includes cooling subsystem 52. Cooling subsystem 52 reduces the temperature of the waste water received from gas floatation and primary oil contaminant removal subsystem 12 by line 22 to an appropriate temperature on line 23, e.g., about 50° C, for use with a desired flocculant, e.g., a polymer such as Cytec A-130 or similar flocculant type known by those skilled in the art.

In one design, weighting agent 34', Fig. 3, where like parts have been given like numbers, may be coal fines. Using coal fines as the weighting agent generates a final sludge which can be filtered, dried, and used as a combustible.

In another design, system 10'', Fig. 4, where like parts have been given like numbers, includes gas floatation and primary oil contaminant subsystem 12 which receives flow of industrial waste water 14 and operates similar as discussed above with reference to Fig. 1. System 10' also preferably includes buffer tank 56 which regulates the flow of waste water, e.g., from cooling subsystem 52 by line 23 and removes coarse particulates from the waste water. Although, as shown in Fig. 4 buffer tank 56 is located between cooling subsystem 52 and contaminant removal subsystem 20, this is not a necessary limitation of this invention, as buffer tank 56 may be located at any desired location in system 10.

In one design, contaminant removal subsystem 20' receives the cooled and regulated waste water from cooling subsystem 52 and buffer tank 56 by line 57. Static mixers 60 introduce and mix the coagulant via coagulant feed R1-82 by line 83 and/or the oxidation agent via oxidation feed R2-84 by line 85. The coagulant and/or

oxidation agent interacts with plates 62 of static mixers 60 to effectively mix of the coagulant and/or the oxidizing agent with the processed waste water in line 57. The statically mixed coagulant and/or oxidizing agent with the processed waste water from subsystem 12 are fed into mixing tanks T-1 and T-2 by line 89. Tanks T-1 to T-2, e.g., weighting agent tank 30 with mixer 32 and flocculant mixing tank 36 with mixer 38 introduce and mix the waste water from static mixers 60 with weighting agents and flocculant to form large flocs of the weighting agent and the microflocs of particulate contaminants and/or large flocs of the weighting agent and the precipitated dissolved contaminants and/or large flocs of the weighting agent and any remaining oil particulates and/or large flocs of any other particulates present in the waste processed, similar as discussed above with reference to Fig. 1. Separation subsystem 44' includes clarifier 70 which removes the large flocs of the weighting agent and the microflocs of particulate contaminants, and/or the large flocs of the weighting agent and precipitated dissolved contaminants and/or large flocs weighting agent and any remaining oil particulates to provide a clear effluent on line 50', e.g., by rapid settling, as known by those skilled in the art.

In one design, contaminant removal subsystem 20' includes weighting agent recovery subsystem 46' for removing fine magnetized weighting agents from the clear effluent on line 50'. In one example, magnetic filter subsystem 72 and/or high shear subsystem 74 and/or magnetic wet drum separator 76 is used to remove and recover the weighting agent from the clear effluent in line 50'. Weighting agent recovery subsystem 70 recovers the weighting agent which is then recycled back to weighting agent mixing tanks, e.g., any of tank T-1 to T-2, by line 78. See, e.g., U.S. Patent No. 6,099,738 cited *supra*.

Although, as discussed above with reference to Figs. 1-4 above, gas floatation

and primary oil contaminant removal subsystem 12 is located before contaminant removal subsystem 20, this is not a necessary limitation of this invention. In another embodiment, system 10^{iv}, Fig. 5, where like parts have been given like numbers, for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water of this invention, may include gas floatation and primary oil contaminants removal subsystem 12 located after contaminant removal subsystem 20". In this embodiment, contaminant removal subsystem 20" receives flow of industrial waste water 14 by line 120. Subsystem 20' includes tanks 100 which receive coagulants 102 by line 103, weighting agents or magnetic ballast 104 by line 105 and a flocculant 106 by line 107. Mixing tanks 100 operate similar to coagulation mixing tank 24 with mixer 24, weighting agent mixing tank 30 with mixer 32, and flocculation mixing tank 36 with mixer 38, as described above with reference to Fig. 1. The output of mixing tanks 100 by line 103 is large flocs of the weighting agent and oil contaminants, large flocs of the weighting agent, and the microflocs of the particulate contaminants, and/or large flocs of the weighting agent and the precipitated dissolved contaminants, and/or large flocs of any other particulates present in the waste water. Clarifier 82 preferably removes the large flocs by rapid sedimentation. Clarifier 82, Fig. 6, may also include skimmer 170, disposed inside clarifier 82, which coalesces the oil contained in the processed waste water, e.g., as shown at 172, and drives the coalesced oil particulates to the surface of the clarifier for removal as shown by arrow 174. Clarifier 82 with skimmer 170 may be utilized in any of the embodiments of system 10 discussed above with reference to Figs. 1-4. Gas floatation and primary oil contaminant removal subsystem 12', Fig. 5, of similar design as gas floatation and primary oil contaminant removal subsystem discussed above with reference to Fig. 1, receives the clear effluent output by clarifier on line

123 and introduces gaseous microspheres which combine with any remaining oil droplets in the waste water to form flocs which float to the surface and are removed as recovered oil 18. The final clear effluent is output by line 50". Sludge 130 output by clarifier 82 by line 132 can be re-circulated by line 110 to tanks 100 and/or processed by magnetic separator 114 which recycles the weighting agents by line 112 to mixing tanks 100. The final sludge 140 can be sent to filtration pond and incineration when the weighting agent is coal fines, indicated at 144. System 10^{iv} may also be combined with system 10, Figs. 1-4, such that gas floatation and primary oil contaminant subsystem 12, 12', is located at before and after contaminant removal subsystem 20, 21'. Such a design is useful for applications requiring more complete removal of oil contaminants.

Although specific features of the invention are shown in some drawings and not in others, this is for convenience only as each feature may be combined with any or all of the other features in accordance with the invention. The words "including", "comprising", "having", and "with" as used herein are to be interpreted broadly and comprehensively and are not limited to any physical interconnection. Moreover, any embodiments disclosed in the subject application are not to be taken as the only possible embodiments. Other embodiments will occur to those skilled in the art and are within the following claims.

In addition, any amendment presented during the prosecution of the patent application for this patent is not a disclaimer of any claim element presented in the application as filed: those skilled in the art cannot reasonably be expected to draft a claim that would literally encompass all possible equivalents, many equivalents will be unforeseeable at the time of the amendment and are beyond a fair interpretation of what is to be surrendered (if anything), the rationale underlying the amendment may

bear no more than a tangential relation to many equivalents, and/or there are many other reasons the applicant can not be expected to describe certain insubstantial substitutes for any claim element amended.

What is claimed is:

CLAIMS

1. A system for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water the system comprising:

a gas floatation and primary oil contaminant removal subsystem including a tank for receiving a flow of the industrial waste water and a flow of gaseous microspheres, wherein the gaseous microspheres combine with oil droplets in the waste water to form flocs which float to the surface and are removed to provide processed waste water with the majority of the oil contaminants removed; and

a contaminant removal subsystem for removing dissolved contaminants, particulate contaminants, and any remaining oil contaminants from the processed waste water.
2. The system of claim 1 in which the gas floatation and primary oil contaminant removal subsystem further includes a floc removal subsystem for removing the flocs from the surface of the waste water.
3. The system of claim 2 in which the floc removal subsystem includes a skimmer.
4. The system of claim 1 further including a cooling subsystem for reducing the temperature of the waste water to an appropriate temperature for use with a desired flocculant.

5. The system of claim 1 further including a buffer tank for regulating the flow of waste water and removing coarse particulates in the waste water.

6. The system of claim 1 in which the contaminant removal subsystem includes a coagulation mixing tank for receiving the processed waste water and introducing and mixing a coagulant with the processed waste water to precipitate and form flocs of the precipitated the dissolved contaminants and of the particulate contaminants.

7. The system of claim 6 further including a weighting agent mixing tank for receiving the processed waste water from the coagulation mixing tank and introducing and mixing a weighting agent with the processed waste water.

8. The system of claim 7 further including a flocculation subsystem for receiving the processed waste water from the weighting agent mixing tank and introducing and mixing a flocculant to form large flocs of the weighting agent and the microflocs of the particulate contaminants and/or large flocs of the weighting agent and the precipitated dissolved contaminants and/or large flocs of the weighting agent and any remaining oil particulates and/or large flocs of the weighting agent and any other particulates present in the waste water.

9. The system of claim 8 further including a separation subsystem for separating the large flocs from the processed waste water to form a clear effluent.

10. The system of claim 6 in further including an oxidation subsystem for

introducing an oxidation agent to the processed waste water for changing the electrical charges on one or more of the particulate contaminants and/or the oil contaminants.

11. The system of claim 10 in which said oxidation agent includes hydrogen peroxide.
12. The system of claim 7 in which the weighting agent includes magnetite.
13. The system of claim 7 weighting agent includes coal fines.
14. The system of claim 9 in which said separation subsystem includes a clarifier.
15. The system of claim 9 in which said separation subsystem includes a rapid settler.
16. The system of claim 9 in which separation subsystem includes hydrocyclone.
17. The system of claim 9 further including a weighting agent recovery subsystem for recovering the weighting agent.
18. The system of claim 17 in which the weighting agent recovery system

includes a high shear mixer subsystem.

19. The system of claim 17 in which said weighting agent recovery subsystem includes a high gradient magnetic filter for removing fine magnetized weighting agents from the clear effluent.

20. The system of claim 17 in which the weighting agent recovery subsystem includes a wet drum magnetic separator.

21. The system of claim 17 further including a recycling subsystem for recycling the weighting agent to the weighting agent mixing tank.

22. The system of claim 9 further including a re-circulation system for re-circulating sludge formed from large flocs of the weighting agent and the microflocs of the particulate contaminants and/or large flocs of the weighting agent and the precipitated dissolved contaminants and/or large flocs of the weighting agent and any remaining oil particulates and/or large flocs of the weighting agent and any other particulates present in the waste water.

23. The system of claim 8 in which the flocculation subsystem includes a static mixer and/or a mixing tank.

24. The system of claim 10 in which the oxidation subsystem includes a static mixer.

25. The system of claim 9 in which the separation subsystem includes a skimmer disposed inside a clarifier for coalescing the oil contained in the processed waste water and driving the coalesced oil particulates to the surface of the clarifier.

26. The system 9 in which the clear effluent has less than about 5 p.p.m. each of oil contaminants and/or particulate contaminants.

27. A system for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water the system comprising:

a gas floatation and primary oil contaminate removal subsystem including a tank for receiving a flow of the industrial waste water and a flow of gaseous microspheres, wherein the gaseous microspheres combine with oil droplets in the waste water to form flocs which float to the surface and are removed to provide processed waste water with the majority of the oil contaminants removed;

a cooling subsystem for reducing the temperature of the waste water to an appropriate temperature for use with a desired flocculant; and

a contaminant removal subsystem for receiving the waste water from the gas floatation subsystem for removing dissolved contaminants, particulate contaminants, and any remaining oil contaminants from the processed waste water.

28. A system for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water the system comprising:

a gas floatation and primary oil removal subsystem including a tank for

receiving a flow of industrial waste water and a flow of gaseous microspheres, wherein the gaseous microspheres combine with oil droplets in the waste water to form flocs which float to the surface and are removed to provide processed waste water with the majority of the oil contaminants removed;

a buffer tank for regulating the flow of oily waste water and removing coarse particulates in the waste water; and

a contaminant removal subsystem for receiving the waste water from the gas floatation subsystem for removing dissolved contaminants, particulate contaminants, and any remaining oil contaminants from the processed waste water.

29. A system for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water the system comprising:

a gas floatation and primary oil removal subsystem including a tank for receiving a flow of the industrial waste water and a flow of gaseous microspheres, wherein the gaseous microspheres combine with oil droplets in the waste water to form flocs which float to the surface and are removed to provide processed waste water with the majority of the oil contaminants removed;

a cooling subsystem for reducing the temperature of the waste water to an appropriate temperature for use with a desired flocculant;

a buffer tank for regulating the flow of waste water and removing coarse particulates in the oily waste water; and

a contaminant removal subsystem for receiving the waste water from the gas floatation subsystem for removing dissolved contaminants, particulate contaminants, and any remaining oil contaminants from the processed waste water.

30. A system for removing dissolved contaminants, particulate contaminants, and oil contaminants from industrial waste water the system comprising:

a gas floatation and primary oil removal subsystem including a tank for receiving a flow of the industrial waste water and a flow of gaseous microspheres, wherein the gaseous microspheres combine with oil droplets in the waste water to form flocs which float to the surface and are removed to provide processed waste water with the majority of the oil contaminants removed;

a cooling tank for reducing the temperature of the waste water to an appropriate temperature for use with a desired flocculant;

a buffer tank for regulating the flow of waste water and removing coarse particulates in the oily waste water; and

a contaminant removal subsystem for removing dissolved contaminants, particulate contaminants, and any remaining oil contaminants from the processed waste water, the contaminant removal subsystem including:

a coagulation mixing tank for receiving the processed waste water and introducing and mixing a coagulant with the waste water to form microflocs of the particulate contaminants and to precipitate the dissolved contaminants,


a weighting agent mixing tank for receiving the processed waste water from the coagulation mixing tank and introducing and mixing a weighting agent with the processed waste water,

a flocculation mixing tank for receiving the processed waste water from the weighting agent mixing tank and introducing and mixing a flocculant

to form large flocs of the weighting agent and the microflocs of the particulate contaminants and/or large flocs of the weighting agent and the precipitated dissolved contaminants and/or large flocs of the weighting agent and remaining oil particulates and/or large flocs of the weighting agent and any other particulates present in the waste water, and

a separation subsystem for separating the large flocs from the processed waste water to form a clear effluent.

1/6

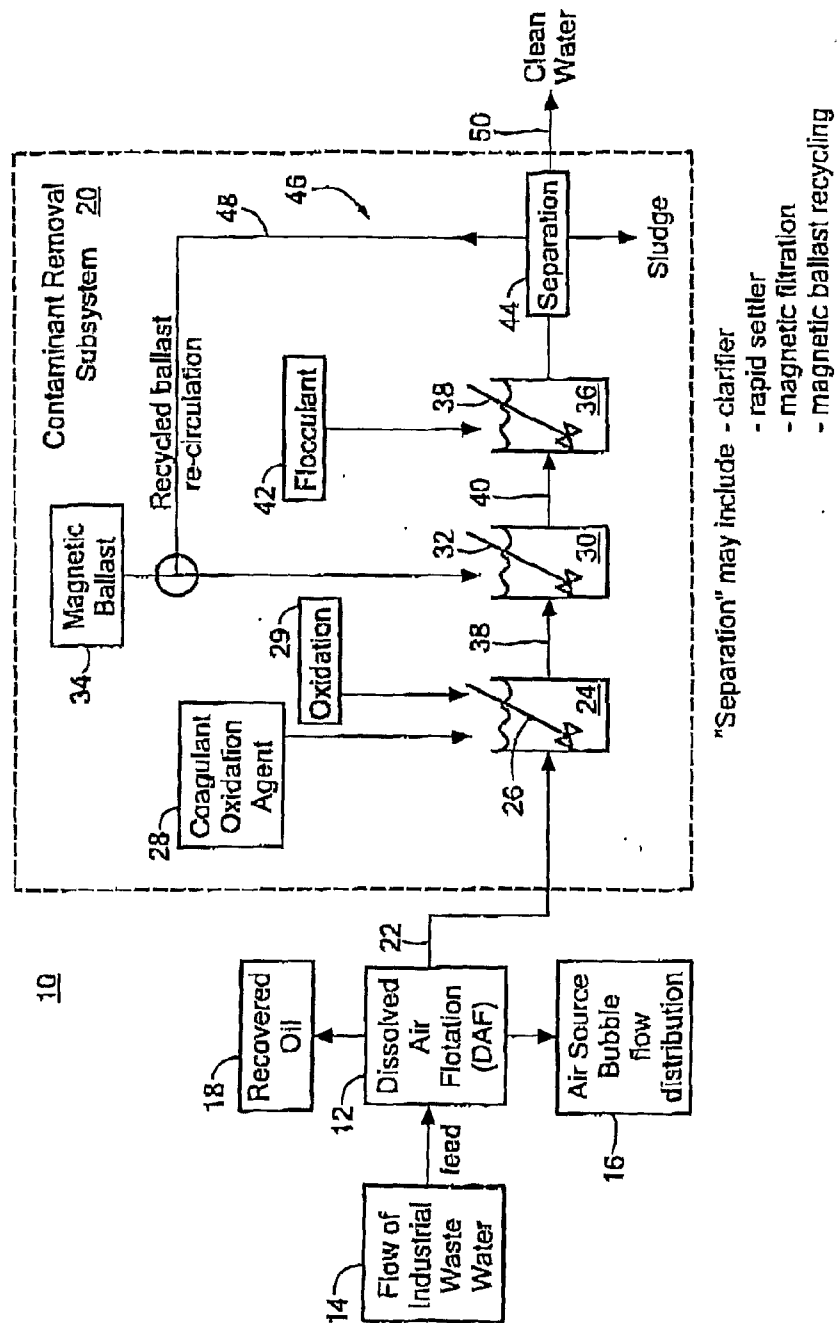

2/6

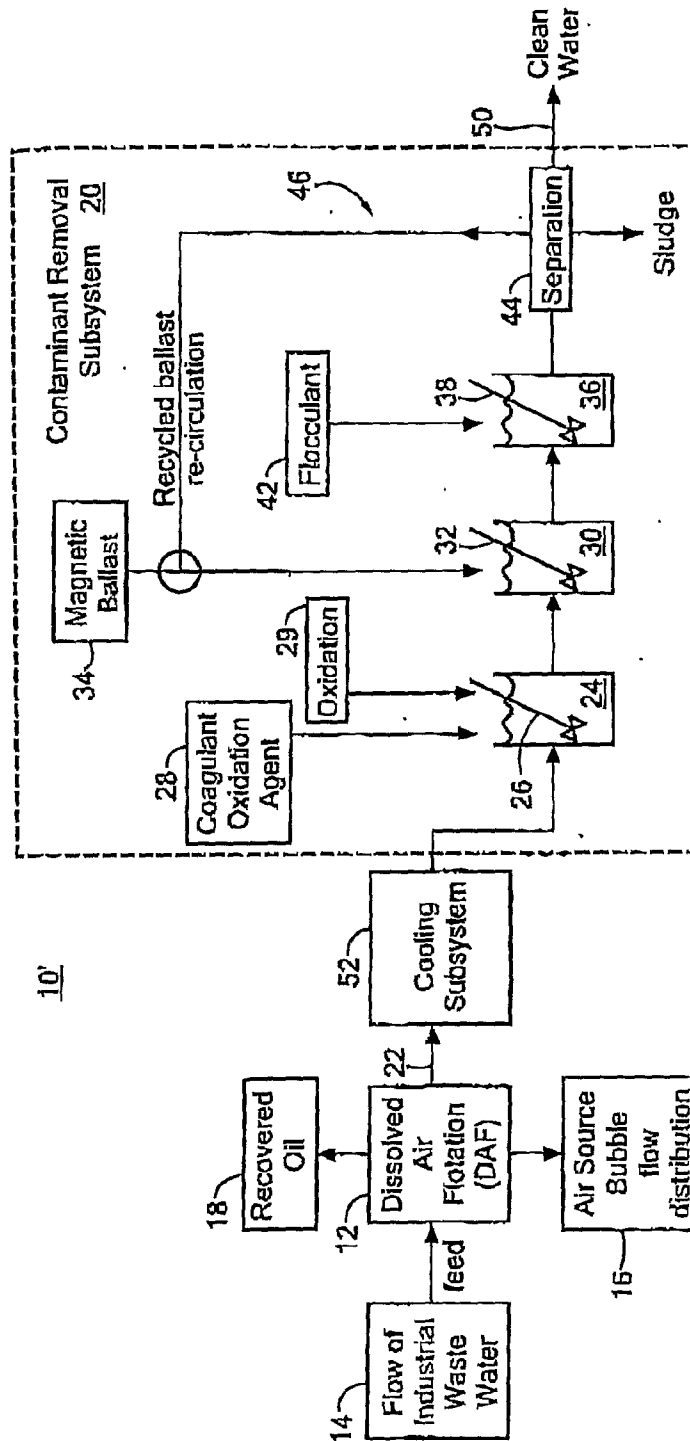


FIG. 2

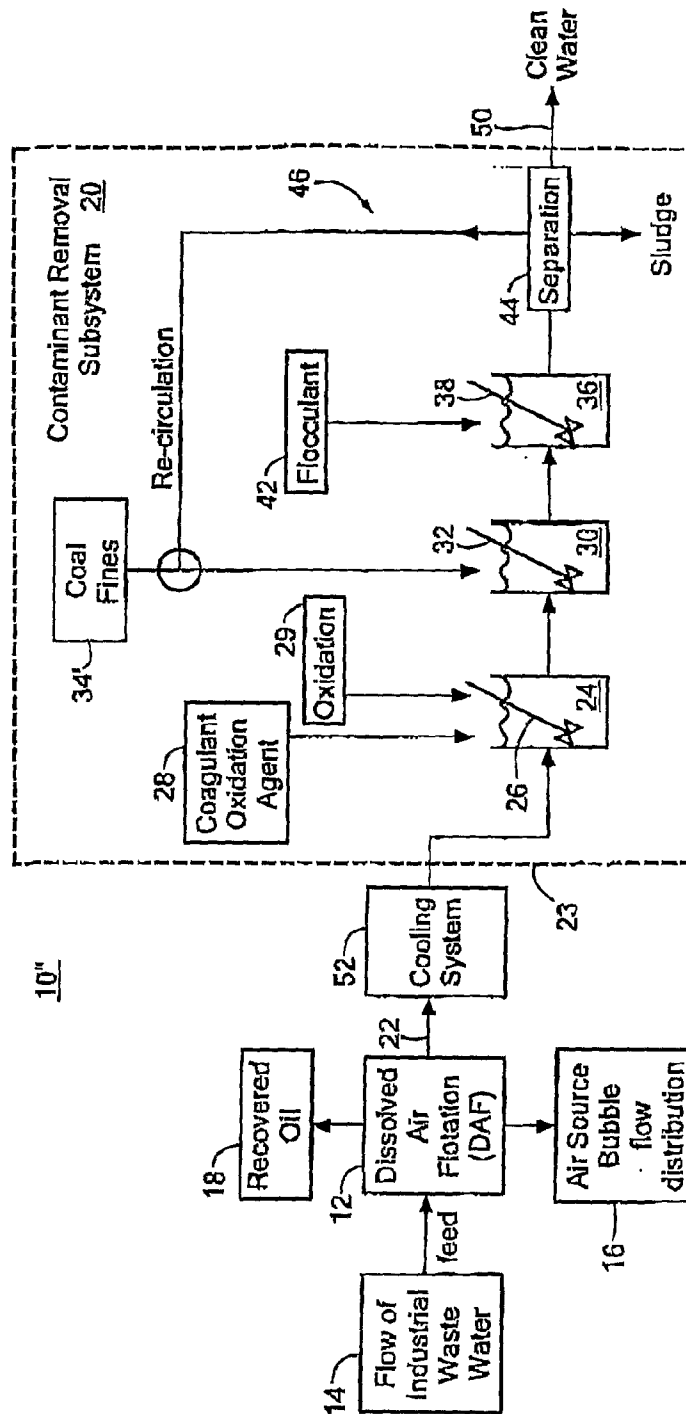


FIG. 3

4/6

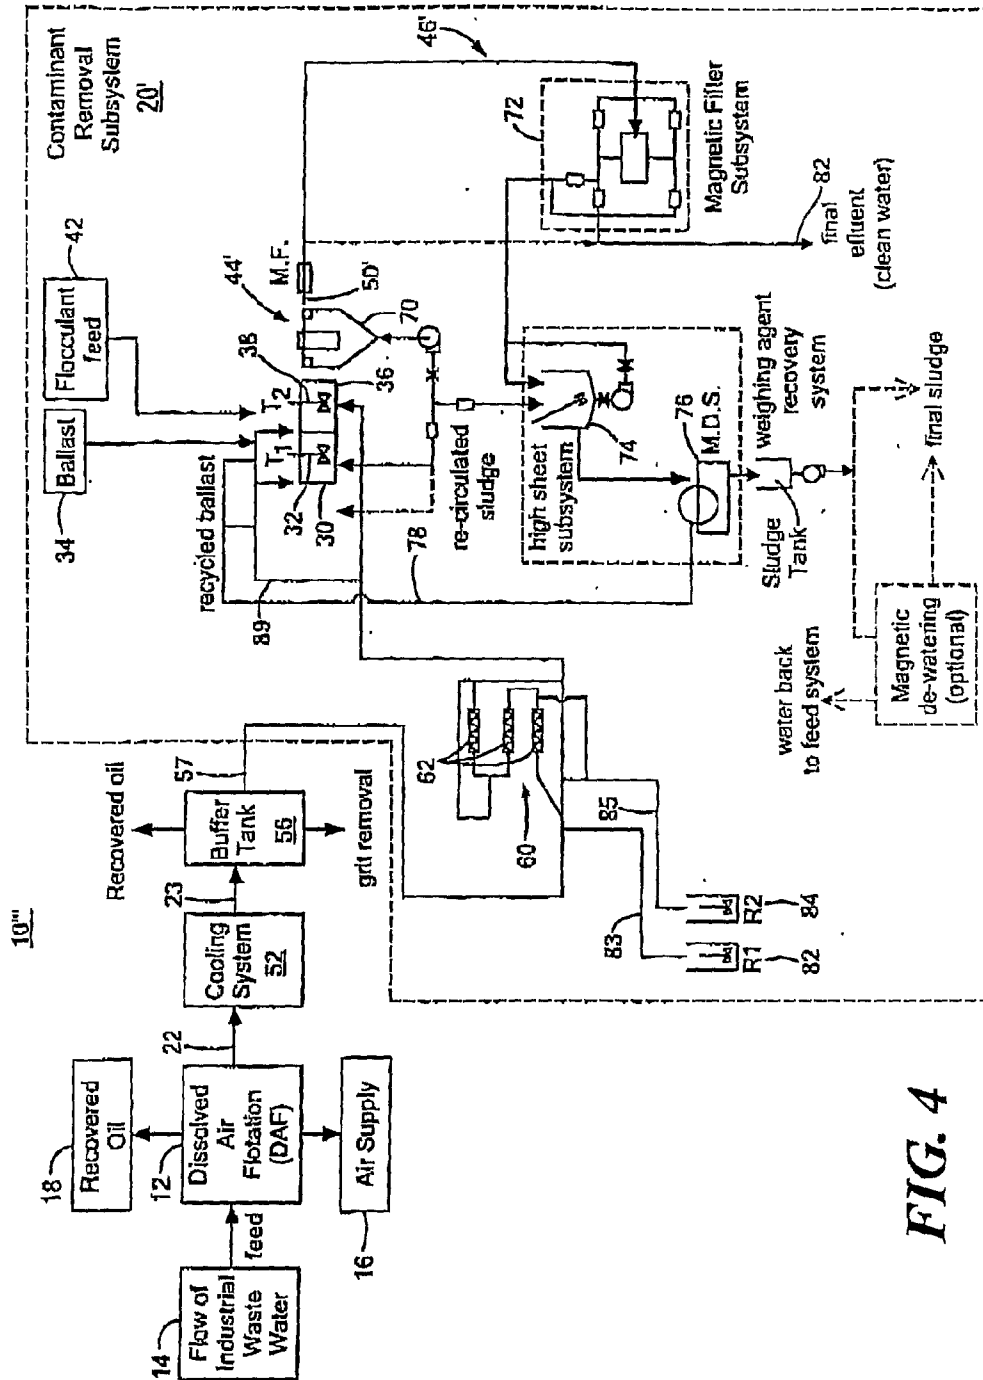


FIG. 4

5/6

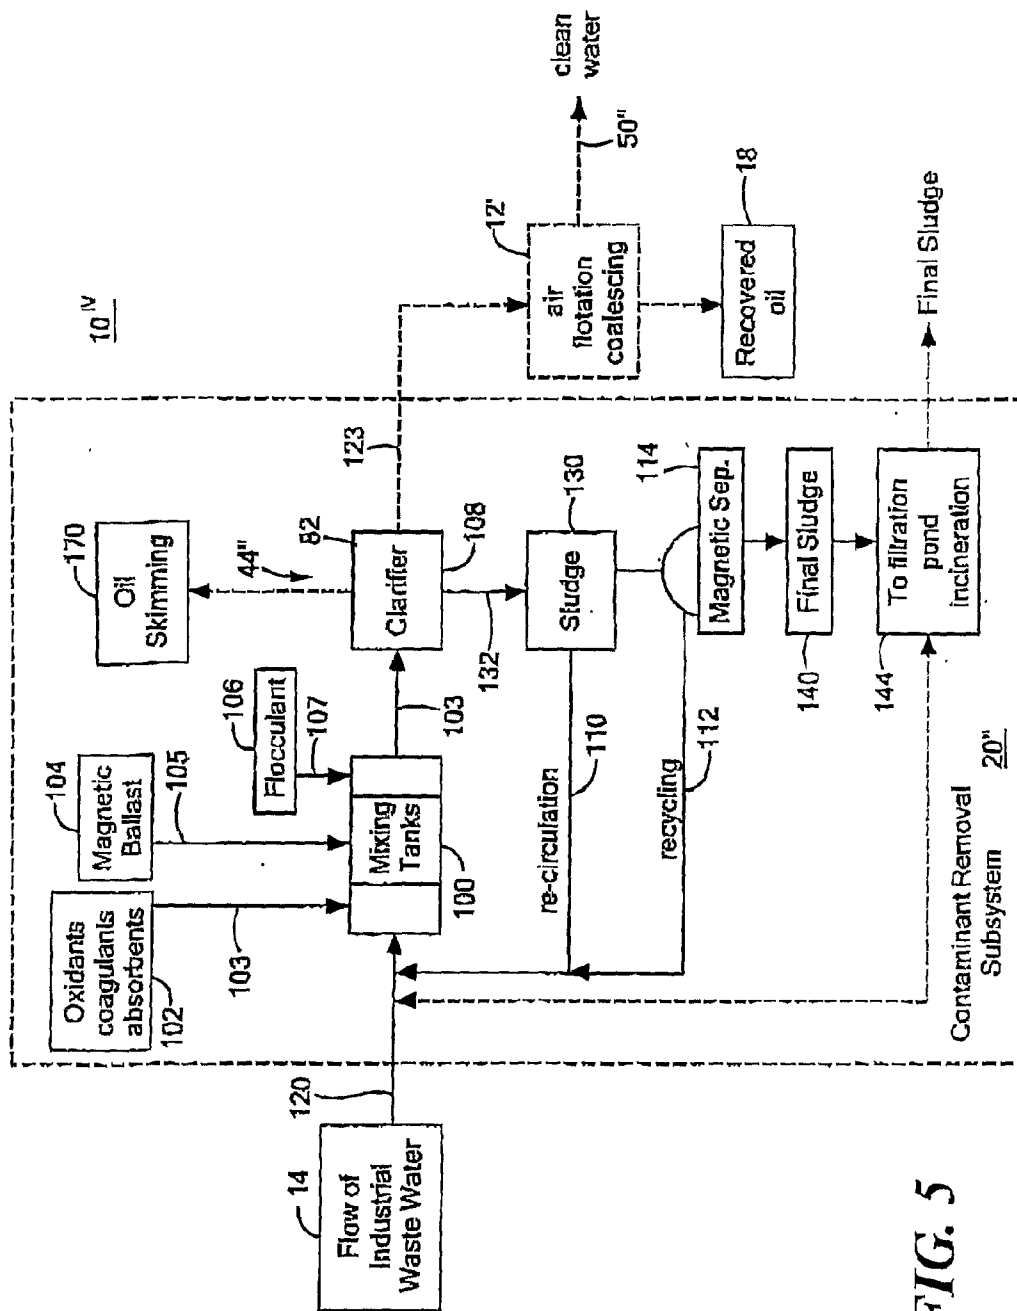


FIG. 5

6/6

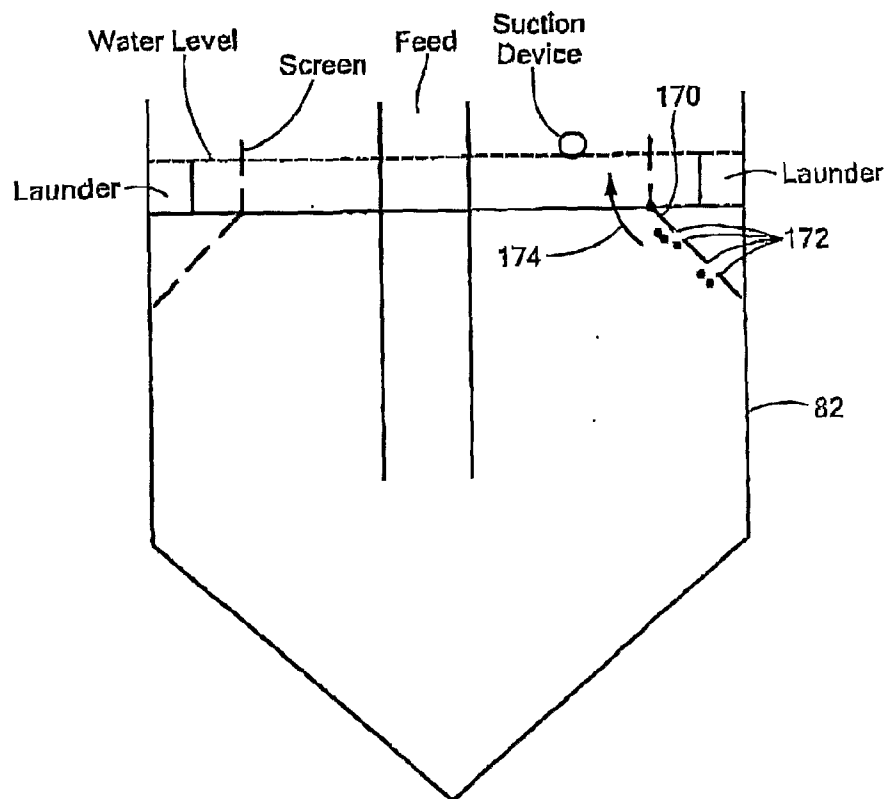


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 08/00322

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - B03D 1/00; C02F 1/24 (2008.04)

USPC - 210/703

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

US: 210/703

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

U.S.: 210/\$ and all classes, Google Patents Internet, Google Scholar

IPC(8): B03D 1/00; C02F 1/24 (2008.04)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Google Patents Internet, Google Scholar, US Pre-grant Publications, US Patents Full-Text, US OCR Full-Text, EPO Abstracts, and JPO Databases for waste water, Wechsler, marston, oil, flocc\$, micro\$, coagula\$, weighting, clarifier, oxidat\$, mixer, agent, coal, magnetite, hydrocyclone, static, magnetic, wet, drum

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6,960,294 B2 (ARNAUD) 01 November 2005 (01.11.2005); col 2-3, 5.	1-3
Y		4-30
Y	US 4,938,876 A (OHSOL) 03 July 1990 (03.07.1990); col 3.	4, 16, 27, 29, 30
Y	US 2006/0186056 A1 (IVAN) 24 August 2006 (24.08.2006); para [0024], [0029]-[0030]; Fig 1.	5, 28-30
Y	US 6,099,738 A (WECHSLER et al.) 08 August 2000 (08.08.2000); Fig 2-3; col 6-11.	6-26, 30
Y	US 2005/0045534 A1 (KIN et al.) 03 March 2005 (03.03.2005); para [0038], [0040].	10, 11, 24
Y	US 4,843,105 A (REISCHL et al.) 27 June 1989 (27.06.1989); col 7-8.	13
Y	US 5,266,200 A (REID) 30 November 1993 (30.11.1993); Fig 5; col 9.	22

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 April 2008 (25.04.2008)

Date of mailing of the international search report

21 MAY 2008

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774