



(51) International Patent Classification: Not classified

(21) International Application Number:  
PCT/GB2009/001039

(22) International Filing Date:  
24 April 2009 (24.04.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0807515.2 24 April 2008 (24.04.2008) GB

(71) Applicant (for all designated States except US): **BLADE DYNAMICS LIMITED** [GB/GB]; The Old Rectory, The Green, Calborne, Isle of Wight PO30 4JE (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HAYDEN, Paul, Trevor** [GB/GB]; 4 Corinthian Court, Cowes, Isle of Wight PO31 7SF (GB). **BROOME, Peter, Anthony** [GB/GB]; 3 Princess Beatrice Court, Cowes, Isle of Wight PO31 7DQ (GB).

(74) Agents: **DRAPER, Martyn, John** et al.; Boulton Wade Tennant, Verulam Gardens, 70 Gray's Inn Road, London WC1X 8BT (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: A WIND TURBINE BLADE

**FIG. 1**

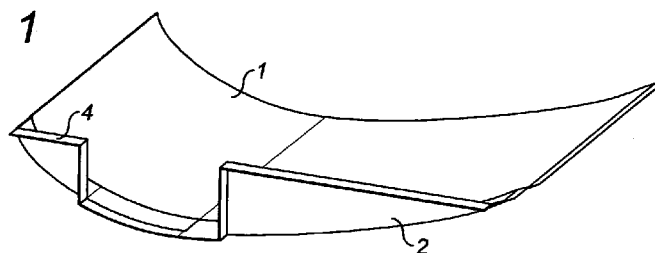

(57) Abstract: A wind turbine blade comprising an elongate spar (6). A first plurality of skin panels (1) are attached in an upper high pressure row to the spar to form a substantial proportion of the external profile of one surface of the blade. A second plurality of skin panels (1) are attached in a lower low pressure row to the spar to form a substantial proportion of the external profile of the opposite lower surface of the blade. A plurality of the skin panels in each row are each integrally provided with a bulkhead (2) which supports the skin panel on the spar.



- 1 -

**A WIND TURBINE BLADE**

The present invention relates to a wind turbine blade.

5       Typically wind turbine blades consist of a structural spar member surrounded by an aerodynamic shell fairing. This fairing is made in two halves, and then later bonded to the structural spar and the two halves joined together at both the leading and trailing edges. In other examples the  
10       wind turbine blade consists of two aerodynamic fairings which also contain structural material. These fairings are later bonded together on their leading and trailing edges as shear webs are also bonded in between the two halves to complete the structural section.

15       As blades get larger it becomes increasingly harder to construct large (i.e, greater than 30m) aerodynamic fairings reliably and in any economic way. Additionally because of their size they become impossible to transport any large  
20       distance and so can only really be constructed close to the final wind farm site. This does not allow versatility in both manufacturing location and process which ultimately leads to lower manufacturing reliability and higher part costs.

25       In order to address this problem, it has been proposed to produce turbine blades which are assembled from a number of sections which are joined together end-to-end to form the finished blade. Such a design is known from EP 1 184 566  
30       and also from our own WO 2009/034291 and WO 2009/034292.

- 2 -

Both designs have an elongate spar extending along substantially the entire length of the blade. A plurality of ribs are attached along the length of the spar and a plurality of skin panels are then attached over these ribs to define the profile of the blade. The ribs are shaped such that they fit with the internal profile of the skin panels thereby providing structural rigidity for the blade.

Also of relevance are WO 01/46582 and US 4,295,790.

These documents both disclose blades with an elongate spar, the upper and lower surfaces of which form part of the outer surface of the blade. The blade geometry is completed by leading and trailing edge segments which are attached to the front and back of the spar in order to form the completed blade.

The present invention is an improvement on these designs.

According to the present invention, the wind turbine blade comprises an elongate spar, a first plurality of skin panels attached in an upper high pressure row to the spar to form a substantial proportion of the external profile of one surface of the blade, a second plurality of skin panels attached in a lower low pressure row to the spar to form a substantial proportion of the external profile of the opposite lower surface of the blade, wherein a plurality of the skin panels in each row are each integrally provided with a bulkhead which supports the skin panel on the spar.

By forming the blade with upper and lower rows of skin panels with the supporting bulkheads integrally with the

- 3 -

skin panels, the need for separate ribs is eliminated. This significantly reduces the number of components required to create a finished blade. Also, whereas previously it was necessary to ensure that the ribs were correctly aligned with respect to the spar and then to ensure that the skin panels were correctly aligned with respect to the ribs, as the relationship between the bulkheads and the skin panels is fixed prior to assembly, it is now only necessary to ensure that the panels are correctly aligned with respect to the spar. Thus, one alignment step is eliminated and the assembly process is therefore simplified.

The present invention also provides a significant benefit over the blades of WO 01/46582 and US 4,295,790. The joints in the two prior art documents are as far as they can be from the neutral axis of the blade. On the other hand, with the present invention, the joint may be positioned at or closer to the neutral axis. This will significantly reduce the stresses which are applied to these edges.

The bulkhead may be positioned anywhere along the length of the skin panel. Indeed, there may be more than one bulkhead per skin panel. However, preferably, each of the skin panels with a bulkhead has the bulkhead at one end and is supported at the opposite by an adjacent panel. Under these circumstances, each skin panel is preferably provided with a recess on its external face at the one end. This ensures that an adjacent skin panel can be supported in such a way that its external surface is flush with that of the adjacent panel.

- 4 -

In an alternative structure, each alternate skin panel may be provided with a bulkhead at both ends. A skin panel without any bulkheads may then be fitted between and supported by each pair of adjacent skin panels with bulkheads.

5

Preferably, each bulkhead has a flange in the region facing the spar to provide a contact surface to the spar. This flange preferably extends across the full width of the bulkhead to provide a contact surface for a facing skin panel.

10

A surface treatment such as a self-adhesive polymer sheet may be attached to the skin panels. Preferably, this is done for individual skin panels prior to assembly, but it may also be done subsequent to the assembly.

15

The joints between the upper and lower rows at the leading and trailing edges may be exactly at the leading and trailing edges as this is the point at which they will experience lowest bending moments. However, the leading edge is a relatively high wear area and it is important to have a precisely defined trailing edge to reduce noise. For these reasons, the skin panel in the upper row is joined to an adjacent skin panel in the lower row at locations adjacent to, but not at, the leading and trailing edges.

20

25

The joints may be simple abutments which are adhered together. However, preferably, at a joint between adjacent panels in the upper and lower rows, one of the upper or lower rows is formed with a recess, and the end of the upper and lower rows fits into the recess such that it is supported in the recess in a manner in which the outer

30

- 5 -

surfaces of the upper and lower panels are flush with one another in the vicinity of the joint. This facilitates the alignment of the upper and lower rows and also produces a joint in which the two rows are precisely aligned.

5

The present invention also extends to a skin panel for a wind turbine blade, the panel having an external face for forming the outer profile of the blade and a bulkhead at one end with an opening for attachment to a spar, the external  
10 face having a recess at the one end for supporting an adjacent panel. The panel may have any of the preferred features referred to above in the context of the blade.

The skin panels may be stackable for ease of storage  
15 and transportation. The longest main dimension of the panel (whether it is the length or the width) is preferably less than 12m. This allows the panels to be transported in a standard container.

20 An example of a wind turbine blade and skin panel in accordance with the present invention will now be described with reference to the accompanying drawings, in which:

Fig. 1 is an inverted perspective view of the skin  
25 panel;

Fig. 2 is a perspective view of a pair of skin panels prior to assembly;

Fig. 3 is a view similar to Fig. 2 showing the skin panels together;

30 Fig. 4 is a cross-section showing an example of the leading and trailing edges;

- 6 -

Fig. 4A shows the detail of the leading edge joint circled A in Fig. 4;

Fig. 4B shows the detail of the trailing edge joint circled by B in Fig. 4; and

5 Figs. 5A to 5E are perspective views showing various stages in the blade assembly process.

The skin panel is made up of a skin portion 1 and a bulkhead 2. The skin portion 1 has a profiled aerodynamic  
10 shape corresponding to a portion of half of a wind turbine blade. At the end closest to the tip of the finished blade, the skin portion is provided with a recess 3 which extends across the full width of the blade and is arranged to support an adjacent panel. The bulkhead 2 is positioned at  
15 the same end and extends across the full width of the internal face of the skin portion. A flange 4 extends across the internal surface of the bulkhead to provide a contact surface. The flange 2 is provided with an opening 5 to fit around the spar as described below.

20

The leading and trailing edge joints are shown in Figs. 4, 4A and 4B. An upper skin panel 10 and a lower skin panel 11 are joined at the leading edge joint 12 as shown in Fig. 4A and a trailing edge joint 13 as shown in Fig. 4B. At the  
25 leading edge, the upper panel 10 has a recess 14 which accommodates the edge of the lower panel 11 which is adhered in place so that the adjoining surfaces are flush with one another. The joint could be inverted such that the recess was on the lower panel 11. It will be noted from Fig. 4  
30 that the joint is close to but not at the leading edge of the blade. The leading edge is on the neutral axis and is therefore subjected to the least bending moments. However,

- 7 -

the leading edge is also typically a high wear area and, therefore, as a compromise, the leading edge joints are therefore positioned slightly away from the edge, for example within the 200mm of the edge.

5

The rear edge joint 13 is similarly constructed in that a recess 15 in the lower panel 11 accommodates the edge of the upper panel 10 which is adhered in place. Again, the joint could be inverted so that the recess was in the upper panel 10. The joint is close to but not at the trailing edge. The reason this time is that precise configuration of the trailing edge is important, particularly for noise considerations. A more precise geometry can be provided by the arrangement shown in Fig. 4B, rather than attempting to achieve precise geometry which also includes a bond line. Again, a spacing of some 200mm from the trailing edge is preferred.

The skin panels can be made from a number of materials such as fibre reinforced plastic, metals and wood.

Typically they are made from glass fibre reinforced plastic which utilises fibres which are placed in a +/- 45 degree direction with respect to the longitudinal blade axis. The skin panels may also contain additional material such as PVC foam or honeycomb, or balsa wood or other laminate arrangement to prevent buckling of the thin skin panels.

The skin panels are typically between 2m and 8m in length when measured along the longitudinal axis of the blade. They have a weight of approximately 50kg-200kg so



- 8 -

can easily be manipulated without the use of large overhead cranes.

The skin panels can be externally covered in  
5 polyurethane paint or polyester or epoxy gelcoat as per  
current art or could be covered in a self adhesive  
thermoplastic coating such as that described in GB 0805713.5  
or US 12/102,506. This could be carried out prior to  
assembly and the individual seams between the elements taped  
10 after assembly or the blade could be completely covered in  
thermoplastic coating after assembly.

The assembly of the blade will now be described with  
reference to Figs. 4A and 4E.

15

Fig. 4A shows a sub-assembly of the spar 6 and root 7.  
The spar 6 may have a one-piece construction or may be  
assembled from a plurality of spar modules 6A, 6B, 6C and  
6D.

20

Beginning at the root end, the skin panels 1 are  
attached to the spar with the flange 4 adjacent to opening 5  
being bonded to the spar 6. The panel closest to the root  
end has a profile at its root end which matches the profile  
25 of the distal end of the root 7. The distal end of the root  
7 may be provided with a recess similar to the recess 3  
provided on the skin panels to ensure that the surface of  
the adjacent skin panel 1 is flush with the surface of the  
root 7. In the illustrated example the root has a tapered  
30 shape such that the distal end of the root 7 has a similar  
shape to the corresponding edge of the skin panels 1.  
However, if a more conventional circular root end is used,

- 9 -

the panel adjacent to the root may be provided with a more complex shape to bridge the transition from the circular shape of the root to the aerodynamic cross-section of the remainder of the blade.

5

As shown in Fig. 4B, successive skin panels 1 are bonded to the spar 6. Four skin panels are shown bonded in place, while the next two panels to be attached are shown separately from the spar. The root end of each one is bonded to the recess 3 of an adjacent panel and the flange at the opposite end is bonded to the spar. As shown in Fig. 4C all of the panels for the lower surface are bonded in place. These decrease in cross-section towards the tip then terminate in a specially shaped tip section 8.

15

Once the lower surface is complete, the same process is repeated for the upper surface as shown in Fig. 4D. In this case, the flange 4 is bonded not only to the spar 6, but also to the corresponding flange of the facing panel. The complete blade is shown in Fig. 4E.

20

Alternative construction methods are possible. Rather than assembling the complete spar, assembling the complete lower surface and assembling the complete upper surface, it would also be possible to begin to start applying skin panels to the upper surface before all of the skin panels are attached to the lower surface. Also, the process of applying the skin panels may begin before the complete spar has been assembled. It would even be possible to manufacture a plurality of modules, each having one of the spar segments 6A-6D surrounded by a plurality of skin

30

- 10 -

panels. These modules could then be assembled to form the complete blade.

Once all of the panels are in place, the surface may be  
5 treated if this has not been done prior to assembly. The  
seams between adjacent panels may also be treated, for  
example, by being taped. The adhesive tape may also be  
applied to the leading edge as is well known in the art.

- 11 -

**CLAIMS:-**

1. A wind turbine blade comprising an elongate spar, a first plurality of skin panels attached in an upper high pressure row to the spar to form a substantial proportion of the external profile of one surface of the blade, a second plurality of skin panels attached in a lower low pressure row to the spar to form a substantial proportion of the external profile of the opposite lower surface of the blade, wherein a plurality of the skin panels in each row are each integrally provided with a bulkhead which supports the skin panel on the spar.

2. A blade according to claim 1, wherein each of the skin panels with a bulkhead has the bulkhead at one end and is supported at the opposite by an adjacent panel.

3. A blade according to claim 2, wherein each panel is provided with a recess on its external face at the one end to support an adjacent panel.

4. A blade according to any one of the preceding claims, wherein bulkhead has a flange in the region facing the spar to provide a contact surface to the spar.

5. A blade according to any one of the preceding claims, wherein a skin panel in the upper row is joined to a skin panel in the lower row at a location adjacent to, but not at, the leading edge.

6. A blade according to any one of the preceding claims, wherein a skin panel in the upper row is joined to a skin

- 12 -

panel in the lower row at a location adjacent to, but not at, the trailing edge.

7. A blade according to any one of the preceding claims,  
5 wherein at a join between adjacent panels in upper and lower rows, one of the upper or lower rows is formed with a recess, and the end of the upper and lower rows fits into the recess such that it is supported in the recess in a manner in which the outer surfaces of the upper and lower  
10 panels are flush with one another in the vicinity of the joint.


8. A blade according to any one of the preceding claims,  
wherein the skin panels fully enclose the spar along a  
15 substantial portion of its length.

9. A blade according to any one of the preceding claims,  
wherein the skin panels are stackable.


20 10. A blade according to any one of the preceding claims,  
wherein the longest main dimension of the panel is less than 12m.

11. A skin panel for a wind turbine blade, the panel having  
25 an external face for forming the outer profile of the blade and a bulkhead at one end with an opening for attachment to a spar, the external face having a recess at the one end for supporting an adjacent panel.


1 / 3

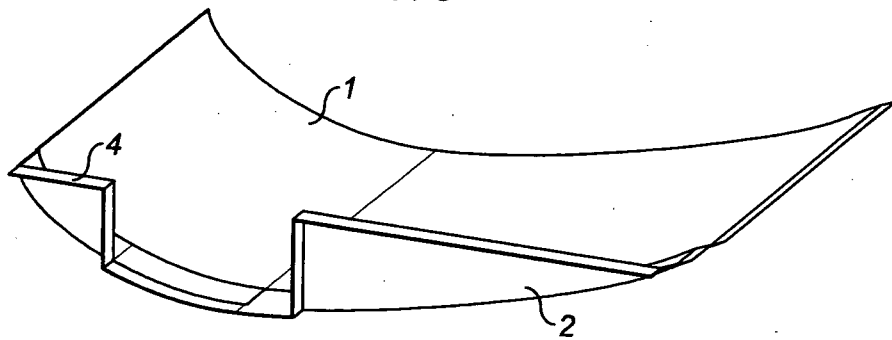

**FIG. 1**

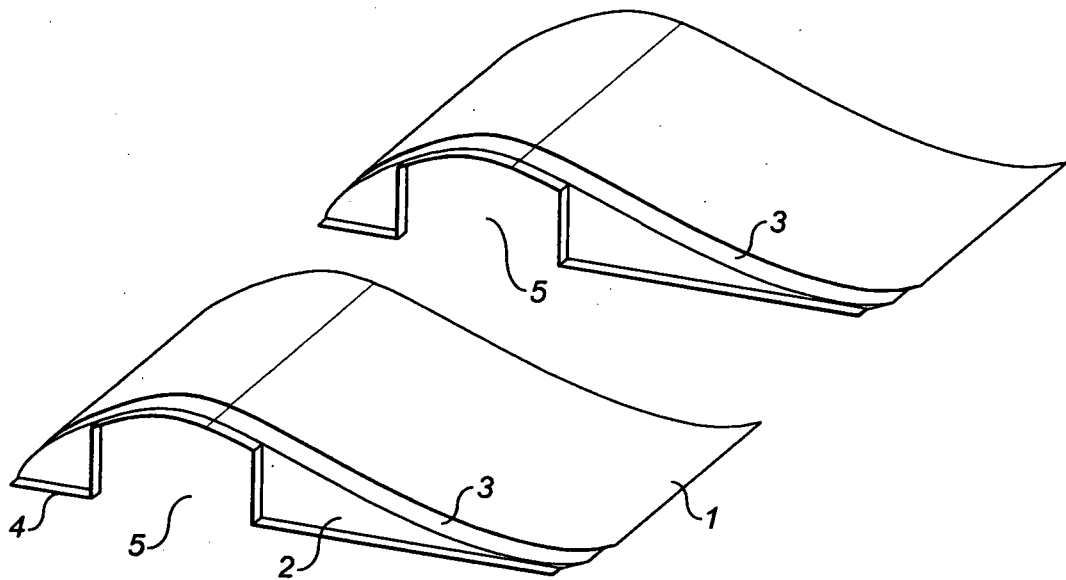

**FIG. 2**

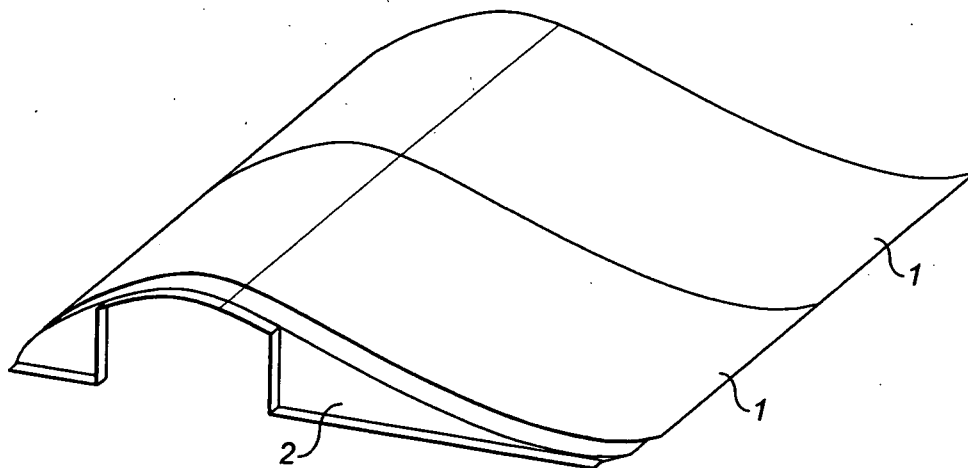

**FIG. 3**

2 / 3

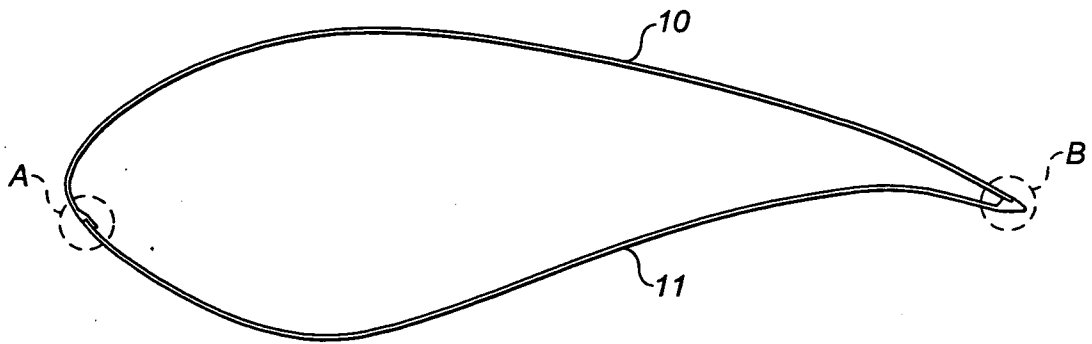


FIG. 4




FIG. 4A






FIG. 4B


3 / 3

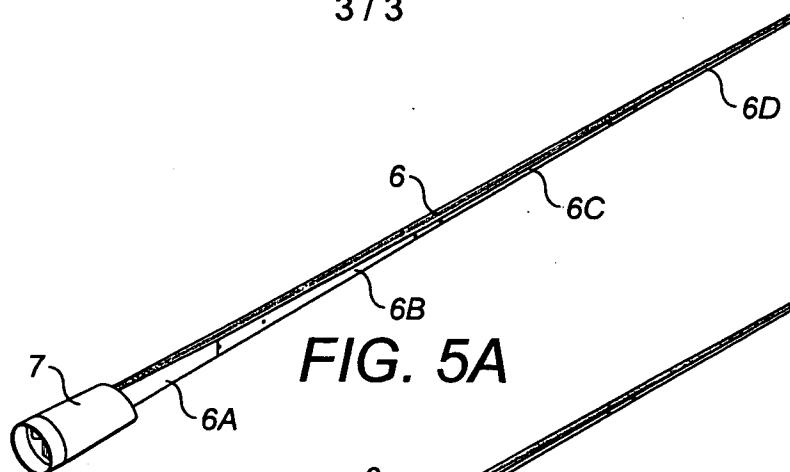


**FIG. 5A**

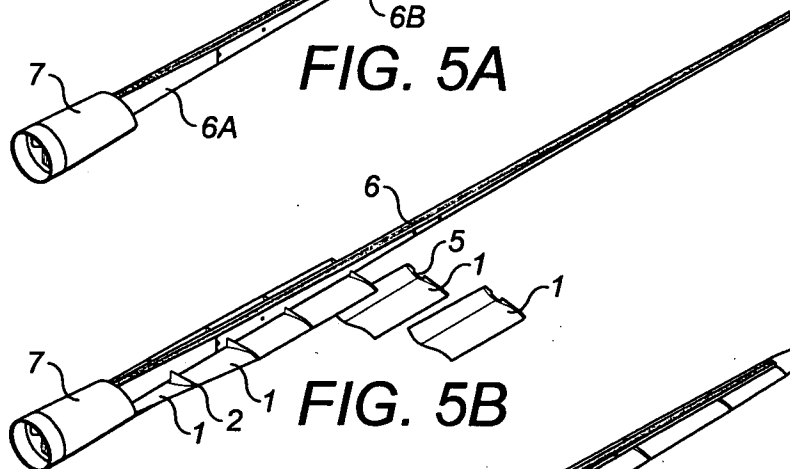


**FIG. 5B**

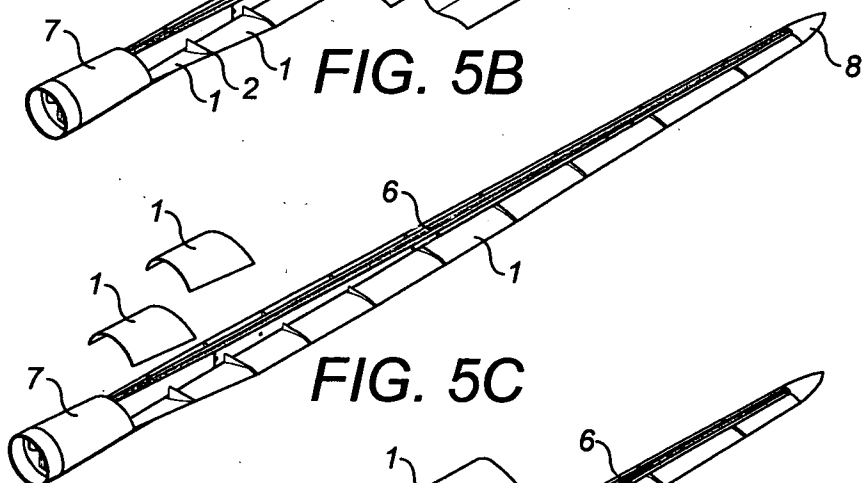

**FIG. 5C**

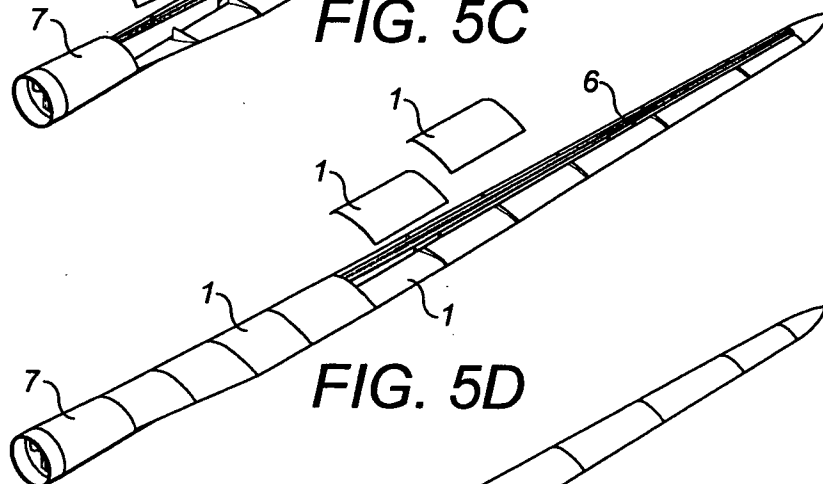

**FIG. 5D**

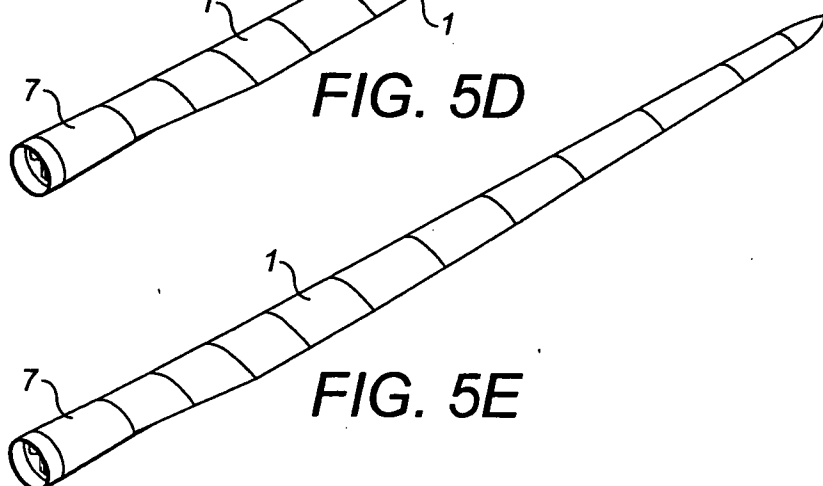

**FIG. 5E**