

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 January 2010 (21.01.2010)

(10) International Publication Number
WO 2010/008965 A1

(51) International Patent Classification:
G06K 7/10 (2006.01)

VOLI, Edward [US/US]; 7 Split Rail Lane, East Sea-
tauket, NY 11733 (US).

(21) International Application Number:
PCT/US2009/049784

(74) Agent: **GIANNETTA, Michael**; Symbol Technologies,
Inc., Att: Patent Administrator, 1303 East Algonquin
Road, Schaumburg, IL 60196 (US).

(22) International Filing Date:
7 July 2009 (07.07.2009)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT,
TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/173,528 15 July 2008 (15.07.2008) US

(71) Applicant (for all designated States except US): **SYM-
BOL TECHNOLOGIES, INC.** [US/US]; Att: Patent
Administrator, 1303 East Algonquin Road, Schaumburg,
IL 60196 (US).

(72) Inventors; and

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

(75) Inventors/Applicants (for US only): **TSI SHI, David**
[US/US]; 1399 Stony Brook Road, Stony Brook, NY
11790 (US). **EPSHTEYN, Alan, J.** [US/US]; 9 Miller
Place-Middle Island Road, Miller Place, NY 11764 (US).

[Continued on next page]

(54) Title: INTEGRATED OPTICAL EXIT WINDOW

(57) Abstract: A device including a housing, an imaging engine
and a transparent exit window. The imaging engine is located
within the housing. The exit window is in the housing allowing
light to pass from an exterior of the device to the imaging engine
within the housing. The exit window has a plurality of segments.
Each of the segments has a corresponding optical property.

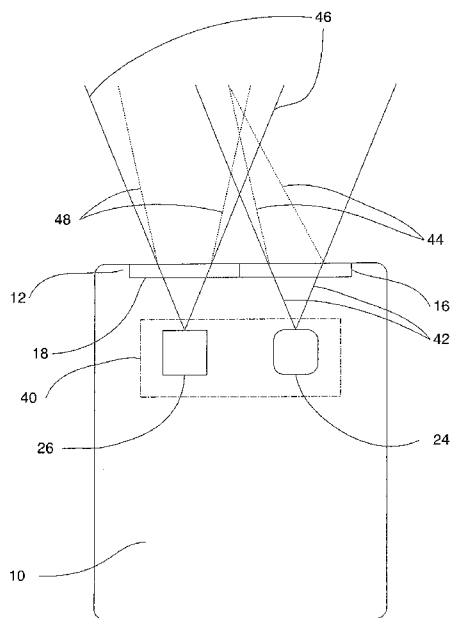


FIGURE 4

WO 2010/008965 A1



ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of
the earlier application (Rule 4.17(iii))*

Published:

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

— *with international search report (Art. 21(3))*

— *with amended claims (Art. 19(1))*

Integrated Optical Exit Window

Inventors: David TSI SHI, Alan J. EPSHTEYN, Edward VOLI

Background

[0001] Optical devices such as scanners and imagers are typically contained within a housing. Generally, the housing includes a transparent exit window that serves to fully enclose the housing while allowing the passage of light therethrough. Typically, the exit window provides no additional optical function, but can introduce negative optical effects.

Summary of the Invention

[0002] The present application relates to a device comprising a housing, an imaging engine, and a transparent exit window. The imaging engine is located within the housing. The exit window is located in the housing and allows light to pass from an exterior of the device to the imaging engine within the housing. The exit window has a plurality of segments. Each of the segments has a corresponding optical property.

[0003] The present application further relates to an exit window comprising a plurality of segments. Each of the segments has a corresponding optical property. The exit window is sized to be positioned in a housing of a mobile electronic device, and is transparent to allow light to pass from an interior of the housing to an exterior of the housing

[0004] The present application further relates to a device comprising a housing, an imaging means located within the housing for collecting images, and a window means for allowing light to pass from an exterior of the device to the imaging

engine within the housing. The window means has a plurality of segments. Each of the segments has a corresponding optical property.

Brief Description of the Drawings

[0005] Figure 1 shows a perspective view of a device including an integrated optical exit window according to an exemplary embodiment of the present invention.

[0006] Figure 2 shows a perspective view of the device of Fig. 1 with a top of a housing thereof removed to show the integrated optical exit window according to the exemplary embodiment of the present invention.

[0007] Figure 3 shows a cross-sectional view of the device of Fig. 2 with the integrated optical exit window according to the exemplary embodiment of the present invention.

[0008] Figure 4 shows a view of the optical benefits that may be introduced by the integrated optical exit window according to the exemplary embodiment of the present invention.

Detailed Description

[0009] The exemplary embodiments of the present invention may be further understood with reference to the following description and the appended drawings, wherein like elements are referred to with the same reference numerals. The exemplary embodiments of the present invention describe a system for an integrated exit window in an optical device. The exemplary embodiments of the integrated optical exit window comprise one or more optical segment zones. The use of the integrated

optical exit window along with its advantages will be discussed in detail below.

[0010] A conventional parallel plate exit window typically only serves to close the housing over optical components and allow light to pass through. Particularly in mobile devices, wherein space is very limited, the exit window may be located in close proximity to optical components, leading to difficulties such as internal reflection, optical distortion, etc. In the exemplary embodiments described herein, an integrated optical exit window is provided that may eliminate optical defects and provide beneficial optical effects.

[0011] The integrated optical exit window will be described with reference to an arrangement for an optical scanning device. However, those skilled in the art will understand that this device is exemplary only and that the exemplary integrated optical exit window may be applied to any optical device with a window, such as a laser scanner. That is, in this description, the term "optical device" refers to any device that collects light for the purpose of collecting data such as a laser scanner, a bar code reader, an image scanner, a camera, a charge coupled device, etc. Also, those skilled in the art will understand that the term "transparent" refers to the ability of a material to pass light through itself. It should be noted that the optical device may be mobile or stationary.

[0012] Fig. 1 shows an exemplary optical device 10, which in this embodiment is a bar code scanner including an exit window 12 mounted in a housing 14 that includes, for example, a pistol grip 16 and a scanning actuator 18. As shown in Fig. 2, a scanning engine 20 (e.g., an optical scanner) is mounted within

the housing 14 along with supporting electronics, a battery, connectors, etc. The scanning engine 20 may include at least an illumination system and an imaging system, as will be illustrated below. As used in this disclosure, an imaging system may include any of the various types of systems for collecting optical data that are known in the art. As would be understood by those skilled in the art, the position of the scanning engine 20 relative to the exit window 12 is determined based on the properties of the scanning engine 20, the exit window 12 and the desired functionality of the device 10. Specifically, the optical properties of the exit window 12 and the scanning engine 20 dictate an optimal distance and angle between the scanning engine 20 and an inner face of the exit window 12 and, consequently, determining the size of a space 22 within the housing forward of the scanning engine 20. The optical properties of the exit window 12 will be discussed in detail below.

[0013] Fig. 3 shows a cross-sectional view of the optical device 10 with the transparent exit window 12 according to an exemplary embodiment of the present invention. The exit window 12 may be a composite, transparent exit. The exit window 12 may comprise a single layer or may comprise multiple layers of the same or different materials. The scanning engine may include an illumination element 24 and an imaging element 26. The function of the illumination element 24 may be to illuminate an image to be captured by the device 10 in order to aid in quick and efficient processing. The illumination element 24 may pass light from, for example, a laser, an LED, etc. The function of the imaging element 26 is to capture the image for processing. Those of skill in the art will understand that the positions of the illumination element 24 and the imaging element 26 relative

to one another, to the main body of the scanning engine 20, and to the rest of the housing are only exemplary and that other positions are possible in other embodiments.

[0014] The exit window 12 may be subdivided into separate functional zones. Fig. 3 illustrates two such zones 16 and 18. Zone 16 is disposed within the exit window 12 so as to aid in the operation of the illumination element 24, while zone 18 is disposed to aid in the operation of the imaging element 26. Each zone has a predetermined optical property and a predetermined relationship to the other zone or zones. Optical functions may be, for example, imaging focus, aiming pattern generation, illumination focus, etc. Zones may be molded as one part or may be formed on an individual basis by compression molding techniques.

[0015] Fig. 4 shows an alternate view of the exemplary device 10, with the illumination element 24 and imaging element 26 exposed by view cutaway 40. Fig. 4 illustrates effects that one exemplary exit window 12, with functional zones 16 and 18 disposed as described above with reference to Fig. 3, may have on the performance of the device 10. Fig. 4 illustrates the illuminated area 42 that may be produced by the illumination element 24 using a standard parallel exit window. In this exemplary embodiment, the functional zone 16 may change the aim of the illumination to an alternate illuminated area 44. Additionally, the functional zone 16 may aid in the generation of an aiming pattern by the illumination element 24, so that a user of the device 10 may more easily aim at a desired image.

[0016] Further, Fig. 4 illustrates the effect that the exit window 12 may have on the imaging element 26. A standard

viewing area of the imaging element 26 may be represented by viewing area 46. The exemplary zone 18 may change the focus of viewing area 46, resulting in a modified viewing area 48. The combined effects of the two zones 16 and 18 of the exit window 12 may thus improve the performance (e.g., time to capture an image, quality of captured image, etc.)

[0017] The exit window 12 may further be formed in order to minimize the internal reflection of the light emitted by the illumination element 24; such internal reflection may interfere with the ability of the imaging element 26 to capture images outside the housing 14. For example, in one exemplary embodiment, rather than having a flat surface that may create a mirror-like reflective effect, the exit window 12 may have a surface figure and profile to re-direct the reflected light emitted from the illumination element 24 such that it does not reflect into the imaging element 26. This may reduce or minimize the internal reflection, and thus improve the performance of the imaging element 26.

[0018] It will be apparent to those skilled in the art that various modifications may be made in the present invention, without departing from the spirit or the scope of the invention. Thus, it is intended that the present invention cover modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

Claim 1 A device, comprising:

a housing;
an imaging engine located within the housing; and
a transparent exit window in the housing allowing light to pass from an exterior of the device to the imaging engine within the housing, the exit window having a plurality of segments, each of the segments having a corresponding optical property.

Claim 2 The device of claim 1, wherein the exit window has two segments.

Claim 3 The device of claim 1, wherein the segments of the exit window have a combined optical property.

Claim 4 The device of claim 3, wherein the combined optical property is a low internal reflection.

Claim 5 The device of claim 1, wherein the exit window comprises one of plastic, polymer and glass.

Claim 6 The device of claim 1, wherein the exit window comprises a plurality of layers.

Claim 7 The device of claim 1, wherein the segments of the exit window are one of molded as a single part and formed individually.

Claim 8 The device of claim 1, wherein a first one of the segments of the exit window is disposed over an illumination element of the imaging engine.

Claim 9 The device of claim 8, wherein a second one of the segments of the exit window is disposed over an imaging element of the imaging engine.

Claim 10 The device of claim 8, wherein the first one of the segments has a corresponding first optical property that one of modifies an imaging focus, modifies a field of view angle, modifies an aiming angle and generates an aiming pattern.

Claim 11 The device of claim 9, wherein the second one of the segments has a corresponding second optical property that one of modifies an imaging focus, modifies a field of view angle, modifies an aiming angle and generates an aiming pattern.

Claim 12 The device of claim 1, wherein the exit window is one of integrally formed with the housing and removable from the housing.

Claim 13 An exit window, comprising:

a plurality of segments, each of the segments having a corresponding optical property,

the exit window being sized to be positioned in a housing of a mobile electronic device, and being transparent to allow light to pass from an interior of the housing to an exterior of the housing.

Claim 14 The exit window of claim 13, wherein a first one of the segments has a corresponding first optical property that one of modifies an imaging focus, modifies a field of view angle, modifies an aiming angle and generates an aiming pattern.

Claim 15 The exit window of claim 14, wherein a second one of the segments has a corresponding second optical property that is one of modifies an imaging focus, modifies a field of view angle, modifies an aiming angle and generates an aiming pattern.

Claim 16 The exit window of claim 13, wherein the segments of the exit window further have a combined optical property.

Claim 17 The exit window of claim 13, wherein the exit window comprises one of glass, plastic and a polymer.

Claim 18 The exit window of claim 13, wherein the exit window comprises a plurality of layers.

Claim 19 The exit window of claim 13, wherein the plurality of segments are one of molded as a single part and formed individually.

Claim 20 A device, comprising:

a housing;

imaging means located within the housing for collecting images; and

window means for allowing light to pass from an exterior of the device to the imaging engine within the housing, the window means having a plurality of segments, each of the segments having a corresponding optical property.

AMENDED CLAIMS**received by the International Bureau on 04 November 2009 (04.11.2009)**

1. A device, comprising:
 - a housing;
 - an imaging engine comprising an illumination element and an imaging element located within the housing; and
 - a transparent exit window in the housing allowing light generated by the illumination element to pass from an exterior of the device to the imaging element within the housing, the exit window having a plurality of segments, each of the segments having a corresponding optical property.
2. The device of claim 1, wherein the exit window has two segments.
3. The device of claim 1, wherein the segments of the exit window have a combined optical property.
4. The device of claim 3, wherein the optical properties of the segments minimize internal reflection of the light.
5. The device of claim 1, wherein the exit window comprises one of plastic, polymer and glass.
6. The device of claim 1, wherein the exit window comprises a plurality of layers.

7. The device of claim 1, wherein the segments of the exit window are either molded as a single part or formed individually.
8. The device of claim 1, wherein a first one of the segments of the exit window is disposed over the illumination element of the imaging engine.
9. The device of claim 8, wherein a second one of the segments of the exit window is disposed over the imaging element of the imaging engine.
10. The device of claim 8, wherein the first one of the segments has a corresponding first optical property that one of modifies an imaging focus, modifies a field of view angle, modifies an aiming angle and generates an aiming pattern.
11. The device of claim 9, wherein the second one of the segments has a corresponding second optical property that one of modifies an imaging focus, modifies a field of view angle, modifies an aiming angle and generates an aiming pattern.
12. The device of claim 1, wherein the exit window is one of integrally formed with the housing and removable from the housing.
13. An exit window of an optical device, comprising:
a plurality of segments, each of the segments having a corresponding optical property,

the exit window being sized to be positioned in a housing of a mobile electronic device, and being transparent to allow light to pass from an interior of the housing to an exterior of the housing,

wherein a first one of the segments has a corresponding first optical property that one of modifies an imaging focus, modifies a field of view angle, modifies an aiming angle and generates an aiming pattern and a second one of the segments has a corresponding second optical property that is one of modifies an imaging focus, modifies a field of view angle, modifies an aiming angle and generates an aiming pattern, the first optical property different from the second optical property.

16. The exit window of claim 13, wherein the segments of the exit window further have a combined optical property.

17. The exit window of claim 13, wherein the exit window comprises one of glass, plastic and a polymer.

18. The exit window of claim 13, wherein the exit window comprises a plurality of layers.

19. The exit window of claim 13, wherein the plurality of segments are one of molded as a single part and formed individually.

20. A device, comprising:

a housing;

imaging means located within the housing for providing light and collecting images; and

window means for allowing light to pass from an exterior of the device to the imaging engine within the housing, the window means having a plurality of segments, each of the segments having a corresponding optical property.

AMENDED SHEET (ARTICLE 19)

1/3

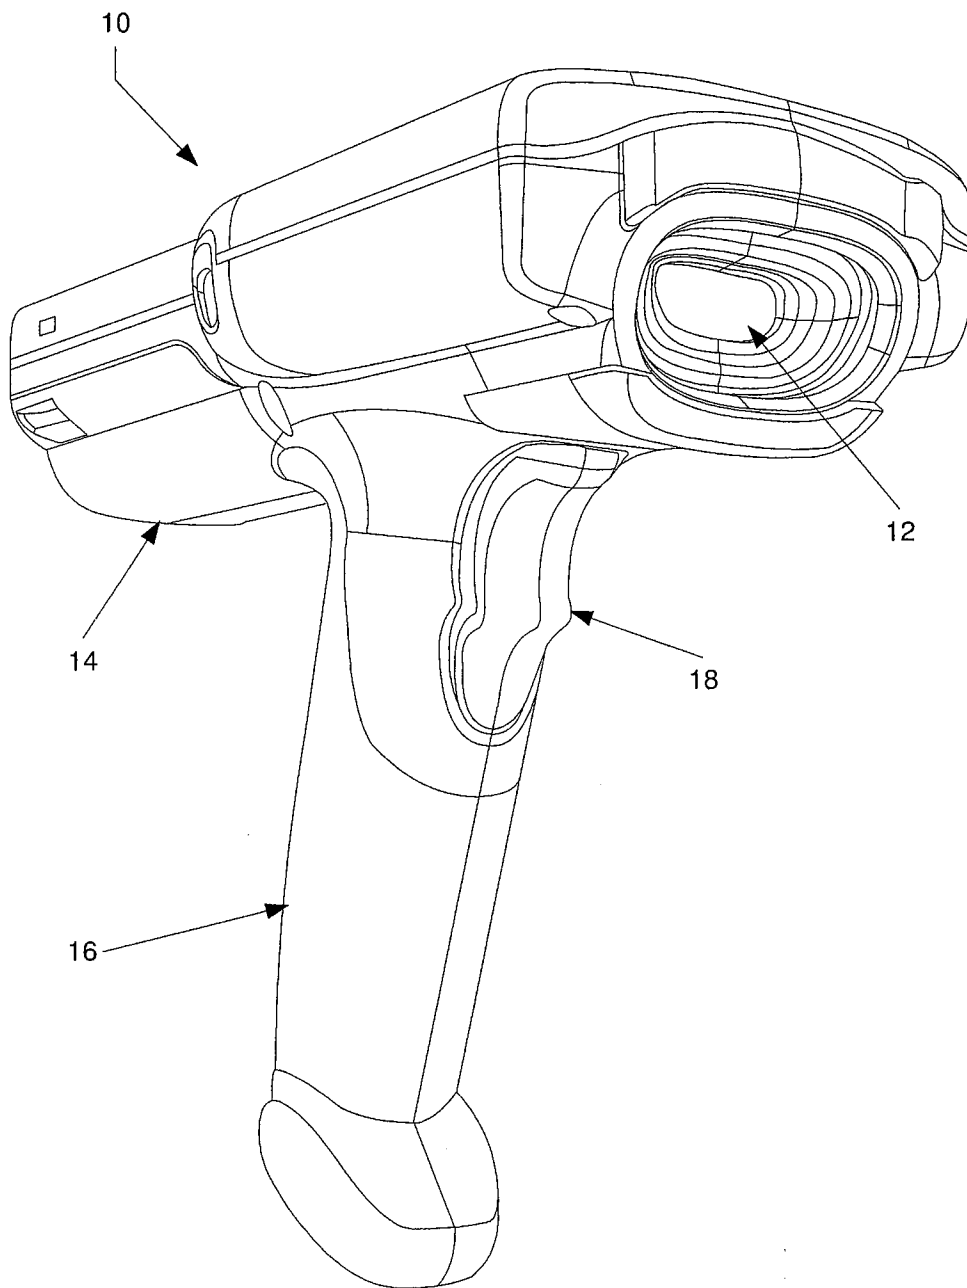


FIGURE 1

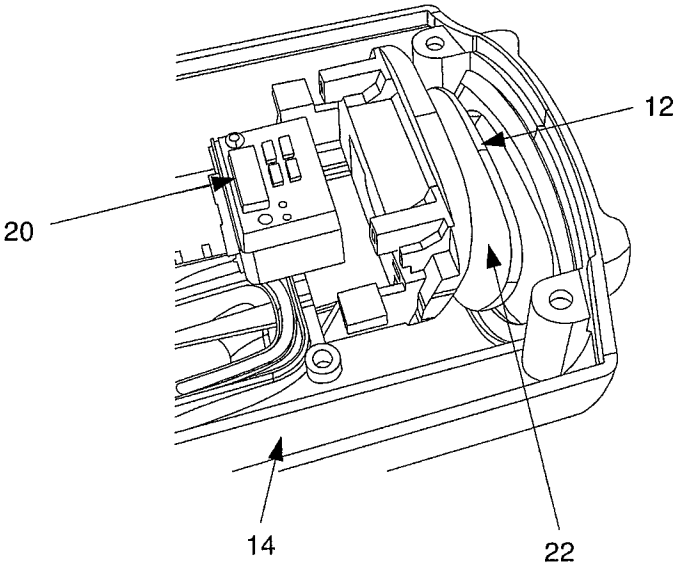


FIGURE 2

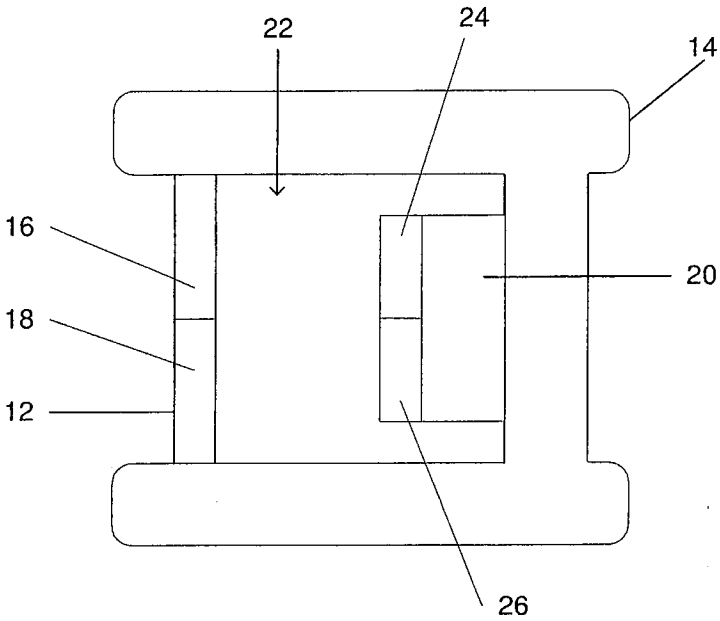


FIGURE 3

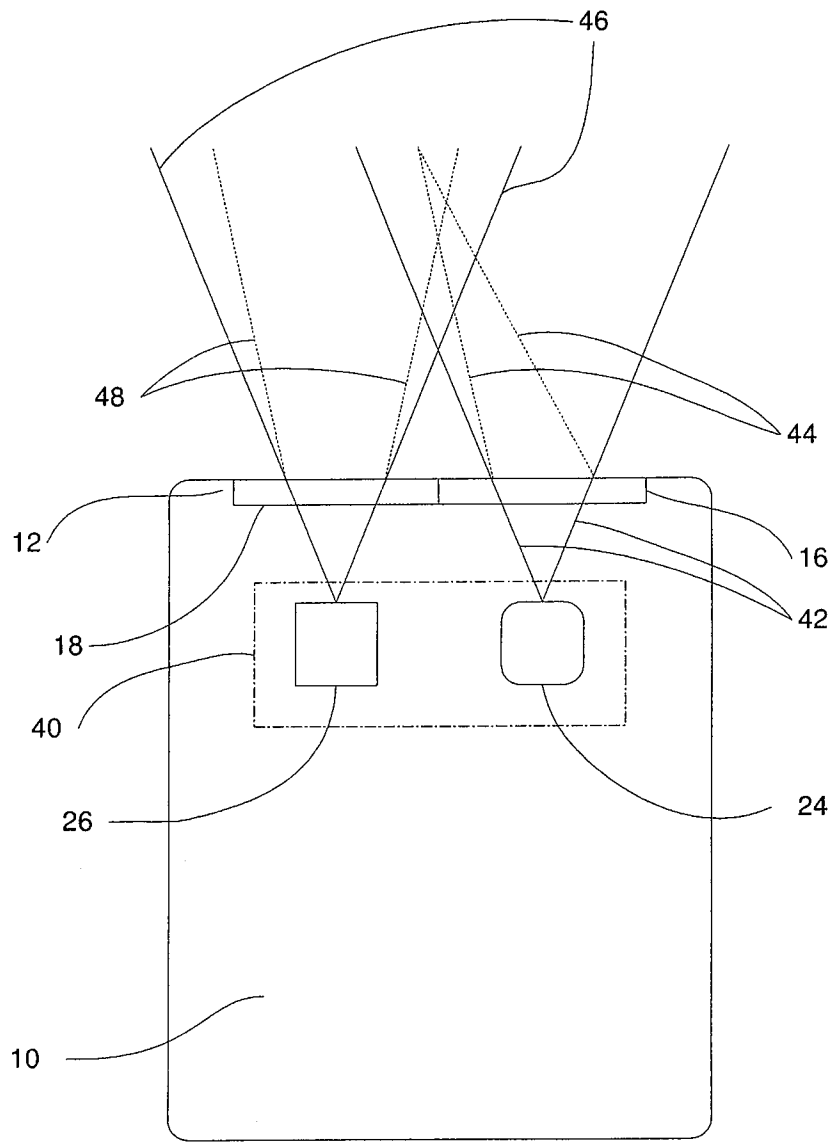


FIGURE 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/049784

A. CLASSIFICATION OF SUBJECT MATTER
INV. G06K7/10

According to International Patent Classification (IPC) or, to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G06K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/062413 A1 (GARDINER ROBERT C [US]; BARBER CHARLES P [US]; COLEMAN ERIC [US]; EHR) 3 April 2003 (2003-04-03) paragraph [0136] - paragraph [0137] paragraph [0140] paragraph [0147] figures 5b-5k figures 6a-6c figures 9a-9k	1-20
X	US 6 105 869 A (SCHARF BRUCE R [US]; FISHER DONALD S [US]) 22 August 2000 (2000-08-22) figures 1,4,6A, 6B column 3, line 64 - column 4, line 55 ----- -/--	1-20

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

25 August 2009

Date of mailing of the international search report

04/09/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040.
Fax: (+31-70) 340-3016

Authorized officer

von Hentig, Roger

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/049784

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 693 930 A (KATOH HIROAKI [JP]; WATANUKI HIROSHI [JP]; ICHIKAWA TOSHIYUKI [JP]) 2 December 1997 (1997-12-02) claims 16,19 column 7, line 54 - column 9, paragraph 12; figure 15 -----	1-2,13, 20
X	US 4 955 693 A (BOBBA MOHAN L [US]) 11 September 1990 (1990-09-11) figures 6,7 column 10, line 18 - column 12, line 21 -----	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2009/049784

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003062413 A1	03-04-2003	US 2003029917 A1	13-02-2003
		US 2003089776 A1	15-05-2003
		US 2003034394 A1	20-02-2003
US 6105869 A	22-08-2000	NONE	
US 5693930 A	02-12-1997	NONE	
US 4955693 A	11-09-1990	NONE	