



(86) Date de dépôt PCT/PCT Filing Date: 2005/04/05

(87) Date publication PCT/PCT Publication Date: 2005/12/01

(45) Date de délivrance/Issue Date: 2014/07/15

(85) Entrée phase nationale/National Entry: 2006/11/08

(86) N° demande PCT/PCT Application No.: US 2005/011582

(87) N° publication PCT/PCT Publication No.: 2005/112562

(30) Priorité/Priority: 2004/05/10 (US10/842,907)

(51) Cl.Int./Int.Cl. *H04L 12/28* (2006.01),
G06Q 10/08 (2012.01), *H04L 12/16* (2006.01),
H04L 12/26 (2006.01), *H04W 84/00* (2009.01),
H04W 84/10 (2009.01), *H04W 84/18* (2009.01)

(72) Inventeurs/Inventors:

OLSEN, JOHN A., III, US;
BRADLEY, DAVID L., US;
JENKINS, RHESA M., US

(73) Propriétaire/Owner:

UNITED PARCEL SERVICE OF AMERICA, INC., US

(74) Agent: SIM & MCBURNEY

(54) Titre : COMMUNICATION AUTONOME DANS L'EXPEDITION

(54) Title: AUTONOMOUS COMMUNICATION IN SHIPPING

(57) **Abrégé/Abstract:**

The invention provides a system and method for the autonomous wireless communication between a service provider device and a customer device. The customer device may notify the service provider device whether the customer has work to be performed by the service provider. The service provider device may provide information to the customer about work to be performed by the service provider. In one embodiment, a shipping service is notified autonomously about items that a customer has for pick up and shipment. The shipping service is also capable of wirelessly transferring information to a customer device about items to be delivered to that customer.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 December 2005 (01.12.2005)

PCT

(10) International Publication Number
WO 2005/112562 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/US2005/011582

(22) International Filing Date: 5 April 2005 (05.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/842,907 10 May 2004 (10.05.2004) US

(71) Applicant: UNITED PARCEL SERVICE OF AMERICA, INC. [US/US]; 55 Glenlake Parkway, Northeast, Atlanta, GA 30328 (US).

(72) Inventors: OLSEN, John, A., III; 4540 Beckwith Place, Cumming, GA 30041 (US). BRADLEY, David, L.; 2105 Country Ridge Road, Alpharetta, GA 30004 (US). JENKINS, Rhesa, M.; 175 15th Street, Ansley Terrace 110, Atlanta, GA 30309 (US).

(74) Agents: CORNETT, David, A. et al.; Alston & Bird LLP, Bank of America Plaza, 101 South Tryon Street, Suite 4000, Charlotte, NC 28280-4000 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AUTONOMOUS COMMUNICATION IN SHIPPING

(57) Abstract: The invention provides a system and method for the autonomous wireless communication between a service provider device and a customer device. The customer device may notify the service provider device whether the customer has work to be performed by the service provider. The service provider device may provide information to the customer about work to be performed by the service provider. In one embodiment, a shipping service is notified autonomously about items that a customer has for pick up and shipment. The shipping service is also capable of wirelessly transferring information to a customer device about items to be delivered to that customer.



WO 2005/112562 A2

AUTONOMOUS COMMUNICATION IN SHIPPING

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention generally relates to the shipment and delivery of
5 items and more particularly relates to the use of autonomous communications in
the shipment and delivery of items.

2. Description of Related Art

Generally, a service provider such as a shipping service, for example, UPS
of Atlanta, Georgia, has a multitude of scheduled stops in a business day for the
10 pick-up of items to be shipped, and for the delivery of items. In many instances,
the shipper at a scheduled pick-up location may not have any items to be shipped
on that particular day. However, the shipping service may not be aware that there
is no need to attempt a pick-up at the scheduled pick-up location. An avoidable
delay may be incurred by the shipping service's personnel when making stops at
15 these "empty" scheduled pick-up locations. Furthermore, when items are delivered
to a location, customers may request shipping service personnel to relay certain
information about the delivered items to the customer thereby increasing the
shipping service's time per stop.

In some instances, a visual indicator may be used at a scheduled pick-up
20 location to inform shipping service personnel whether there are items at that
location to be picked-up for shipment. Such visual indicators may be in the form
of a sign placed in the window or door of the scheduled pick-up location.
However, this approach is not practical in many instances because the pick-up
location may not have exterior windows or doors where the visual indicator may be
25 placed. In other instances, the windows may be at an elevation where the visual
indicator cannot be seen from the street by shipping service personnel.

The embodiments of the present invention overcome many of the
challenges encountered in the prior art, some of which are described above, by
providing efficient methods and systems to notify service provider personnel
30 whether or not there is work to be performed at a customer's location and to
quickly and efficiently transfer information from the service provider to the
customer.

BRIEF SUMMARY OF THE INVENTION

Embodiments of the present invention include systems and methods of a service provider's device having communications with a customer's device. More specifically, the embodiments of the present invention include systems and methods of a shipping service's device having autonomous communications with a shipper's device. In one embodiment of the invention, a Delivery Information Acquisition Device (DIAD), as used by UPS of Atlanta, Georgia, has autonomous contact with a shipper's personal computer or other processor-based device having a unique network address or wireless access address. In one embodiment, the unique address is a MAC address. A MAC address is a unique identifier burned into Ethernet TM and token ring adapters that identify that device's network interface from all others. In other embodiments, the unique address may be an Internet protocol (IP) address, as are known in the art, or other means of individually identifying customers' devices.

A shipping service provider such as, for example, UPS, has on the average, 1.3 million pick-ups a day (situations where UPS has agreed to stop and see if a customer has anything to be picked up). The embodiments of the present invention prevent the shipping service provider's driver from having to walk from the driver's truck to the customer's location to inquire if the customer has anything for pick up. For example, a driver may walk into an office building's lobby and the DIAD autonomously communicates with one or more different customers' devices on different floors to see which customers have work for the driver and to transfer information to the customer's device. In one embodiment of the invention, a wireless personal area network (WPAN) such as, for example, a Bluetooth TM network (IEEE 802.15.1 standard compatible) is used to transfer information between the service provider's device and the customer's device. In other embodiments, WPANs compatible with the IEEE 802 family of standards are used.

One aspect of the invention is to use a WPAN signal to measure the signal strength between two devices such as, for example, the service provider's device and the customer's device, to determine whether the two devices are within data transmission range.

Another aspect of the invention is a system comprised of a service provider's device having a communications device capable of communicating with customers' devices and a database with an address of customers' devices, a customer's device having a communications device capable of communicating
5 with the service provider's device.

Another aspect of the invention is for the service provider's device to autonomously poll the customer's device to determine if the customer has any work for the service provider.

Another aspect of the invention is for the shipping service's device to
10 autonomously poll the customer's device to determine if the customer has any items to be shipped.

Another aspect of the invention is for the service provider's device to transfer information to the customer's device.

Another aspect of the invention is for the shipping service's device to
15 transfer information to the customer's device about items to be delivered to the customer.

Another aspect of the invention is to use a WPAN signal to determine the signal strength between a shipping service's device and a customer's device and to transfer item information between the devices if within a suitable data range.

Another aspect of the invention is associating in a database location
20 information that indicates a location of at least one customer's premises with at least one wireless access address for a wirelessly-enabled computing device at the customer's premises.

In one aspect of the invention, the location information comprises at least a
25 portion of a street address.

In another aspect of the invention, the location information comprises global positioning system (GPS) coordinates.

In other aspects of the invention, the wireless access address is a MAC address, or the wireless access address is an Internet Protocol address.

Another aspect of the invention is wirelessly transmitting location
30 information from a computing device to a database storage unit storing location information for a plurality of customer locations., Respective wireless access addresses of the respective wirelessly-enabled computing devices at the customer locations is also transmitted to the database storage unit. The wireless access

address associated with the transmitted location data is retrieved from the database storage unit and is transmitted to the computing device, where it is received. The wireless access address is then wirelessly transmitted to at least one customer computing device at the customer location to determine whether an item is
5 available to be picked up for shipment at the customer's location. The location information may be comprised of at least a portion of a street address, or global positioning system (GPS) coordinates. The wireless access address may be a MAC address, or an Internet Protocol address.

These and other aspects of the invention are more fully described herein.

10

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING(S)

Having thus described the invention in general terms, reference will now be made to the accompanying drawings, which are not necessarily drawn to scale, and wherein:

15

FIG. 1A is one exemplary embodiment of the system of the invention for autonomous communication between a service provider device and a customer device;

20

FIG. 1B is another exemplary embodiment of the system of the invention for autonomous communication between a service provider device and a customer device, which is further comprised of a DTR device;

FIG. 1C is another exemplary embodiment of the system of the invention for autonomous communication between a service provider device and one or more customer devices that are connected to a network;

25

FIG. 1D is one exemplary embodiment of the system of the invention for autonomous point-to-point communication between a service provider device and a customer device;

FIG. 1E is another exemplary embodiment of the system of the invention for autonomous point-to-point communication between a service provider device and a customer device, which is further comprised of a DTR device;

30

FIG. 2 is an exemplary illustration of the use of an embodiment of the system of the invention for communications between a service provider device and various customer devices;

FIG. 3 is an exemplary embodiment of a service provider device that may be used in an embodiment of the system of the invention;

FIG. 4 is a flowchart describing an exemplary method of use of one or more embodiments of the system of the invention, wherein a service provider device is autonomously provided information by a customer device about work to be performed at the customer's location;

5 FIG. 5 is another flowchart describing an exemplary method of use of one or more embodiments of the system of the invention, wherein there are multiple customer devices at a location (e.g., an office building);

 FIG. 6 is yet another flowchart describing an exemplary method of use of one or more embodiments of the system of the invention, wherein the signal
10 strength between the customer device and the service provider device is determined before the transfer of information is initiated;

 FIG. 7 is a flowchart that describes an exemplary method to measure the signal strength between two communications devices to determine if the devices are within data transmission range in an embodiment of the invention; and

15 FIG. 8 is another embodiment of a flowchart that describes an exemplary method to measure the signal strength between two communications devices to determine if the devices are within data transmission range in an embodiment of the invention.

20 DETAILED DESCRIPTION OF THE INVENTION

 The present inventions now will be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all embodiments of the invention are shown. Indeed, these inventions may be embodied in many different forms and should not be construed as limited to the embodiments set forth
25 herein; rather, these embodiments are provided so that this disclosure will satisfy applicable legal requirements. Like numbers refer to like elements throughout.

 The embodiments of the present invention may be described below with reference to block diagrams and flowchart illustrations of methods, apparatuses (i.e., systems) and computer program products according to an embodiment of the
30 invention. It will be understood that each block of the block diagrams and flowchart illustrations, and combinations of blocks in the block diagrams and flowchart illustrations, respectively, can be implemented by computer program instructions. These computer program instructions may be loaded onto a general purpose computer, special purpose computer, or other programmable data

processing apparatus to produce a machine, such that the instructions that execute on the computer or other programmable data processing apparatus create means for implementing the functions specified in the flowchart block or blocks.

These computer program instructions may also be stored in a computer-readable memory that can direct a computer or other programmable data processing apparatus to function in a particular manner, such that the instructions stored in the computer-readable memory produce an article of manufacture including instruction means that implement the function specified in the flowchart block or blocks. The computer program instructions may also be loaded onto a computer or other programmable data processing apparatus to cause a series of operational steps to be performed on the computer or other programmable apparatus to produce a computer implemented process such that the instructions that execute on the computer or other programmable apparatus provide steps for implementing the functions specified in the flowchart block or blocks.

Accordingly, blocks of the block diagrams and flowchart illustrations support combinations of means for performing the specified functions, combinations of steps for performing the specified functions and program instruction means for performing the specified functions. It will also be understood that each block of the block diagrams and flowchart illustrations, and combinations of blocks in the block diagrams and flowchart illustrations, can be implemented by special purpose hardware-based computer systems that perform the specified functions or steps, or combinations of special purpose hardware and computer instructions.

Embodiments of the present invention include systems and methods of a service provider's device having autonomous communications with a customer's device. More specifically, in one embodiment of the invention, a Delivery Information Acquisition Device (DIAD), as used by UPS of Atlanta, Georgia, has autonomous contact with a shipper's computer or other device having a unique network address or wireless access address. In one embodiment, the unique address is a specific MAC address. In other embodiments, the unique address may be a serial number of the computer or device's CPU or of the computer itself, a hash of the serial numbers of various components of a computer, an IP address, etc.

Considering an example where a MAC address is used as the unique address of the customer's computer or other device, a communications link is established between a customer's device and a service provider's device. The service provider's device is programmed for the unique address such as, for example, the specific MAC addresses at a stop location. Upon approaching the location, signals are sent from a communications device within the service provider's device to each customer's device. The signals are addressed to the specific unique address of the customers' devices at the stop location. These unique addresses such as, for example, MAC addresses are stored in a memory of the service provider's device. An operator of the service provider's device selects a location and the service provider's device will then send signals addressed to the MAC addresses of the customers' devices at that location. If a signal reaches a customer's device having a corresponding MAC address, software within the customer's device enables the customer's device having the specific MAC address to send a signal to the service provider's device informing the service provider whether that customer does, or does not, have need for the service provider's assistance.

A MAC address is a unique number assigned to a network interface such as, for example, a network interface card (NIC). These network interfaces are used in networks such as, for example, Ethernet TM and token ring networks. A NIC may also be called an Ethernet TM card. The MAC "address" is created by the manufacturer of the interface device. A standard MAC address is generally comprised of 12 alphanumeric characters. Each character is a number from 0-9 or a letter from A-F (i.e., a hexadecimal number). Sometimes colons or dashes separate the characters of a MAC address. Examples of possible MAC addresses include: 34528CF3D0B8, 34:52:8C:F3:D0:B8, 34-52-8C-F3-D0-B8, etc. In other embodiments, various unique identifiers other than MAC addresses may be used to identify a customer's computer or other device.

In one embodiment, a WPAN is supported by the communications link between the service provider's devices and the customers' devices. The supported WPAN includes a Bluetooth TM wireless protocol.

In one embodiment, the service provider's device is a DIAD such as a DIAD IV that is equipped with Bluetooth™ communications device. A customer's device (e.g., a personal computer) also has Bluetooth™ communications device. In one embodiment, the customer's device is a Bluetooth™ enabled communications device adapter that connects to the customer's device
5 via a serial port (e.g., an RS-232 connection) or to a USB port via a device such as a Bluetooth-enabled USB dongle. The Bluetooth™ enabled communications device may be equipped with a special board to enable it to measure signal strength. Such boards are available from, for example, "Wavespeed" by Digi
10 International of Minnetonka, Minnesota, or connectblue AB of Malmö, Sweden.

The Wavespeed/S wireless serial adapters offer a secure, standards-based solution to enable wireless RS-232 serial data transfer between peripheral devices and a host. Two Wavespeed/S units may be paired with a host PC and barcode scanner, receipt printer, scale or other device to create a wireless link for instant
15 serial cable replacement. A single Wavespeed/S may be used in server mode to communicate with a Bluetooth-enabled serial device like a DIAD, PDA, PLC, tablet PC or WAN radio. Generally, the Wavespeed/S wireless serial adapters connect to any serial port – no host PC or application software is required. Wavespeed/S increases user mobility in applications such as, for example, mobile
20 computing (emergency vehicles, delivery trucks), medical, point-of-sale, etc.

While present versions of Bluetooth™ enabled communications devices do not have inherent signal strength measurement capabilities, thus necessitating the special boards to measure signal strength, it is anticipated that future versions of Bluetooth™ enabled communications devices will have intrinsic signal
25 strength measurement capabilities. Therefore, the embodiments of this invention encompass this anticipated enhancement to Bluetooth™ technology communications.

Bluetooth™ technology is chip technology that enables seamless voice and data connections between a wide range of devices through short-range digital
30 two-way radio. It is an open specification for short-range communications of data and voice between both mobile and stationary devices. For instance, it specifies how mobile phones, wireless information devices (WIDs), computers and PDAs interconnect with each other, with computers, and with office or home phones. Bluetooth™ technology is a result of an alliance between mobile

communications and mobile computing companies to develop a short-range communications standard allowing wireless data communications at ranges of about 10 meters. Bluetooth™ technology encompasses both a standard communications interface and a low-cost computer chip. It is a cross between the
5 DECT (Digital European Cordless Telephone) and iRDA (infra Red Data Association) technologies, though the direct line of sight requirements of iRDA are avoided.

Bluetooth technology does not involve mobile network transactions, its spectrum is freely available to use in the unlicensed spectrum area (at about 2.45
10 gigahertz). Data transmission speeds using Bluetooth™ enabled devices are now approximately between 720 kbps and one megabit per second (Mbps). Bluetooth™ technology will facilitate wireless local area networks (LANs) in which networks of different handheld computing terminals and mobile terminals can communicate and exchange data, even on the move and when there is no line-of-
15 sight between those terminals. The synchronization and exchange of data are the major applications of Bluetooth™ enabled devices, as are electronic commerce applications such as, for example, electronically paying for parking meters, bus tickets, shopping, movies and so on. Bluetooth™ technology runs in the background and line of sight is not even needed for the machines to automatically
20 initiate and trigger processes. The Bluetooth™ standard incorporates control mechanisms, since each device is assigned a unique address (e.g., 12-byte (MAC)), and to connect to that device, its address must be known. There is also an enquiry feature to search for other Bluetooth™ enabled devices within range.

In one embodiment of the invention, a signal produced by Bluetooth™
25 enabled devices is used to measure the signal strength between two devices to determine whether the two devices are within data transmission range (DTR). In other embodiments communications between the two devices is attempted without measuring signal strength. In one embodiment, the two devices are a DIAD (such as a DIAD IV) and one or more customers' computers. The customers' computers
30 are equipped with Bluetooth™ communications devices having network interfaces such as NICs, each with separate MAC addresses. A DIAD equipped with a Bluetooth™ communication's device is programmed with the unique addresses (e.g., MAC addresses) of customer's computers' NICs. In an embodiment wherein signal strength between two Bluetooth™ enabled devices

(e.g., a DIAD and a customer device) is measured to determine DTR, as a service provider carries a DIAD into a designated area the DIAD is programmed to know the unique addresses (e.g., MAC addresses, IP addresses, etc.) that are in the area and begins monitoring the signal strength between the DIAD and the customers' computers with a DTR device. Once a sufficient signal strength is established between a DIAD and a customer's computer, the DTR device provides a set bit of "1" to the communications device, which allows communications to be established between the DIAD and the customer's computer. When the DTR strength shows that a connection is established, the DIAD downloads shipping information and receives an acknowledgment. A DIAD may also communicate to a customer's device that the customer has, for example, a COD package and the customer needs to provide payment to the service provider. Furthermore, the DIAD may receive information from the customer's device indicating that the customer has items to be picked up by the service provider for shipment.

15 A computer program associated with the customer's device may provide the customer with the option to request a pick up or other work. The DIAD will autonomously check the customer's device. The computer program will cause the communications device of the customer's device to transmit a signal to the service provider's device thereby instructing the service provider to go to that customer's location. Alternatively, the DIAD may receive from the customer's device a signal that there is no work at a particular customer site or the DIAD may not receive a signal from the customer's device. Therefore, the service provider knows whether there is a need to perform work at the customer's location without having to shut off the service provider's vehicle and/or leave the vehicle. If there is a need for work at a customer's location, the service provider can be better prepared for the specific work to be performed at the customer's location such as, for example, by having the necessary labels, carts, etc. for parcels, or in other instances, by taking the proper tools, equipment or parts to the customer's location.

FIG. 1A illustrates one embodiment of the system of the invention for autonomous communication. In this embodiment, a service provider device 102 and a customer device 104 are provided. Communications between the devices 102, 104 occurs via a wireless network 120. As previously described, the service provider device 102 may be, for example, a DIAD as employed by UPS, or it may be a personal digital assistant (PDA), WID, or other communications device

having processing capability. The customer device 104 may be a personal computer, server, microprocessor, or other device capable of causing the transmission of communications signals and processing received signals. The service provider device 102 is further comprised of a communications device 106,
5 such as, for example, a Bluetooth™ enabled wireless transceiver, and a DTR device 108. A processor 110, capable of executing instructions, communicates with the communications device 106, the DTR device 108 and one or more databases 112 stored in a memory device.

The customer device 104 is further comprised of a communications device
10 114, such as, for example, a Bluetooth-enabled wireless transceiver. The customer device 104 also has a processor 116 capable of executing instructions and communicating with the communications device 114 and one or more databases 118 stored in a memory device.

The service provider device 102 communicates over the network 120 with
15 the customer device 104 via the respective communications devices 106, 114. Generally, this is accomplished by the communications device 106 of the service provider device 102 sending a signal having a specific MAC address to a customer device 104 having that specific MAC address. Once this signal is received by the customer device 104 having that particular MAC address, the two devices may
20 communicate. In other embodiments unique addressing schemes other than MAC addressing may be used.

In one embodiment, as shown in FIG. 1A, the service provider device 102 includes a DTR device 108. This device measures the signal strength of a test communications signal between the customer device 104 and the service provider
25 device 102. Once this test communications signal meets or exceeds a predetermined level, a bit is set in the processor 110 of the service provider device 102 thereby allowing the transfer and receipt of data between the service provider device 102 and the customer device 104 via their respective communications devices 106, 114. In various embodiments, the DTR device 108 may be a separate
30 electronic board or chip from the Bluetooth™ enabled wireless transceiver, whereas in other embodiments the DTR device 108 may be incorporated into the electronic board, circuits or chips of the Bluetooth™ enabled wireless transceiver.

In another embodiment, as shown in FIG. 1B, the service provider device 102 does not include a DTR device 108. In such an embodiment, communications is established by selecting a location from the memory of the service provider device 102, wherein the location is associated with one or MAC addresses of customers' devices 104. The communications device 106 of the service provider device 102 then sends a signal having a specific unique address such as, for example, a MAC address to a customer device 104 having that specific address. Once this signal is received by the customer device 104 having that particular address, the customer device 104 will send an acknowledgment signal to the service provider device 102. Once the acknowledgment signal is received by the service provider device 102, the two devices may communicate and transfer information from one to another.

In one embodiment, the network 120 is designed to support a WPAN protocol, which includes a Bluetooth™ wireless protocol, although other wireless fidelity protocols such as wireless wide area network (WWAN), and wireless local area network (WLAN), may be supported in other embodiments. Furthermore, in one embodiment as shown in FIG. 1C, a service provider device 102 may be able to communicate with one or more customer devices 104 that are connected to a network 120. The network 120 that may be wired, wireless or a combination thereof. In one embodiment (not shown), the service provider device 102 may communicate with one master device (e.g., server, router, etc.) that is connected to the network. The master device may then communicate with other customer devices that are connected to the network. In other embodiments of the invention, as shown in FIGS. 1D and 1E, communications between the service provider device 102 and the customer device 104 are point-to-point.

The database 112 of the service provider device 102 includes information about locations and the unique addresses of customer devices associated with those locations. For instance, and as shown in FIG. 2, an office building 202 having a specific address 204 may have numerous devices 206 having unique addresses associated with that one location 202. The service provider's device 208 contains a database 210 that associates location information 212 with unique network addresses or wireless access addresses 214 at those locations. An exemplary structure of such a database 216 is shown in FIG. 2.

In one embodiment, a service provider will select a location from the database by, for example, pressing a button (not shown) on the service provider device 102, selecting a location from a menu, scanning a barcode, RFID tag, or some other machine-readable indicia that identifies a location, by receiving a
5 signal from a transmitter at the location wherein the signal provides information identifying the location, or by receiving global positioning system information.

Referring now to FIGS. 1A and 2, the service provider device's processor 110 will cause a signal to be sent from the Bluetooth™ enabled communications device 106 of the service provider device 208 to each unique address of customer
10 devices 206 associated with that specific location 202. A response (acknowledgment) is sent by the communications device 114 of the customer device 104, 206 if the signal is received. If so equipped, the DTR device 108 measures the strength of these signals and, if the signals are sufficiently strong and meet a certain threshold, the DTR device 108 enables the transfer of data between
15 the devices 208, 206. In other embodiments not equipped with a DTR device 108, data transfer may be enabled simply by the receipt of the acknowledgment by the service provider device 208 from the customer device 206.

As shown in the embodiment of FIG. 2, the service provider may determine, by use of the service provider device 208, from the customer devices
20 206 located within the building 202 whether the customers have any work for the service provider, without having to enter the building 202. Although in the embodiment shown in FIG. 2 the service provider's personnel 220 has exited the vehicle 218, it is not necessary that the service provider device 208 be located outside the vehicle 218 and in some instances, the service provider device 208 may
25 be mounted within the vehicle 218.

In one embodiment, the service provider is a shipping service such as, for example, United Parcel Service of America, Inc. of Atlanta, Georgia (UPS); FedEx Corp. of Memphis, Tennessee; etc. A driver 220 for the shipping service will have a number of designated stops to pick up and deliver parcels throughout the work
30 day. The driver 220 carries a service provider device 208. In one embodiment, the service provider device 208 is a DIAD IV, as used by UPS. FIG. 3 is an exemplary embodiment of a DIAD IV 300, though other service provider devices may be utilized in the embodiments of the invention. Upon making a stop at a designated location, the driver 220 keys in the location 204 into the service

provider device 208, selects the location 204 from a list, or otherwise enters or receives location information into the service provider device 208. In one embodiment, not shown, global positioning system (GPS) coordinates may be received by the service provider device as location information. By entering or receiving the location information into the service provider device 208, a processor in the service provider device 208 accesses a database 210 that contains one or more unique network addresses 214 or wireless access addresses associated with that location 204. Once the unique addresses 214 for that location 204 are retrieved from the database 210, the processor causes a Bluetooth™ enabled communications device within the service provider device 208 to send signals addressed to each unique address 214 associated with that location 204.

The customers' devices 206, if within range, receive the signals from the service provider's device 208. Each customer's device 206 will send an acknowledgment to the service provider's device 208 indicating to the service provider's device 208 that the signal has been received. In one embodiment, the service provider's device 208 will monitor the strength of this reply signal through the use of a DTR device 108. If the strength of the signal, as determined by the DTR device 108, indicates that the customer's device 206 and the service provider's device 208 are within data transmission range, then the DTR device 108 enables the transfer of information between the service provider's device 208 and the customer's device 206. In other embodiments, as shown in FIG. 1B, the DTR device may not be present and the transfer of information will be enabled once the reply signal is received by the service provider device 208 from the customer's device 206. In future releases of Bluetooth™ devices and software, a separate DTR device may not be necessary as the signal strength measurement function of the DTR device may be performed by the Bluetooth™ devices and/or software.

In one embodiment, a software application residing within the customer's device 206 is programmed to notify the service provider if the customer has work for the service provider by sending information via a Bluetooth signal to the service provider device 208 once communications between the customers' devices 206 and the service provider's device 208 has been established. For instance, the software application may be programmed to notify the service provider device 208 that the customer has a certain number of packages to be picked up and shipped, where the packages are to be shipped, what class of shipment (e.g. next-day

delivery, second-day delivery, regular shipping, etc.), and other pertinent shipping information. The software application may also notify the service provider device that the customer has no items or parcels for pick-up or shipment and, therefore, the service provider does not need to visit that office or location.

5 In one embodiment, the service provider device transfers information from the service provider's device 208 to a customer's device 206. Such information may pertain to, for example, parcels to be delivered to the customer and may include information such as the number of parcels and who they are from, where the parcels were shipped from, any fees due, etc.

10 A method of use of the systems shown in FIGS. 1A, 1B and 2 include the steps described in the flowchart of FIG. 4. The process begins at Step 402. At Step 404, a service provider selects a location. At Step 406, the service provider nears the chosen location with a service provider device. At Step 408, the service provider device is provided with a description of the location such as, for example,
15 an address, customer number, barcode, etc. At Step 410, the service provider device retrieves one or more unique addresses (e.g., MAC addresses) of customer devices at the chosen location. At Step 412, one of the unique addresses is chosen and the service provider device sends a wireless transmission such as, for example, a Bluetooth signal, that is addressed to the one or more unique addresses of that
20 location. At Step 414, the customer device receives the wireless transmission from the service provider device. At Step 416, the customer device sends an acknowledgment in the form of a wireless transmission such as, for example, a Bluetooth signal to the service provider device. At Step 418, information is transferred from the service provider device to the customer device and from the
25 customer device to the service provider device. Such information may include, for example, information about parcels to be picked up at the customer's office, information about parcels to be delivered at the customer's location, etc. At Step 420, the service provider will then physically go to the customer locations that have indicated that there is work to be done, while not going to the ones that have
30 no work for the service provider. At Step 422, the work is performed at the customer's location, and the process ends at Step 424.

Another method of use begins at Step 502. At Step 504, a location, such as an office building, mall, etc., is chosen by a shipping service provider. At Step 506, the shipping service provider nears the chosen location with a service provider

device. At Step 508, the shipping service provider's device is provided with a description of the location such as, for example, an address, customer number, barcode, a wireless signal having a coded address, an RFID tag with encoded address information, etc. At Step 510, the service provider device retrieves one or
5 more unique addresses (e.g., MAC addresses) of customer devices at the chosen location. At Step 512, one of the unique addresses is chosen and the service provider device sends a Bluetooth signal that is addressed to the chosen unique addresses of that location. At Step 514, the customer device receives the Bluetooth transmission from the service provider device. At Step 516, the customer device
10 sends an acknowledgment in the form of a Bluetooth signal to the service provider device. At Step 518, information is transferred from the customer device to the service provider device indicating that the customer has one or more parcels to be picked up at the customer's location by the shipping service provider. Such information may include, for example, information about parcels to be picked up at
15 the customer's office, information about parcels to be delivered at the customer's location, etc. At Step 520, it is determined whether there is another unique address associated with that location. If so, the process returns to Step 512. If not, the process continues to Step 522. At Step 522, the shipping service provider will then physically go to the customer locations that have indicated that there is work to be
20 done, while not going to the ones that have no work for the shipping service provider. At Step 524, the work is performed at the customer's location, and the process ends at Step 526.

Another method of use of the embodiments of the system begins at Step 602. At Step 604, a location, such as an office building, mall, etc., is chosen by a
25 shipping service provider. At Step 606, the shipping service provider nears the chosen location with a service provider device. At Step 608, the shipping service provider's device is provided with a description of the location such as, for example, an address, customer number, barcode, a wireless signal having a coded address, an RFID tag with encoded address information, etc. At Step 610, the
30 service provider device retrieves one or more unique addresses (e.g., MAC addresses) of customer devices at the chosen location. At Step 612, one of the unique addresses is chosen and the service provider device sends a Bluetooth signal that is addressed to the chosen unique address at that location. At Step 614, the customer device receives the Bluetooth transmission from the service provider

device. At Step 616, the customer device sends an acknowledgment in the form of a Bluetooth signal to the service provider device. At Step 618, a DTR device in the service provider device measures the signal strength of the acknowledgement. At Step 620, it is determined whether the measured signal strength is sufficient to

5 transmit information to and from the customer device. If the signal as measured in Step 620 is sufficient, then the process moves on to Step 622. If the signal is not sufficient to transmit information, then the process returns to Step 612. At Step 622, information is transferred from the customer device to the service provider device indicating whether the customer has work for the shipping service provider.

10 At Step 624, it is determined whether the customer has work for the shipping service provider. If the customer does not have work, then the process returns to Step 612. If the customer does have work, then in Step 626 it is determined what type of work is to be performed. At Step 626, it is determined whether the customer has parcels to be picked-up, if the shipping service provider has parcels

15 to be delivered to the customer, or both. If there are only items to be picked up at the customer's location, then in Step 628 the shipping service provider will travel to the customer's location to pick up the parcels. If there are only items to be delivered to the customer, then in Step 630 the service provider device will transfer information to the customer device about the items to be delivered and the service

20 provider will deliver the items to the customer. If the customer has both, items to be picked up and items to be delivered, then in Step 632 the shipping service provider will take the items to be delivered to the customer's location, transfer information about the delivered items from the service provider's device to the customer's device, and pick up the items for shipment. At Step 634, it is

25 determined whether there is another unique customer device address (e.g., MAC address) associated with that location. If so, the process returns to Step 612. If not, the process continues to Step 636, where it ends.

FIG. 7 is a flowchart illustrating an exemplary method for measuring the strength of a Bluetooth signal transmitted between two communications devices to

30 determine if the devices are within data transmission range (DTR). The process begins at Step 702. At Step 704, a wireless communications signal is transmitted from a first Bluetooth TM enabled communications device to a second Bluetooth TM enabled communications device. At Step 706, the first wireless communications signal is received at the second Bluetooth TM enabled

communications device. At Step 708, a DTR device at the second communications device measures the strength of the received wireless communications signal. At Step 710, it is determined whether the signal strength measured by the DTR device meets or exceeds a certain predetermined value. If it does meet or exceed the predetermined value, then at Step 712, wireless communications between the first communications device and the second communications device are enabled. If at Step 710 the measured signal strength does not meet or exceed the predetermined value, then the process returns to Step 704, above. The process ends at Step 714.

Another embodiment of an exemplary method for measuring the strength of a wireless signal transmitted between two Bluetooth™ enabled communications devices to determine if the devices are within data transmission range (DTR) is shown in the flowchart of FIG. 8. The process begins at Step 802. At Step 804, a wireless communications signal is transmitted from a first Bluetooth™ enabled communications device to a second Bluetooth™ enabled communications device. At Step 806, the first wireless communications signal is received at the second communications device. At Step 808, a second wireless communications signal is transmitted from the second communications device to the first communications device. The second wireless signal acknowledges the receipt of the first communications signal by the second communications device. At Step 810, the second communications signal is received at the first communications device and the strength of the second communications signal is measured with a DTR device. At Step 812, it is determined whether the measured signal strength meets or exceeds a predetermined value. If it meets or exceeds the predetermined value, then at Step 814 the wireless transmission of information between the first and second communications devices is enabled. If at Step 812, the measured signal strength does not meet or exceed the predetermined value, the process returns to Step 804, above. The process ends at Step 816.

All trademarks disclosed herein are the property of their respective owners. Use of such trademarks is only intended to indicate the source of particular goods or services and is not intended to constitute any advertising, sale, distribution, promotion, or offer for such work.

Many modifications and other embodiments of the inventions set forth herein will come to mind to one skilled in the art to which these inventions pertain having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is to be understood that the inventions are not to
5 be limited to the specific embodiments disclosed and that modifications and other embodiments are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A system for determining whether a customer has one or more items to be picked up at a customer location comprising:

a service provider computing device comprising one or more memory storage areas, one or more processors, and one or more databases storing a plurality of location identifiers, wherein each location identifier (a) identifies a customer location and (b) is associated with one or more network addresses that correspond respectively to one or more customer computing devices at the customer location;

a customer computing device (a) comprising one or more memory storage areas and one or more processors and (b) being associated with a network address of the one or more network addresses for external communications; and

a communications network operating in accordance with a communications protocol for communicating between the service provider computing device and the customer computing device,

wherein the service provider computing device is configured to:

(a) receive input from a user selecting a location identifier from the plurality of location identifiers,

(b) after receiving input selecting the location identifier, determine whether the strength of a communications signal from the customer computing device meets or exceeds a predetermined value,

(c) after determining the strength of the communications signal from the customer computing device meets or exceeds the predetermined value, establish electronic communication with the customer computing device using the network address associated with the location identifier, and

(d) after establishing electronic communication with the customer computing device, receive data from the customer computing device (i) indicating that a customer has an item to be picked up at the customer location and (ii) comprising information about the item to be picked up from the customer location.

2. The system of Claim 1, wherein establishing electronic communication with the customer computing device comprises polling the customer computing device.

3. The system of Claim 2, wherein the service provider computing device is further configured to receive an acknowledgement from the customer computing device in response to polling the customer computing device.

4. The system of Claim 3, wherein the service provider computing device is further configured to measure the strength of the communications signal from the customer computing device to determine if the strength of the communications signal meets or exceeds a certain predetermined value.

5. The system of Claim 1, wherein the service provider computing device is further configured to identify at least a portion of a street address for the customer location associated with the location identifier.

6. The system of Claim 1, wherein the network address is a Media Access Control (MAC) address.

7. The system of Claim 1, wherein the service provider computing device is further configured to determine global positioning system (GPS) coordinates for the customer location associated with the location identifier.

8. The system of Claim 1, wherein the data indicates that the customer has the item to be picked up at the customer location.

9. The system of Claim 1, wherein the data confirms that the item has been delivered to the customer location.

10. The system of Claim 1, wherein the data comprises information about items to be delivered to the customer location.

11. The system of Claim 1, wherein the system is used for autonomous communications between the service provider computing device of a shipping service and the customer device of the customer of the shipping service.

12. A method for communications comprising:

causing display, via a service provider computing device, of a plurality of location identifiers, wherein each location identifier (a) identifies a customer location and (b) is associated with one or more network addresses that correspond respectively to one or more customer computing devices at the customer location;

receiving input from a user selecting a location identifier from the plurality of location identifiers,

after receiving input selecting the location identifier, determining whether the strength of a communications signal from the customer computing device meets or exceeds a predetermined value,

after determining the strength of the communications signal from the customer computing device meets or exceeds the predetermined value, establishing electronic communication with a customer computing device using a network address associated with the location identifier, and

after establishing electronic communication with a customer computing device, receiving data from the customer computing device (i) indicating that a customer has an item to be picked up at the customer location and (ii) comprising information about the item to be picked up from the customer location.

13. The method of Claim 12, wherein establishing electronic communication with the customer computing device comprises polling the customer computing device.

14. The method of Claim 13 further comprising receiving an acknowledgement from the customer computing device in response to polling the customer computing device.

15. The method of Claim 14 further comprising electronically measuring the strength of the communications signal from the customer computing device to determine if it meets or exceeds a certain predetermined value.

16. The method of Claim 12 further comprising identifying at least a portion of a street address for the customer location associated with the location identifier.

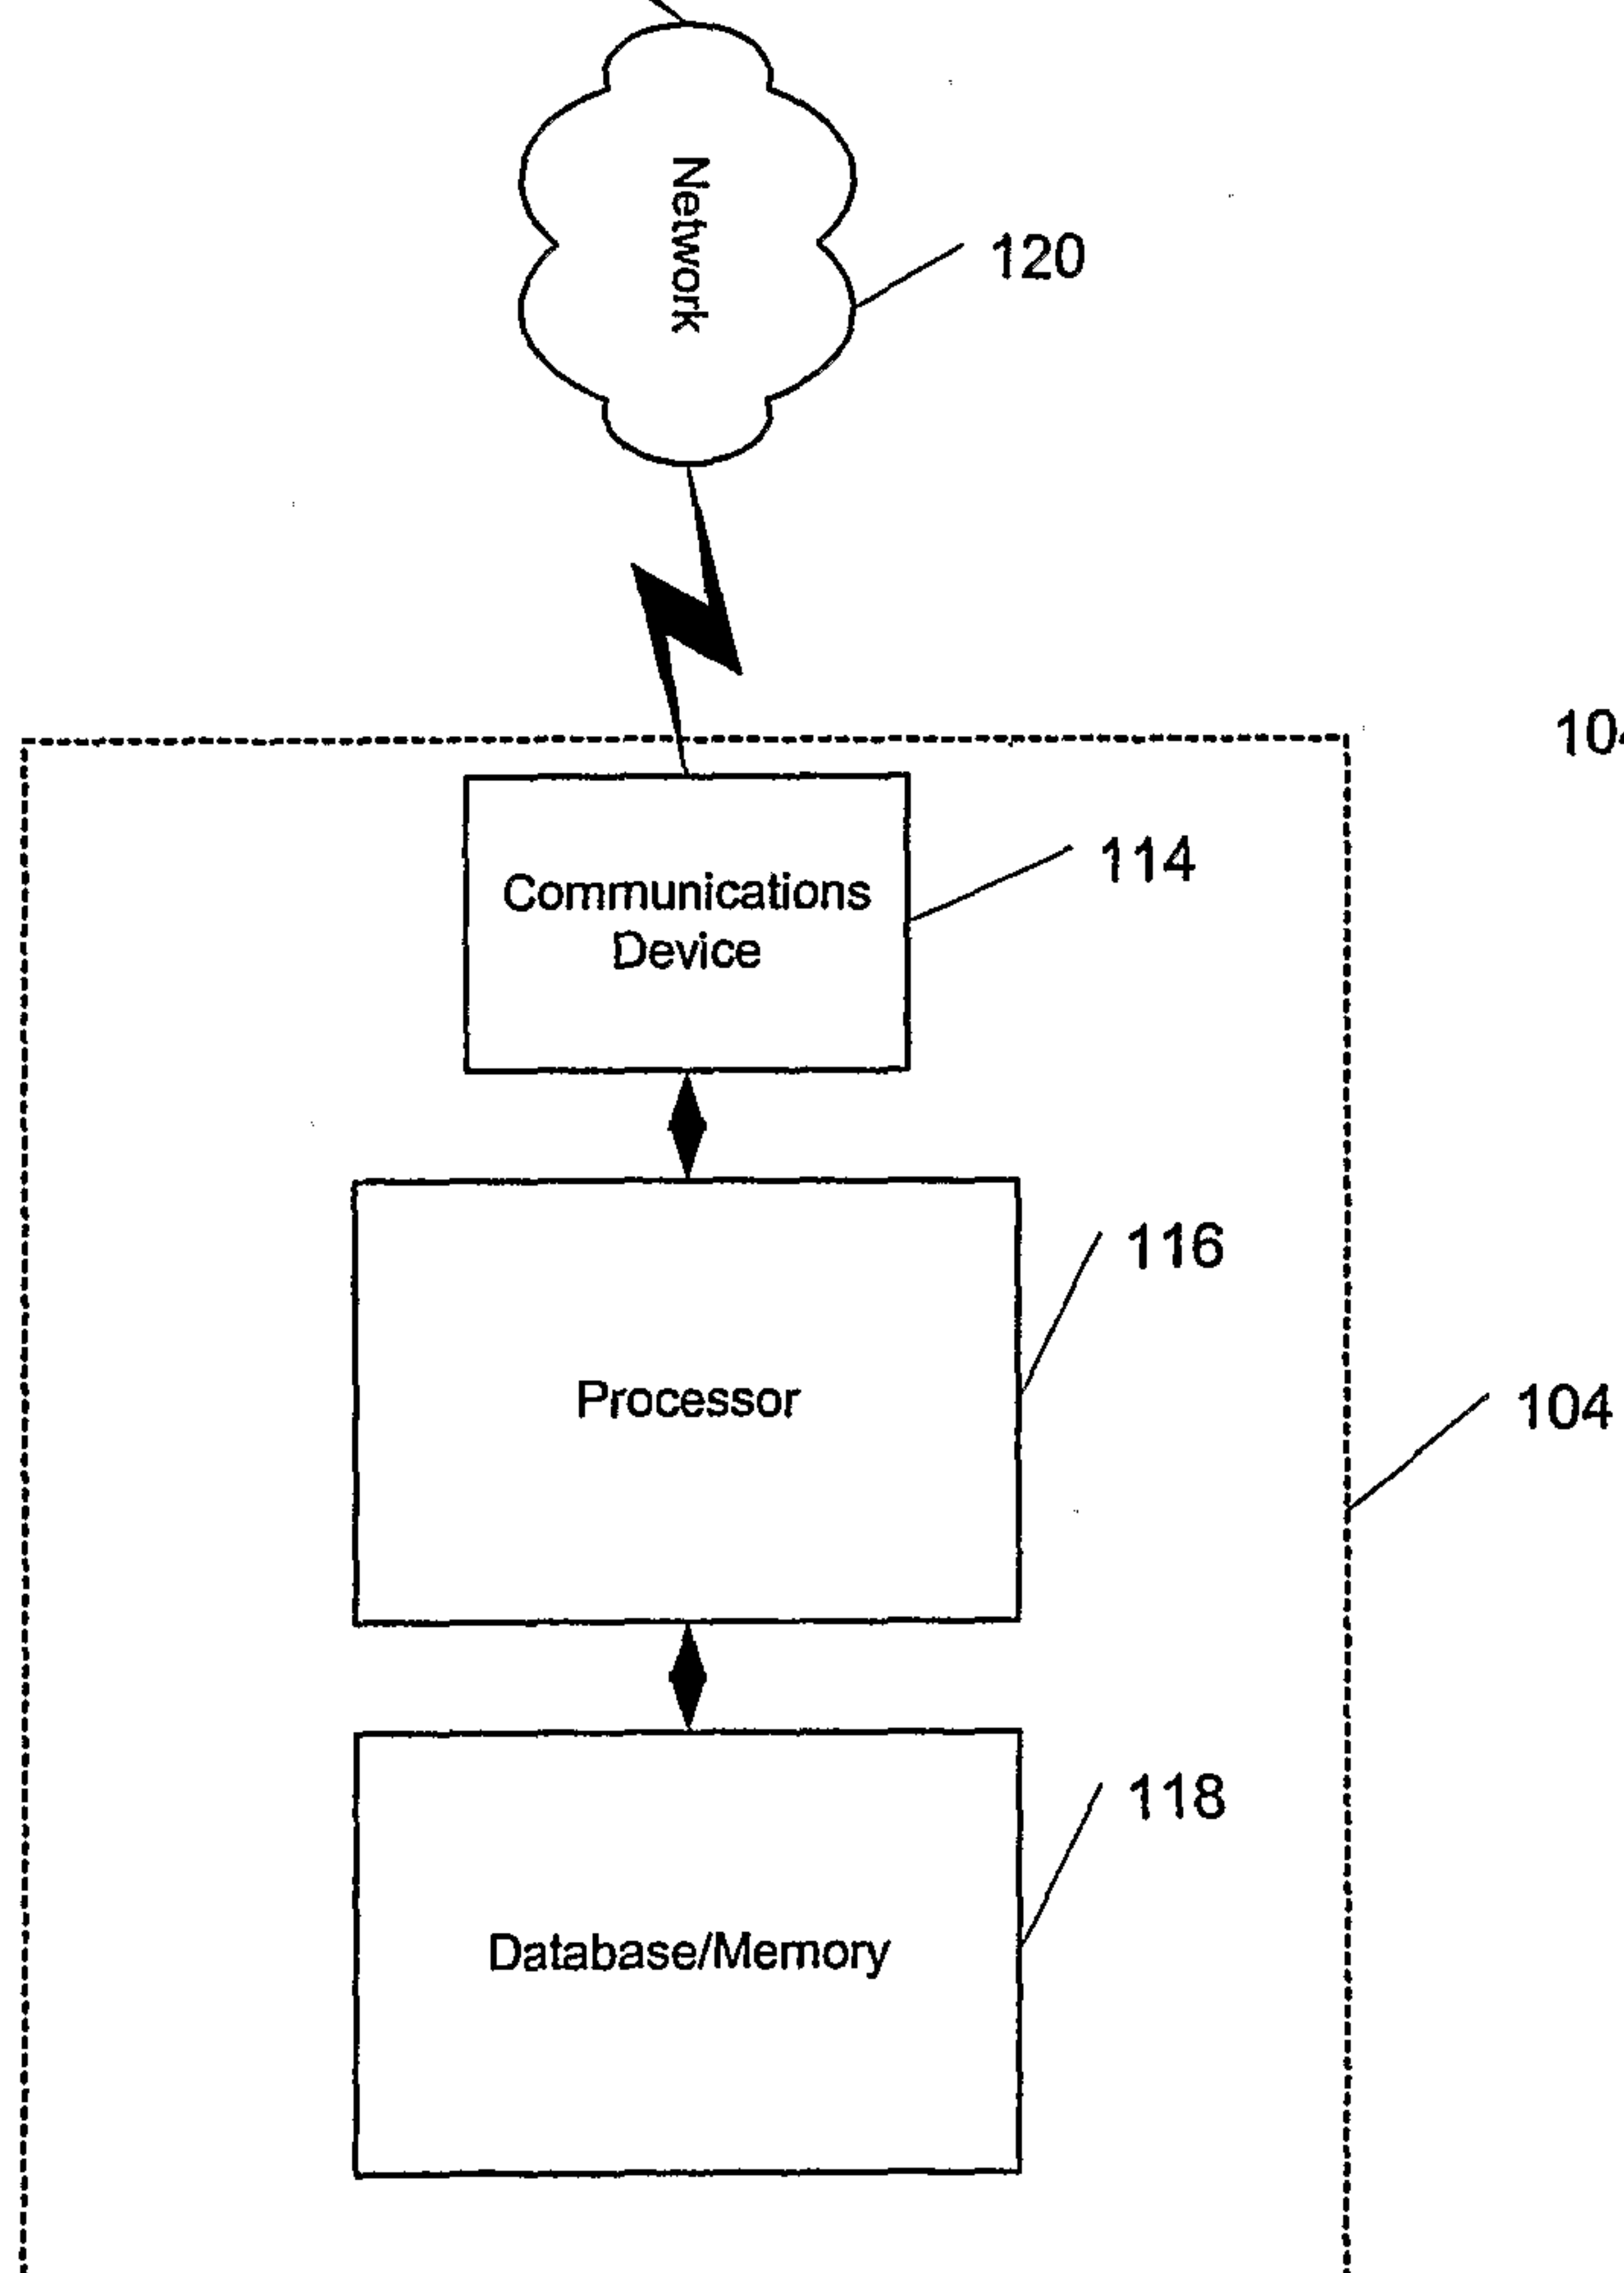
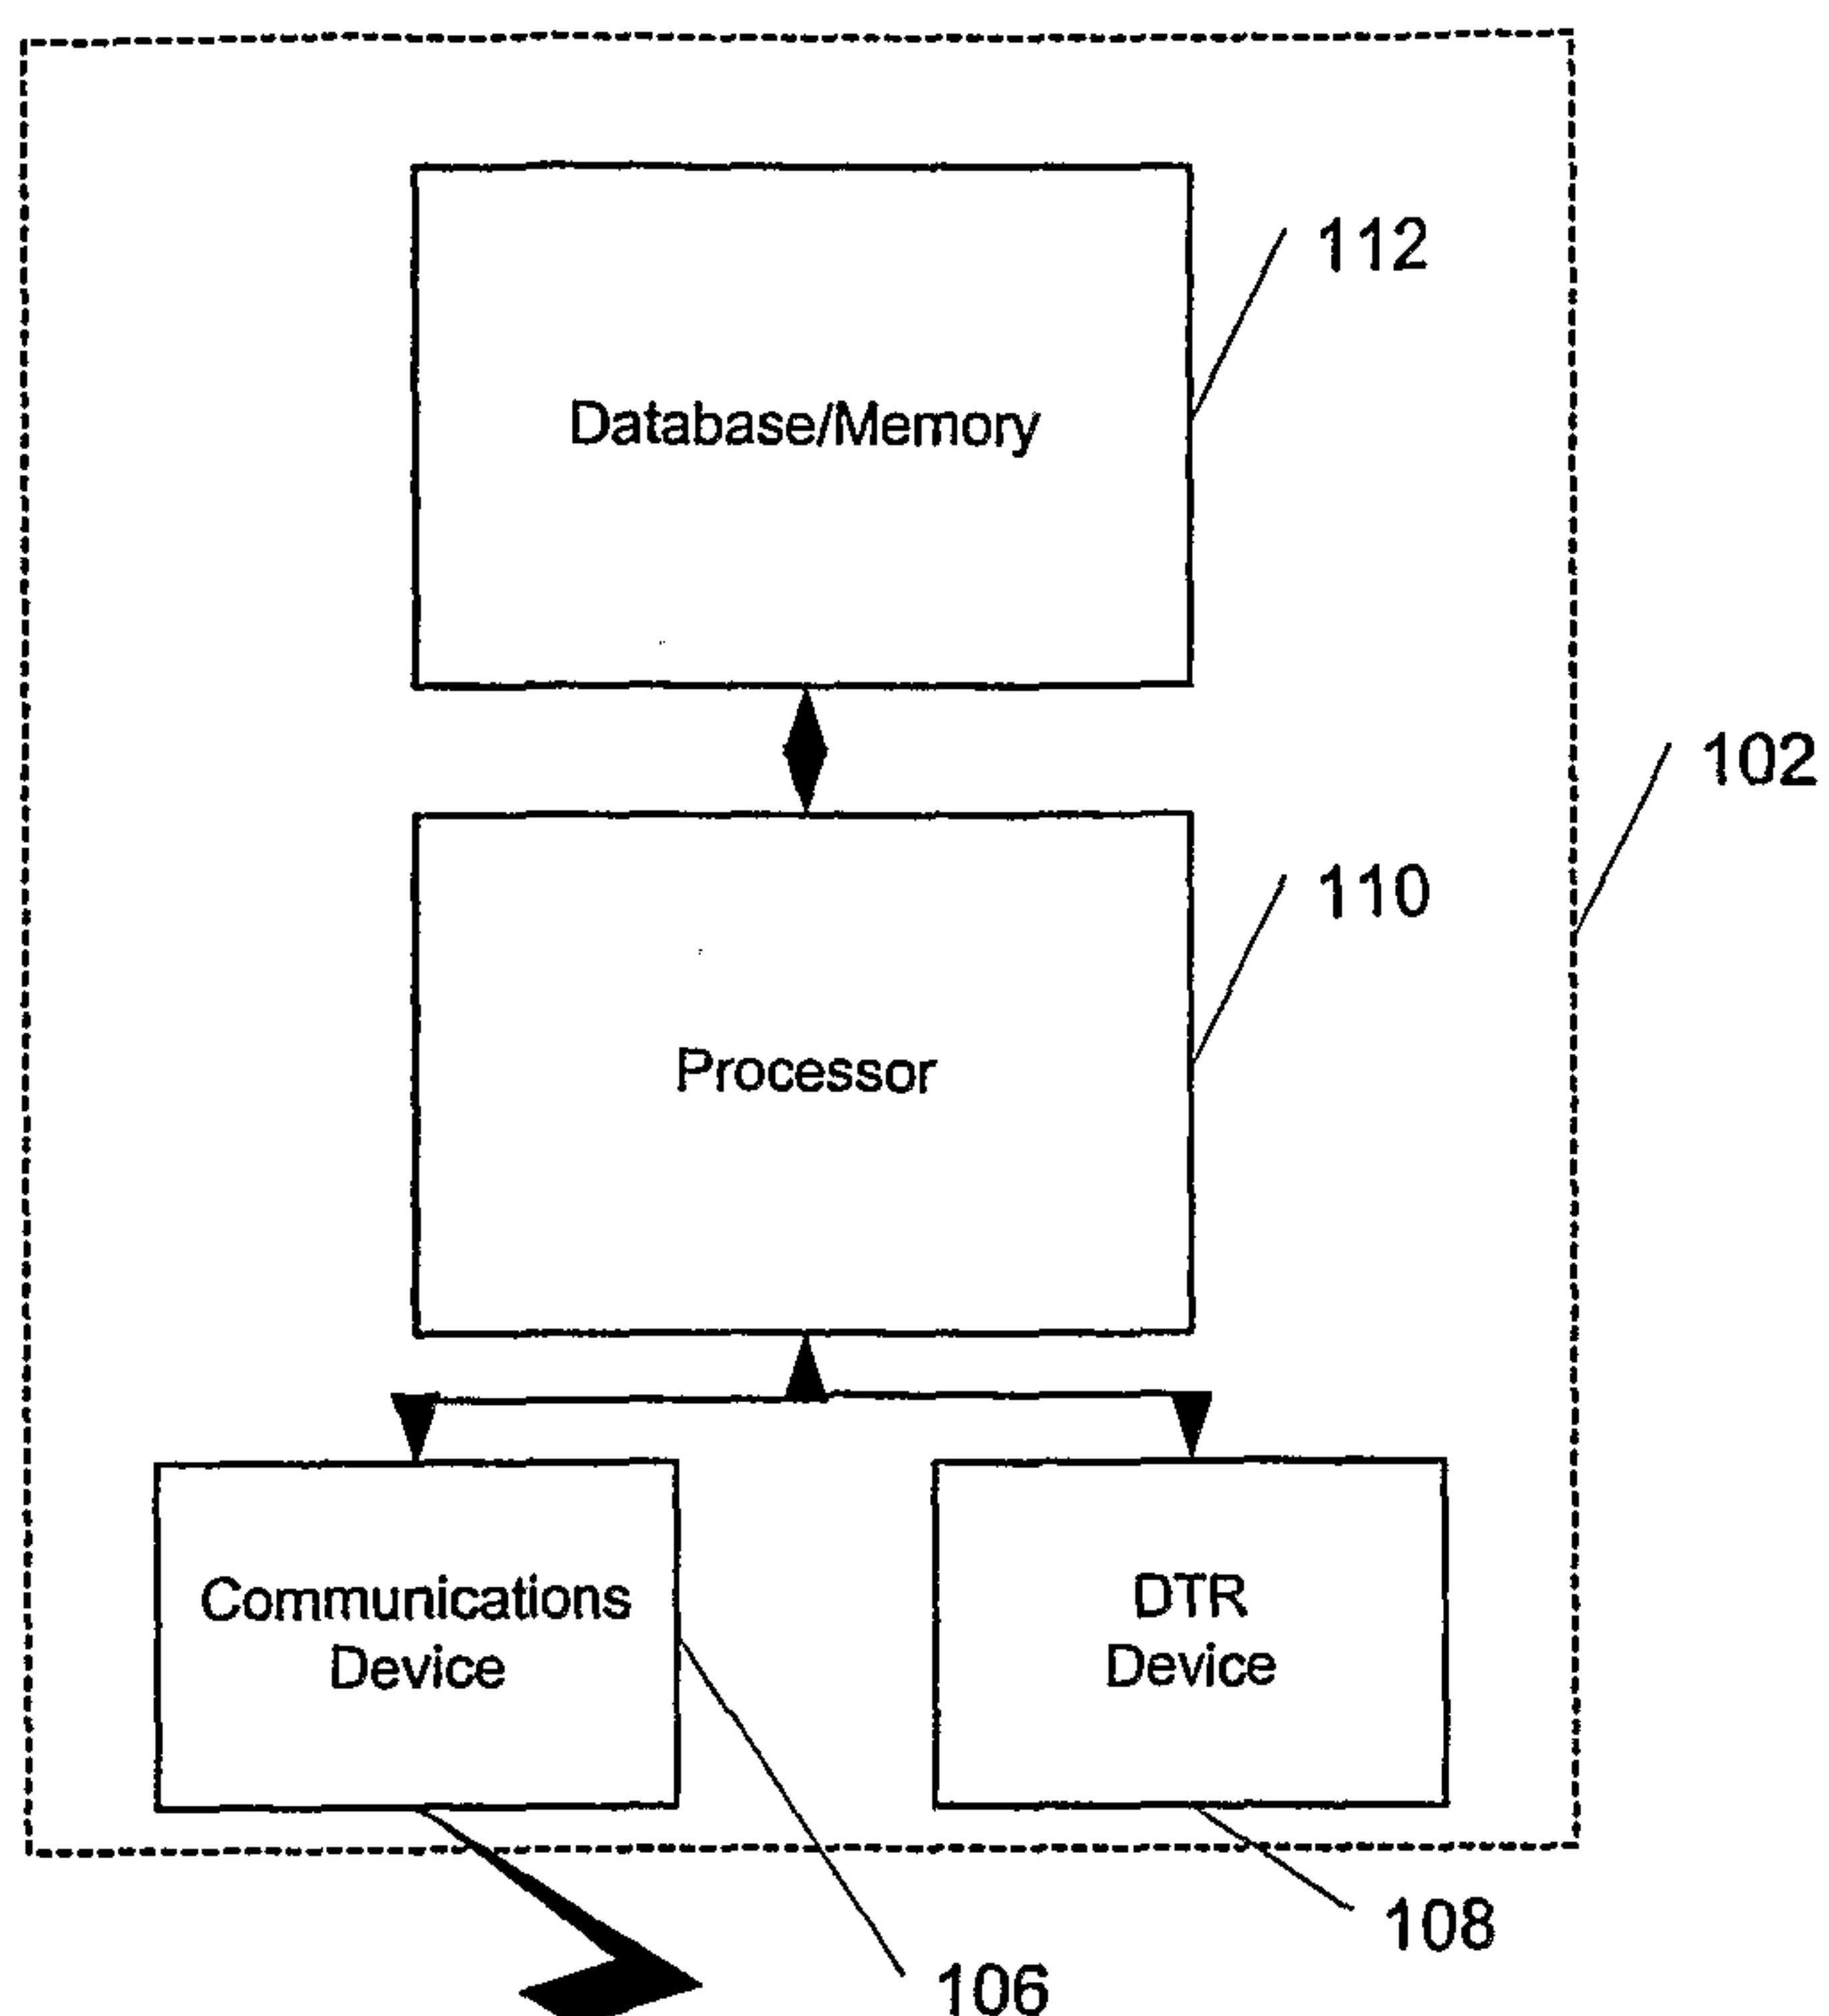
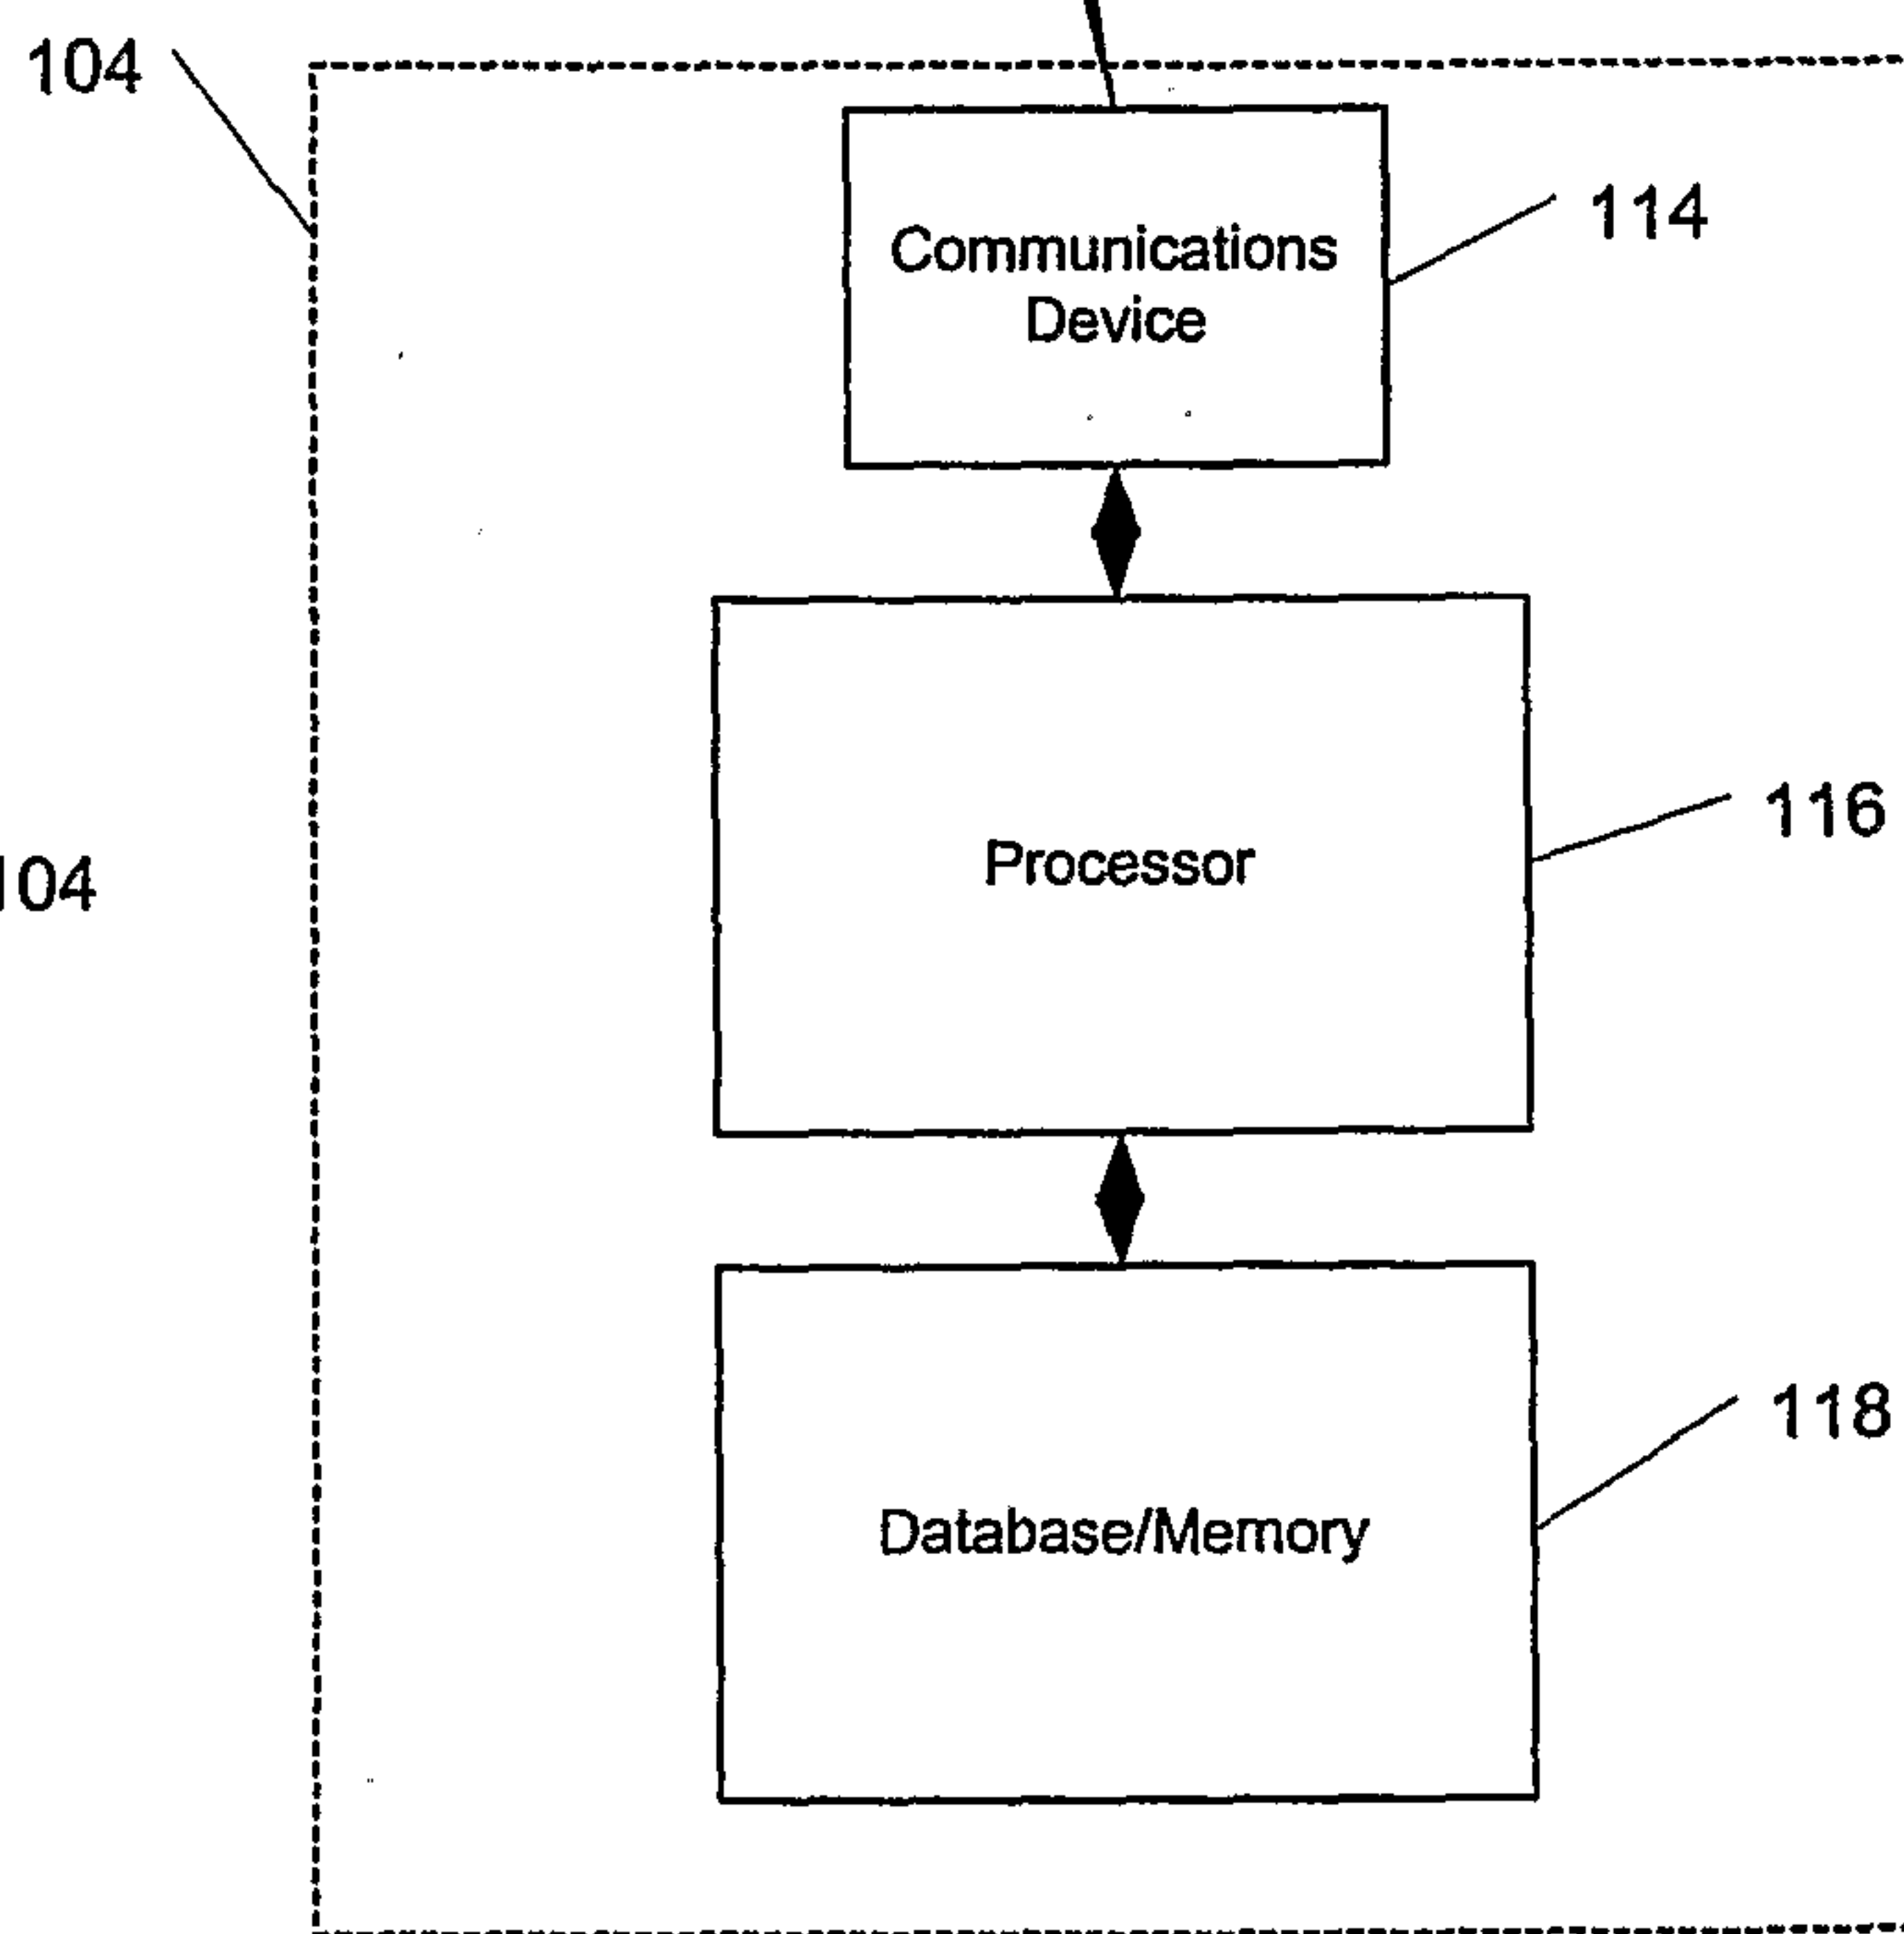
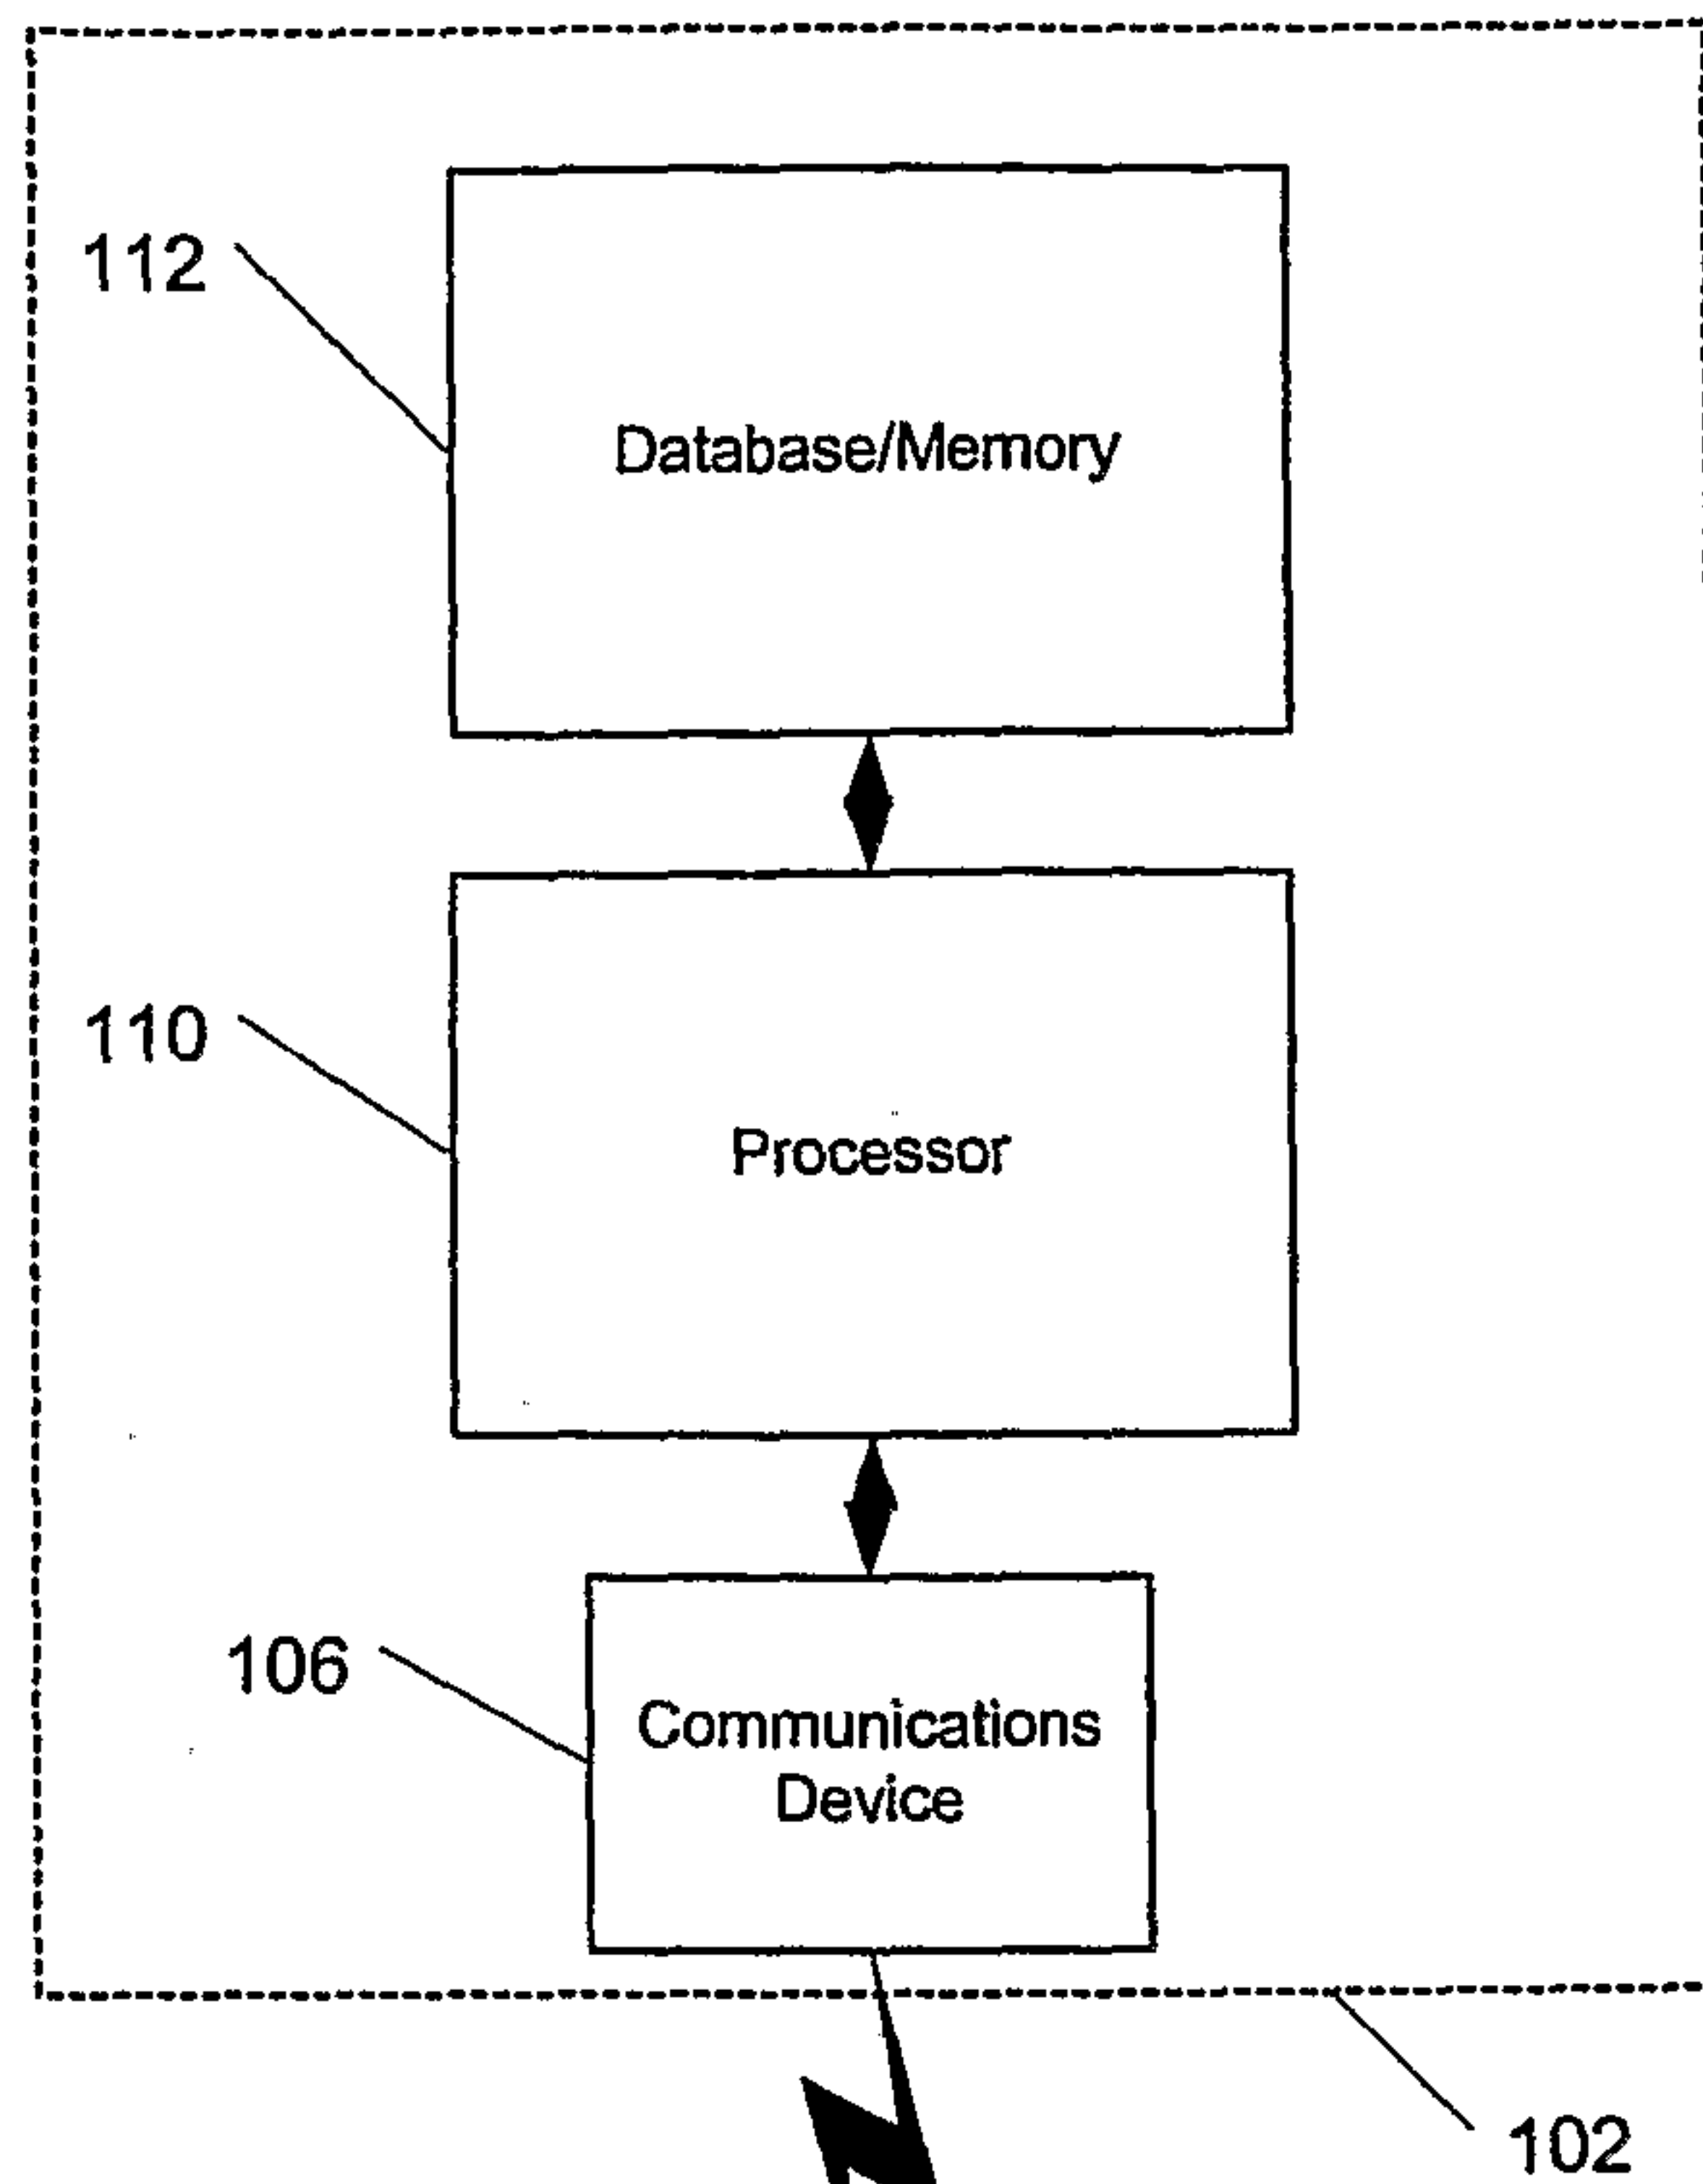
17. The method of Claim 12, wherein the network address is a Media Access Control (MAC) address.

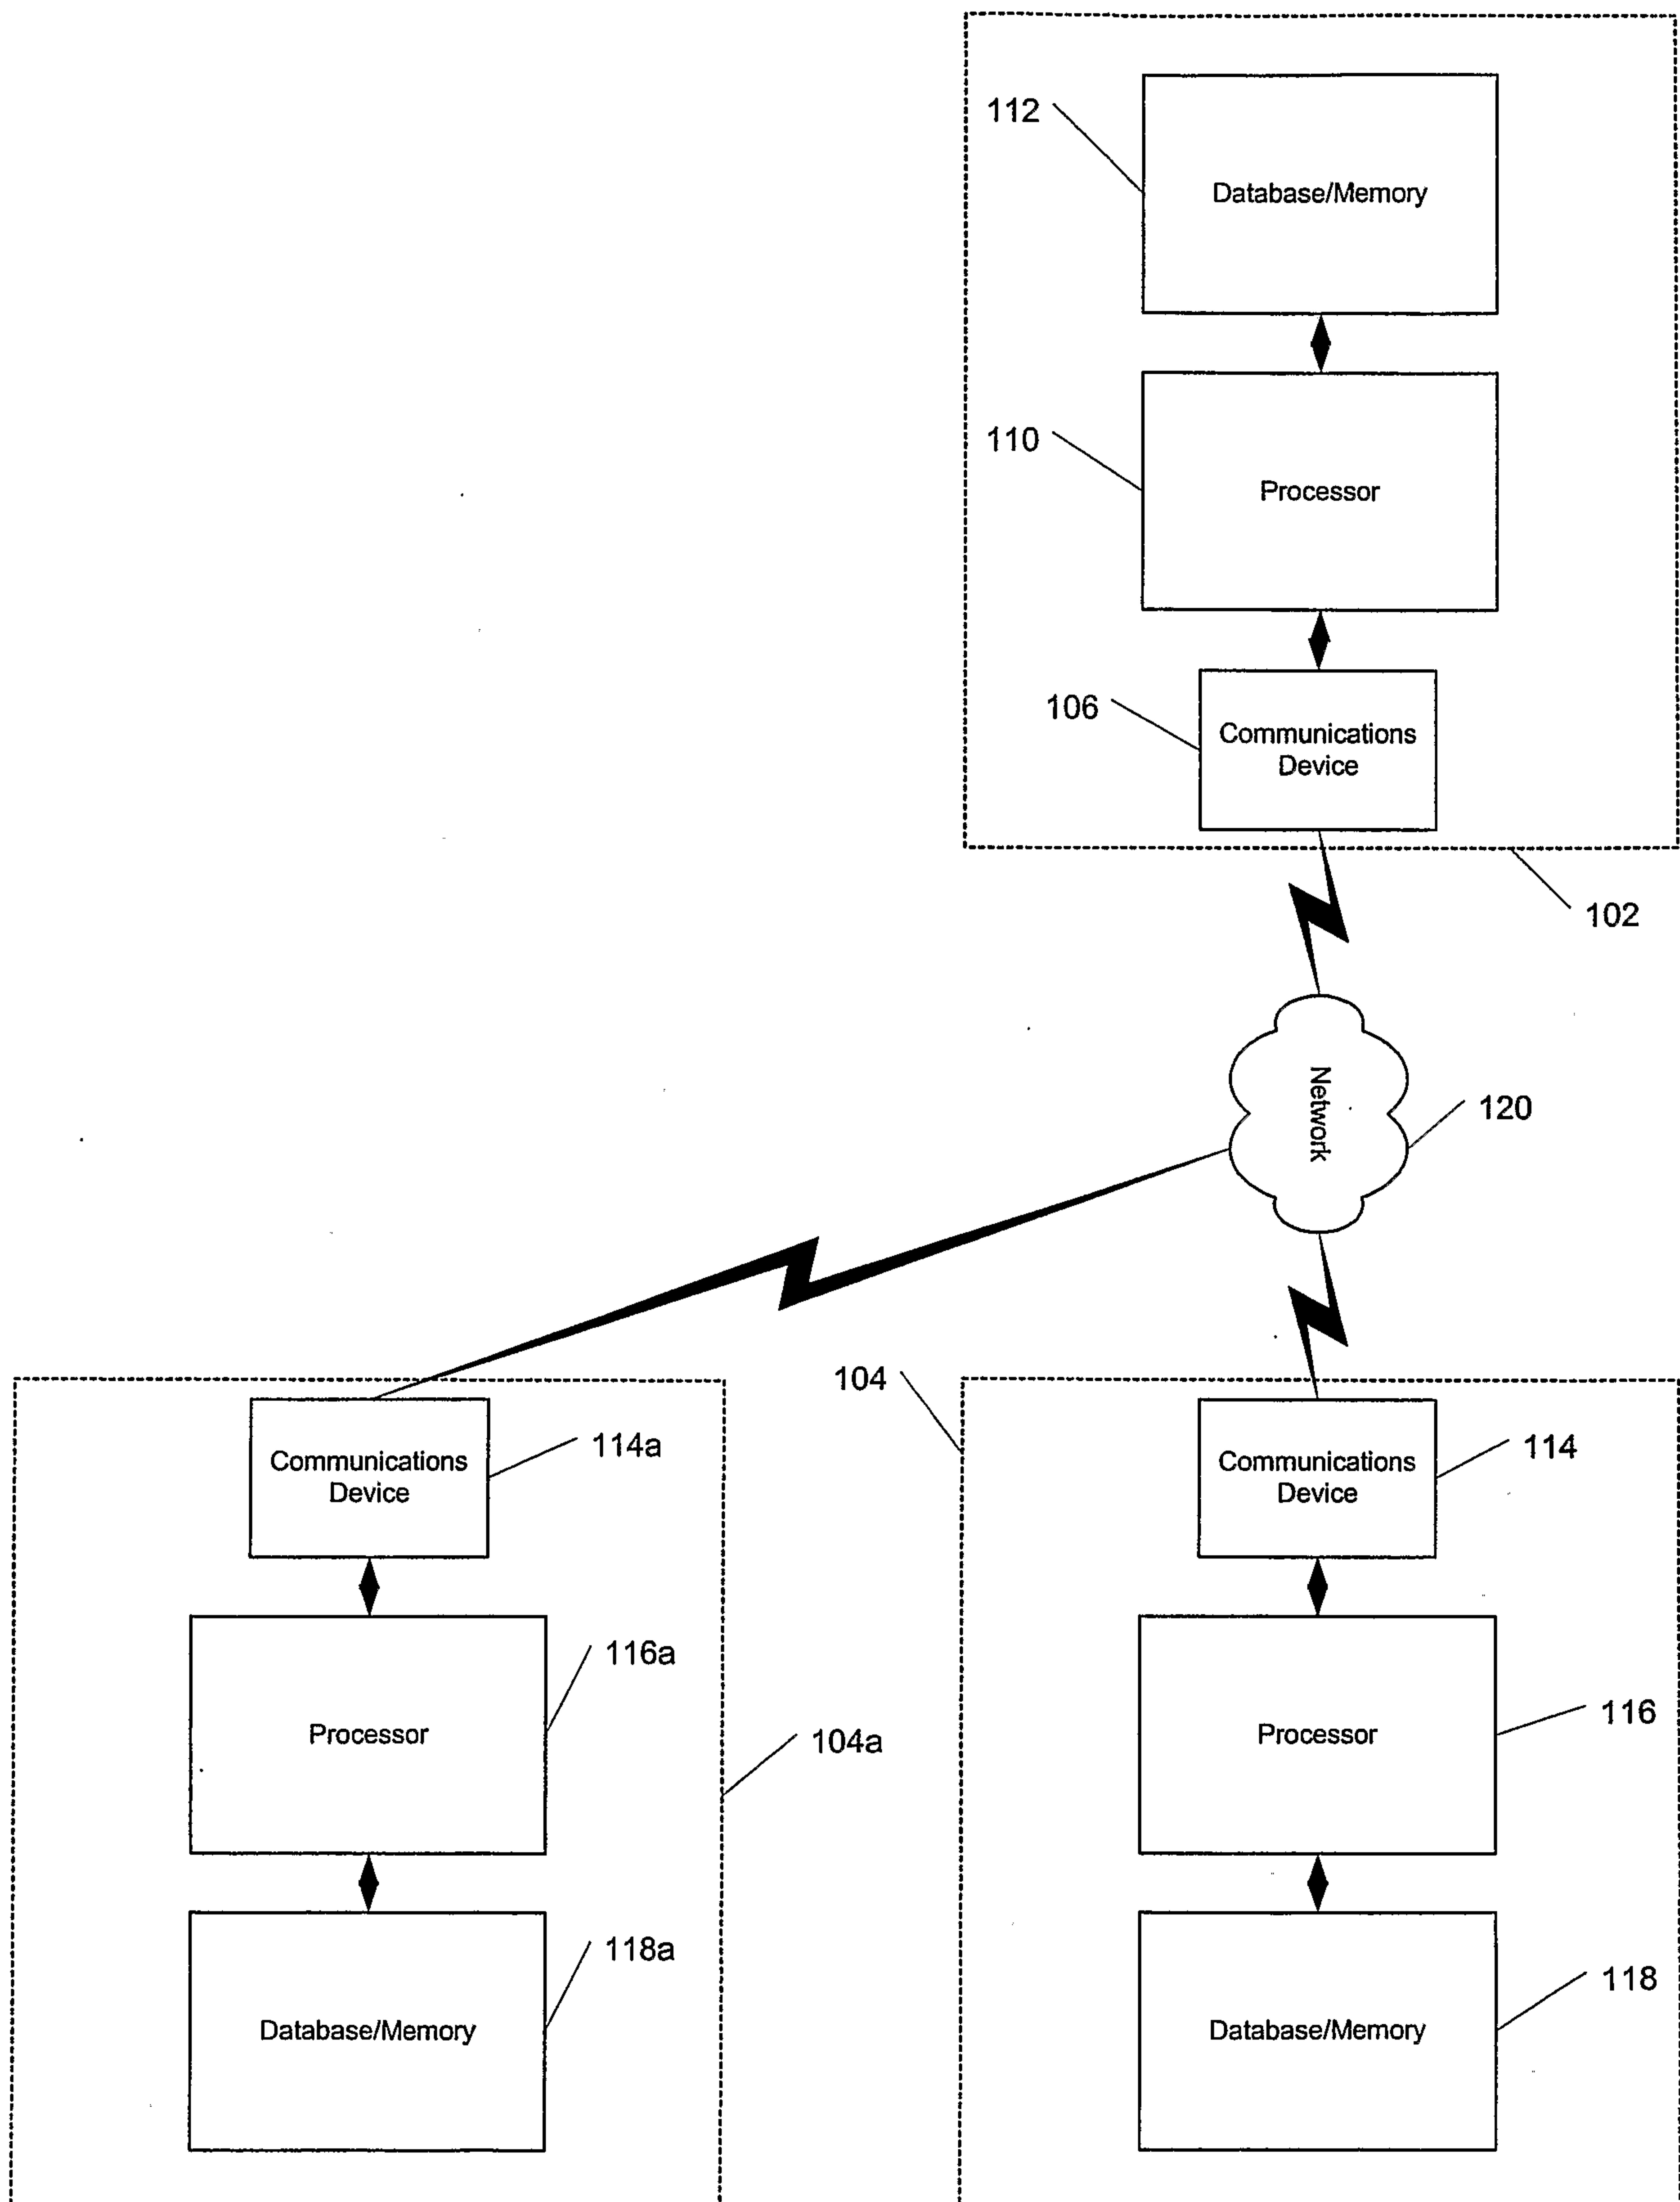
18. The method of Claim 12 further comprising determining global positioning system (GPS) coordinates for the customer location associated with location identifier.

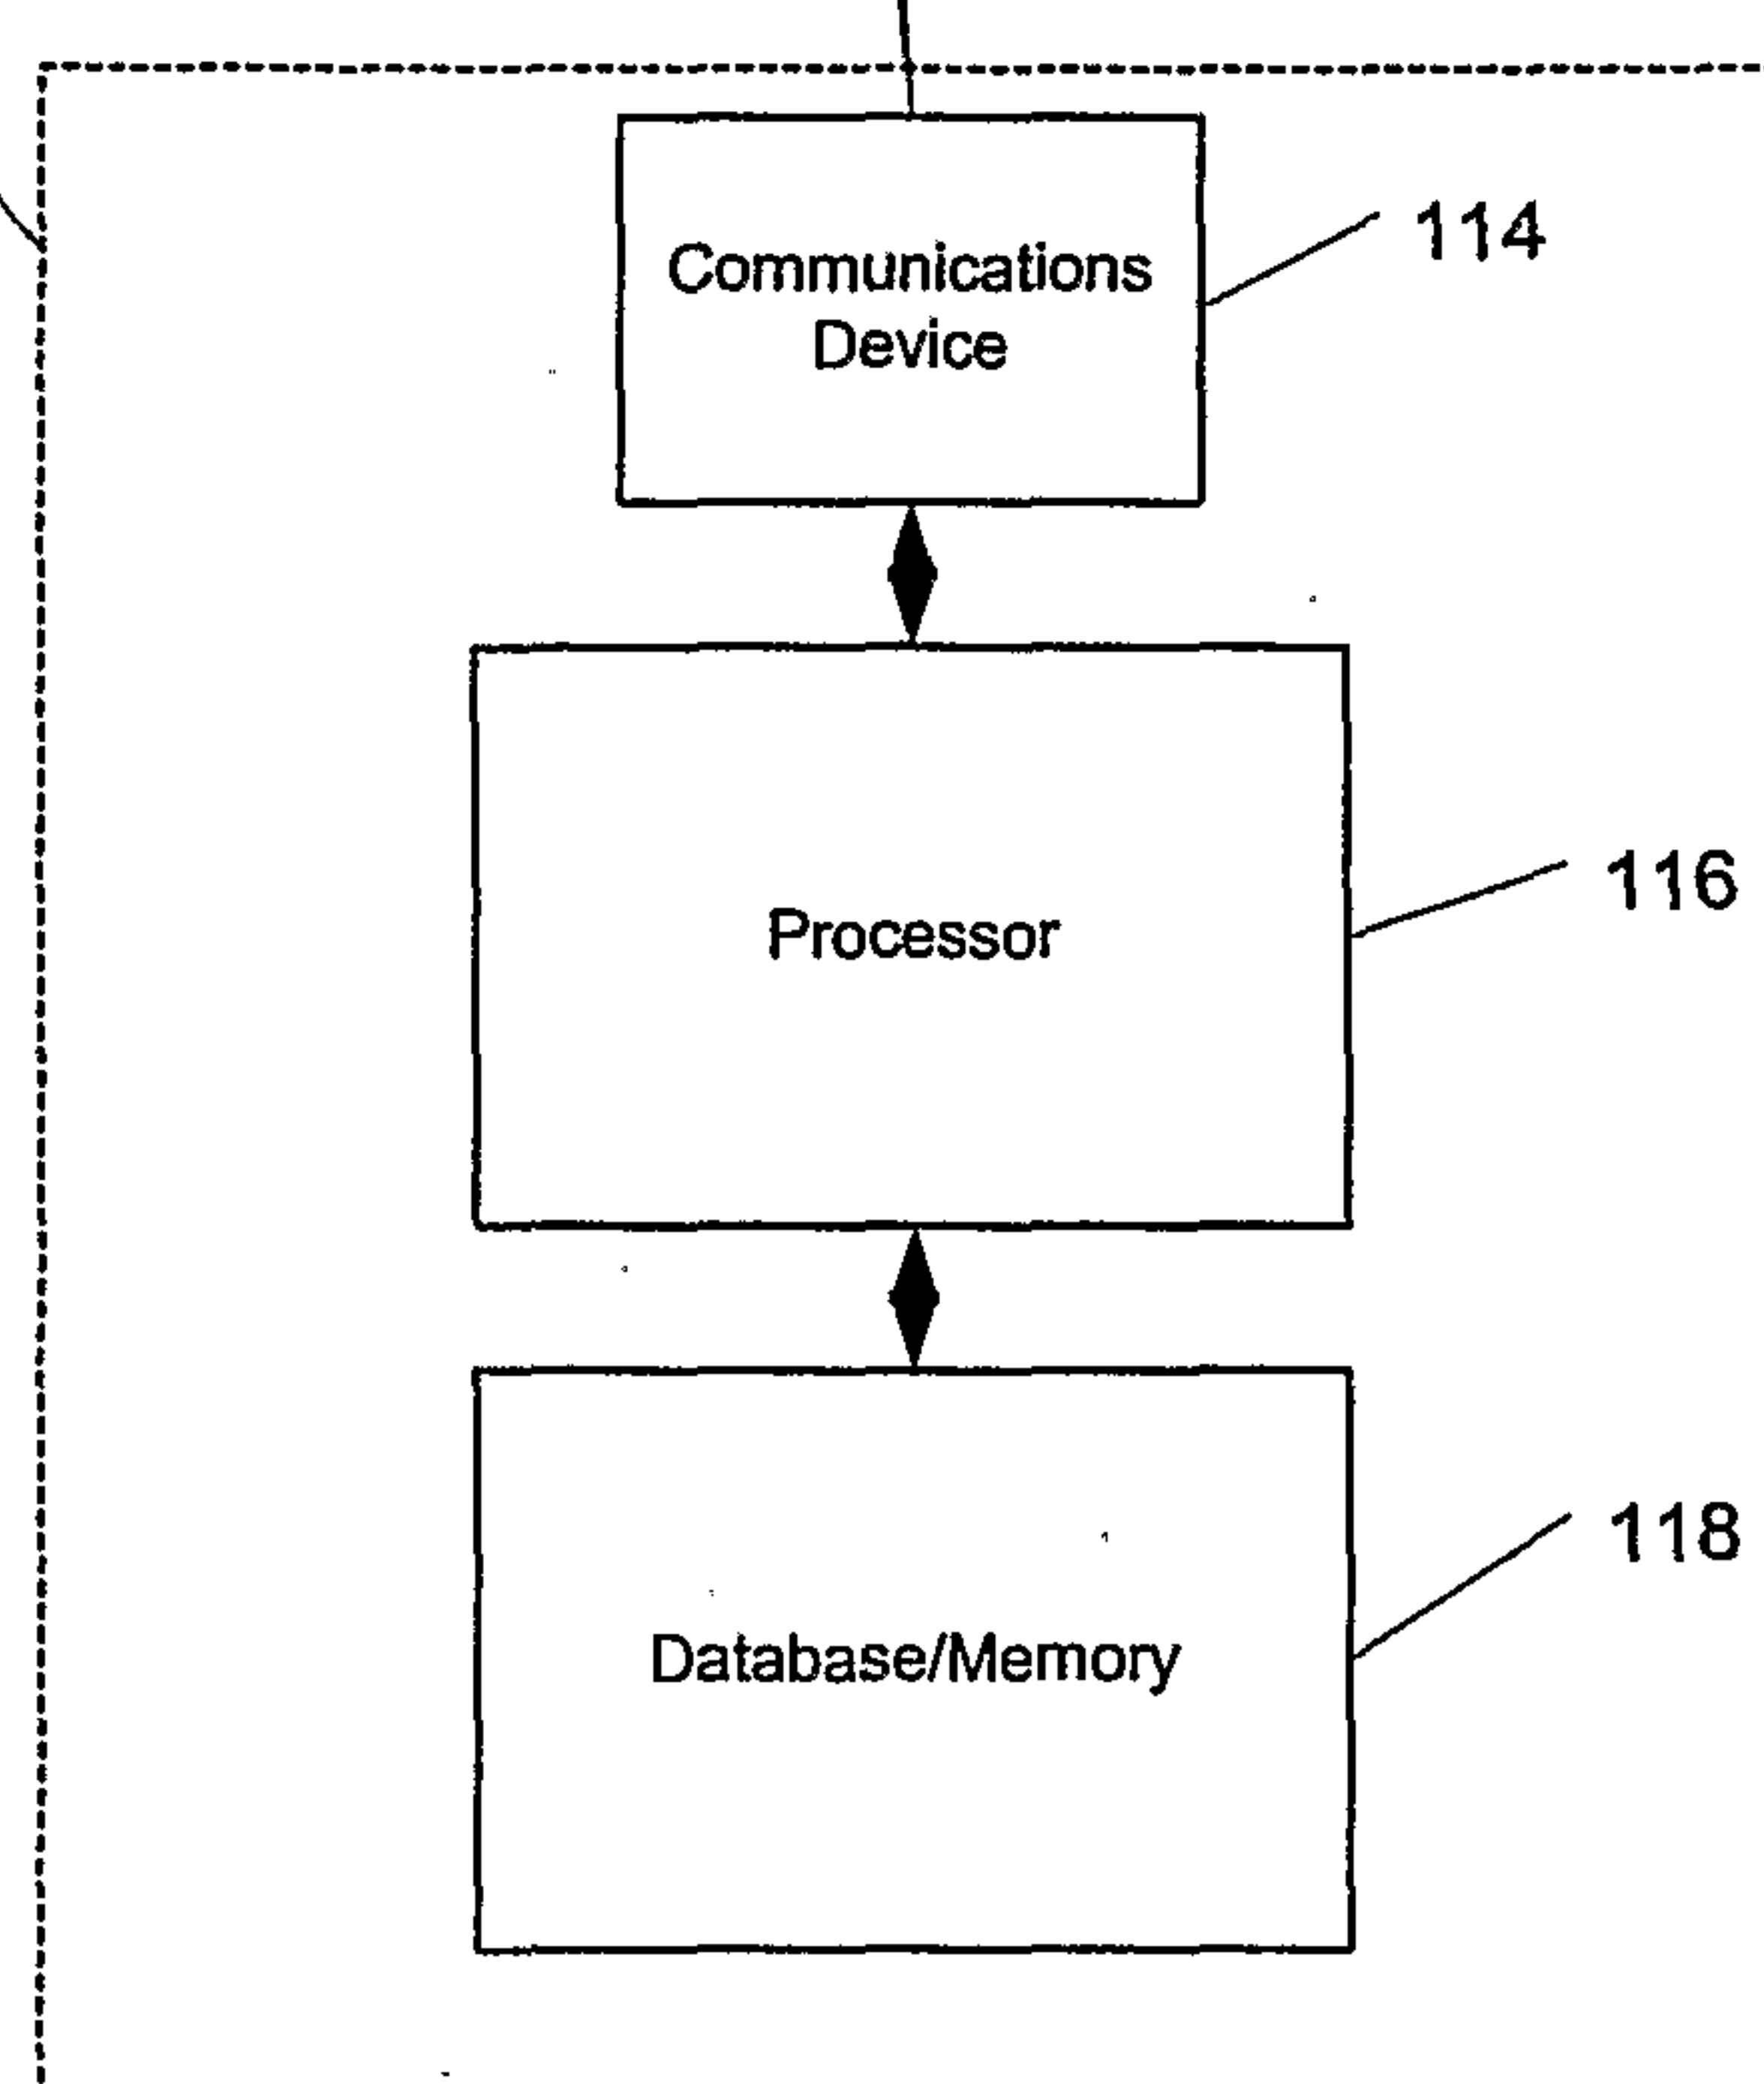
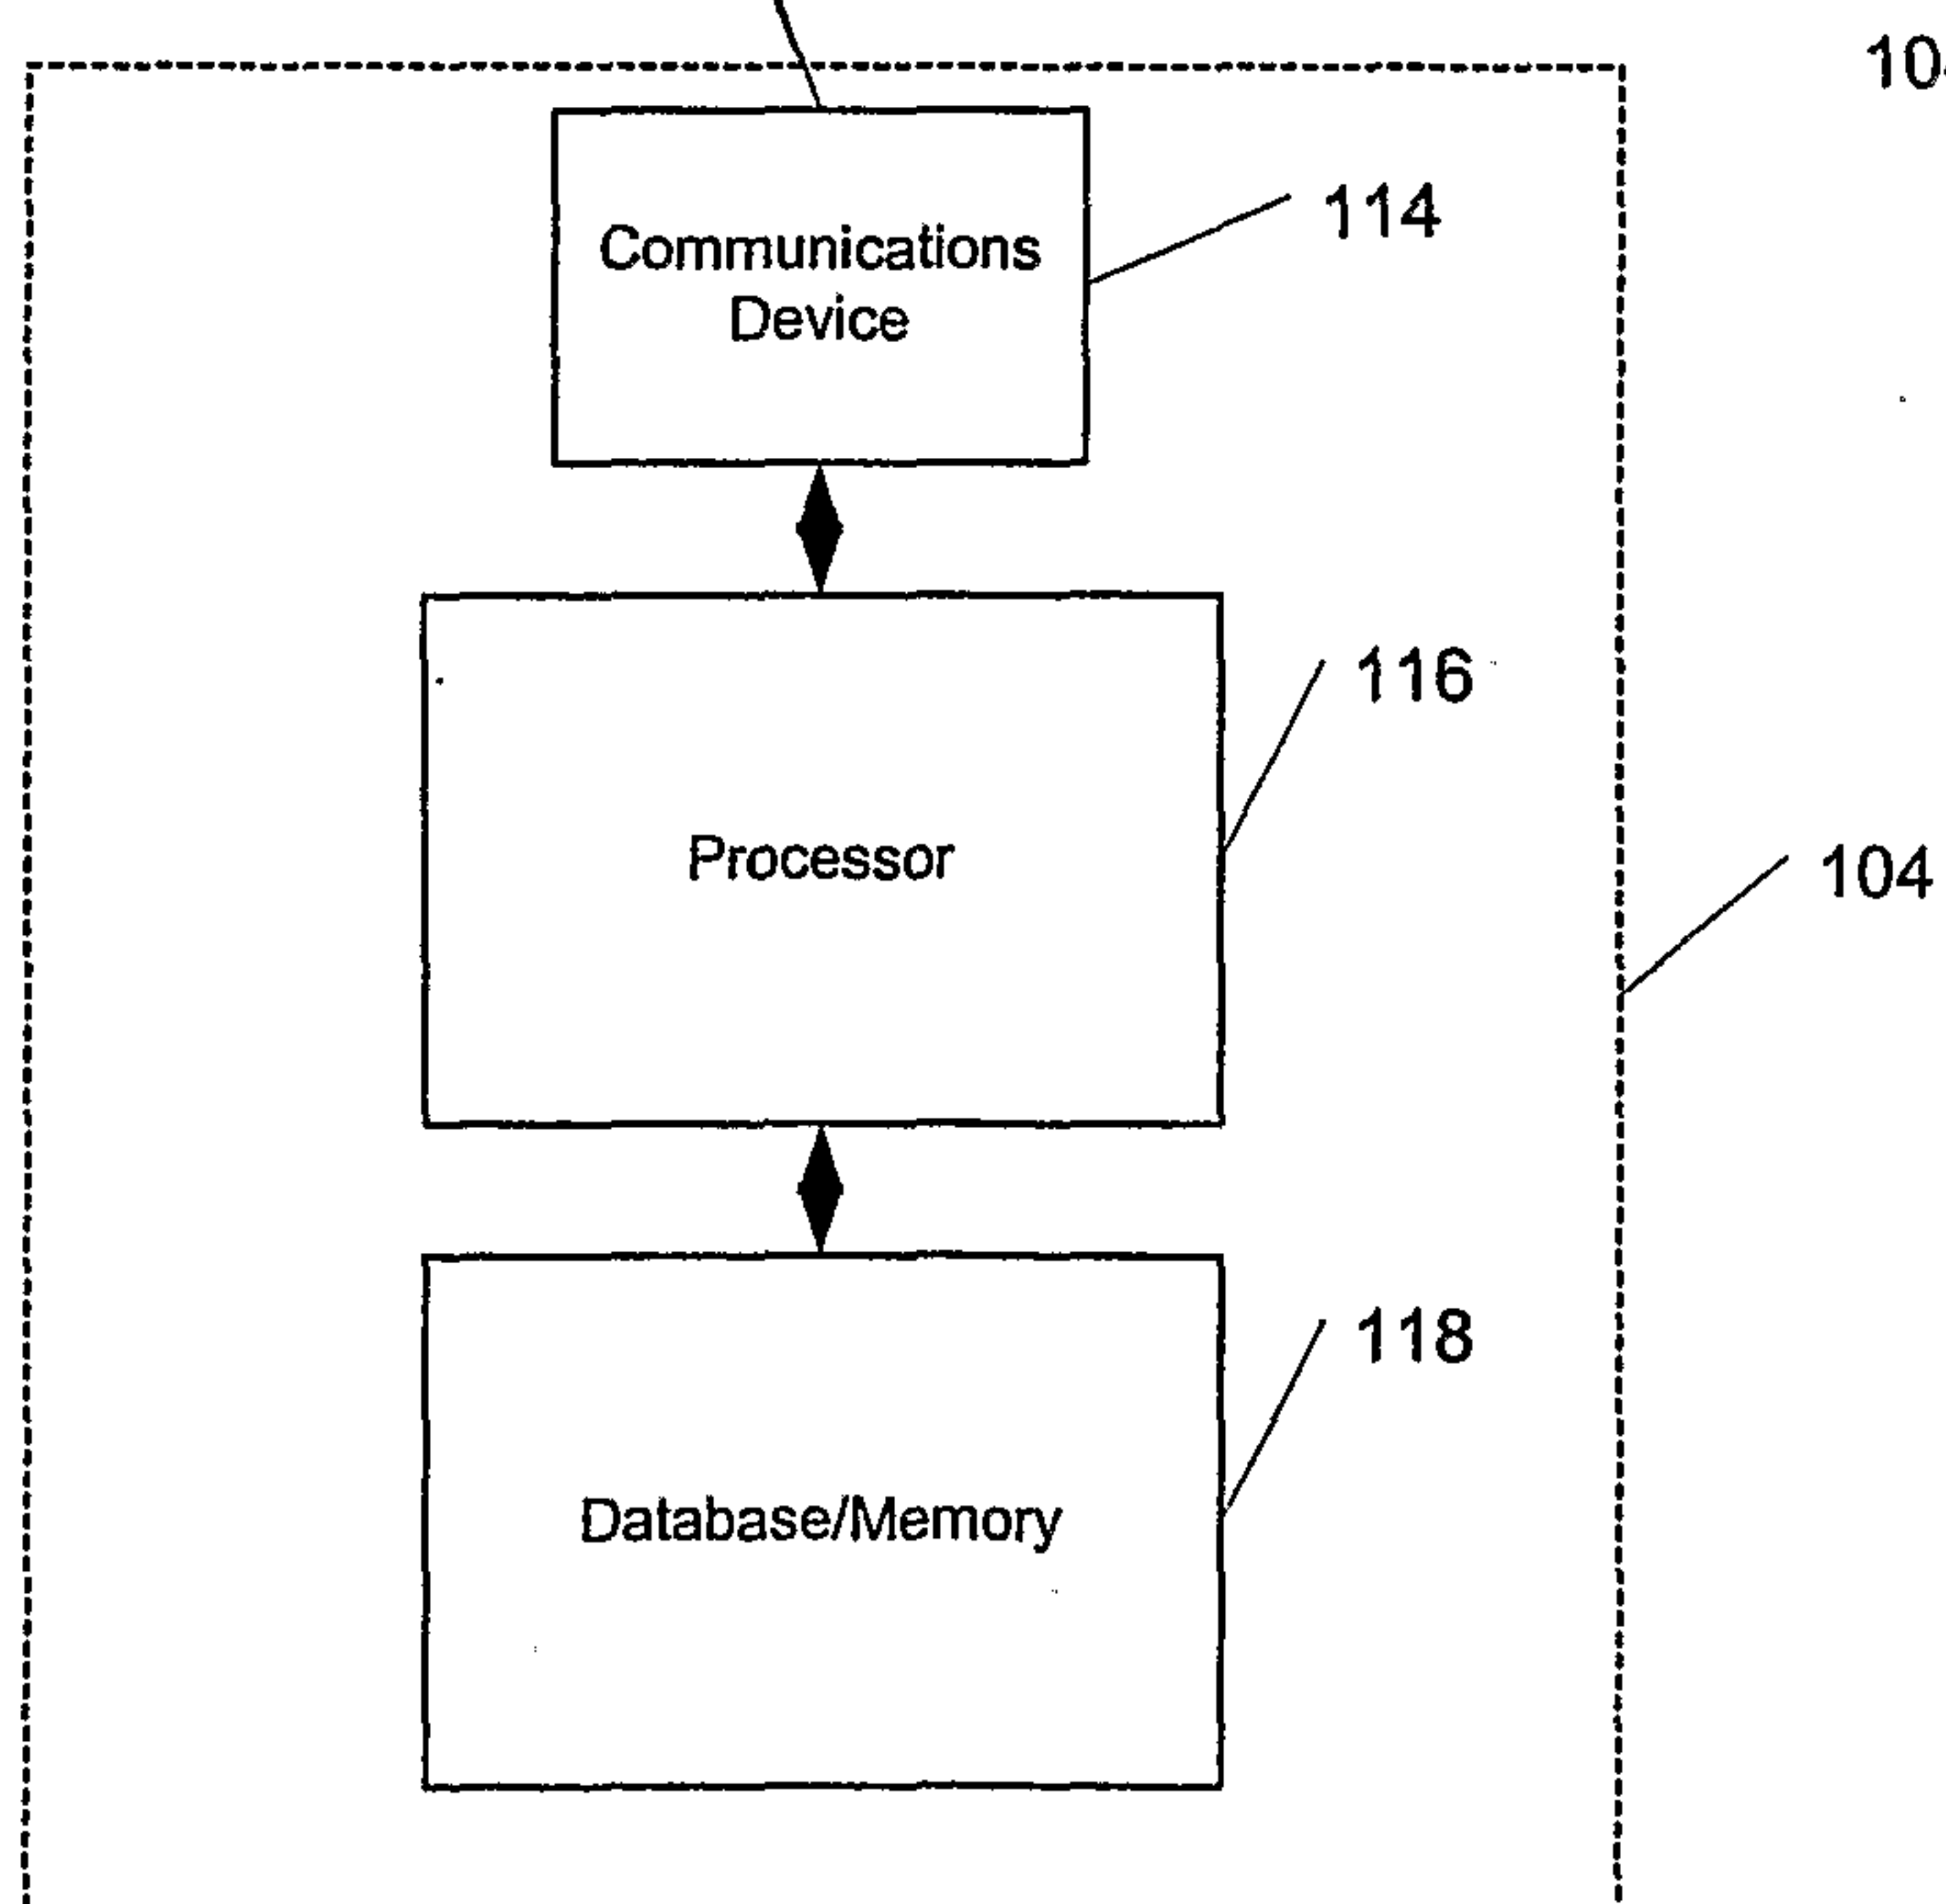
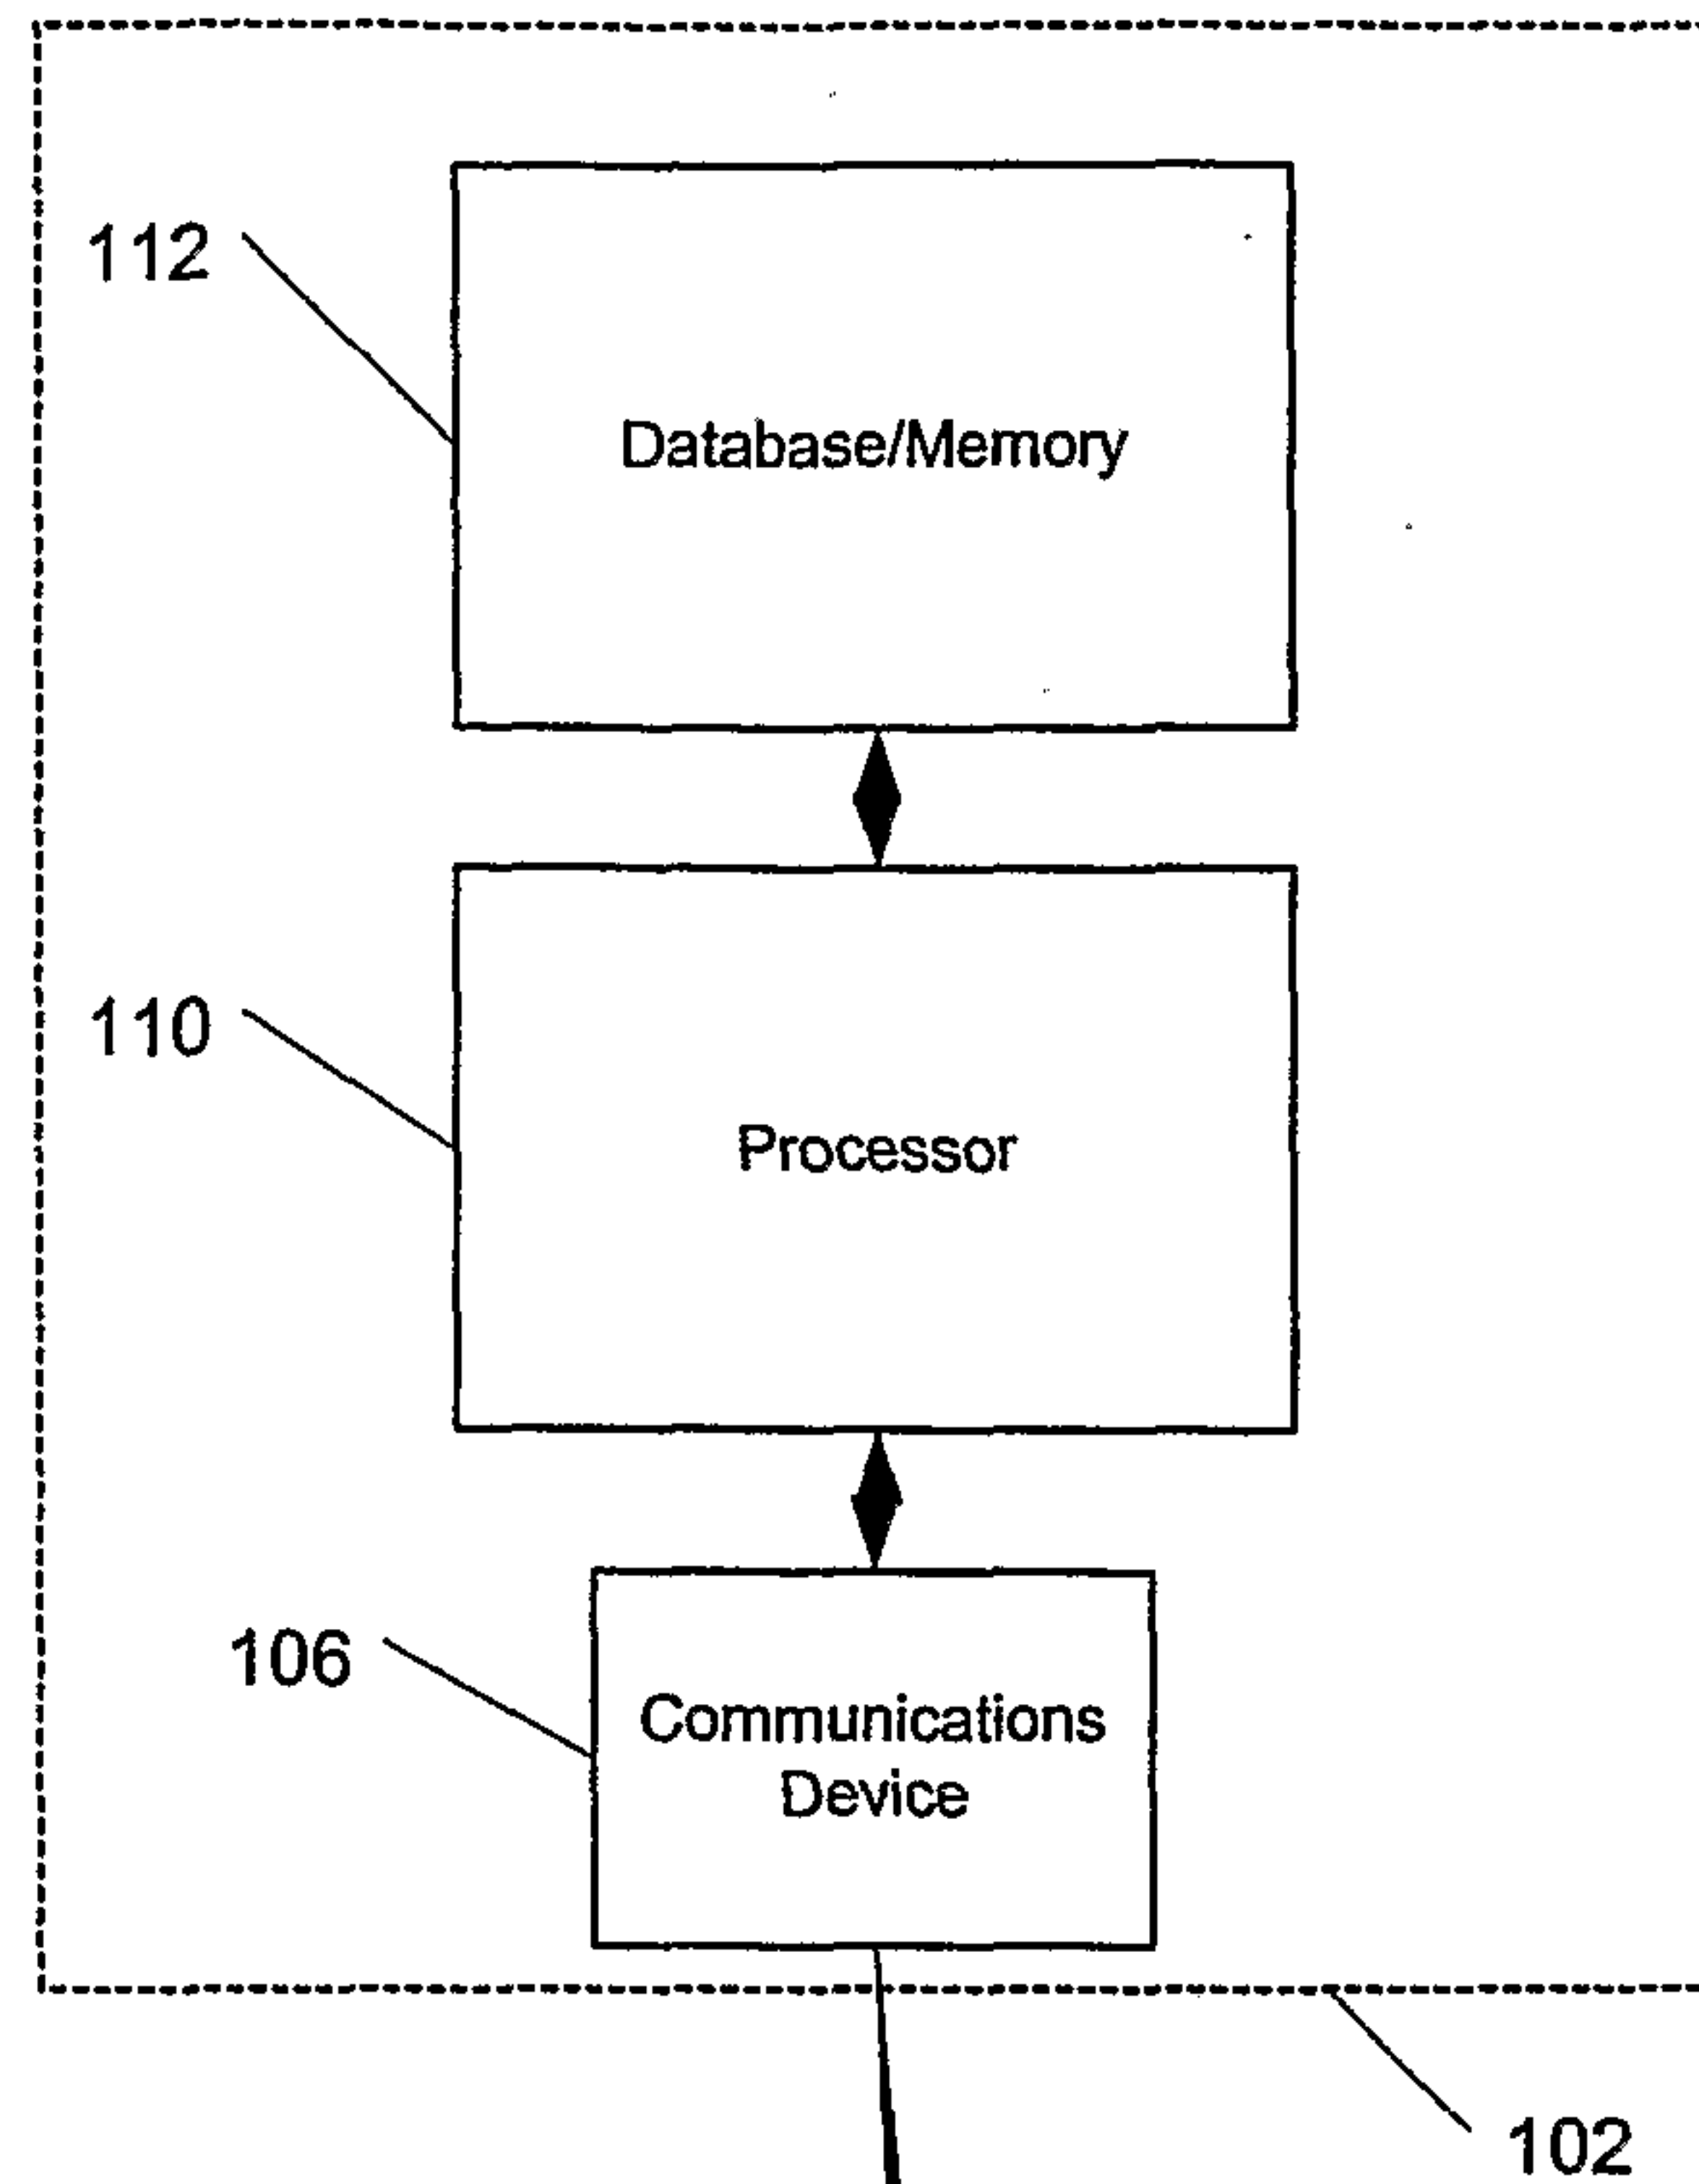
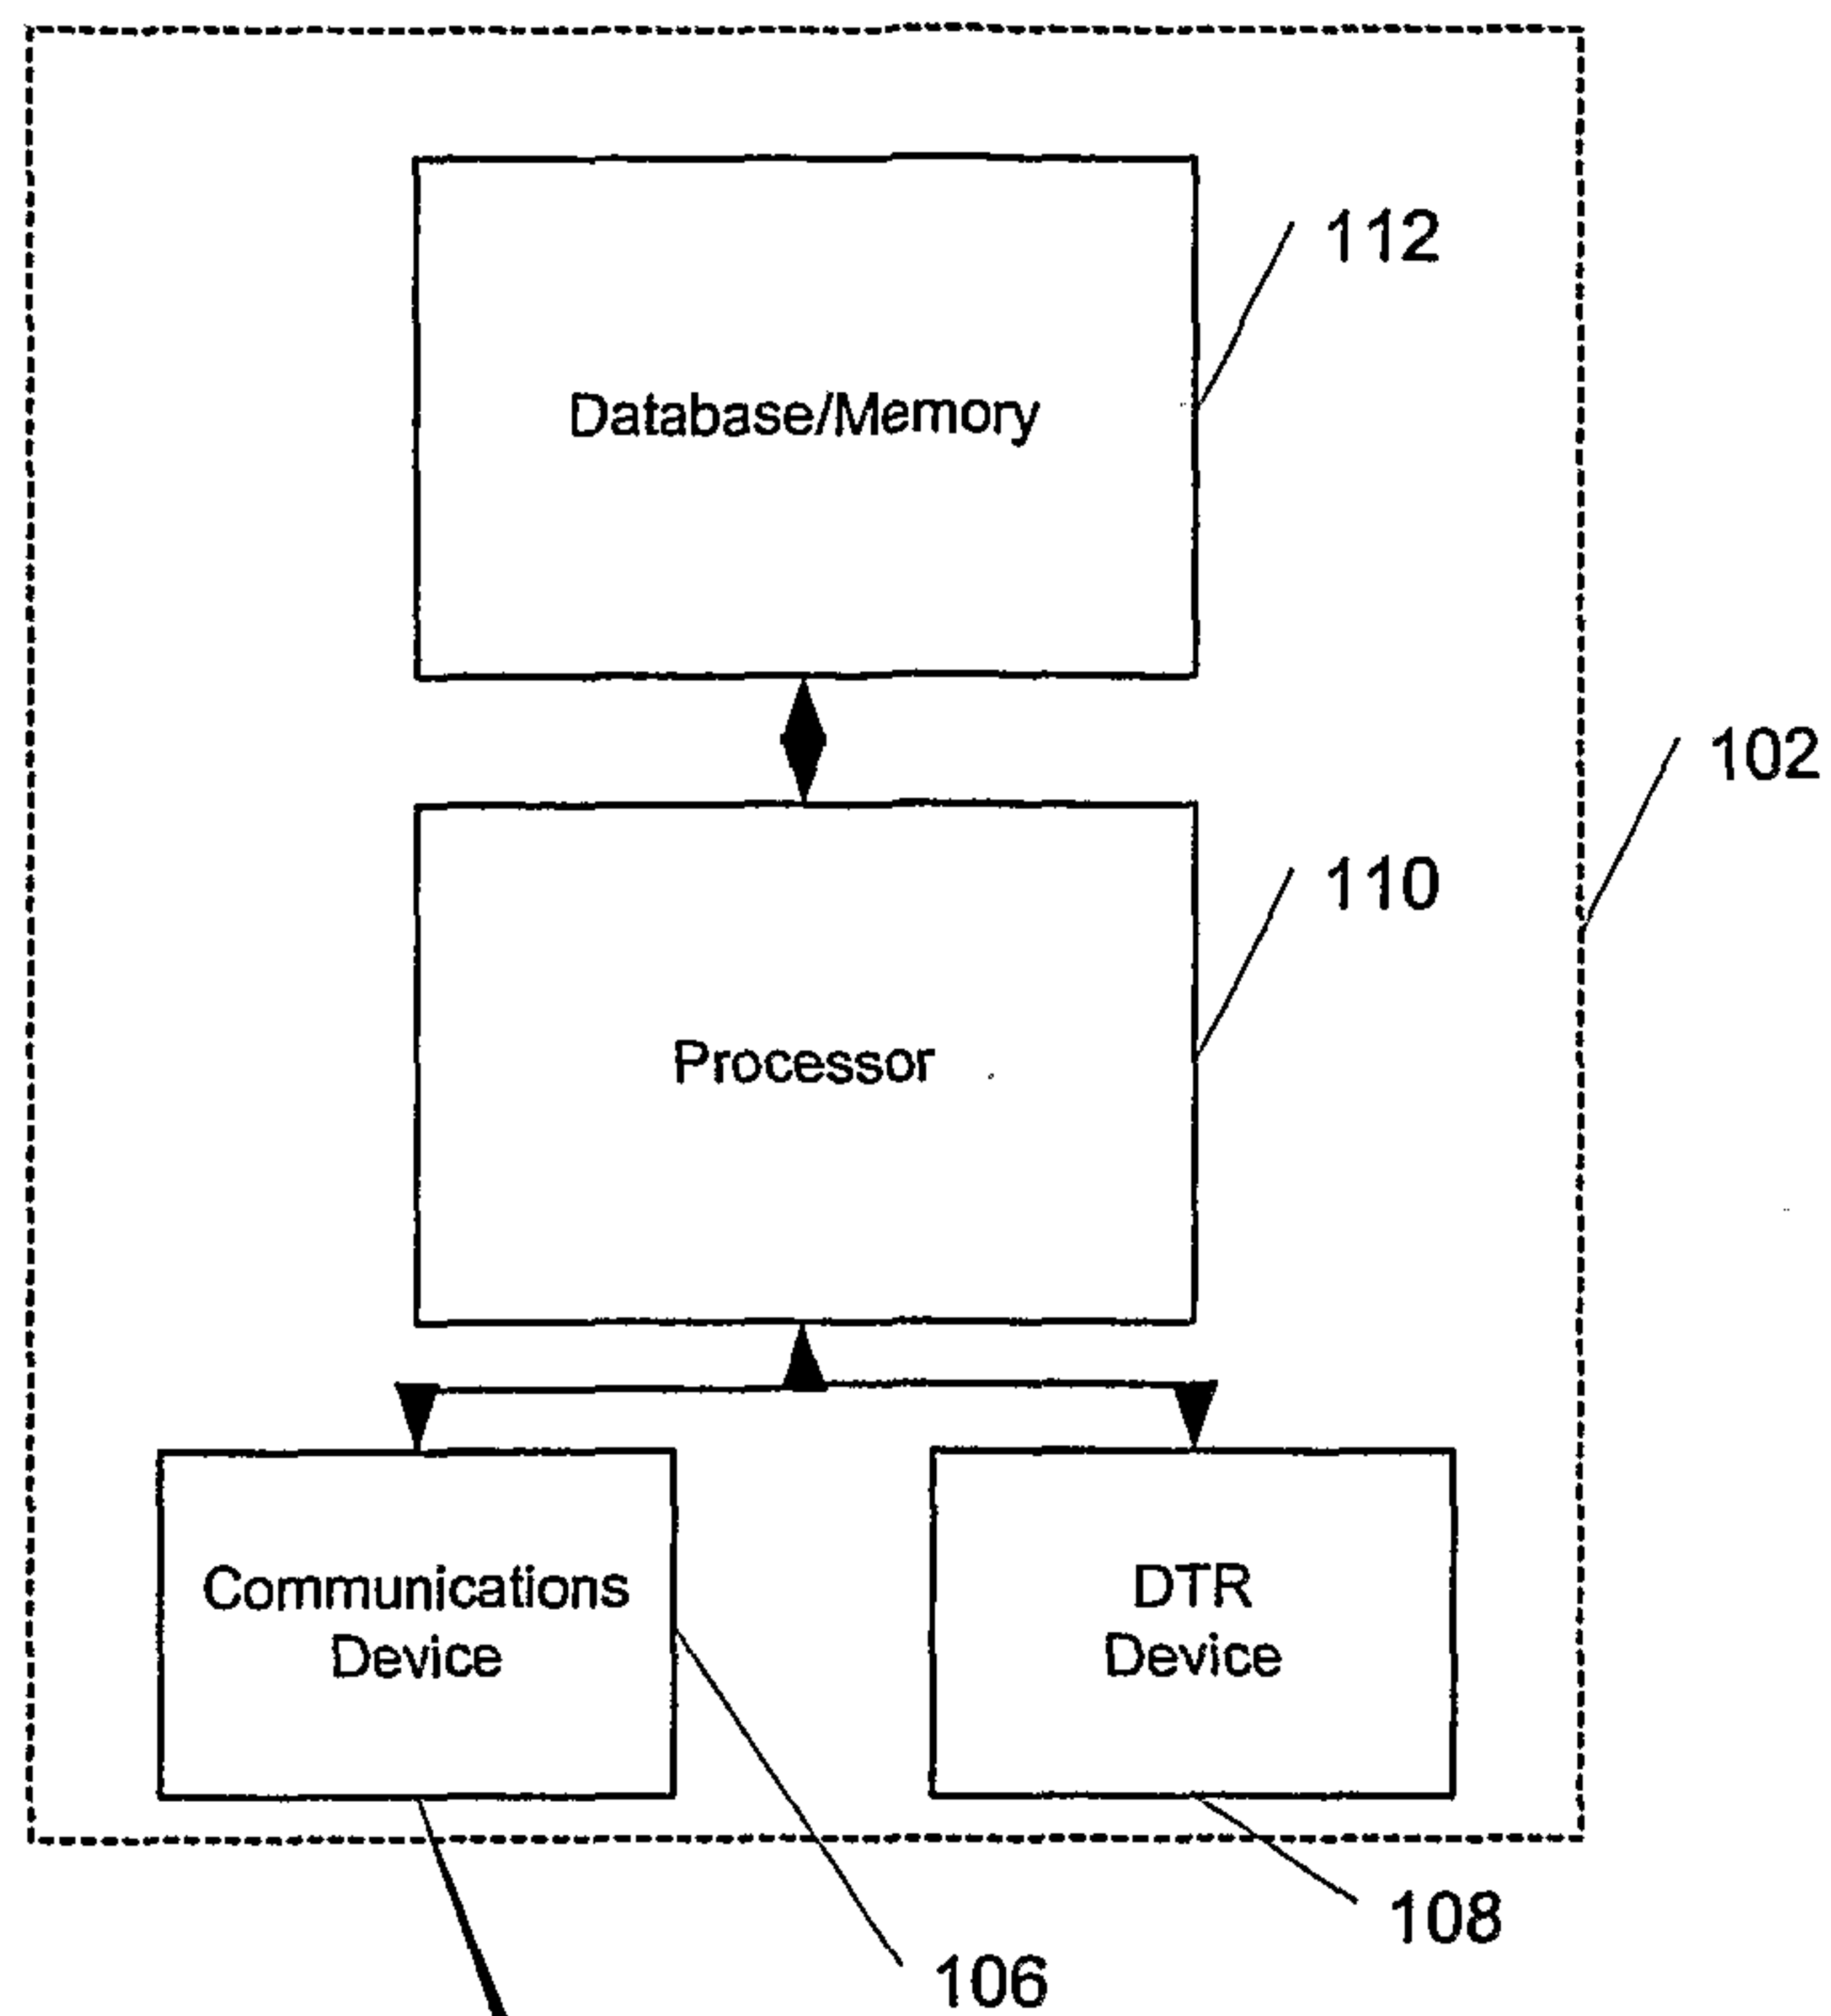
19. The method of Claim 12, wherein the data indicates that the customer has the item to be picked up at the customer location.

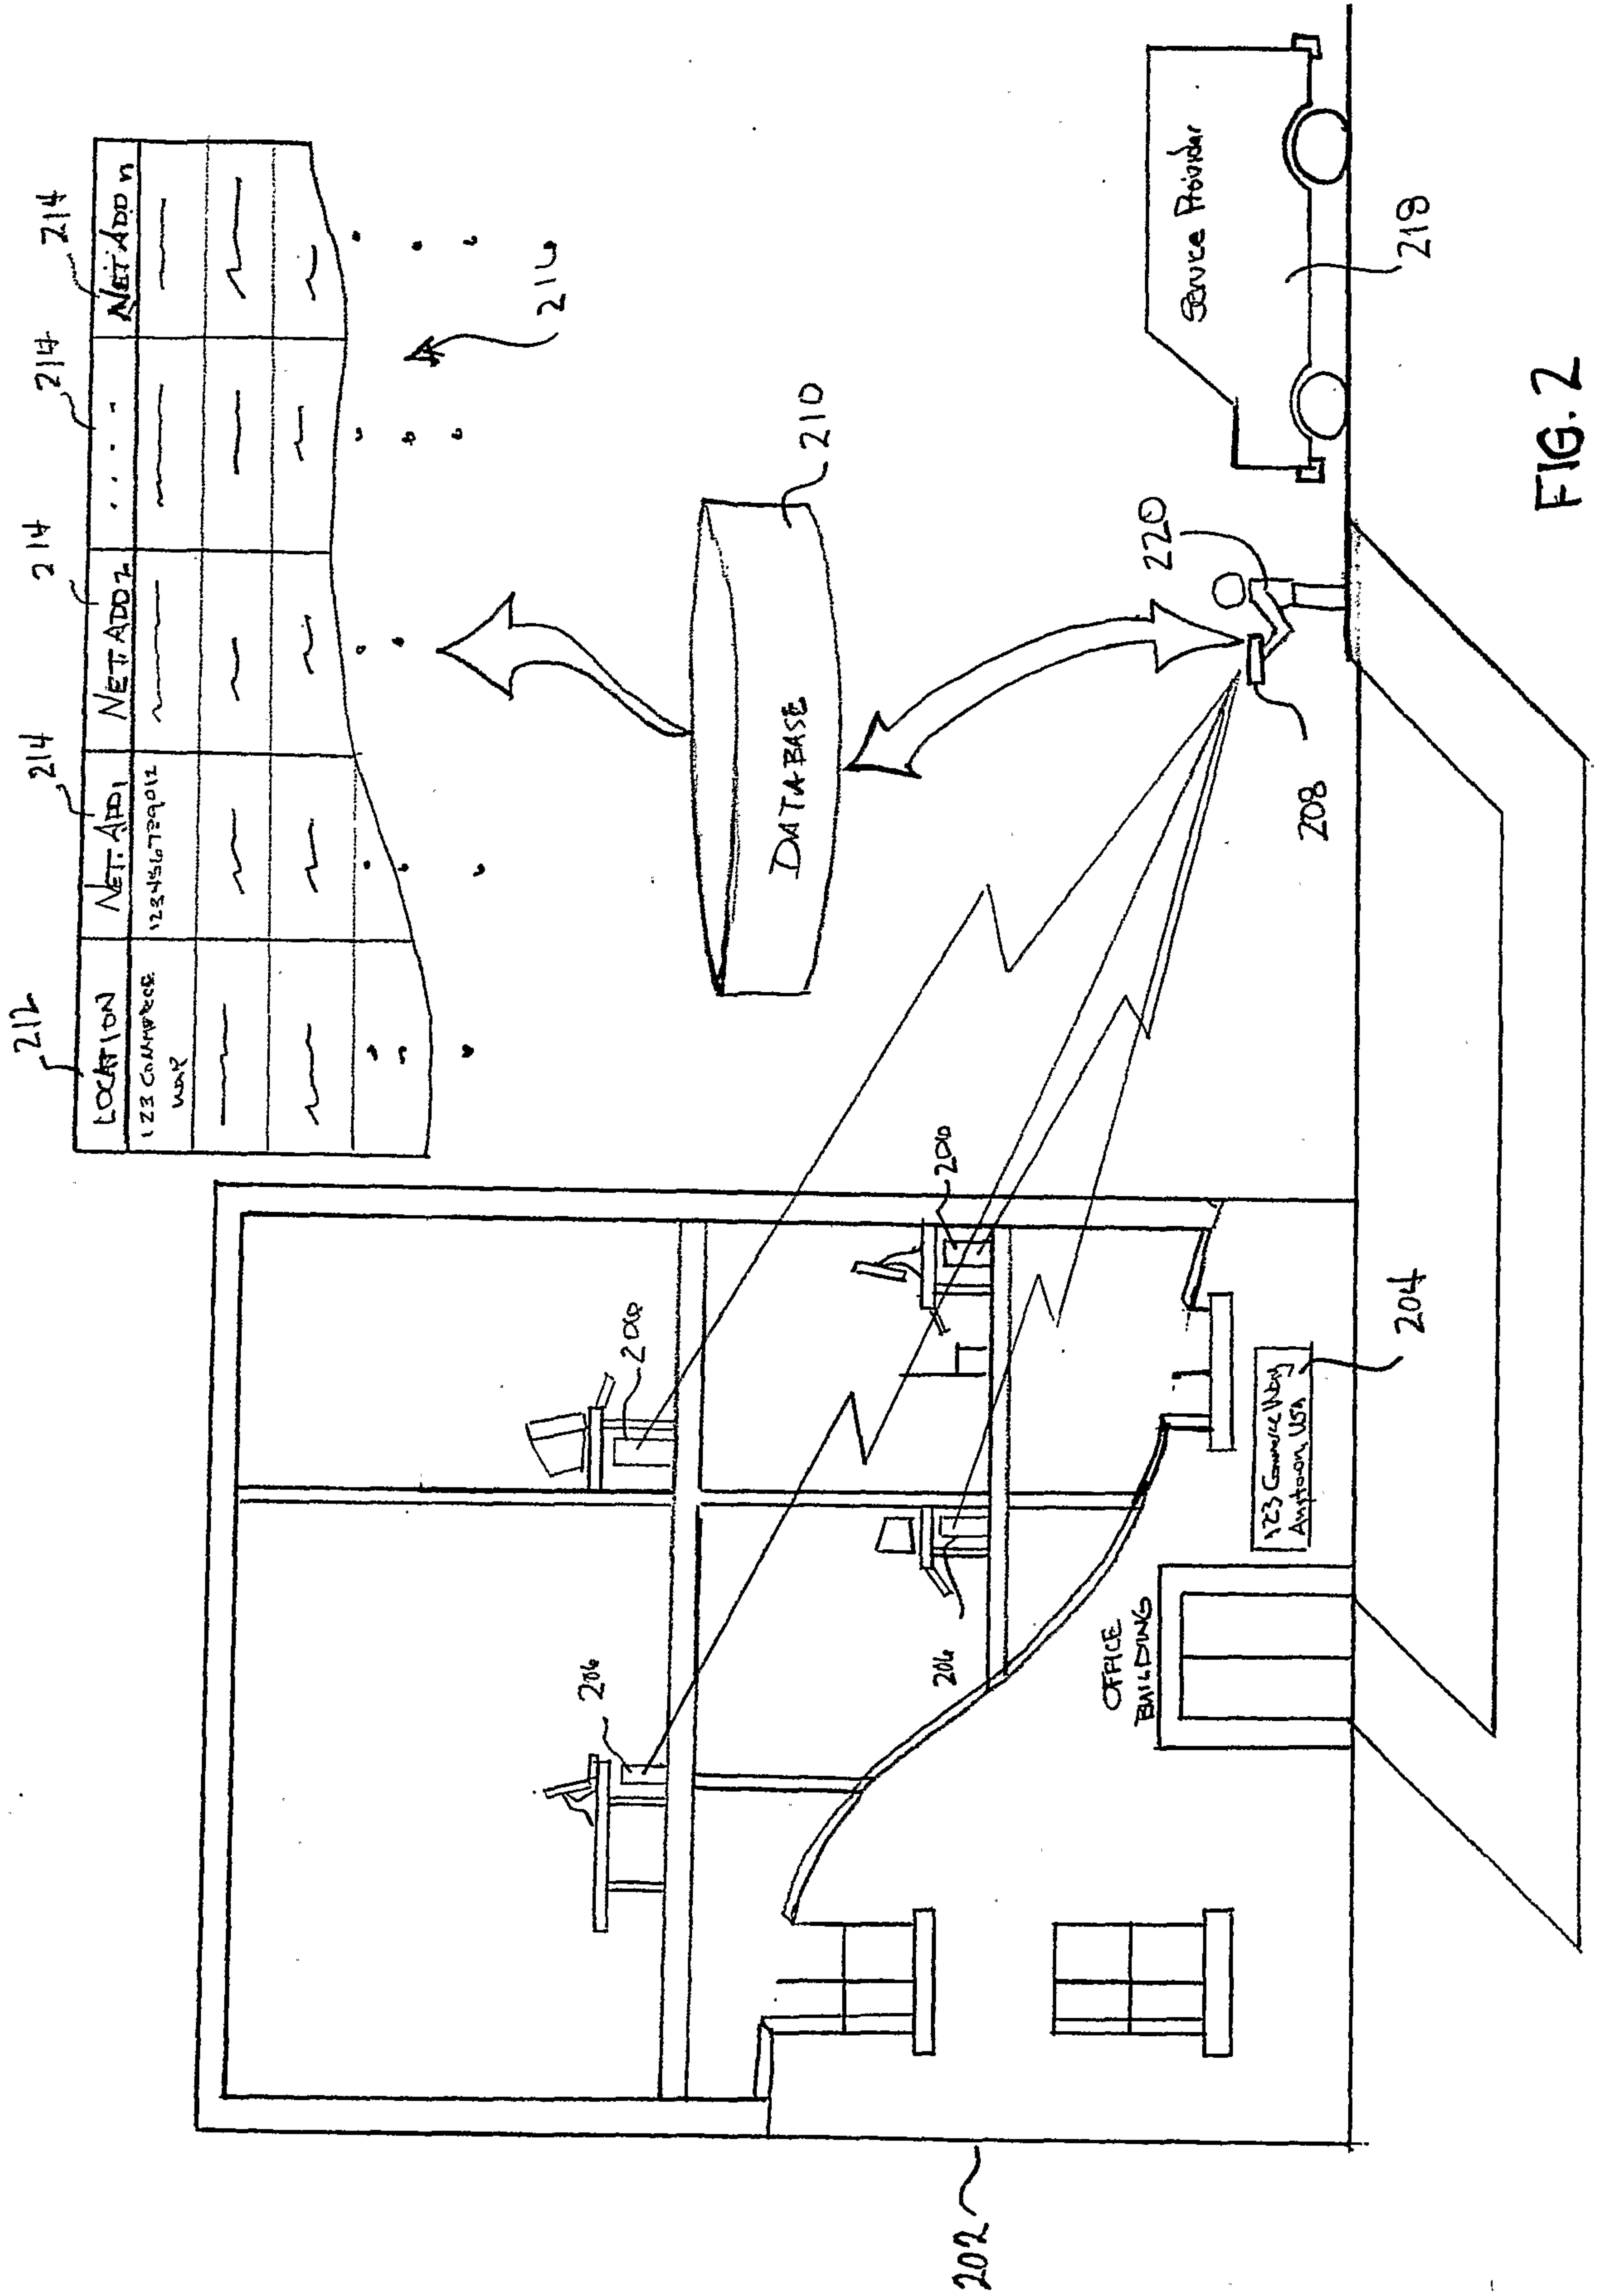
20. The method of Claim 12, wherein the data confirms that the item has been delivered to the customer location.

21. The method of Claim 12, wherein the data comprises information about items to be delivered to the customer location.

**FIG. 1A****FIG. 1B**

**FIG. 1C**

**FIG. 1D****FIG. 1E**



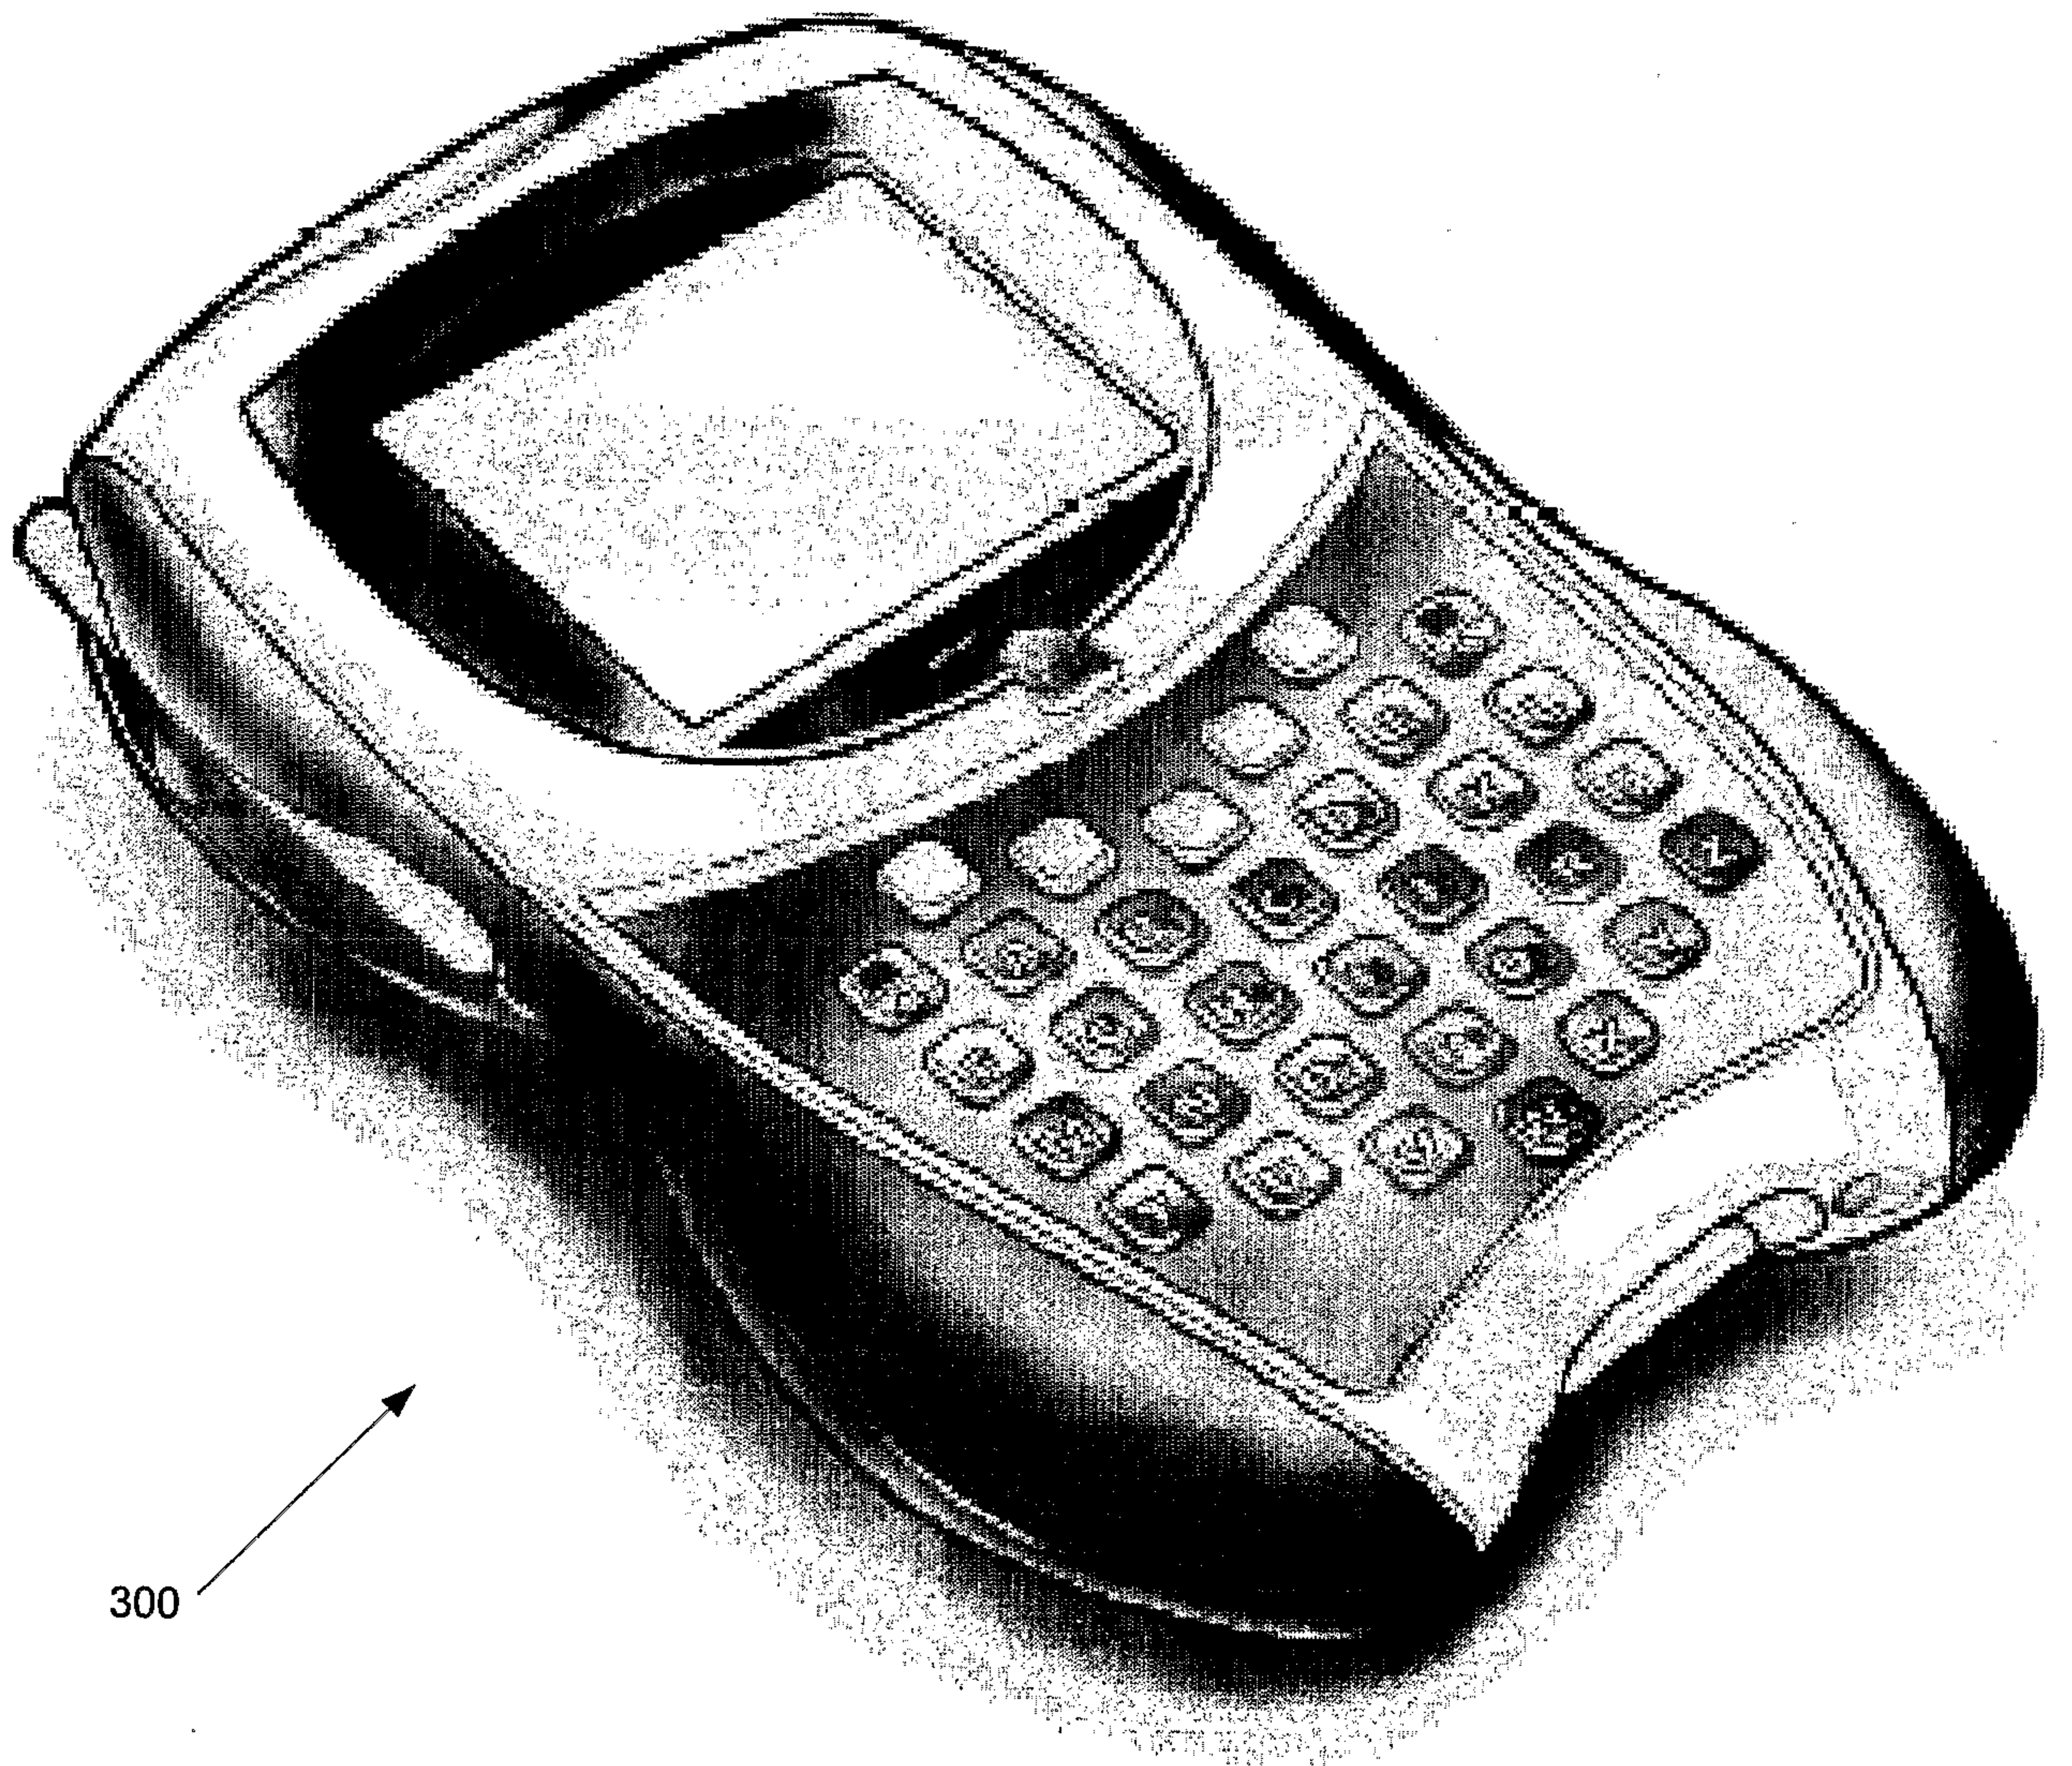
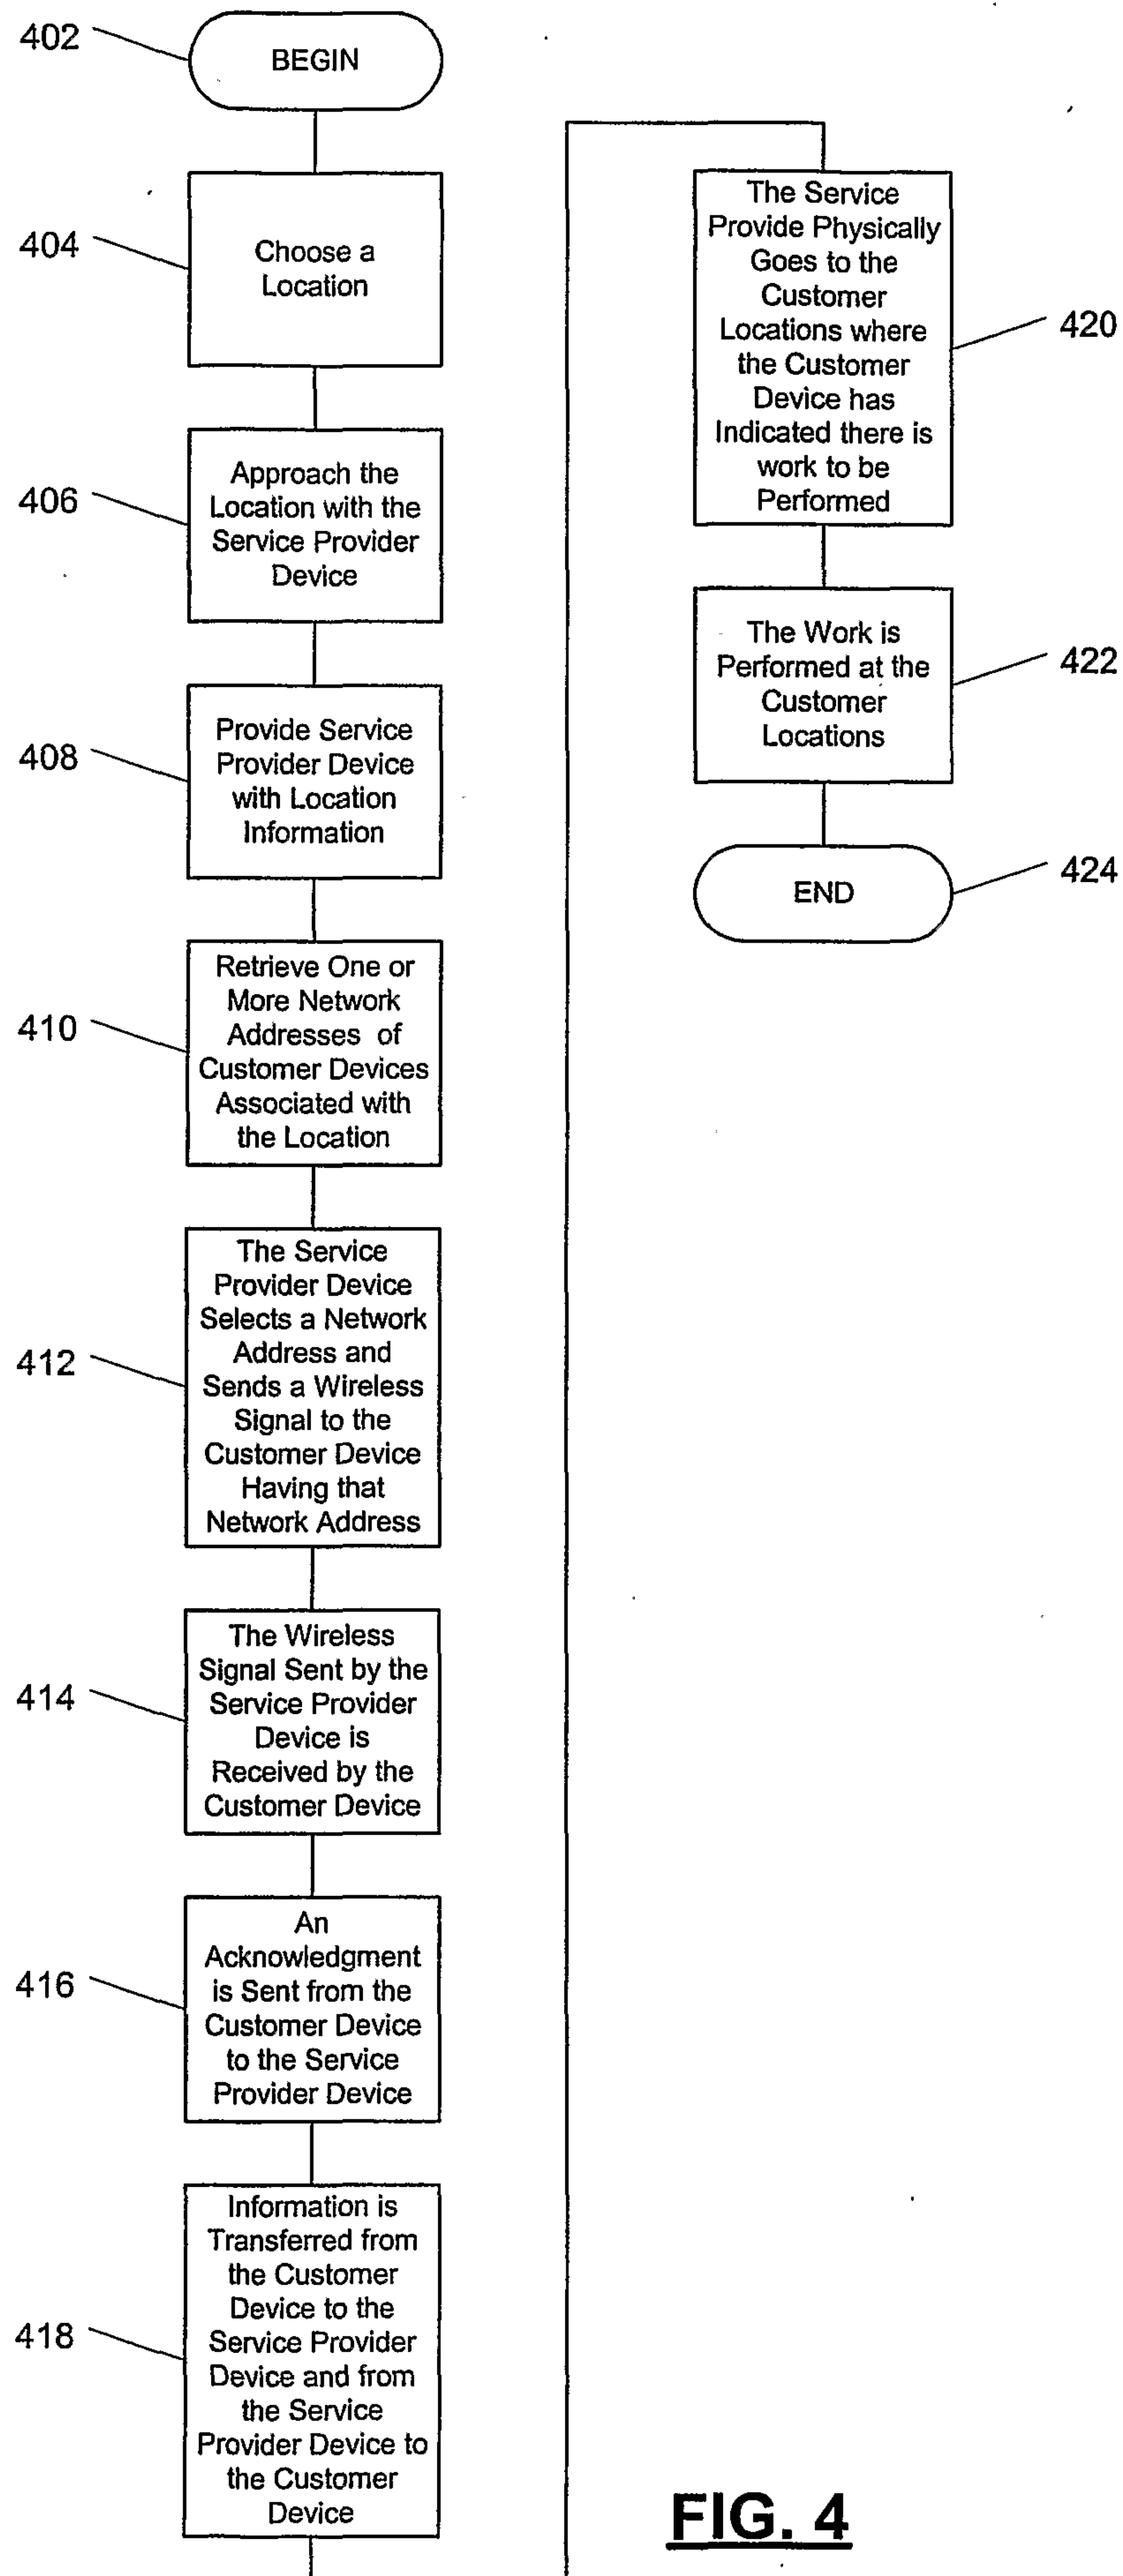
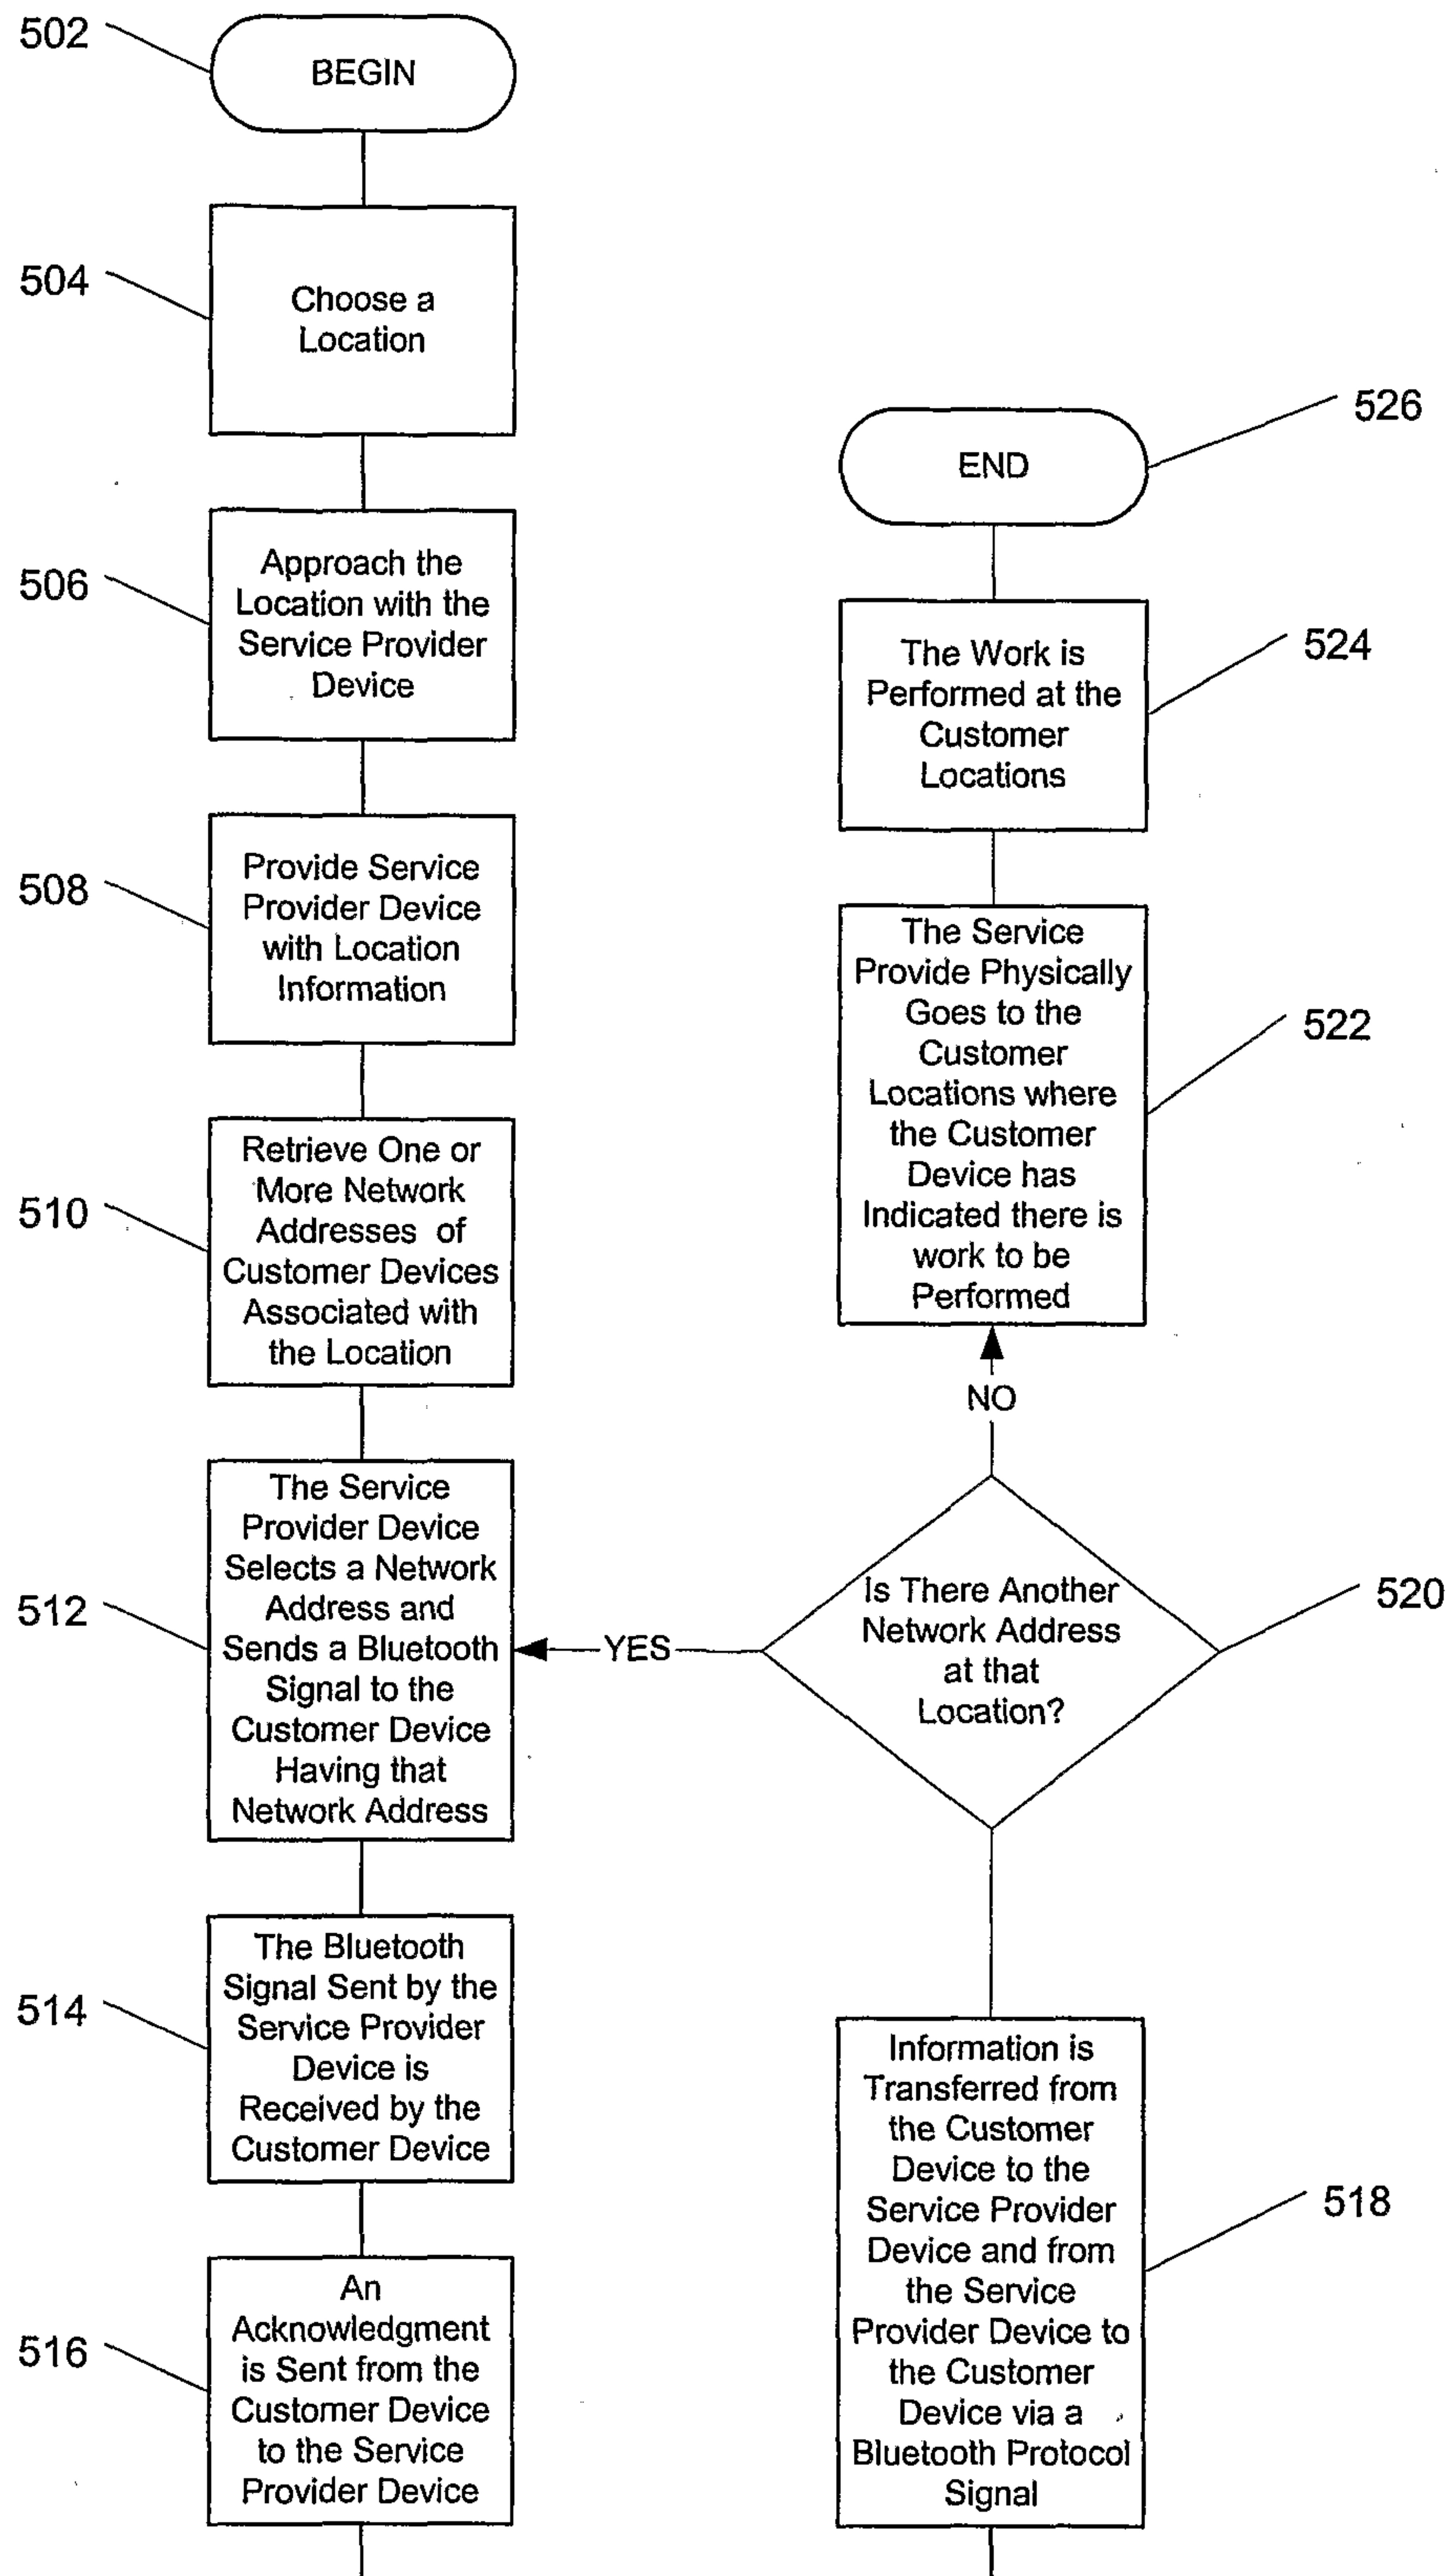
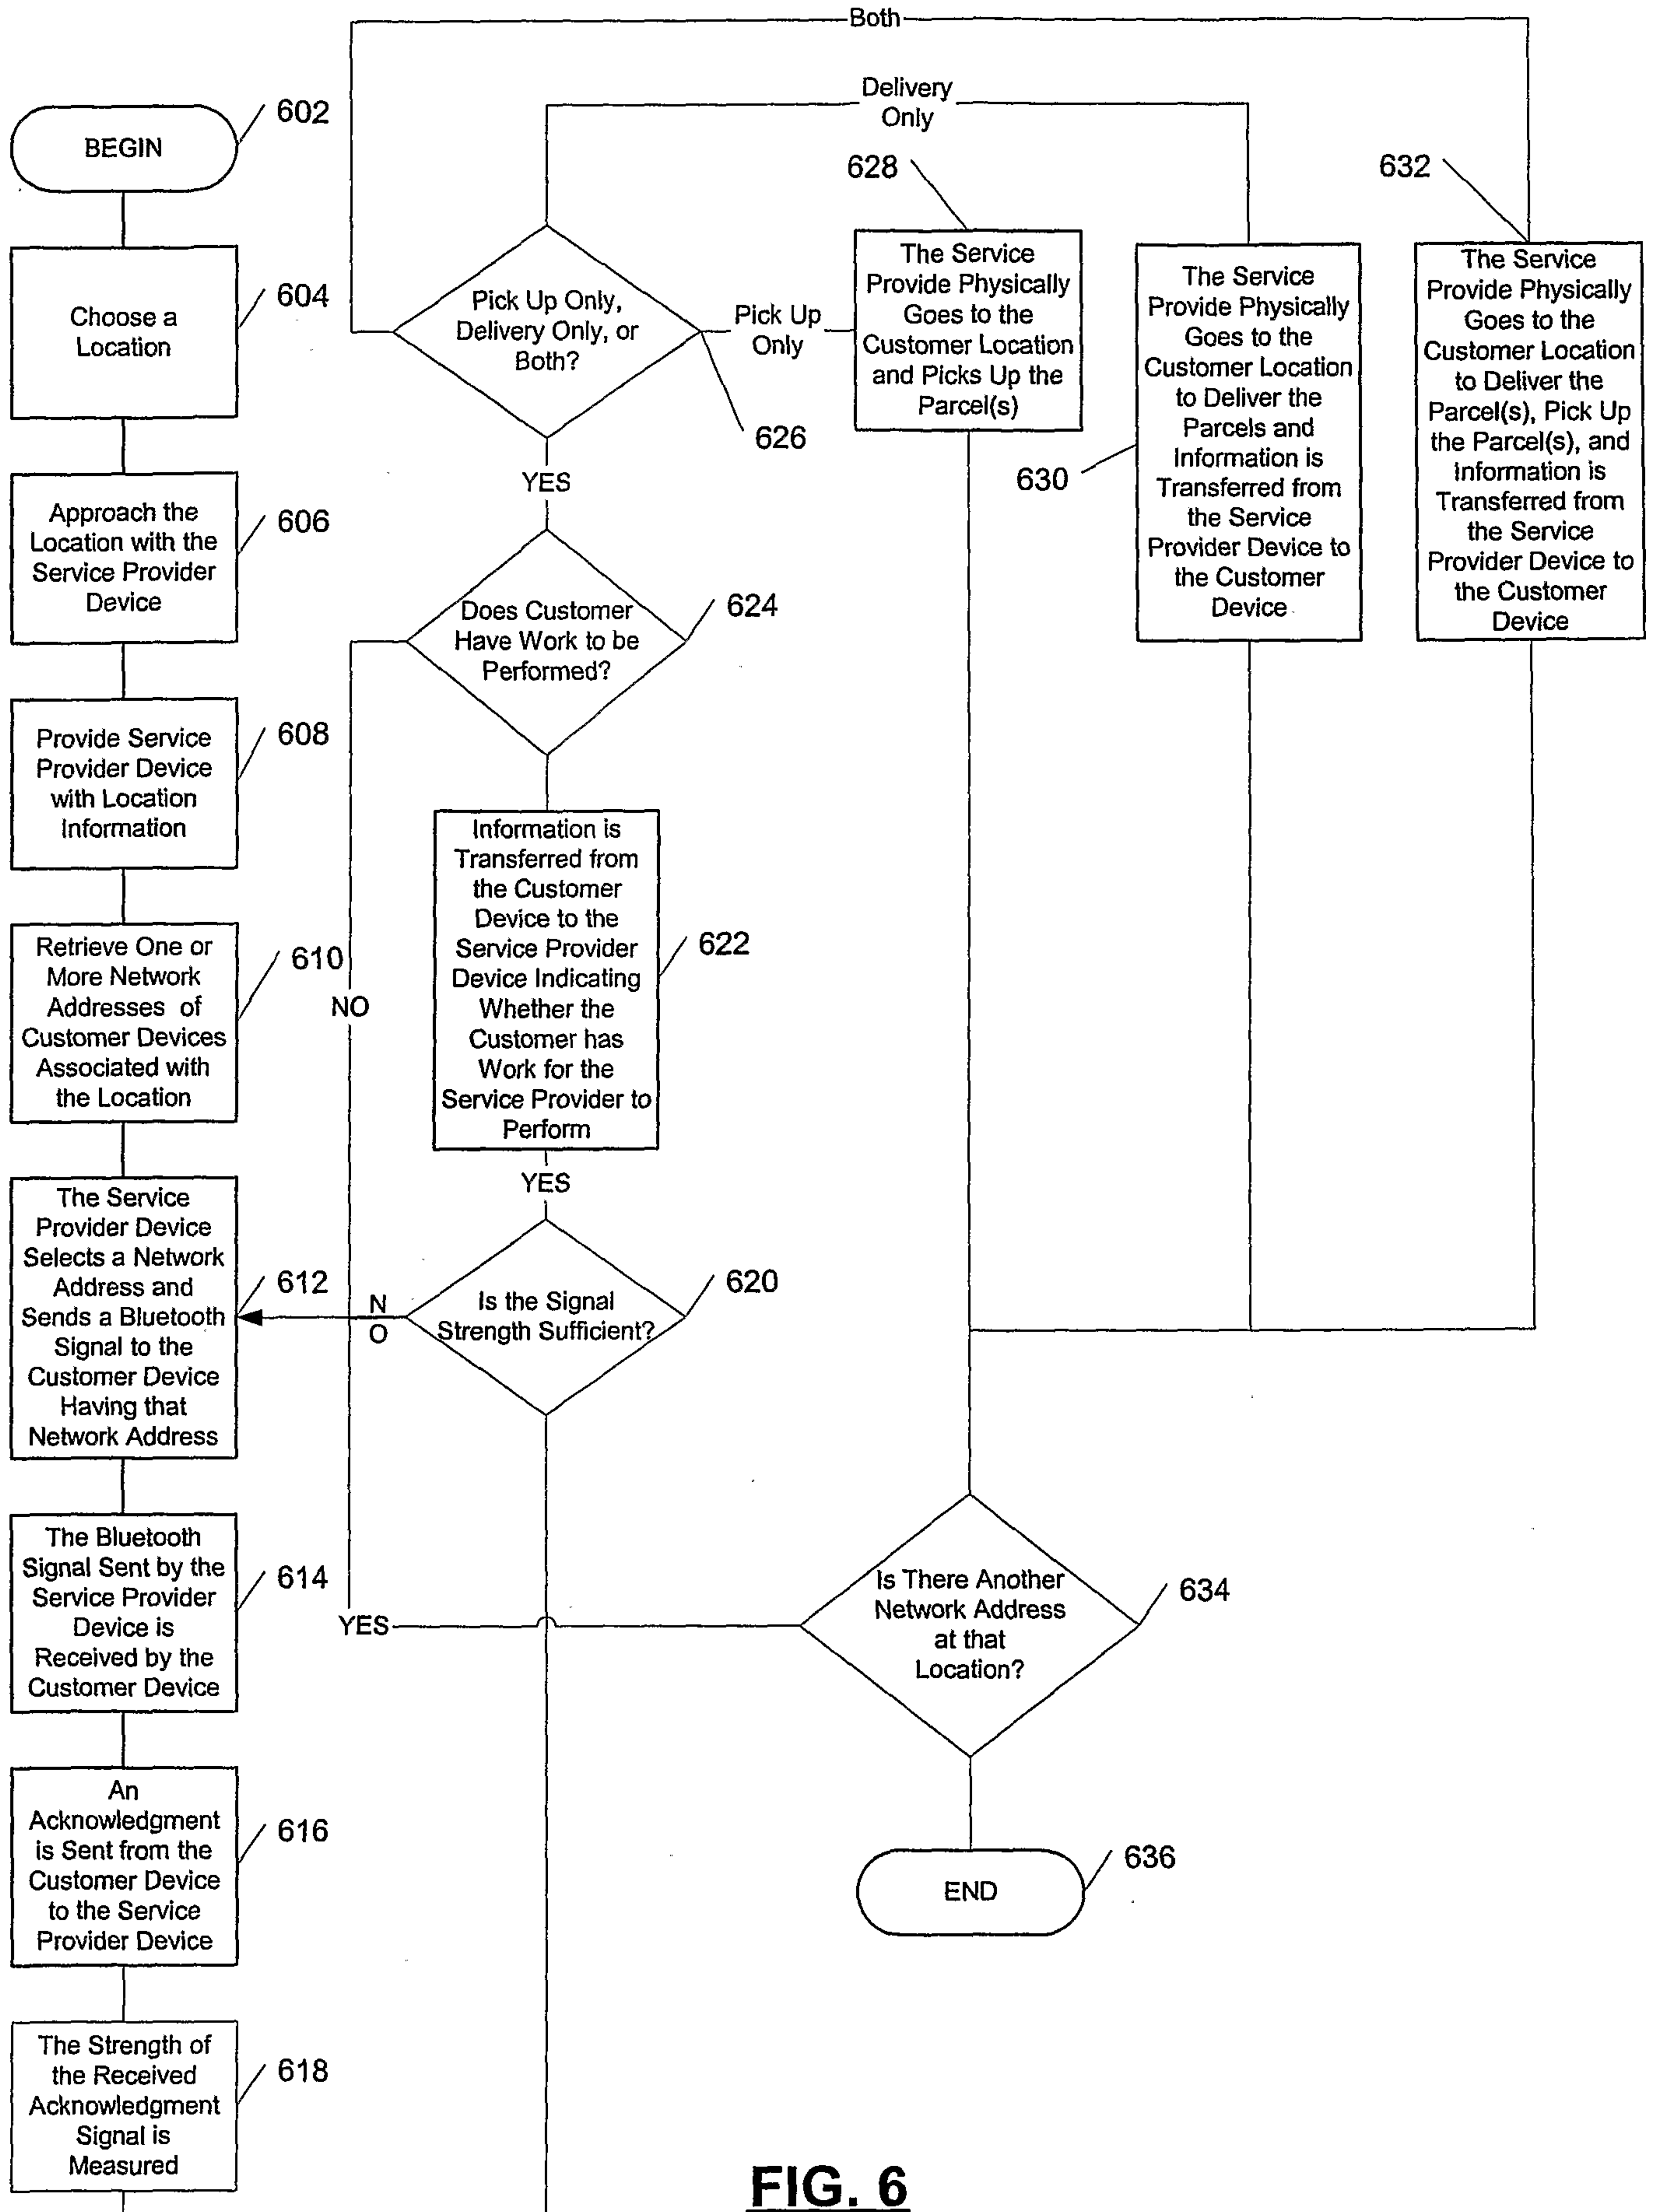


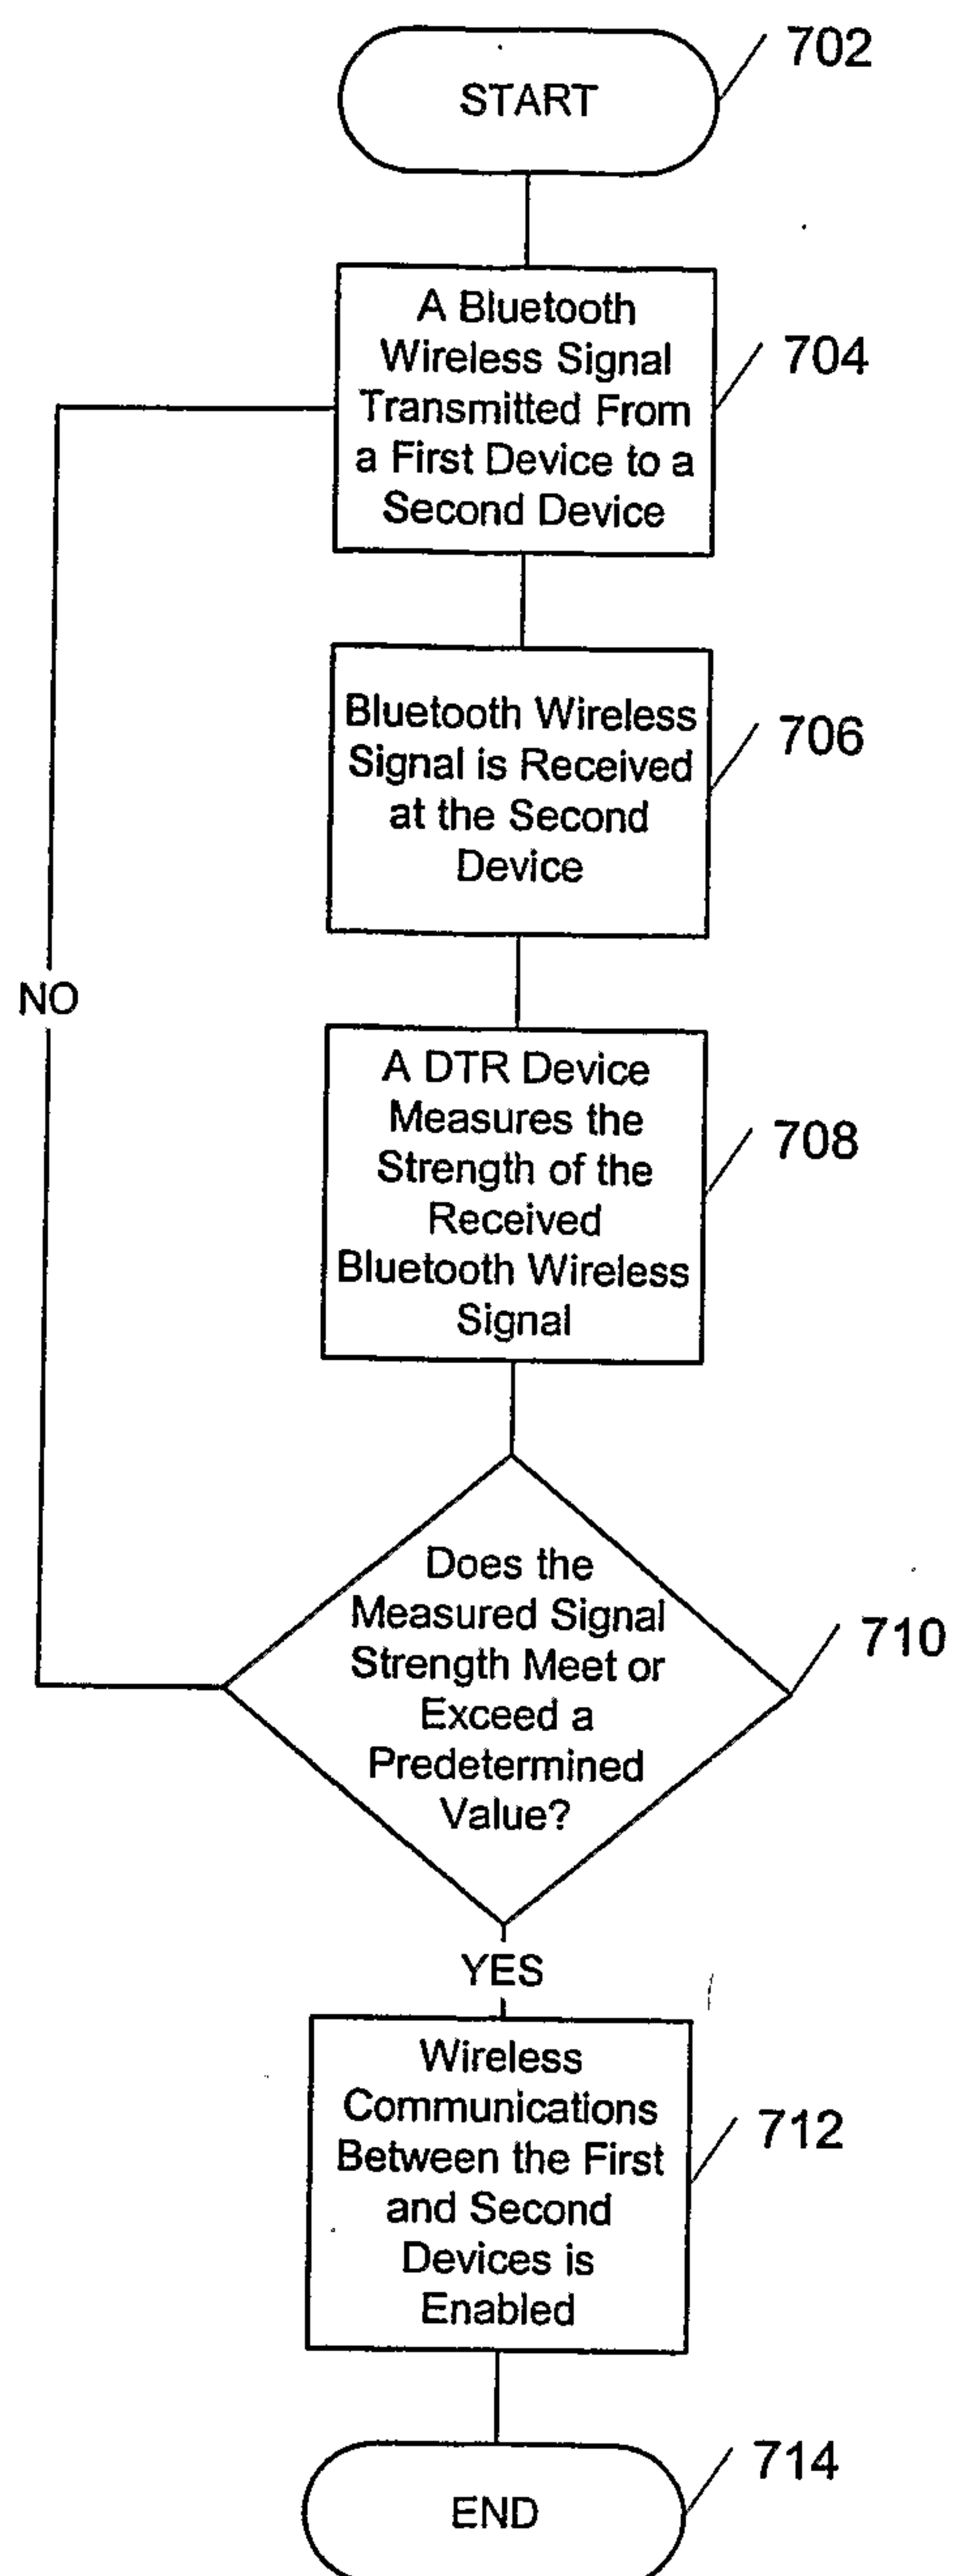
FIG. 3

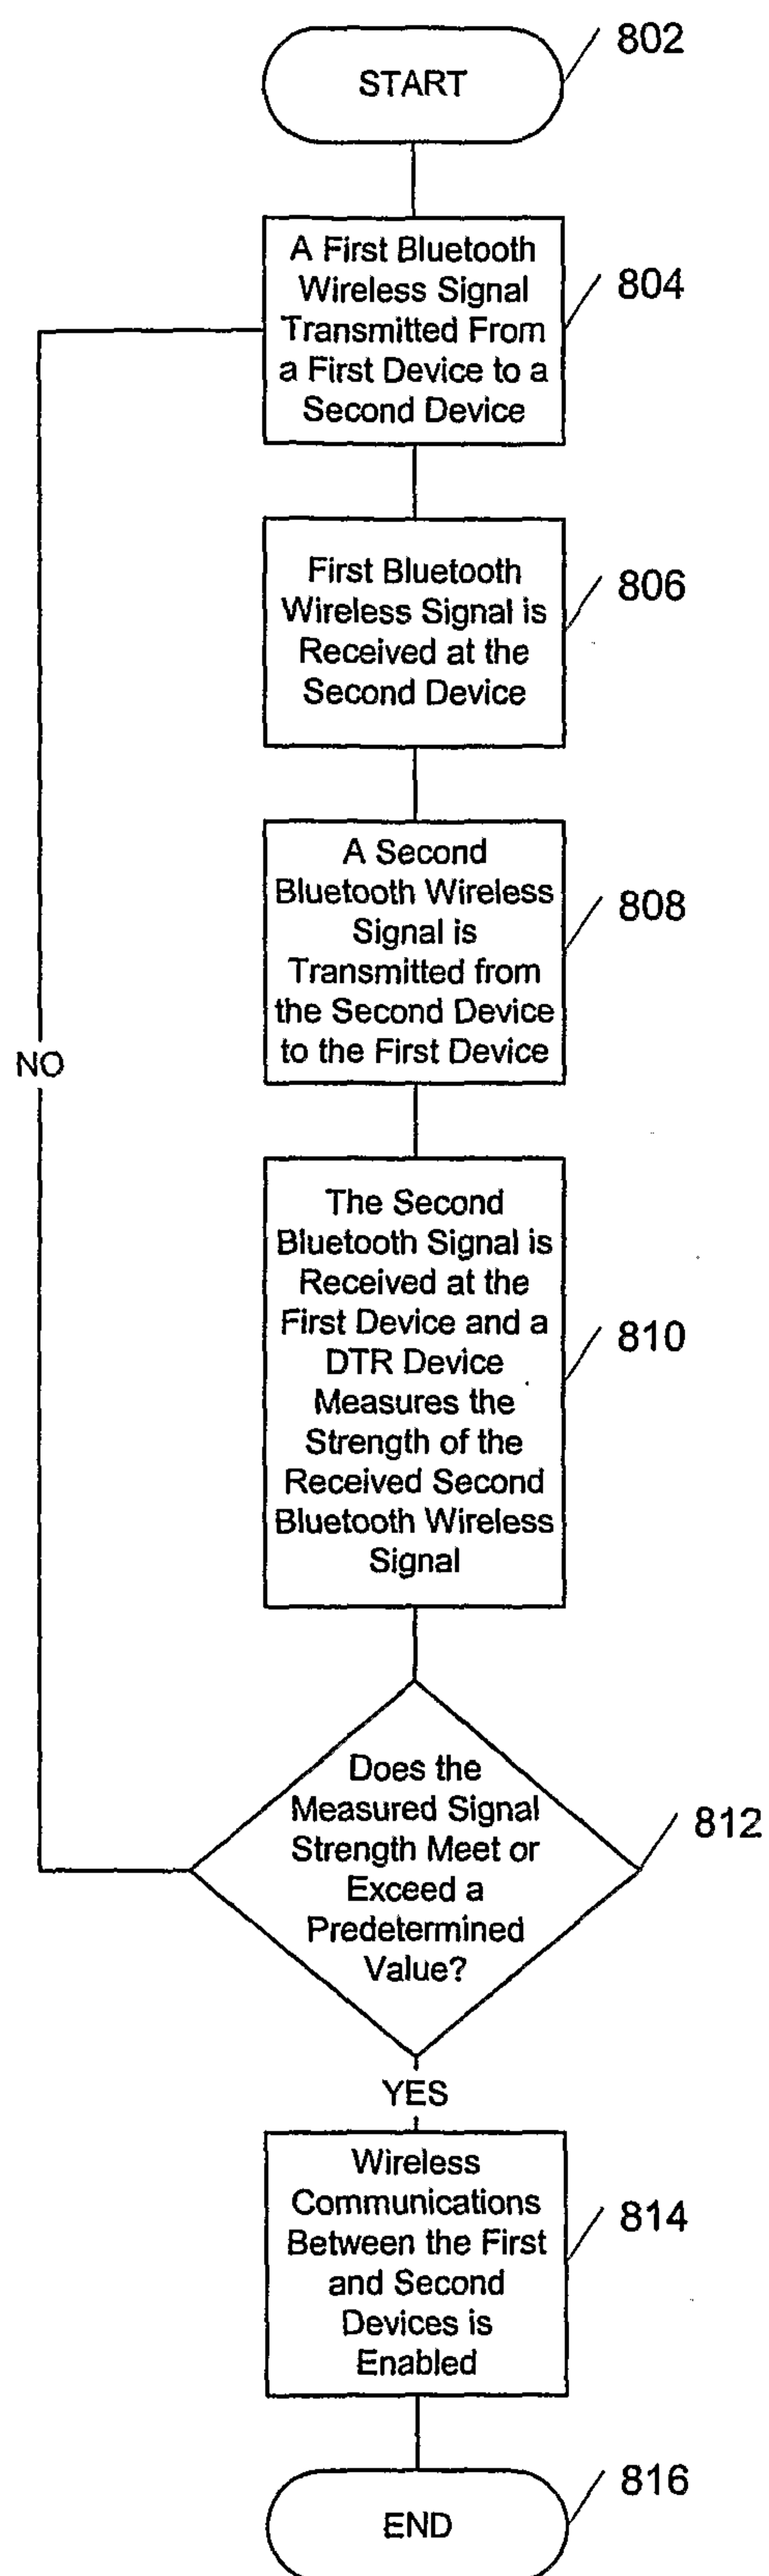
**FIG. 4**

**FIG. 5**

**FIG. 6**

9/10

**FIG. 7**

**FIG. 8**