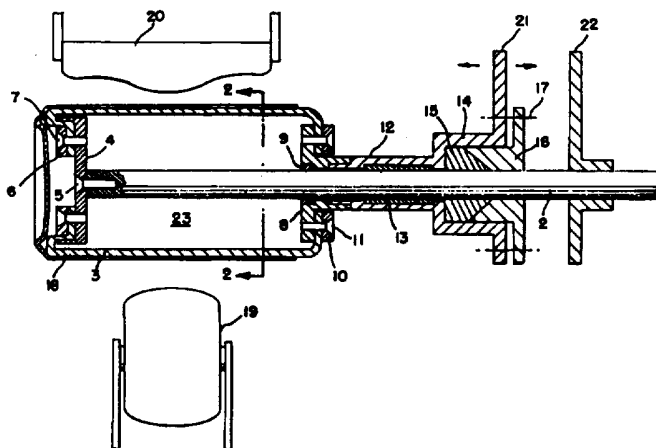


PCTWORLD INTELLECTUAL PROPERTY
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER 1

WO 9609129A1

(51) International Patent Classification ⁶ : B21D 17/04, 22/16, 51/26	A1	(11) International Publication Number: WO 96/09129 (43) International Publication Date: 28 March 1996 (28.03.96)
(21) International Application Number: PCT/US95/12084 (22) International Filing Date: 21 September 1995 (21.09.95) (30) Priority Data: 08/309,688 21 September 1994 (21.09.94) US (71) Applicant: THE COCA-COLA COMPANY [US/US]; P.O. Drawer 1734, Atlanta, GA 30301 (US). (72) Inventor: PLESTER, George; The Coca-Cola Company, Chaussee de Mons 1424, B-1070 Brussels (BE). (74) Agents: BRASWELL, Dennis, R.; The Coca-Cola Company, P.O. Drawer 1734, Atlanta, GA 30301 (US) et al.		(81) Designated States: BR, JP, KR, MX, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: METHOD AND APPARATUS FOR MAKING SHAPED CANS**(57) Abstract**

A method and apparatus for shaping cans entails placing an inflatable flexible-walled mandrel inside a drawn can body, inflating the mandrel, rotating the can body and the inflated mandrel, applying a forming tool, such as a rubber-surfaced roller, to the exterior surface of the can body to deflect the sidewall inwardly, deflating the mandrel and withdrawing it from the shaped can body. The flexible walls of the mandrel may have corrugations longitudinally thereof for selective shaping of the can body. The mandrel may also include separate sections along its longitudinal axis having different expansion capabilities for each section. The mandrel may also include movable end plates at distal ends of the flexible walls and an incompressible fluid therebetween wherein the mandrel is inflated by compressing the plates.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

METHOD AND APPARATUS FOR MAKING SHAPED CANS

BACKGROUND

The present invention relates to a method and apparatus for shaping cans, such as metal cans used for beverages. More specifically, the present invention
5 relates to a method and apparatus for shaping cans utilizing an inflatable mandrel within the can body in conjunction with various external shaping tools.

Currently, most large-scale mass-produced cans used for food and beverage are straight-wall. Shaped cans can
10 be an important marketing instrument, if means of producing these inexpensively can be established, because they create product identity.

Technology exists for shaping cans, but each available solution has some/all of the following
15 disadvantages:

A relatively high cost because of an inability to decorate the straight-wall can before shaping (because of use of external chucks), and/or complex/high-maintenance means of applying pressure to the can side-wall, and/or
20 capital-intensive means of picking-up/centering the can, and/or the necessity to make can-shaping an additional, separate process.

A reliance on outward-shaping (i.e. expanding the metal in such a way as to increase the straight-wall can

- 2 -

diameter in the areas shaped). Particularly in the case of two-piece drawn cans, the scope of this outward-expansion is limited, because current technology already draws the metal to its ultimate degree in order to reduce cost. When the can walls are expanded further for the purpose of shaping, the metal cracks or deforms.

A limitation in shaping scope. This limitation includes inability to shape the entire straight-wall can surface (typically, because the can is held in an external chuck and shaping behind the chuck is not possible), and/or the inability to produce non-radial shapes, and/or the inability to produce outward-expanded as well as inward-compressed shapes.

A limitation to three-piece cans and not usable for two-piece cans.

A limitation in choice of can material (aluminum or steel), typically because expansion requires very high pressures with steel, or because the use of external chucks is unsuitable for thin-walled aluminum cans.

SUMMARY

Accordingly, it is the object of this invention to provide a method of shaping mass-produced cans, which addresses the problems with current technology by:

Reducing capital and operating costs by gripping can internally (thus avoiding risk of damage to can decoration, or to the can itself, due to external chucks. This in turn, enables pre-decoration of straight-wall cans before shaping); using a simple internally-gripping tool, which in itself provides both the can-picking-up and the centering function; employing a shaping method which can also be applied to the normally-necessary can-necking-in and flanging, so that the shaping process

- 3 -

becomes part of an existing production step.

Avoiding limitations in can-shape by enabling inward-shaping, as well as outward-shaping, on any part of the side-wall and making non-radial shaping also possible.

Enabling shaping of both 2-piece and 3-piece cans.

Avoiding limitations in can material.

The objects of the invention are fulfilled by providing a method of shaping a can comprising the steps of:

- a) providing a flexible-walled inflatable mandrel;
- b) inserting the mandrel into a can body and picking up the can body, while it is being guided in a single stream (or multiple streams) by conventional conveyor guide rails, where necessary with the indexing help of a star-wheel, or similar device;
- c) inflating the mandrel until the flexible walls thereof firmly grip inside surfaces of walls of the can body;
- d) applying a forming tool to any selected surface portion of the entire can body to deflect the can body sidewalls in the selected portion inwardly into the mandrel; and or pressing selected portions of the can body outwardly against a forming tool by expanding the mandrel;
- e) deflating the mandrel; and
- f) withdrawing the mandrel from the shaped can body.

This is achieved by a mandrel, which is hollow, constructed of reinforced rubber or other flexible material, and shaped to contact the entire inner side-wall of the can after expansion. In the preferred embodiment, the cavity of the mandrel is filled with a

- 4 -

suitable non-compressible fluid, and the mandrel is designed so that its end-walls can be pulled toward one-another, thus causing the side-walls of the mandrel to expand due to the pressure exerted by the displaced fluid in the mandrel's cavity. Alternatively, the mandrel can be inflated by means of ducting compressed air (or other fluid) into the cavity of the mandrel. When the side-walls of the mandrel are expanded outwards, they apply pressure evenly on the inside of the entire side-wall of the can.

When the side-walls of the mandrel are contracted, they are sufficiently distant from the inner surface of the can side-wall so that the mandrel can be easily inserted into the can, and later withdrawn after shaping. The mandrel can therefore be used to pick up, to center and to set-down the can, and provides a backing for shaping tools placed on the outside of the can. It permits all forms of shaping, depending on the external tools used, including the normal necking-in and flanging operations in the can-opening.

The mandrel rotates to enable inward radial shaping. The mandrel's rotation can be stopped and the mandrel inserted into an external mold to enable non-radial, or outward-radial shaping, where this mold is constructed in 2 halves and these 2 halves are closed to confine the outside of the can. Alternatively, simple, conventional tools can be used to produce longitudinal ridges, etc. The rubber walls of the mandrel are reinforced with steel or nylon thread, using conventional means common to the motor-tire industry, so as to provide strength for the forces needed to expand metal. The mandrel is constructed in a form which permits its diameter to expand, in spite of non-expandable reinforcement by

- 5 -

convoluting the rubber wall of the mandrel along its longitudinal axis.

Further scope of applicability of the present invention will become apparent from the detailed description given hereinafter. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

BRIEF DESCRIPTION OF DRAWINGS

The present invention will be more readily understood from the detailed description given hereinbelow, and the accompanying drawings, which are given by way of illustration only and thus are not limiting to the present invention, and wherein:

Figure 1, shows the mandrel and the particular embodiment, which involves a non-compressible fluid in the cavity formed by the outer walls of the mandrel, and which permits the ends of the mandrel to be drawn together so that the internally-trapped fluid forces the mandrel's radial walls outwardly and enables them to press against the side-walls of a can in which the mandrel is inserted;

Figure 2, shows a section of the mandrel demonstrating how the radial walls can be made to expand outwardly in spite of non-expandable reinforcement;

Figure 3, shows the mandrel with a multiplicity of sections, enabling each section to perform differently with respect to outward expansion; and

Figure 4, shows a sequence of shaping operations,

- 6 -

where the mandrel is first inserted in the can, then made to expand and grip the inside of the can wall. This is followed by shaping operation(s) by means of external tools, or by using a conventional, split shaping-mold, which partially (or completely) encases the outer walls of the can (mold not shown). Finally the mandrel is withdrawn by causing its sidewalls to contract. During the insertion and grip operations, the mandrel is used to pick-up and center the can, and the mandrel is also used to set down the can, during the mandrel-withdrawal-stage, after the shaping operation is complete.

DETAILED DESCRIPTION

Figure 1, shows the mandrel 1, which comprises of a central-rod 2, and a reinforced rubber sleeve 3. The central-rod 2 connects to a flange-ring 4, to which it is fixed by counter-sunk screws 5. The end of the rubber-sleeve 3 is fixed to the flange-ring 4 by means of a fixing-ring 6 and countersunk ring screws 7. At the other end of the rubber-sleeve 3, the central-rod 2 passes through a sliding flange-ring 8, in which there is a bearing ring 9. The bearing-ring 9 in turn contacts the central-rod 2 and permits the central-rod 2 to move freely through the sliding flange-ring 8. This enables the distance between the flange-ring 4 and sliding-flange-ring 8 to be changed. The rubber-sleeve 3 is fixed to the sliding flange-ring 8 by means of a fixing-ring 10 and countersunk ring screws 11. The sliding-flange-ring 8 is screwed into a bearing-housing 12, in which is located a bearing 13 and to which is connected a seal-housing 14. A seal 15 is compressed in the seal-housing 14 by a press-ring 16 and ring bolts 17.

A can 18 slips over the mandrel 1. The mandrel 1

- 7 -

can 18 be made to rotate and the can may then be shaped using rotating radial tools 19 of appropriate shape and dimensions for radial shaping. Non-rotating longitudinal tools 20 - or externally placed cavity molds (not shown) - of appropriate shape and dimensions can be used for indenting longitudinal shapes, or expanded radial shapes, whilst mandrel 1 is not rotating. The means of rotation of the mandrel 1 is applied conventionally to the central-rod 2 and is not shown.

The seal-housing 14 has an actuating-finger 21 which runs in a rail (not shown), or other similar device, in a conventional rotating machine (also not shown), so that it is moved in the directions shown (i.e. back and forth), thus changing the distance between flange-ring 4 and sliding-flange-ring 8. This compresses/decompresses the fluid 23 in the cavity of the rubber-sleeve 3. The cam-follower 22 runs in a rail (not shown), and enables the mandrel 1 to be moved back/forth during the operational cycle. This is also part of a conventional rotating machine, and this machine comprises a plurality of mandrels 1.

Figure 2, shows a detail of the mandrel 1 and particularly shows the section of the rubber-sleeve 3 before expansion. The rubber-sleeve 3 has indentations of predetermined depth, so that on full expansion these either grip the inside of the can 18 firmly or expand further to press out the walls of the can 18 at the appropriate section.

Figure 3, shows a multi-section rubber-sleeve. Intermediate flange-ring(s) 30, and intermediate keep-ring(s) 31, enable the rubber-sleeve 3 to be separated into 2 or more sections 32. Each section 32 may have its own individual depth of indentation 25 and all sections

- 8 -

32 are compressed together by compressing action on fluid 23 already described. This enables each section 32 either to expand and grip the inside of the can 18, or to expand further so that the side-wall of the can 18 is expanded outwardly, as desired.

Figure 4, shows the sequence of operation of the mandrel 1 in a rotary machine (not shown) wherein position A it is inserted into the can 18, due to the motion of the cam-follower 22 in the direction shown by the action of a rail (not-shown). In position B, the actuating-finger 21 moves in the direction shown, thus shortening the length of the mandrel 1, and compressing fluid 23. This forces the walls of the rubber-sleeve 3 outwardly, gripping the inside walls of the can 18 and/or expanding these walls, outwardly and radially. In position C, the mandrel 1 rotates, enabling radial tools 19 to shape the can radially, and/or remains still (non-rotating), enabling longitudinal tools 20 to shape the can longitudinally, and/or remains still (non-rotating) enabling outward shaping into a cavity mold (not shown). In position D, the actuating-finger 21 moves back in the direction shown, increasing the length of the mandrel 1, so that it is now able to withdraw past the shaping protrusions made in the can 18. The mandrel 1 is then withdrawn by means of the can-follower 22 which is moved in the direction shown. The cycle A to D can now be repeated.

There is a multiplicity of mandrels 1 and these are conventionally mounted in a rotating machine (not shown) so that the mandrels pass through operations A to D. The actuating-fingers 21 and cam-followers 22 run in rails (not shown) within this machine, and the shape of these rails determines their motion at the appropriate stages

- 9 -

as indicated herewith. The machine, the rails and other actuating details, are conventional technology, and are not described in further detail.

5 The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the
10 following claims.

- 10 -

What is Claimed is:

- 1 1. A method of shaping a can comprising the steps of:
2 a) providing a flexible-walled inflatable mandrel;
3 b) inserting the mandrel into a can body;
4 c) inflating the mandrel until the flexible walls
5 thereof firmly grip inside surfaces of walls of the can
6 body;
7 d) removing any external support of the can body
8 so that the mandrel becomes the sole means of support
9 thereof;
10 e) applying a forming tool to any selected surface
11 portion of the entire can body to deflect the can body
12 sidewalls in the selected portion inwardly into the
13 mandrel thereby shaping the can body;
14 f) deflating the mandrel; and
15 g) withdrawing the mandrel from the shaped can
16 body.
- 1 2. A method of shaping a can comprising the steps of:
2 a) providing a flexible-walled inflatable mandrel;
3 b) inserting the mandrel into a can body;
4 c) inflating the mandrel until the flexible walls
5 thereof firmly grip inside surfaces of the walls of the
6 can body;
7 d) applying forming tools to the selected surface
8 portions of the can body to deflect the can body
9 sidewalls in the selected portion inwardly into the
10 mandrel thereby shaping the can body, said step of
11 applying forming tools including the substeps of,
12 1) rotating the can body about its

- 11 -

13 longitudinal axis while pressing a forming
14 tool radially thereof to form selected
15 circumferential shapes in the can body,
16 2) holding the can body so that it does not
17 rotate, and
18 3) moving a forming tool longitudinally
19 thereof to form selected longitudinal shapes;
20 e) deflating the mandrel; and
21 f) withdrawing the mandrel from the shaped can
22 body.

1 3. Apparatus for shaping a can comprising:
2 a) a flexible-walled inflatable mandrel;
3 b) means for inserting the mandrel into a can body
4 while supporting the can body;
5 c) means for inflating the mandrel until the
6 flexible walls thereof firmly grip inside surfaces of the
7 walls of the can body;
8 d) means for removing any external support of the
9 can body so that the mandrel becomes the sole means of
10 support thereof;
11 e) means for applying a forming tool to any
12 selected surface portion of the entire can body to
13 deflate the can body sidewalls in the selected portion
14 inwardly into the mandrel thereby shaping the can body;
15 f) means for deflating the mandrel; and
16 g) means for withdrawing the mandrel from the
17 shaped can body.

1 4. Apparatus for shaping a can comprising:
2 a) a flexible-walled inflatable mandrel;
3 b) means for inserting the mandrel into a can body
4 while supporting the can body;

- 12 -

- 5 c) means for inflating the mandrel until the
6 flexible walls whereof firmly grip inside surfaces of the
7 walls of the can body;
- 8 d) means applying forming tools to selected
9 surface portions of the can body to deflate the can body
10 sidewalls in selected portions inwardly into the mandrel
11 thereby shaping the can body, said means for applying
12 forming tools including,
- 13 1) means for rotating the can body about its
14 longitudinal axis while pressing a forming
15 tool radially thereof to form selected
16 circumferential shapes in the can body,
- 17 2) means for holding the can body so that it
18 does not rotate, and
- 19 3) means for moving a forming tool
20 longitudinally thereof to form selected
21 longitudinal shapes;
- 22 e) means for deflating the mandrel, and
- 23 f) means for withdrawing the mandrel from the
24 shaped can body.

- 1 5. Apparatus for shaping a can comprising:
- 2 a) a flexible-walled inflatable mandrel, said
3 mandrel including a plurality of separate sections
4 longitudinally thereof, each section having different
5 radial expansion capabilities,
- 6 b) means for inserting the mandrel into a can body
7 while supporting the can body;
- 8 c) means for inflating the mandrel until the
9 flexible walls thereof firmly grip inside surfaces of the
10 walls of the can body;
- 11 d) means for applying a forming tool to any
12 selected surface portion of the entire can body to

- 13 -

13 deflate the can body sidewalls in the selected portion
14 inwardly into the mandrel thereby shaping the can body;
15 e) means for deflating the mandrel; and
16 f) means for withdrawing the mandrel from the
17 shaped can body.

1 6. The apparatus of claim 5 wherein at least one of
2 said sections has spaced longitudinal corrugations in the
3 flexible walls thereof defining peaks and depressions,
4 said peaks engaging the inner walls of the can body as
5 the mandrel is inflated before the depressions engage the
6 inner walls, said depressions having predetermined depths
7 so that when expanded by further inflation of the mandrel
8 the degree of expansion of the depressions is
9 controllable to regulate the gripping force thereof
10 against the inner surface of the can body and the radius
11 of expansion of the depressions.

1 7. The apparatus of claim 6 wherein each of said
2 sections has said spaced longitudinal corrugations.

1 8. Apparatus for shaping a can comprising:
2 a) a flexible-walled inflatable mandrel, said
3 mandrel having spaced longitudinal corrugations in the
4 flexible walls thereof defining peaks and depressions,
5 said peaks engaging the inner walls of the can body as
6 the mandrel is inflated before the depressions engage the
7 inner walls, said depressions having predetermined depths
8 so that when expanded by further inflation of the mandrel
9 the degree of expansion of the depressions is
10 controllable to control the gripping force thereof
11 against the inner surface of the can body and the radius
12 of expansion of the depressions;

- 14 -

- 13 b) means for inserting the mandrel into a can body
14 while supporting the can body;
- 15 c) means for inflating the mandrel until the
16 flexible walls thereof firmly grip inside surfaces of the
17 walls of the can body;
- 18 d) means for applying a forming tool to any
19 selected surface portion of the entire can body to
20 deflate the can body sidewalls in the selected portion
21 inwardly into the mandrel thereby shaping the can body;
- 22 e) means for deflating the mandrel; and
- 23 f) means for withdrawing the mandrel from the
24 shaped can body.



1 9. The apparatus of claims 3, 4, 5, or 6 wherein said
2 mandrel includes two relatively movable plates at the
3 distal ends thereof and non-compressible fluid contained
4 between said plates and the flexible walls of the
5 mandrel, and there is further means for compressing said
6 plates to inflate said mandrel.


1 10. The apparatus of claims 3, 4, or 6 wherein said
2 mandrel includes a plurality of separate sections
3 longitudinally thereof, each section having different
4 radial expansion capabilities.


1 11. The apparatus of claims 2, 4 or 5 wherein said
2 mandrel includes spaced longitudinal corrugations in the
3 flexible walls thereof defining peaks and depressions,
4 said peaks engaging the inner walls of the can body as
5 the mandrel is inflated before the depressions engage the
6 inner walls, said depressions having predetermined depths
7 so that when expanded by further inflation of the mandrel
8 the degree of expansion of the depressions is

- 15 -

9 controllable to regulate the gripping force thereof
10 against the inner surface of the can body and the radius
11 of expansion of the depressions.

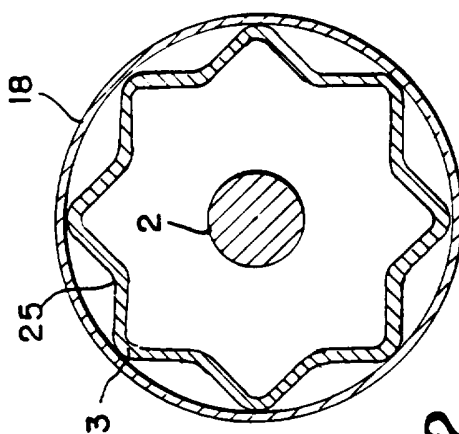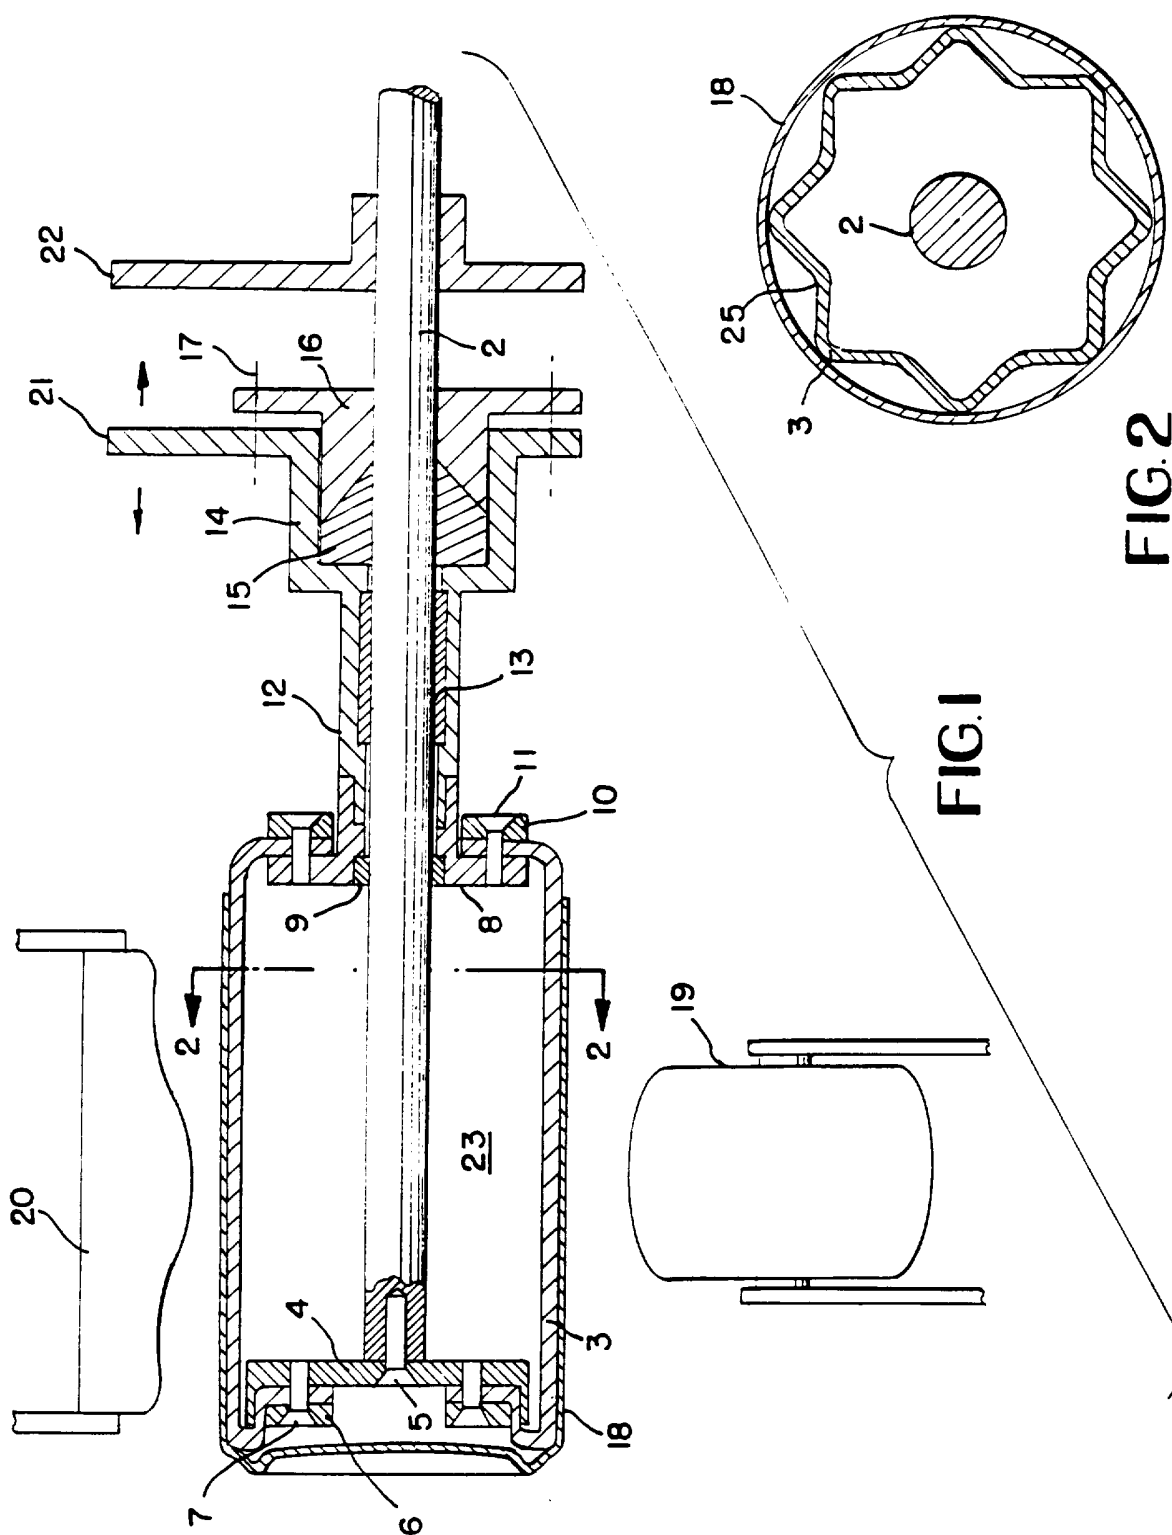


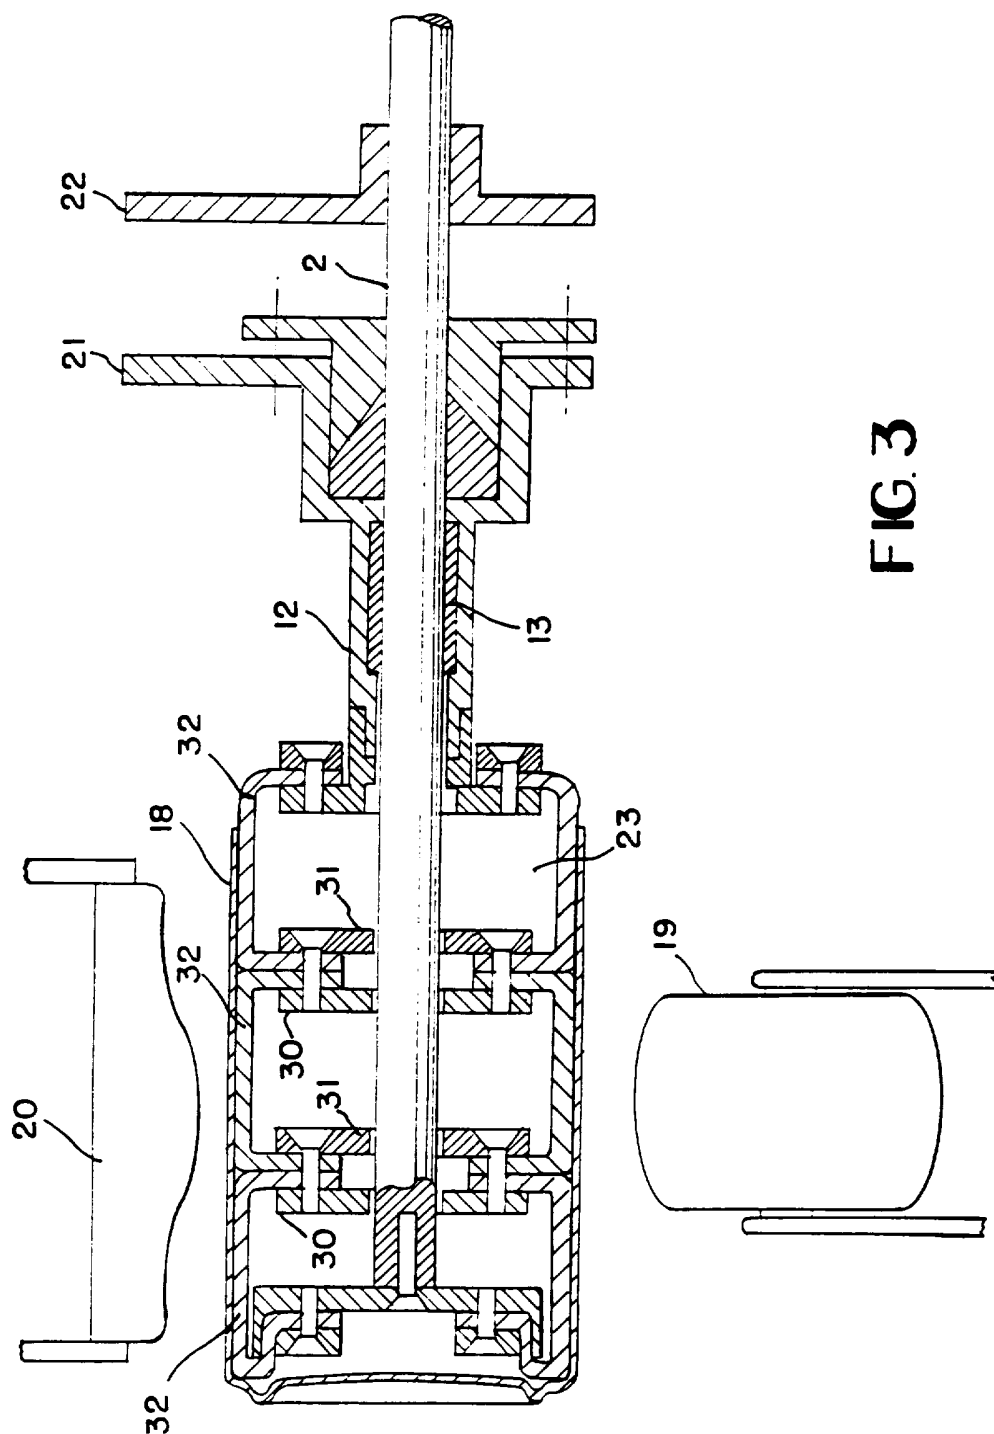

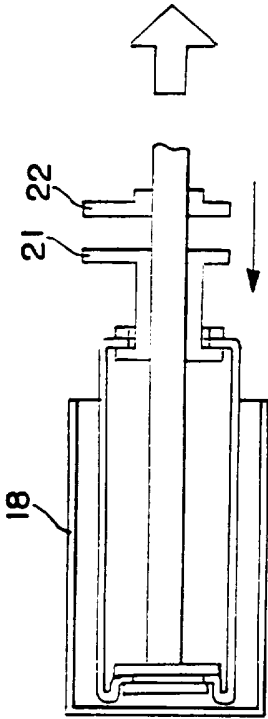


INSERT

FIG. 4A

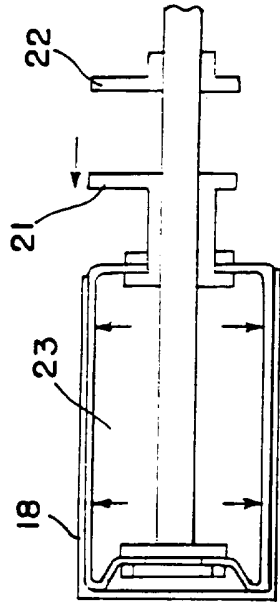


GRIP

FIG. 4B

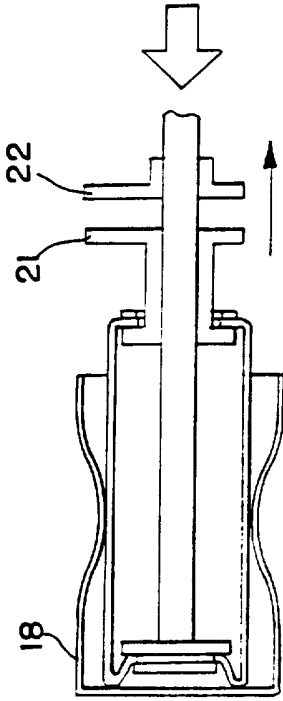

WITHDRAW & EJECT

FIG. 4D

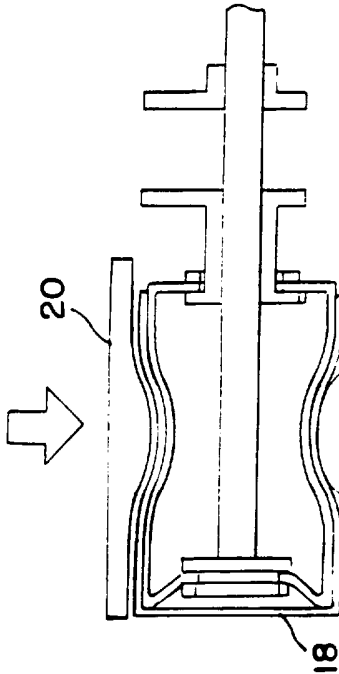

SHAPE

FIG. 4C

INTERNATIONAL SEARCH REPORT

 International Application No
 PC/US 95/12084

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B21D17/04 B21D22/16 B21D51/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B21D B23B B23Q B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US,A,4 953 376 (MERLONE JOHN C) 4 September 1990	1-4
A	see the whole document ---	5-11
A	DE,B,11 71 837 (WALBERSDORF SONDERMASCHINENBAU) 4 June 1964 see claim 1; figures 8-11 ---	3-11
A	US,A,3 757 555 (BLUTT J ET AL) 11 September 1973 see figure 3 ---	3-11
A	US,A,4 389 147 (VAN ALSBURG EARL R) 21 June 1983 see figure 1 -----	1-4



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

12 January 1996

Date of mailing of the international search report

12.02.96

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Vinci, V

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 95/12084

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4953376	04-09-90	NONE	
DE-B-1171837		NONE	
US-A-3757555	11-09-73	NONE	
US-A-4389147	21-06-83	NONE	