

F. F. ALLISON,
DISPLAY FORM.

APPLICATION FILED APR. 27, 1905. RENEWED FEB. 5, 1910.

967,482.

Patented Aug. 16, 1910.

2 SHEETS—SHEET 1.

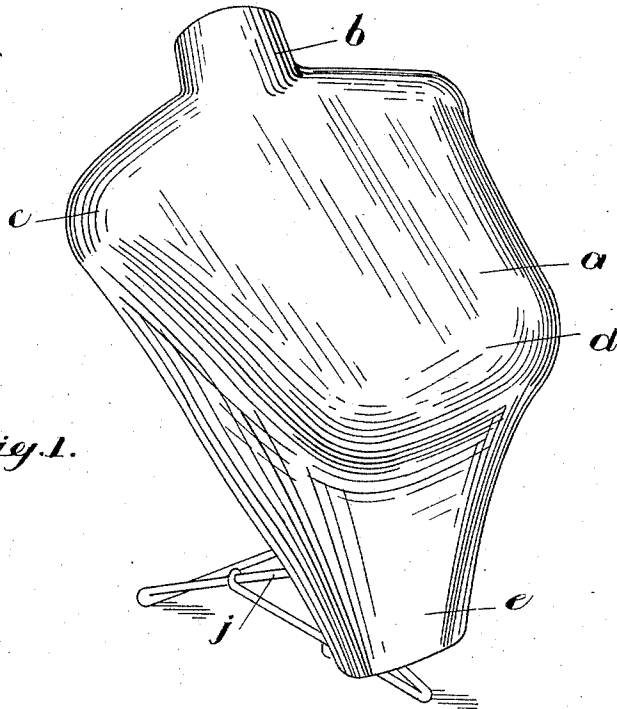


Fig. 1.

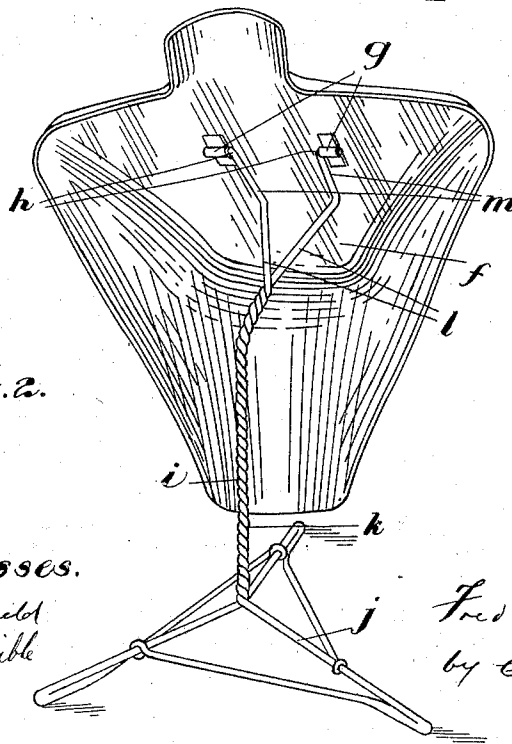


Fig. 2.

Witnesses.

M. Sheffield
H. L. Trumble

Inventor.

Fred Forster Allison
by Chas. R. Riches
his attorney

F. F. ALLISON.
DISPLAY FORM.

APPLICATION FILED APR. 27, 1905. RENEWED FEB. 5, 1910.

967,482.

Patented Aug. 16, 1910.

2 SHEETS—SHEET 2.

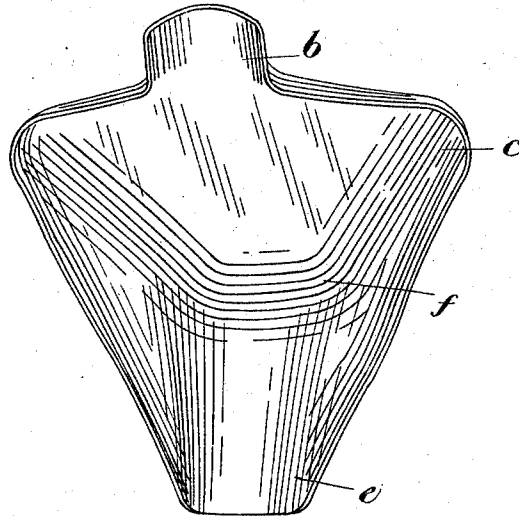


Fig. 3.

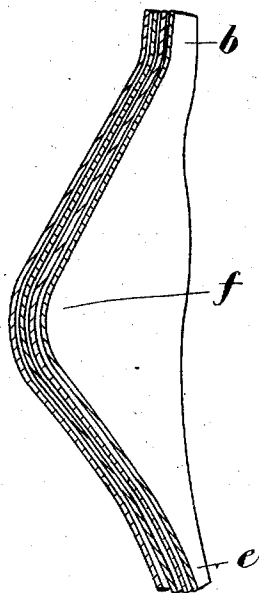


Fig. 4.

Witnesses.

W. B. Sheffield
H. L. Trumble.

Inventor

Fred Forpe Allison
by Charles H. Knicker
his attorney.

UNITED STATES PATENT OFFICE.

FRED FORFAR ALLISON, OF TORONTO, ONTARIO, CANADA.

DISPLAY-FORM.

967,482.

Specification of Letters Patent.

Patented Aug. 16, 1910.

Application filed April 27, 1905, Serial No. 257,785. Renewed February 5, 1910. Serial No. 542,293.

To all whom it may concern:

Be it known that I, FRED FORFAR ALLISON, of the city of Toronto, in the county of York and Province of Ontario, Canada, have invented certain new and useful Improvements in Display-Forms; and I hereby declare that the following is a full, clear, and exact description of the same.

This invention relates to a display form, for exhibiting ladies' wearing apparel such as blouses, corset covers, vests, neck wear etc., consisting essentially of a pedestal and a display member, having the contour or shape of a female bust, supported thereby; and the objects of the invention are to so construct the display member that any number of them can be stacked or nested together, so as to occupy as small a space as possible for transportation, storage and other purposes, and to so arrange the pedestal that it can be detachably connected to the display member to support it in its display position or to be detached therefrom.

For a full understanding of the invention reference is to be had to the following description and to the accompanying drawings in which,

Figure 1 is a perspective view of the display form looking at it from the front. Fig. 2 is a similar view looking at it from the rear. Fig. 3 is a perspective view of the display member looking at it from the rear. Fig. 4 is a sectional view showing several display members stacked or nested together.

Like letters of reference refer to like parts throughout the specifications and drawings.

The display member consists of a thin shell *a* of uniform thickness and made preferably of a plastic material embossed or molded so that its front surface will be fashioned to represent a woman's bust, and its back surface will have a correspondingly shaped unoccupied cavity so that several display members can be stacked together, as shown in Fig. 4. The shape of the display member may be described as consisting of a neck portion *b*, consisting of a thin curved band and less in circumference than a semi-circle, sloping shoulder portions *c* extending laterally from the base of the sides of the neck portion *c* and curved at their outer ends to merge into converging sides *c'* of the body of the display member, a waist portion *e*, the sides of which form a continuation of the converging sides of the body portion, and a breast portion confined be-

tween the sloping shoulder portions and sides of the body portion sloping forwardly and downwardly and then downwardly and rearwardly to the waist portion. The edges of the shoulder, body and waist portions are slightly flattened to permit a second display member correspondingly formed entering the unoccupied recess at the back of the shell and forming a close contact with all of the parts of the same. The display member is preferably made of papier-mâché or other plastic material capable of being molded to the required shape in a wet condition and which will, when dried, retain its molded form, and in the molding of the display member the back of the shell is formed so that the edges of the neck, shoulder, body, and waist portions will be slightly flattened and of a shallow formation to permit of two or more display members being nested together so as to keep the space equal only to the dimensions of the surface of the first display member plus the thickness of the number of display members nested together. By forming the display member in this way, a very large number of display members of equal size can be stored or transported in a very small space, and can be employed to exhibit garments under substantially the same conditions of appearance as they would assume when in use.

In the back of the display member *a* are two hinge members *g* to receive the hinge members *h* of the pedestal *i* which may be described as consisting of a base *j* having a standard *k* of the requisite height to support the display member in an inclined position and forked supporting members *l* at the upper end of the standard having inclined rests *m* to engage the back of the display member and maintain it at its proper inclination. The hinge members *h* preferably constitute an integral part of the inclined rests *m* and when the parts of the display form are assembled are contained in the hinge members *g* to articulately fasten the display member to the standard so that it may be maintained in its display position.

The pedestal is preferably constructed of two or more wire strands properly shaped, to form the base *j* and the standard *k*, and of sufficient strength and rigidity to maintain the display member properly positioned. The forked members of the standard are shaped to form inclined rests to engage the rear face of the display member

and hold it at an inclination to the stand-
ard, and at the ends of the forked members
are the outturned hinge members *h* to enter
the hinge members *g*. The resiliency of the
5 wire strands allows the forked members to
spring asunder so that the outturned hinge
members *h* will enter the hinge members *g*
and remain within them until the forked
members have been contracted to withdraw
10 the hinge members *h* to effect the separation
of the pedestal from the display member.

Having thus fully described my invention
what I claim as new and desire to secure by
Letters Patent is:

15 A display device comprising a display
member formed of a thin shell of uniform
thickness, and composed of a body portion
having converging sides, a curved neck por-
tion, sloping shoulder portions extending
20 laterally from the sides of the neck portion
and curved at their outer ends to merge into
the sides of the body portion, a waist por-
tion having its sides in continuation of the
sides of the body portion, a breast portion
25 confined between the sides of the shoulder,
body and waist portions sloping down-
wardly and forwardly and then downwardly

and rearwardly to shape the front of the
display member to correspond with a wom-
an's figure, the display member having at 30
the back of the shell an unoccupied cavity
corresponding in shape and measurements
with the front to receive therein a second
display member of the same size and shape,
the edges of the neck, shoulder, body and 35
waist portions being devoid of obstructions
to permit the entry of the second display
member into the unoccupied cavity, and a
pedestal to support the display member com-
prising a base portion, a standard for the 40
base portion having its upper end forked
and formed to provide two hinge members,
the forked portion of the standard being
bent forwardly and then rearwardly to
form a support which will engage the shell 45
of the display member and hold it in its
fixed position, and hinge parts connected to
the shell of the display member to engage
with the hinge members of the pedestal.

Toronto, April 5th, A. D. 1905.

FRED FORFAR ALLISON.

Signed in the presence of—

CHAS. H. RICHES,
E. B. SHEFFIELD.