US 20070277294A1

(19) United States

(12) Patent Application Publication (10) Pub. No.: US 2007/0277294 A1

Green (43) Pub. Date: Dec. 6, 2007

(54) PROTECTIVE HEADGEAR SYSTEM WITH FILTER PROTECTOR

(76) Inventor: **Lawrence J. Green**, Santa Ana, CA (US)

Correspondence Address:
G. DONALD WEBER, JR.
18442 TAFT AVENUE
VILLA PARK, CA 92861

(21) Appl. No.: **11/442,402**

(22) Filed: **May 30, 2006**

Publication Classification

(51) **Int. Cl.**
A42B 1/06 (2006.01)

(52) **U.S. Cl.** **2/410**

(57) **ABSTRACT**

This invention is directed to a protective headgear system which includes a relatively light weight, substantially rigid, headgear structure which may include an internal, adjustable headband. The system includes filter means which is attachable to the headgear structure to cover the structure. A fan mechanism is mounted on the headgear structure to draw air into the headgear structure through the filter means. A power supply selectively powers the fan. A facial shield is attachable to the headgear structure to cover the face of the wearer to maintain non-contaminating conditions relative to the wearer. A flexible cuff or hood is attachable to the facial shield to enclose the lower opening of the lens and provides protection for the wearer through which air can be exhausted.

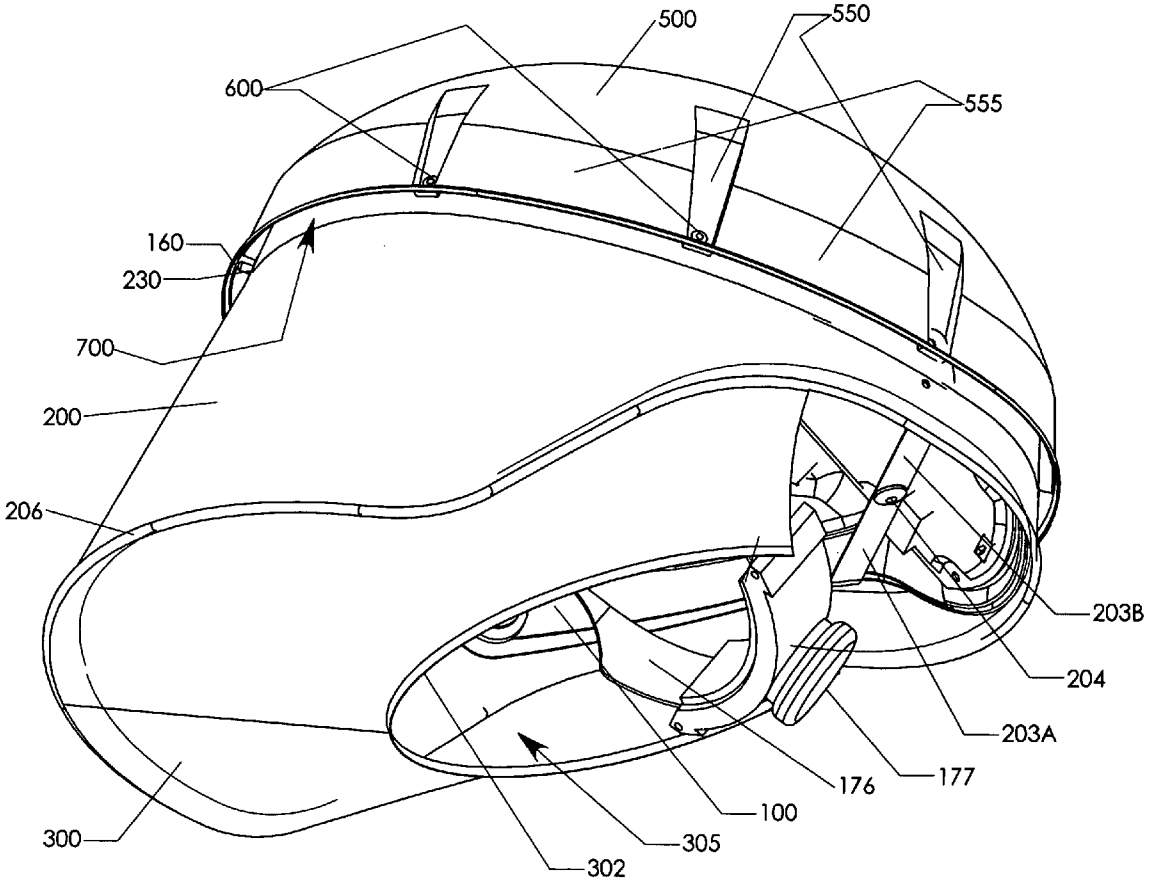

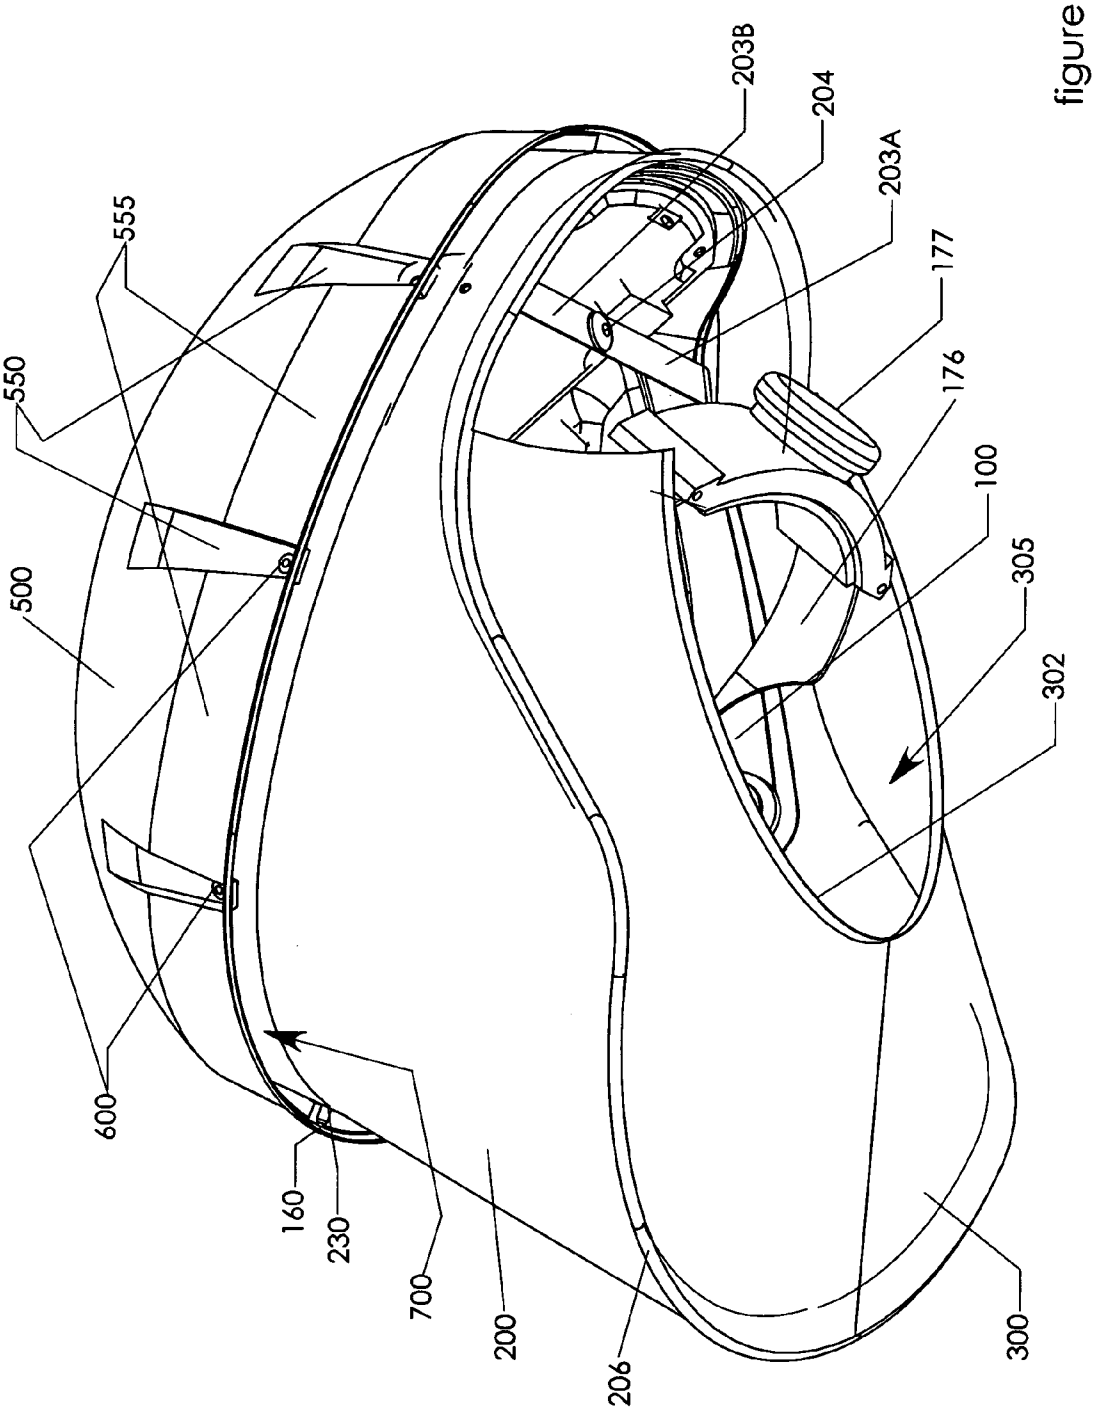
203B
204
203A
177
176
100
305
302
555
550
500
600
160
230
700
200
206
300

figure 1

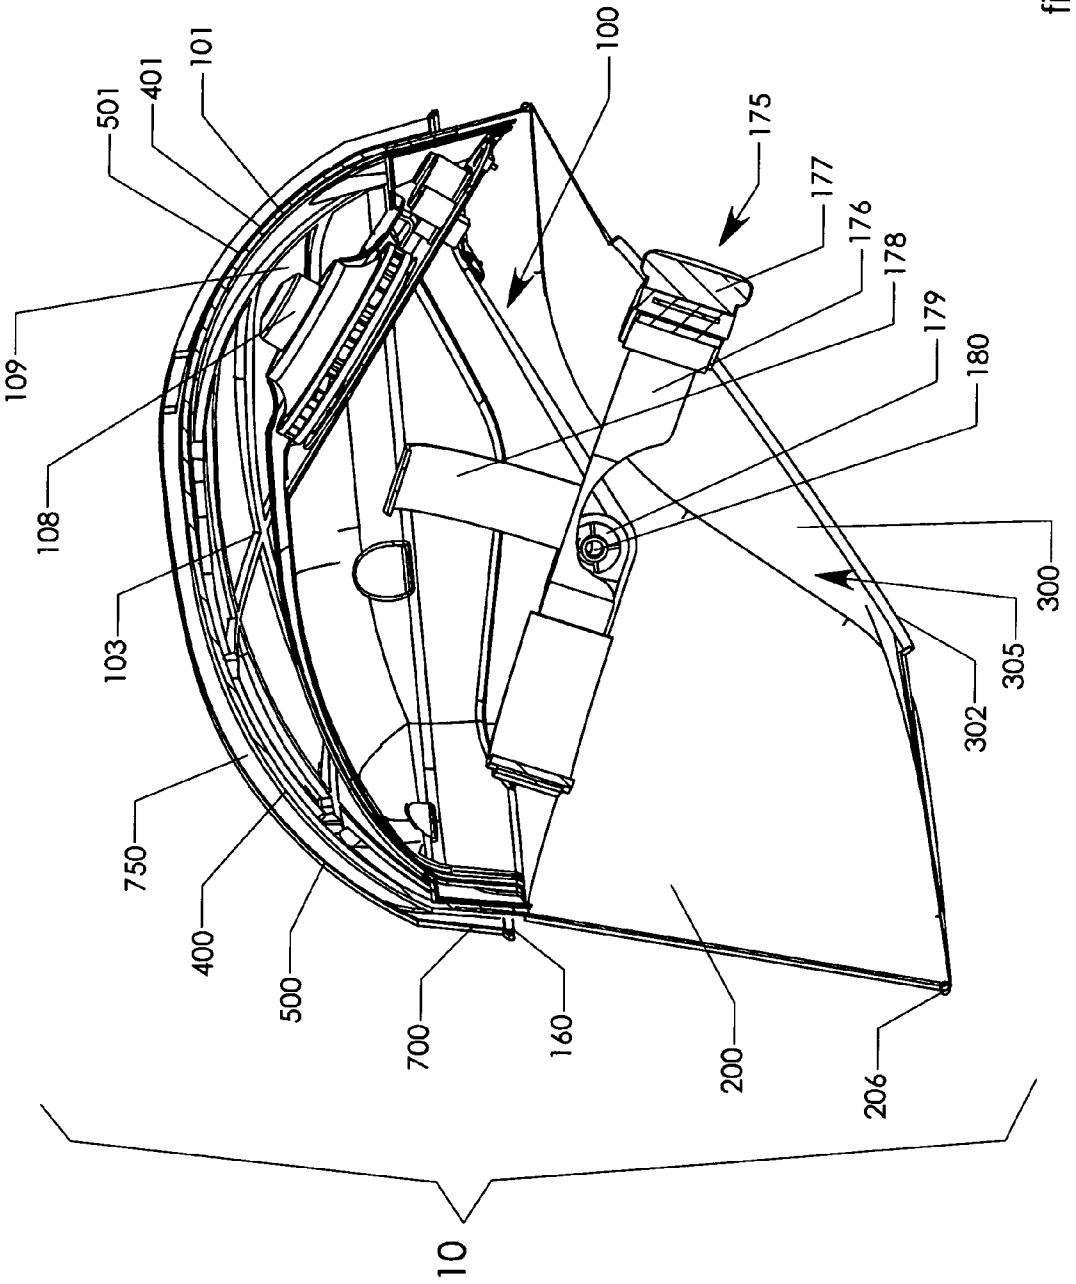
10
109
108
103
750
400
500
700
160
200
206
302
305
300
180
179
178
176
177
175
100
501
401
101

figure 2

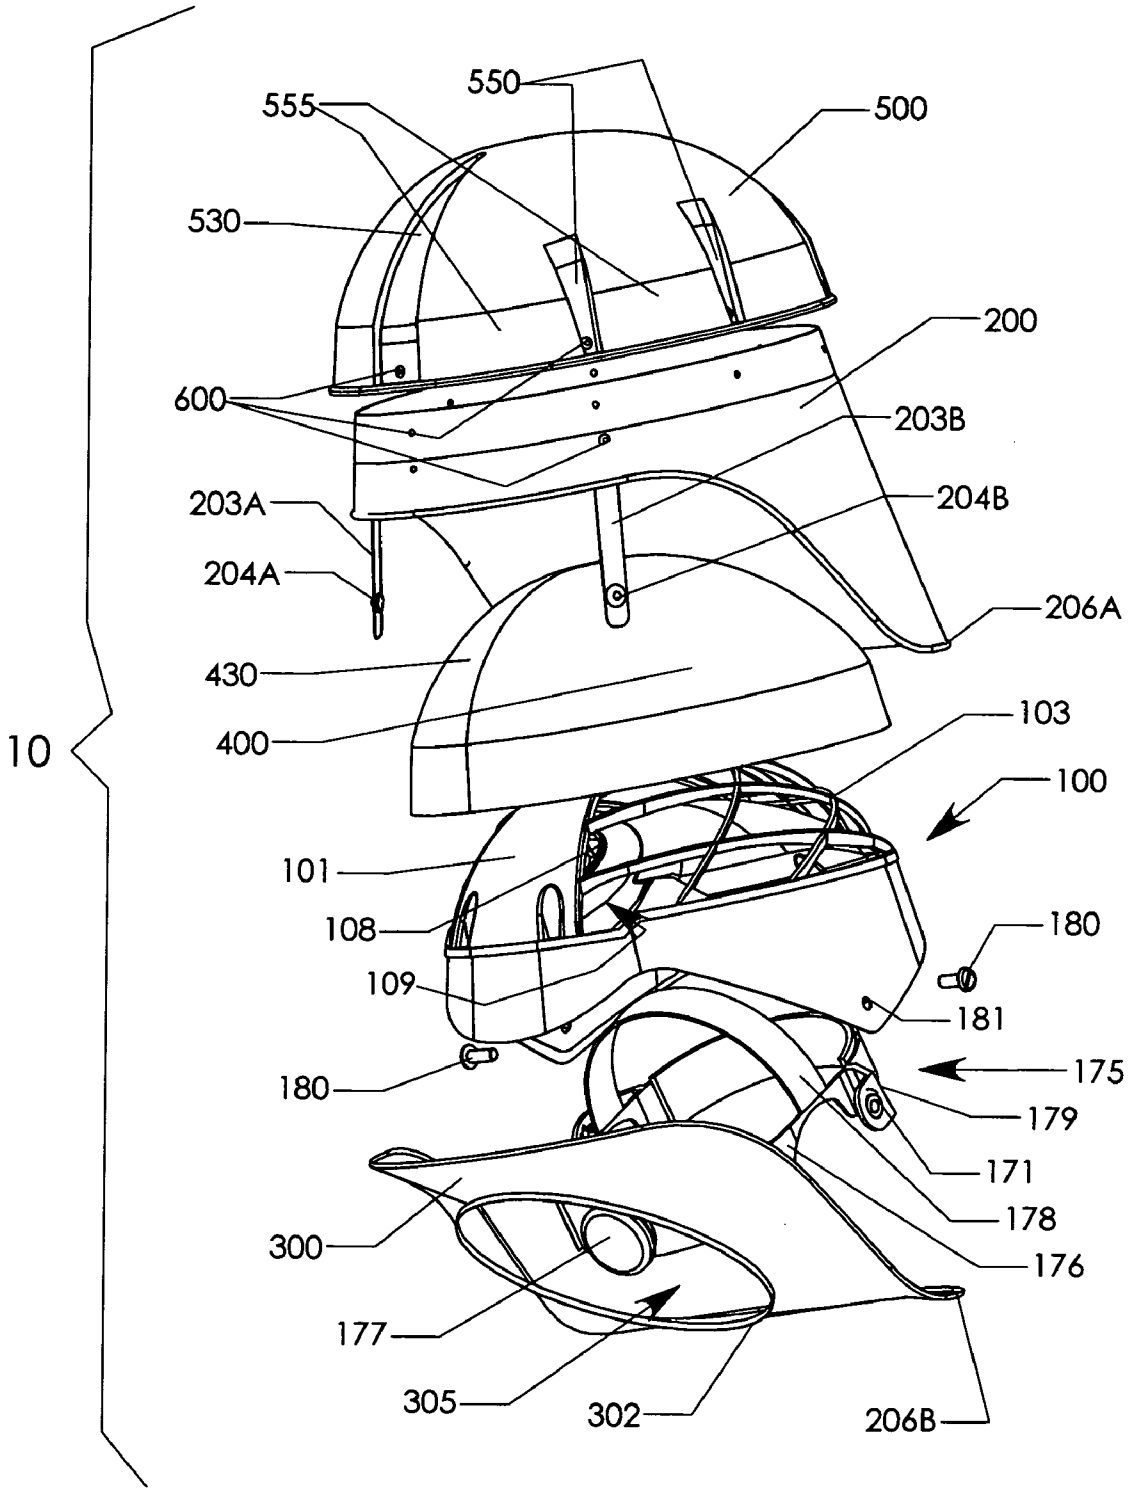
10
550
555
500
530
200
600
203B
203A
204B
204A
206A
430
400
103
100
101
108
180
109
181
175
180
179
171
178
176
300
177
305
302
206B

figure 3

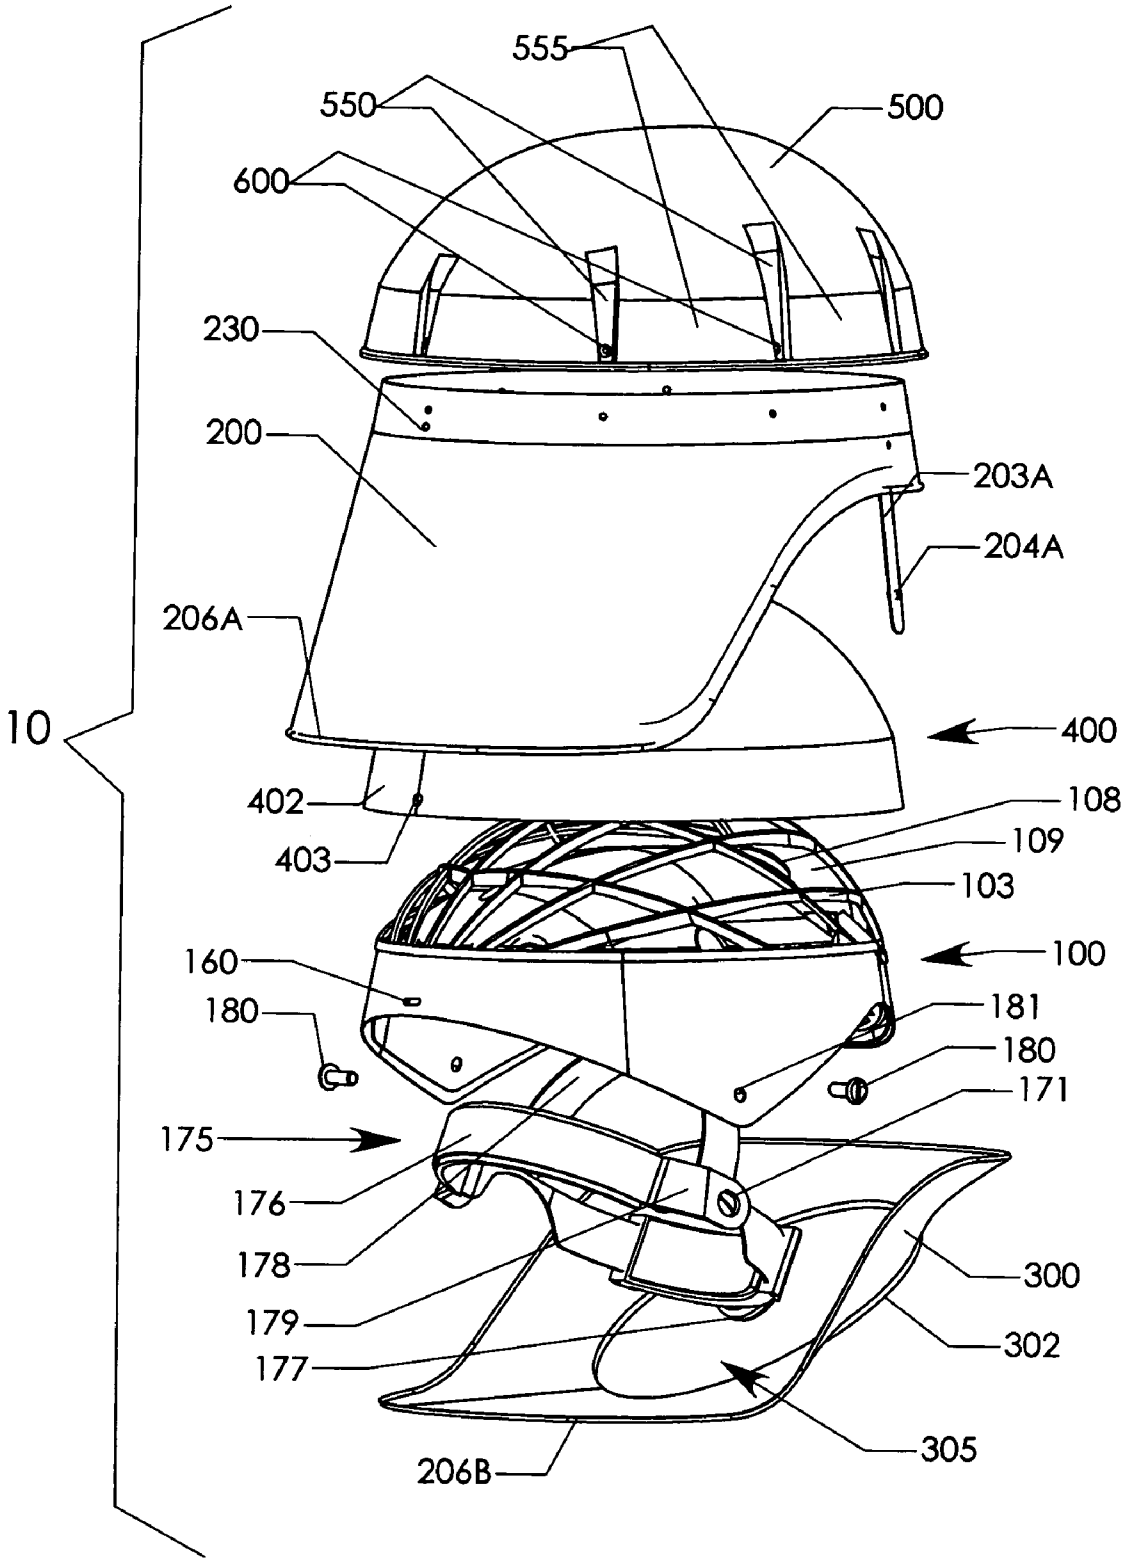
10
555
550
500
600
230
200
203A
204A
206A
400
402
403
108
109
103
100
160
180
181
180
171
175
176
178
179
177
300
302
305
206B

figure 4

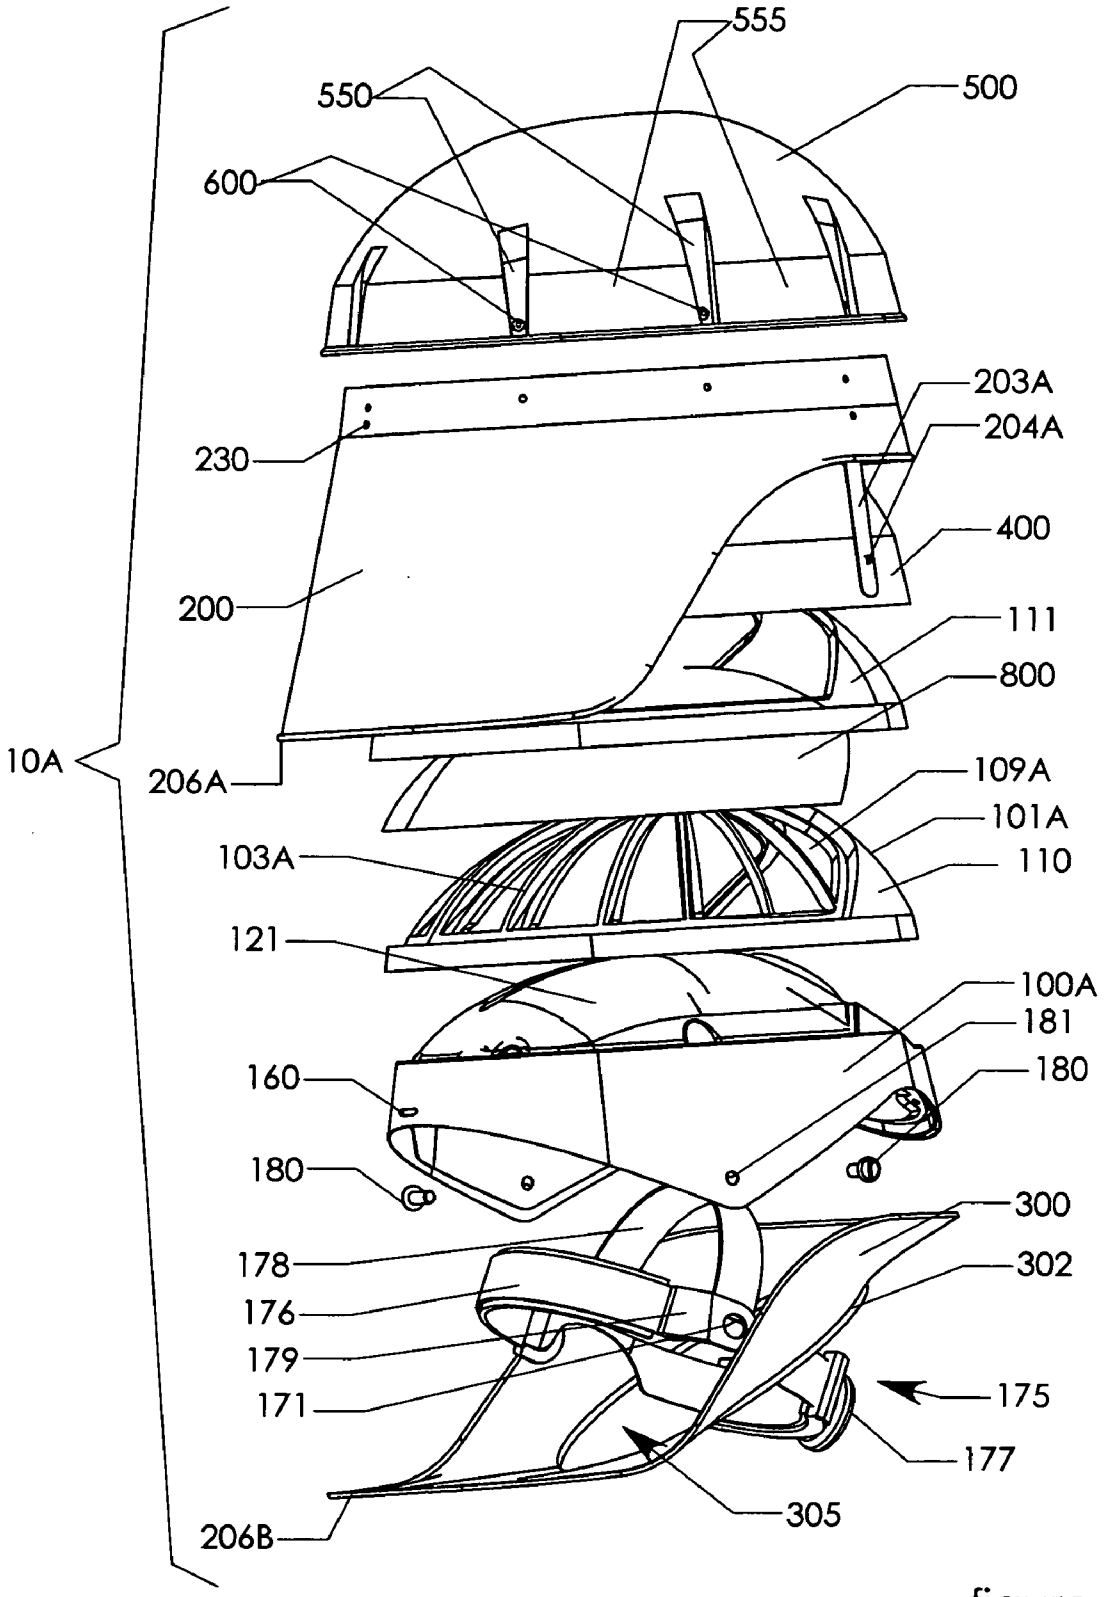
555
550
500
600
203A
204A
230
400
200
111
800
10A
206A
109A
101A
103A
110
121
100A
181
160
180
180
300
178
302
176
179
175
171
177
305
206B

figure 5



figure 6

PROTECTIVE HEADGEAR SYSTEM WITH FILTER PROTECTOR

BACKGROUND

[0001] 1. Field of the Invention

[0002] This invention is directed to personal environmental protection systems, in general, and, more particularly, to a headgear structure which is worn by an individual in an environment wherein control of filtered air and protection from particulate material is required.

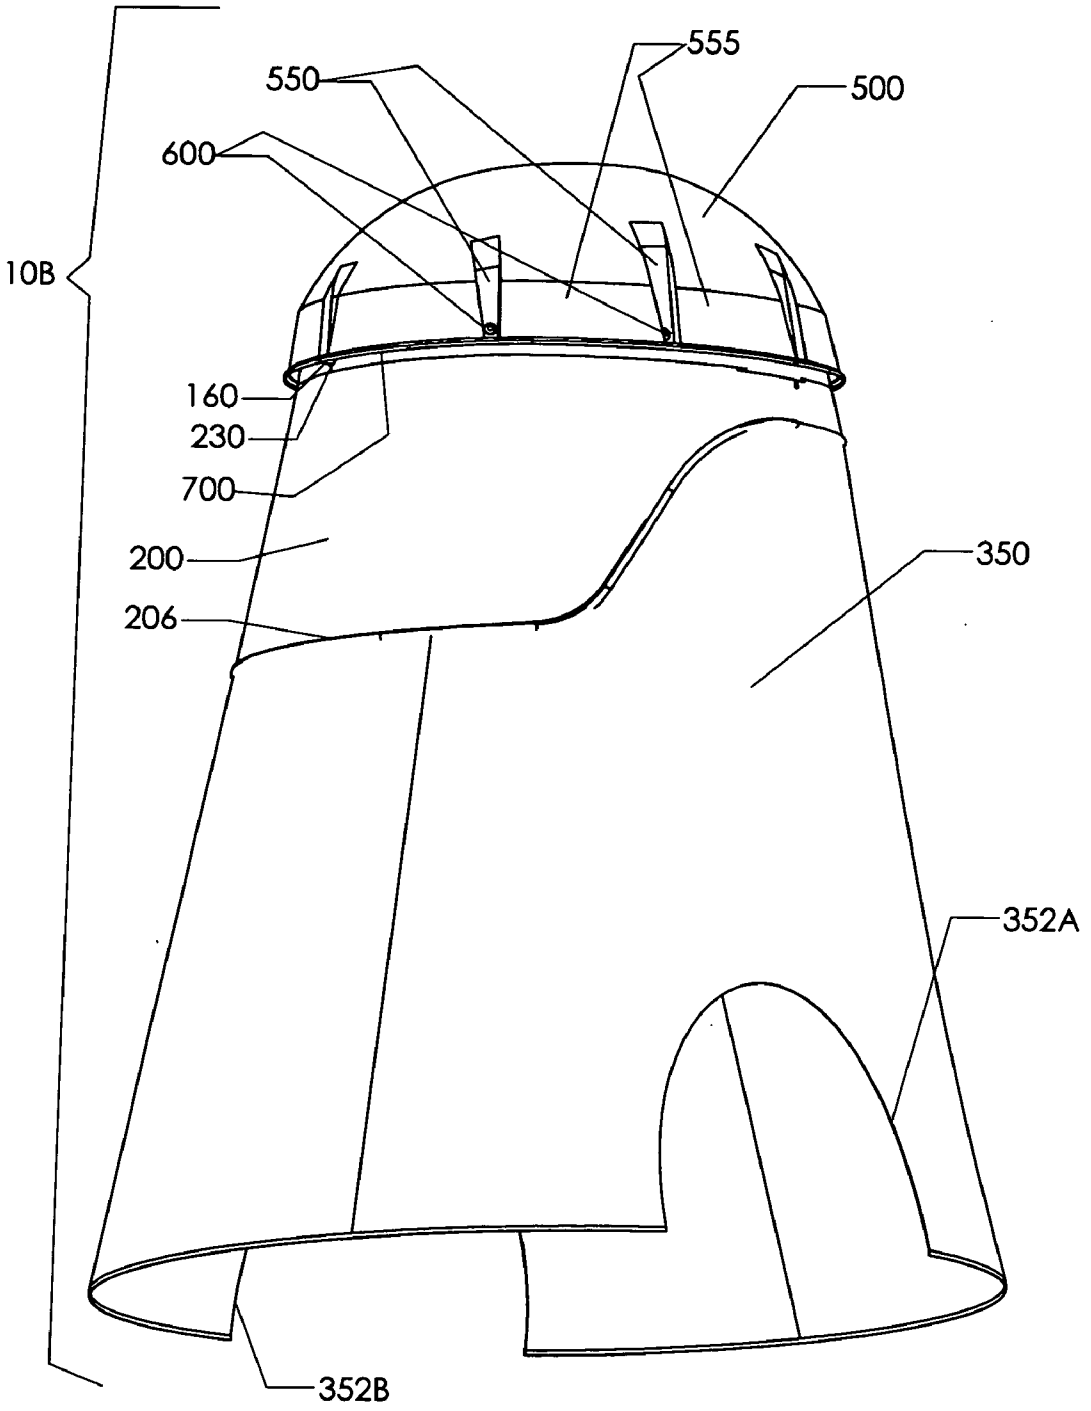[0003] 2. Prior Art

[0004] There are several types of air flow, filtration and protective systems which are known in the art. Several types of such systems are currently available on the market for use in surgical arenas, in "clean room" environments, or in hazardous/contaminated environments.

[0005] Some of the existing systems include hoods, gowns, filters, and the like. In some instances, the air filters are built into the helmet structure and produce a rather clumsy, cumbersome headgear unit. Known units frequently include external sources of air such as gas cylinders, air lines or the like which are connected to the helmet structure by tubes, hoses or the like. The hose-connected systems, and the long gowns or hoods tend to become extremely cumbersome as well as restrictive of the movements and flexibility of the wearer during a procedure.

[0006] In many of the systems known in the art the hoods and/or gowns are used as filtration devices which have to be replaced frequently. This structure tends, therefore, to become costly inasmuch as the disposable filtration devices are quite expensive.

[0007] Moreover, these systems tend to be fairly expensive, especially regarding the disposable portions of the system.

[0008] Many such products are known in the prior art. One suitable and functional system is described in U.S. Pat. No. 5,054,480; PERSONAL AIR FILTRATION AND CONTROL SYSTEM, R. O. Bare et al.

[0009] Another such system is described in U.S. Pat. No. 5,711,033; AIR FILTRATION AND CONTROL SYSTEM INCLUDING HEADGEAR by L. J. Green, et al.

[0010] The most pertinent prior disclosure is described in U.S. Pat. No. 6,918,141; PROTECTIVE HEADGEAR SYSTEM, by Lawrence J. Green, Celestino Murillo and Obed Rios.

SUMMARY OF THE INSTANT INVENTION

[0011] This invention is directed to a protective headgear system which is worn by a surgeon during a surgical procedure, a technician during an assembly process, a worker during handling of toxic wastes, or the like.

[0012] The system includes a relatively light weight, substantially rigid, support headgear structure. Typically, a fan mechanism is mounted on the headgear structure to provide air flow at the headgear structure. A suitable power supply, such as a battery pack or the like, can be used to selectively power the fan.

[0013] The system also includes one or more removable and disposable filters which are adapted to be easily and snugly attached to and supported by the headgear structure to significantly cover the outer surface of the headgear structure.

[0014] A transparent facial shield (or lens) is adapted to easily attach to the headgear structure so as to cover the face of the wearer in order to maintain sterile, non-contaminating conditions for the wearer.

[0015] A flexible containment cuff is adapted to be easily attached to the lower edge of the facial shield in order to enclose the lower projection of the lens and provide a sealed space about the wearer's head. In one embodiment, the cuff can be closed around the wearer's neck.

[0016] An adjustable headband is attached to the headgear structure for supporting the assembled structure on the wearer's head.

[0017] An outer, relatively lightweight, substantially rigid filter protector is provided for mounting to the lens in at least a partially spaced apart relationship to provide an air gap between the lens and the filter protector.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. **1** is a perspective view of one embodiment of the assembled helmet system of the instant invention.

[0019] FIG. **2** is a cross-sectional view of the embodiment of the assembled helmet system shown in FIG. **1**.

[0020] FIG. **3** is a rear exploded view of the embodiment of the helmet system shown in FIGS. **1** and **2**.

[0021] FIG. **4** is a frontal exploded view of the embodiment of the headgear structure of the instant invention as shown in FIGS. **1**, **2** and **3**.

[0022] FIG. **5** is a frontal exploded view of another embodiment of the instant invention.

[0023] FIG. **6** is a perspective view of another embodiment of the instant invention.

DESCRIPTION OF A PREFERRED EMBODIMENT

[0024] Referring concurrently to FIGS. **1** through **4**, there is shown one embodiment of the helmet assembly **10** of the instant invention. The helmet assembly **10** includes the helmet shell **100**, the fan mechanism **108** mounted on the helmet shell, the outer filter protector **500**, the main filter **400**, the facial shield **200**, the cuff **300**, and the headband assembly **175**.

[0025] The headband **175** is used to seat the helmet **10** on the head of the wearer (not shown). The headband **175** is fairly conventional and is, also, optional. That is, a different head engaging support mechanism can be utilized or it can be omitted, if preferred.

[0026] The headband **175** includes the head-encircling band **176** which is adjustable to comfortably fit the head size of the individual wearer. The adjustment latch **177** permits the band **176** to be shortened or lengthened in a conventional manner.

[0027] An over-the-head strap **178** is attached to the band **176** in any conventional fashion. The band **176** and strap **178** may be integrally formed, if so desired. The strap and band are formed of a suitable material, such as nylon, for example. While adjustment of the length of strap **178** is contemplated, this is not a required feature of the invention, per se.

[0028] The headband **176** includes suitable attachment arms **179** (see FIG. **5**) which extend outwardly from the headband **176**. The arms **179** are provided for attachment to the helmet **100** by means of suitable fasteners **180** which can be pan screws or the like, as discussed supra.

[0029] A suitable socket **181** at each side of the helmet shell **100** and a suitable socket **171** at each side of the headband **175** (seen best in FIG. **3**) is provided for receiving connectors **180**, such as pan screws or the like, to secure headband **175** to the helmet shell as described infra.

[0030] The helmet shell **100** is, typically, formed of a lightweight material, such as PETG or Polycarbonate, for example. Helmet shell **100** is configured to conform, generally, to the shape of the upper portion of the wearer's head but to be spaced away from the top of the head of the wearer by the headband **175** described infra.

[0031] In addition, as will be described infra, the helmet shell **100** is sufficiently sturdy so as to support a cooling or air moving mechanism **108**, typically, e.g. a fan or the like.

[0032] A plurality of radial ribs **103** extend upwardly from the outer surface of the helmet shell **100** and radiate upwardly and outwardly from the longitudinal center of the helmet shell **100** toward the perimeter thereof. The ribs **103** may be integral with the helmet shell **100** and formed in an inverted basket shape although this configuration is not required.

[0033] A fan covering **101** extends above the outer surface of helmet shell **100**. The fan covering **101** is joined to or is integrally formed with ribs **103** to provide a protective and contouring cover for the fan mechanism **108** of any conventional type as, for example, described in U.S. Pat. Nos. D460,584 and 6,792,944. Thus, the fan covering **101**, in conjunction with ribs **103**, provides a spacer for maintaining a distance between the helmet shell **100** and filter **400**. A fan opening **109** is provided through the side portion of the fan covering **101**.

[0034] The fan covering **101**, as well as ribs **103**, serve to support the protective filter **400** above the helmet shell **100**. Thus, air flow channels can be defined and maintained around the helmet assembly **10** whereby the fan mechanism **108** can provide a cooling and filtered air flow to the wearer of the helmet assembly **10**.

[0035] A mounting pin **160** is attached to the front of the helmet shell **100**. The mounting pin **160** is provided to receive and position facial shield (or lens) **200** as well as filter **400**, as described infra.

[0036] A filter **400** typically, but not limitatively, fabricated of electrostatically charged fibrous plastic material (melt blown polypropylene) is configured to conform to the outer shape of the helmet shell **100** and is adapted to fit fairly snugly thereto. By selecting the material of the filter **400**, the level or degree of filtration of air which enters or leaves the helmet shell **100** can be controlled.

[0037] The front edge **402** of filter **400** is secured to helmet shell **100** with any suitable fastener such as Velcro, or the like. In addition, the filter **400** includes an aperture **403** therein through which mounting pin **160** extends to position the filter **400**. As will be described infra, the top edge of lens **200** clamps the perimeter of the main filter **400** to the helmet shell **100**.

[0038] In this embodiment, a filter protector **500** is provided to cover the filter **400**. The filter protector **500** can be fabricated of a material which is the same as (or similar to) helmet **100**, if so desired. The filter protector **500** prevents damage to the filter **400** and, as well, prevents persons (including the helmet wearer) from touching the possibly contaminated surface of filter **400**.

[0039] The filter protector **500** is attached to the upper edge portion of the lens **200**, for example by rivets **600**. In particular, the protector **500** includes a plurality of indented sections **550** (or standoffs) through which the rivets **600** are inserted. The sections **555** of filter protector **500** which are intermediate the indented sections **550** are spaced away from the surface of the upper edge portion of the lens **200** thereby providing the gap **700** through which air can pass into the enclosed space above the filter.

[0040] Additionally, the filter protector has an upper indented detail **530** which bears on the upper rear surface **430** of filter **400** which, in turn, bears on fan covering **101** thereby providing a standoff from the filter **400** and maintaining separation **750** between filter **400** and filter protector **500**.

[0041] A facial lens **200** fabricated of an impervious, transparent material such as polycarbonate, or the like, is adapted to be mounted on the outer surface of helmet shell **100**. The lens **200** may include a sealing gasket fabricated of a closed cell foam or other compressible material mounted at the upper, substantially linear edge thereof. The lens **200** is adapted to bear against the outer surface of the filter **400** which in turn bears on the outer surface of the helmet shell **100** thereby clamping the perimeter of the filter **400** in place. The juxtaposition of the inner surface of the filter **400** and the outer surface of the helmet shell **100** provides a secure, hermetic seal between the inner surface of the filter **400** and the outer surface of the helmet shell **100**. In like manner, the inner surface of the lens **200** is sealed to the outer surface of the filter **400**.

[0042] In one embodiment, the filter protector **500** and the lens **200** are fabricated and adapted to conform to the perimeter shape of the helmet shell **100**. In this case, a suitable locking device is provided to secure the lens **200** to the helmet shell **100**. In one embodiment, the locking device can comprise a pair of holding tabs **203**A and **203**B attached to lens **200** by rivets or the like, and a snap connector **204** (comprised of the snap components **204**A and **204**B). Other locking techniques are contemplated, as well.

[0043] A positioning aperture **230** is provided at the center of the shield **200** adjacent the upper edge thereof. The aperture **230** is placed over the mounting pin **160** on the helmet shell **100**, as described supra, to position the shield **200** relative to the helmet shell **100**.

[0044] It is also contemplated that the positioning aperture as well as the tabs **203**A and **203**B can be incorporated into the filter protector **500** such that the filter protector **500** can function as an integrated assembly.

[0045] In addition, one side of a zipper **206**, viz. zipper side **206**A, is attached to the lower, curvilinear edge of lens **200** for attachment of the cuff **300**, as described infra. The other side of zipper **206**, viz. zipper side **206**B, is attached to the outer edge of the cuff **300** described infra. The zipper side **206**B is adapted to be selectively connected to the zipper side **206**A in a conventional manner to thereby attach the cuff **300** to the lens **200** which is adapted to be attached to the helmet shell **100**, as described supra.

[0046] In one embodiment, the filter protector **500** and the lens **200** are fabricated and adapted to conform to the perimeter shape of the helmet shell **100**. In this case, a suitable locking device is provided to secure the lens **200** to the helmet shell **100**. In one embodiment, the locking device can comprise a pair of holding tabs **203**A and **203**B attached to lens **200** by rivets or the like, and a snap connector **204** (comprised of the snap components **204**A and **204**B). Other locking techniques are contemplated, as well.

[0047] A positioning aperture **230** is provided at the center of the shield **200** adjacent the upper edge thereof. The aperture **230** is placed over the mounting pin **160** on the helmet shell **100**, as described supra, to position the shield **200** relative to the helmet shell **100**.

[0048] It is also contemplated that the positioning aperture as well as the tabs **203**A and **203**B can be incorporated into the filter protector **500** such that the filter protector **500** can function as an integrated assembly.

[0049] In addition, one side of a zipper **206**, viz. zipper side **206**A, is attached to the lower, curvilinear edge of lens **200** for attachment of the cuff **300**, as described infra. The other side of zipper **206**, viz. zipper side **206**B, is attached to the outer edge of the cuff **300** described infra. The zipper side **206**B is adapted to be selectively connected to the zipper side **206**A in a conventional manner to thereby attach the cuff **300** to the lens **200** which is adapted to be attached to the helmet shell **100**, as described supra.

[0050] In an alternative embodiment, the zipper can be replaced by a suitable grip or engagement device which includes, for example, a deformable, grooved material which securely engages a bead on the lower edge of lens **200**.

[0051] The cuff **300** is fabricated of a sheet of flexible material such as rayon or plastic or meltblown polypropylene. This material, typically breathable, acts as a filter for ambient air adjacent to the wearer's head. The cuff also serves as a protective barrier to prevent particulate material from being transmitted to or from the wearer to or from the ambient.

[0052] The cuff **300** includes an opening **305** which is designed to be able to pass over the wearer's head. In a preferred embodiment, an elastic band **302** is attached to the circumference of opening **305**. The elastic band **302** can be stretched to pass over the head of the wearer and then contract to form a reasonably snug but comfortable fit of the cuff **300** around the wearer's neck. Alternatively, a tie, drawstring or other securing means can be used to contract the head opening **305**. The cuff **300**, thus, provides a protective barrier for the wearer's head.

[0053] In an alternative embodiment, it is contemplated that filter **400**, facial shield **200** and protective cuff **300** can be joined together as a subassembly and placed over the helmet shell **100** to provide the filtering and protecting functions described.

[0054] Referring now to FIG. **5**, there is shown another embodiment of the instant invention. In this embodiment, components which are similar to previously described components bear similar reference numerals and the prior description is incorporated herewith.

[0055] Thus, the helmet assembly **10**A includes the helmet shell **100**A, the fan mechanism **108** mounted on the helmet shell, the outer filter (or protector) **500**, the main filter **400**, the facial shield **200**, the cuff **300**, and the headband assembly **175**.

[0056] The headband **175** is used to seat the helmet **10** on the head of the wearer as described supra. The headband **175** is fairly conventional and is, also, optional. That is, a different head engaging support mechanism can be utilized or it can be omitted, if preferred.

[0057] Typically, the headband **175** includes the head-encircling band **176**, an over-the-head strap **178**, suitable attachment arms **179**, for attachment to the helmet shell **100**A by means of suitable fasteners **180** which can be pan screws or the like, as discussed supra.

[0058] The helmet shell **100**A is, typically, formed of a lightweight material, such as PETG or Polycarbonate, for example. Helmet shell **100**A is configured to conform, generally, to the shape of the upper portion of the wearer's head but to be spaced away from the top of the head of the wearer by the headband **175** described infra. In addition, as will be described infra, the helmet shell **100**A is sufficiently sturdy so as to support a cooling or air moving mechanism **108**, typically, e.g. a fan or the like. Helmet shell **100**A, typically, has a closed upper surface **121**.

[0059] In the embodiment of FIG. **5**, a separate filter support **110** includes a plurality of radial ribs **103**A which extend upwardly therefrom a fan covering **101***a* and an opening **109**A, as described supra. The filter support **110** is adapted to be mounted above the upper surface **121** of the helmet shell **100**A such that ribs **103**A radiate outwardly from the longitudinal center of the helmet shell **100**A toward the perimeter thereof. A snap-in or frictional-fit assembly of the helmet shell **100**A and filter support **110** is contemplated.

[0060] An optional post-filter **800** can be provided, if desired. The post-filter **800** can be fabricated of a material which is the same as filter **400**, if so desired. Alternatively, to achieve a different filtration characteristic (or to reduce costs), the post-filter **800** can be fabricated of a material such as felt or activated carbon which is different from the material of filter **400**. Of course, post-filter **800** can be omitted altogether, or used exclusively, if so desired. A retaining device **111** may be utilized to attach the post filter **800** to the support structure **110**, if desired.

[0061] Filter **400**, lens **200** and filter protector **500** are mounted to the other components in similar fashion as described in relation to Figures described supra.

[0062] Referring now to FIG. **6**, there is shown another embodiment of the instant invention. In this embodiment, the headgear assembly **10**B is similar to the headgear assembly **10** shown in FIG. **1** except for the lower filter protector structure **350** which can be used in place of cuff **300**.

[0063] In this embodiment, the structure **350** (also referred to as a hood or shroud) is attachable to the lens **200** along the lower edge **206** by either a zipper **206**, as shown in the embodiment of FIGS. **1-4**, or a grooved, snap-on connector or any other suitable arrangement.

[0064] The shroud **350** is, typically, fabricated of polyethylene, polypropylene, synthetic fabric or other suitable material.

[0065] The shroud **350** is configured to extend to, and, as shown, below the shoulders of the wearer although the length of the shroud is selectable as desired.

[0066] In the configuration shown in FIG. **6**, provision is made for the shroud **350** to fit over and conform to the shoulders of the wearer. In this instance, the shaped cutouts **352**A and **352**B are depicted. However, any suitable shape or even slits can be provided in the lower edges of the filter protector **350**.

[0067] In operation, the components shown in the exploded views of FIGS. **3**, **4** and/or **5** are assembled as described supra. The headgear structure is put in place by adjusting the headband **175**. The assembled headgear structure is then placed over the head of the wearer by passing the cuff **300** or protective shroud **350** over the user's head. The headgear structure is now ready for use by the wearer who

receives air through the gaps and filters. The filtered air is directed by fan **108** to the enclosed space created by the filters, helmet shield and cuff. This creates a clean air environment in proximity to the wearer's face.

[0068] Thus, there is shown and described a unique design and concept of a headgear system including an air filtration and control system. While this description is directed to a particular embodiment, it is understood that those skilled in the art may conceive modifications and/or variations to the specific embodiments shown and described herein. Any such modifications or variations which fall within the purview of this description are intended to be included therein as well. It is understood that the description herein is intended to be illustrative only and is not intended to be limitative. Rather, the scope of the invention described herein is limited only by the claims appended hereto.

1. A protective headgear system comprising,
a supportive shell,
a facial shield adapted to be attached to said supportive shell by conforming said facial shield to the perimeter of said supportive shell,
a filtration device adapted to be mounted on top of said supportive shell and substantially secured thereto by said facial shield,
a protective covering adapted to be mounted to the lower portion of said facial shield, and
a filter protector adapted to be mounted to an upper portion of said facial shield over said filtration device.

2. The system recited in claim **1** wherein,
at least portions of said filtration device are compressed between said filter protector and said facial shield.

3. The system recited in claim **1** including,
a headband adapted to be attached to the interior of said supportive shell.

4. The system recited in claim **1** wherein,
said supportive shell includes at least one spacer device thereon for supporting said filtration device.

5. The system recited in claim **1** wherein,
said filter protector includes at least one spacer for establishing a space between said filter protector and said facial shield to permit air flow through said space.

6. The system recited in claim **1** wherein,
said protective covering comprises a layer of air permeable material.

7. The system recited in claim **1** wherein,
said protective covering includes an aperture therein.

8. The system recited in claim **7** wherein,
said protective covering includes an adjustable closure means for substantially closing said aperture.

9. The system recited in claim **8** wherein,
said adjustable closure means comprises an elastic element around at least a portion of said aperture.

10. The system recited in claim **1** wherein,
said filter protector is selectively removable from said facial shield.

11. The system recited in claim **1** wherein,
said protective covering is mounted to said facial shield below said supportive shell.

12. The system recited in claim **1** including,
zipper means for connecting said protective covering to a bottom edge of said facial shield.

13. The system recited in claim **14** including,
fan means mounted to said supportive shell below said filtration device.

14. The system recited in claim **3** wherein,
said facial shield and said shield protector are substantially transparent to light.

15. The system recited in claim **1** wherein,
said protective covering is fabricated of a flexible breathable material which substantially prevents transmission of particulate material therethrough.

16. The system recited in claim **1** wherein,
said facial shield, said filtration device and said filter protector are assembled as a unit.

17. The system recited in claim **1** including,
a supportive frame, and
a filter device adapted to be mounted on top of said supportive frame,
said supportive frame and said filter device mounted intermediate said filtration device and said supportive shell.

18. The system recited in claim **17** wherein,
said filter device conforms to the shape of said supportive frame.

19. The system recited in claim **17** including,
a support means on said supportive shell to space said filtration device away from said supportive shell.

20. A protective headgear system comprising,
a supportive shell,
a facial shield adapted to be attached to said supportive shell by conforming said facial shield to the perimeter of said supportive shell,
a filtration device adapted to be mounted on top of said supportive shell and substantially secured thereto by said facial shield,
a supportive frame,
a filter device adapted to be mounted on top of said supportive frame,
said supportive frame and said filter device mounted intermediate said filtration device and said supportive shell,
a protective covering adapted to be mounted to the lower portion of said facial shield, and
a filter protector adapted to be mounted to an upper portion of said facial shield over said filtration device.

* * * * *