



(51) International Patent Classification:

C03B 23/02 (2006.01) *C03B 23/03* (2006.01)
C03B 23/025 (2006.01) *C03B 35/24* (2006.01)
C03B 23/035 (2006.01)

(21) International Application Number:

PCT/US2012/023561

(22) International Filing Date:

2 February 2012 (02.02.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/033,817 24 February 2011 (24.02.2011) US

(71) **Applicant** (for all designated States except US): **CORNING INCORPORATED** [US/US]; 1 Riverfront Plaza, Corning, New York 14831 (US).

(72) Inventors; and

(75) **Inventors/Applicants** (for US only): **DANNOUX, Thierry Luc Alain** [FR/FR]; 18 Petit Bel Ebat, F-77210 Avon (FR). **DELAUTRE, Paul** [FR/FR]; 7 Rue Chretien de Troyes, F-91090 Lisses (FR). **FLORENT, Frederic Henri** [FR/FR]; 7 Rue Pasteur, F-77300 Fontainebleau (FR). **FREDHOLM, Allan Mark** [FR/FR]; Le Clos Mallarme, 3 Route d'Hericy, F-77870 Vulaines sur Seine (FR). **HERVE, Patrick Jean Pierre** [FR/FR]; 16 rue de la charite, F-77210 Avon (FR). **LEREBOULLET, Jean-Pierre H** [FR/FR]; 13 allée des Cerisiers, F-77590 Bois le Roi

(FR). **POISSY, Stephane** [FR/FR]; 39 avenue Numance Bouel, F-91800 Brunoy (FR).

(74) **Agent: SANTANDREA, Robert P**; Corning Incorporated, Intellectual Property Department, SP-Ti-03-01, Corning, New York 14831 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** APPARATUS AND METHOD FOR MASS PRODUCING 3D ARTICLES FROM 2D GLASS-CONTAINING SHEETS

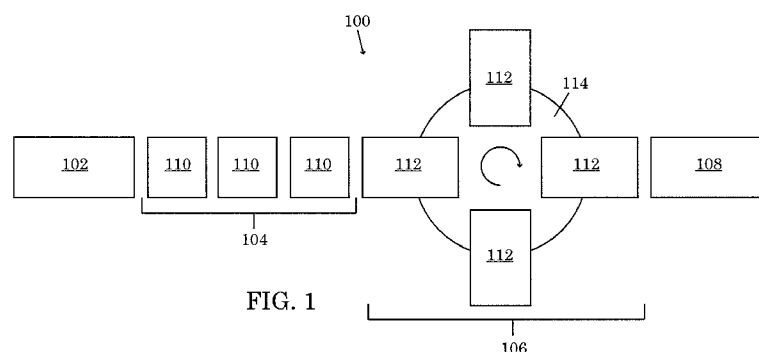


FIG. 1

(57) **Abstract:** An apparatus for mass production of 3D articles from 2D glass-containing sheets includes a heating section having a heating station that includes a heating chamber adapted to receive a 2D glass-containing sheet, a pneumatic bearing system proximate to the heating chamber for suspending the 2D glass-containing sheet inside the heating chamber, and a heater system proximate to the heating chamber for supplying heat to the heating chamber. A forming section downstream of the heating section has a forming station that includes a mold system adapted to shape a heated 2D glass-containing sheet into a 3D article. A cooling section downstream of the forming section has a cooling chamber adapted to controllably cool off one or more 3D articles. A method of mass producing 3D articles from 2D glass-containing sheets involves use of the apparatus.

APPARATUS AND METHOD FOR MASS PRODUCING 3D ARTICLES FROM 2D GLASS-CONTAINING SHEETS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of priority under 35 U.S.C. § 120 of U.S. Application Serial No. 13/033,817 filed on February 24, 2011, the content of which is relied upon and incorporated herein by reference in its entirety.

BACKGROUND

[0002] Methods for producing three-dimensional (3D) articles by thermally reforming two-dimensional (2D) glass sheets are known from, for example, International Publication Numbers WO2010/002446, WO2010/061238, WO2010/065371, and WO2010/065349, all by Corning Incorporated et al. These methods generally involve loading a 2D glass sheet onto a relatively cold mold, heating the mold and the 2D glass sheet to an elevated temperature at which the glass sheet can be deformed, shaping the 2D glass sheet into a desired 3D article using the mold, cooling the 3D article in the mold, and unloading the 3D article from the mold. These methods have in common a very long residence time of the glass in the mold, i.e., from the time the glass is loaded into the mold to the time the glass is unloaded from the mold. Typical residence times are between 6 minutes and 1 hour. Mass production of 3D articles using these methods would have a low throughput and require a large number of molds.

SUMMARY

[0003] In one aspect of the present invention, an apparatus for mass producing 3D articles from 2D glass-containing sheets comprises a heating section comprising a heating station. The heating station comprises a heating chamber adapted to receive a 2D glass-containing sheet, a pneumatic bearing system proximate to the heating chamber for suspending the 2D glass-containing sheet inside the heating chamber, and a heater system proximate to the heating chamber for supplying heat to the heating chamber. The apparatus further includes a forming section downstream of the heating section. The forming section comprises a forming station. The forming station comprises a mold system adapted to shape a heated 2D glass-containing sheet into a 3D article. The

apparatus further includes a cooling section downstream of the forming section. The cooling section comprises a cooling chamber adapted to controllably cool off one or more 3D articles.

[0004] In one embodiment, the apparatus further comprises a preheating section upstream of the heating section, and the preheating section comprises a preheating chamber adapted to receive one or more 2D glass-containing sheets and a heating system proximate to the preheating chamber for supplying heat to the preheating chamber.

[0005] In one embodiment, the apparatus further comprises a conveyor disposed inside the preheating chamber for moving the one or more 2D glass-containing sheets along the preheating chamber.

[0006] In one embodiment, the apparatus further comprises means for transferring a preheated 2D glass-containing sheet from the preheating section to the heating section, means for transferring a heated 2D glass-containing sheet from the heating section to the forming section, and means for transferring a 3D article from the forming section to the cooling section.

[0007] In one embodiment, the apparatus further comprises a conveyor disposed inside the cooling chamber for moving the one or more 3D articles along the cooling chamber.

[0008] In one embodiment, the apparatus further comprises means for transferring a heated 2D glass-containing sheet from the heating section to the forming section and means for transferring a 3D article from the forming section to the cooling section.

[0009] In one embodiment, the means for transferring a heated 2D glass-containing sheet from the heating section to the forming section includes a mechanism for selectively creating a pneumatic ram effect in the heating chamber that ejects the heated 2D glass-containing sheet from the heating chamber.

[0010] In one embodiment, the mechanism for selectively creating a pneumatic ram effect comprises a door, shutter, or gate mounted at an inlet of the heating chamber, where the door, shutter, or gate is operable to open or close the inlet of the heating chamber.

[0011] In one embodiment, the pneumatic bearing system comprises a pair of opposed pneumatic bearings, and the heating system of the heating section comprises a pair of opposed heaters.

[0012] In one embodiment, the heating section further comprises a pair of actuators disposed in the heating chamber and controllable to define an area within the heating chamber where a 2D glass-containing sheet is constrained while being heated within the heating chamber.

[0013] In one embodiment, the heating section of the apparatus comprises at least one additional heating station and means for transferring a heated 2D glass-containing sheet from one heating station to another heating station.

[0014] In one embodiment, the forming section comprises at least one additional forming station.

[0015] In one embodiment, the forming stations are mounted on a rotatable support to enable selective alignment of the each forming station with the heating section.

[0016] In one embodiment, the mold system comprises a first mold having a cavity defined by a first 3D surface.

[0017] In one embodiment, at least one vacuum port is provided in the mold for applying vacuum to the first 3D surface.

[0018] In one embodiment, the mold system comprises a second mold having a protrusion defined by a second 3D surface, where the protrusion is adapted to be received in the cavity defined by the first 3D surface.

[0019] In one embodiment, at least one vacuum port is provided in at least one of the first and second molds for applying vacuum to at least one of the first and second 3D surfaces.

[0020] In another aspect of the present invention, a method of mass producing 3D articles from 2D glass-containing sheets comprises periodically loading a 2D glass-containing sheet into a preheating chamber and heating the 2D glass-containing sheet to a first temperature. The method further includes periodically transferring a preheated 2D glass-containing sheet from the preheating chamber into a heating chamber, suspending the preheated 2D glass-containing sheet inside the heating chamber by pneumatic pressure, and heating the preheated 2D glass-containing sheet to a second temperature range higher than the first temperature. The method further includes periodically ejecting a heated 2D glass-containing sheet from the heating chamber into a mold system and forming the heated 2D glass-containing sheet into a 3D shape in the mold system. The method further includes periodically unloading a 3D article from the mold system into a cooling chamber and controllably cooling off the 3D article to a third temperature lower than the second temperature.

[0021] In one embodiment, forming the heated 2D glass-containing sheet comprises one of pressing, vacuum sagging, and pressure forming the heated 2D glass-containing sheet.

[0022] In one embodiment, periodically unloading a 3D article comprises (i) vacuum clamping the 3D article to a mold surface, releasing the 3D article onto a support, and transferring the

support and 3D article to the cooling chamber or (ii) grabbing the 3D article with a vacuum chuck, releasing the 3D article onto a support, and transferring the support and 3D article to the cooling chamber.

[0023] In one embodiment, the method further comprises coordinating the timing of the steps of the method such that 3D articles are produced from 2D glass-containing sheets substantially continuously over a selected time period.

[0024] Other aspects of the present invention will be apparent from the following description and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] The following is a description of the figures in the accompanying drawings. The figures are not necessarily to scale, and certain features and certain views of the figures may be shown exaggerated in scale or in schematic in the interest of clarity and conciseness.

[0026] FIG. 1 is a block diagram of an apparatus for producing 3D articles from 2D glass-containing sheets.

[0027] FIG. 2 is a detailed diagram of a preheating section.

[0028] FIG. 3 is a detailed diagram of a heating station.

[0029] FIG. 4A is a detailed diagram of a forming station.

[0030] FIG. 4B is another detailed diagram of a forming station.

[0031] FIG. 4C is another detailed diagram of a forming station.

[0032] FIG. 5 is a detailed diagram of a cooling section.

[0033] FIG. 6A shows a step in a method of unloading a 3D article from a pressing mold arrangement.

[0034] FIG. 6B shows another step in a method of unloading a 3D article from a pressing mold arrangement.

[0035] FIG. 7 shows a method of unloading a 3D article from a sag mold.

DETAILED DESCRIPTION

[0036] In the following detailed description, numerous specific details may be set forth in order to provide a thorough understanding of embodiments of the invention. However, it will be clear to one skilled in the art when embodiments of the invention may be practiced without some or all

of these specific details. In other instances, well-known features or processes may not be described in detail so as not to unnecessarily obscure the invention. In addition, like or identical reference numerals may be used to identify common or similar elements.

[0037] In FIG. 1, an apparatus 100 for mass producing 3D articles from 2D glass-containing sheets includes a preheating section 102, a heating section 104, a forming section 106, and a cooling section 108. The heating section 104 is located downstream of the preheating section 102, the forming section 106 is located downstream of the heating section 104, and the cooling section 108 is located downstream of the forming section 106. 2D glass-containing sheets are loaded into the preheating section 102, heated in the preheating section 102 to a certain temperature, passed on to the heating section 104 for additional heating, and then passed on to the forming section 106 for forming into 3D articles. The 3D articles are passed on to the cooling section 108 for controlled cooling off. In one embodiment, the preheating section 102, heating section 104, forming section 106, and cooling section 108 are designed such that production of the 3D articles is substantially continuous over a selected time period.

[0038] Every time interval T_1 , the preheating section 102 receives a 2D glass-containing sheet from an external source. The 2D glass-containing sheet may be a 2D glass sheet or a 2D glass-ceramic sheet. The length of the preheating section 102 is such that the preheating section 102 can accommodate a plurality of 2D glass-containing sheets at the same time. Typically, the 2D glass-containing sheets are cold, e.g., at room temperature, when loaded into the preheating section 102. The preheating section 102 heats the 2D glass-containing sheets it receives to a preheated temperature within a first temperature range. In one embodiment, the first temperature range is defined as $[T_a - \delta_1, T_a + \delta_2]$, where T_a is the annealing point and δ_1 , δ_2 are some step temperatures away from the annealing point, where δ_1 and δ_2 may or may not be the same. Alternatively, the first temperature range could be defined as the temperature range at which the viscosity of the 2D glass-containing sheets is in a range from 10^{13} Poise to 10^{16} Poise.

[0039] Every time interval T_2 , the heating section 104 receives a preheated 2D glass-containing sheet from the preheating section 102 and heats the preheated 2D glass-containing sheet to a forming temperature within a second temperature range. The forming temperature is greater than the preheated temperature. In one embodiment, the second temperature range is defined as $[T_a, T_s]$, where T_a is the annealing point of the 2D glass-containing sheet and T_s is the softening point of the 2D glass-containing sheet. Alternatively, the second temperature range could be defined as

the temperature range at which the viscosity of the 2D glass-containing sheet is in a range from 10^8 Poise to 2×10^{10} Poise. The heating section 104 includes one or more heating stations 110. The heating of the 2D glass-containing sheets occur inside the heating stations 110. When the heating section 104 includes more than one heating station 110, heating of the 2D glass-containing sheet may be shared among the heating stations 110. Each heating station 110 can be controlled to deliver a certain amount of heat to the 2D glass-containing sheet so that at the end of the heating section 104 the 2D glass-containing sheet is at the desired forming temperature. The amount of heat delivered by the individual heating stations 110 may or may not be the same, i.e., the amount of heat delivered by a heating station may either be the same or may differ from that delivered by other heating stations.

[0040] Every time interval T_3 , the forming section 106 receives a heated 2D glass-containing sheet at forming temperature from the heating section 104. In the forming section 106, the heated 2D glass-containing sheet is shaped (or formed) into a 3D article. Any suitable mold-based shaping (or forming) method may be used to shape the 2D glass-containing sheet into the 3D article. Examples of mold-based shaping processes include pressing, pressure forming, and vacuum sagging. The forming section 106 includes one or more forming stations 112, where the shaping of the 2D glass-containing sheet occurs inside the forming stations 112. When the forming section 106 includes more than one forming station 112, the forming stations 112 may be mounted on a rotatable support or carousel 114 in a radial pattern. Every time interval T_4 , the carousel 114 rotates so that a forming station 112 can be aligned with the heating section 104 to receive a heated 2D glass-containing sheet from the heating section 104.

[0041] Every time interval T_5 , the cooling section 108 receives a 3D article from the forming section 106. The length of the cooling section 108 is such that the cooling section 108 can accommodate a plurality of 3D articles at the same time. The cooling section 108 allows controlled cooling off of the 3D articles it receives to a handling temperature in a third temperature range. In one embodiment, the third temperature range is defined as the temperature range at which the viscosity of the 3D article is greater than 10^{13} Poise. Where the forming section 106 has multiple forming stations 112, there is more flexibility in when to load a 2D glass-containing sheet from the heating section 104 into the forming section 106 and when to unload a 3D article from the forming section 106 into the cooling section 108. For example, it is possible to load a 2D glass-containing sheet from the heating section 104 into a first forming

station 112 before, while, or after unloading a 3D article from a second forming station 112 into the cooling section 108. All the time intervals mentioned above and geometrical and thermal characteristics of the sections of the apparatus 100 can be selected so that production of the 3D articles is substantially continuous over a selected time period.

[0042] In FIG. 2, the preheating section 102 includes a preheating chamber 200 and a heating system having heaters 202, 204 proximate to and on opposite sides of the preheating chamber 200. The heaters 202, 204 are for heating 2D glass-containing sheets 206 inside the preheating chamber 200. Each of the heaters 202, 204 may comprise one or more heating elements. Any suitable heaters or heating elements may be used. A conveyor 208, such as a roll conveyor or any other suitable linear travel mechanism, is disposed in the preheating chamber 200 to transport the 2D glass-containing sheets 206 along the preheating chamber 200. The 2D glass-containing sheets 206 can be loaded into the preheating chamber 200 from the upstream (left) side of the preheating section 102 and offloaded from the preheating chamber 200 from the downstream (right) side of the preheating section 102. A retractable push mechanism 210 may be selectively inserted into the preheating chamber 200 and used to push the 2D glass-containing sheets out of the preheating section 102 into the heating section (104 in FIG. 1).

[0043] In FIG. 3, each heating station 110 includes a heating chamber 300, a pneumatic bearing system having a pair of pneumatic bearings 302, 304, e.g., air bearings, proximate to and on opposite sides of the heating chamber 300. The heating station 110 also includes a heating system having a pair of heaters 306, 308 proximate to and on opposite sides of the heating chamber 300. The pneumatic bearings 302, 304 are for suspending a 2D glass-containing sheet 310 in the heating chamber 300. The heaters 306, 308 are for heating the 2D glass-containing sheet 310 in the heating chamber 300. The heaters 306, 308 include a plurality of heating elements 324, 326, respectively, although it is possible for each of the heaters 306, 308 to include only a single heating element. The pneumatic bearings 302, 304 suspend the 2D glass-containing sheet 310 in the heating chamber 300 without making physical contact with the 2D glass-containing sheet 310. This helps preserve the surface quality of the 2D glass-containing sheet 310 when the 2D glass-containing sheet 310 is heated to the higher forming temperature where surface stickiness is of concern because of the lower glass viscosity. Each of the pneumatic bearings 302, 304 have plenums 312, 314 and porous plates 316, 318, respectively. The plenums 312, 314 have inlet ports 320, 322 that can be connected to a pneumatic fluid source, e.g., an air

source. The pneumatic fluid in the plenums 312, 314 is discharged to the porous plates 316, 318 and distributed through the porous plates 316, 318 to the heating chamber 300. The porous plates 316, 318 may be a plate of porous material, e.g., mullite. Alternatively, the porous plates 316, 318 may be plates in which pores are formed. It is possible for the pneumatic bearing system to have only one pneumatic bearing instead of two opposed pneumatic bearing. However, the 2D glass-containing sheet may be prone to distortion if only one pneumatic bearing is used. The two opposed pneumatic bearings exert opposing pneumatic forces on the opposite surfaces of the 2D glass-containing sheet. These opposing forces are balanced so that distortion of the 2D glass-containing sheet is minimized.

[0044] Each heating station 110 in the heating section (104 in FIG. 1) receives a 2D glass-containing sheet 310 from the preheating section (102 in FIG. 1) or from a preceding heating station (110 in FIG. 1). Once inside each heating station 110, the 2D glass-containing sheet 310 is suspended inside the heating chamber 300 by pneumatic pressure, as explained above, and heated to an elevated temperature. The elevated temperature may or may not be a forming temperature depending on the location of the heating station 110 in the heating section (104 in FIG. 1) or the number of heating stations 110 in the heating section (104 in FIG. 1). However, at the last heating station 110 in the heating section (104 in FIG. 1), the 2D glass-containing sheet 310 would have the desired forming temperature.

[0045] In one embodiment, each heating station 110 includes an ejector mechanism to assist in ejecting the 2D glass-containing sheet 310 from the heating chamber 300 into the next heating station (110 in FIG. 1) or forming section (106 in FIG. 1) without touching the 2D glass-containing sheet. As mentioned above, stickiness of the glass is of concern at the forming temperature. Therefore, it is desirable to avoid touching the surfaces of the 2D glass-containing sheet, at least in the quality area of the 2D glass-containing sheet. In one embodiment, the ejector mechanism includes a door or shutter or gate 328 mounted at the upstream (left) end of each heating station 110. The door, shutter, or gate 328 can be moved in one direction to temporarily seal off the opening 329 at the upstream end of the heating station 110 and thereby create a pneumatic ram effect within the heating chamber 300 of the heating station 110 that would eject the 2D glass-containing sheet from the heating chamber 300. The ejection speed is determined by the pneumatic pressure within the heating chamber 300 after the door, shutter, or gate 328 is closed, and the pneumatic pressure within the heating chamber 300 at any time is determined by

the pneumatic bearings 302, 304. The pneumatic pressure within the heating chamber 300 can be adjusted by changing the height of the gaps between the porous plates 316, 318 and the 2D glass-containing sheet 310 and by changing the rate at which pneumatic fluid is supplied to the plenums 312, 314. In general, the ejection speed should be high enough to propel the 2D glass-containing sheet to the next heating station 110 or forming section (106 in FIG. 1), but should not be too high as to result in the 2D glass-containing sheet rebounding or striking unintended objects. After the 2D glass-containing sheet 310 has been ejected from the heating chamber 300, the door, shutter, or gate 328 can be moved in another direction to unseal the upstream (left) end of the heating station 110 and thereby remove the pneumatic ram effect as well as allow another 2D glass-containing sheet to be loaded into the heating station 110.

[0046] In one embodiment, a pair of actuators 301, 303, such as linear actuators, are located in the heating chamber 300 to confine movement of the 2D glass-containing sheet to a defined area 305 within the heating chamber 300 while the 2D glass-containing sheet is being heated within the heating chamber 300. Without the actuators 301, 303, the 2D glass-containing sheet 310 will be free to move all along the heating chamber 300. If there are irregularities in the temperature homogeneity in the heating chamber 300, each new 2D glass-containing sheet 310 received in the heating chamber 300 will experience a different heating than the previous 2D glass-containing sheet 310 received in the heating chamber 300. By constraining each 2D glass-containing sheet 310 received in the heating chamber 300 within the same area 305 of the heating chamber 300, each 2D glass-containing sheet 310 received in the heating chamber 300 will experience approximately the same heating. The spacing between the actuators 301, 303 is generally slightly greater than the length of the 2D glass-containing sheet 310, e.g., 5% to 35% greater, the length being defined as the dimension of the 2D glass-containing sheet 310 to be constrained between the actuators 301, 303. In general, the spacing between the actuators 301, 303 will be selected to achieve the desired reproducibility of heating within the constraints of the length of the heating chamber 300. The distance between the actuator 303 closest to the exit side 307 of the heating chamber 300 and the exit side 307 of the heating chamber 300 should be sufficient to provide a guiding length to the 2D glass-containing sheet 310 during ejection of the 2D glass-containing sheet 310 from the heating chamber 300. The ejection of the 2D glass-containing sheet 310 from the heating chamber 300 begins with retracting the actuator 303 to

open a pathway for ejection of the 2D glass-containing sheet 310. After the pathway is open, the door, shutter, or gate 328 is closed to create the pneumatic ram effect described above.

[0047] The configuration of the forming station (112 in FIG. 1) depends on the method to be used in shaping the 2D glass-containing sheet into a 3D article. In FIG. 4A, the forming station 112 is configured for forming a 3D article from a 2D glass-containing sheet by pressing. The forming station 112 includes opposed plunger mold (or top mold) 400 and cavity mold (or bottom mold) 402. The plunger mold 400 includes a protrusion 404 defined by a 3D surface 406. The cavity mold 402 includes a cavity 408 defined by a 3D surface 410. The 3D surface 406 of the protrusion 404 will shape the inner surface of the 3D article to be formed, and the 3D surface 410 of the cavity 408 will shape the outer surface of the 3D article to be formed. The protrusion 404 is sized to be received in the cavity 408. To form the 3D article, a 2D glass-containing sheet 412 is placed on the cavity mold 402. Features such as alignment pins can be used to precisely place the 2D glass-containing sheet 412 on the cavity mold. Then, the plunger mold 400 is used to press the 2D glass-containing sheet 412 into the cavity 408. Heaters 414, 416 may be provided to heat the molds 400, 402 so that the 2D glass-containing sheet 412 is not contacted by cold molds. The molds 400, 402 do not have to be as hot as the 2D glass-containing sheet 412.

[0048] In FIG. 4B, a forming station 112A is configured for forming a 3D article from a 2D glass-containing sheet by pressure forming. The forming station 112A has a cavity mold 420 having a cavity 422 defined by a 3D surface 423. The orientation of the cavity mold 420 is upside down. At least one vacuum port 424 is provided in the cavity mold 420 for applying vacuum to the cavity 422 or 3D surface 423. When a 2D glass-containing sheet is ejected into the forming station 112A, the 2D glass-containing sheet is pulled upward into the cavity 422 by vacuum, thereby forming the 3D article 426. A heater 428 is provided to heat the mold 420. The mold 420 need not be as hot as the 2D glass-containing sheet formed into the 3D article 426. Although not shown, a support having a cavity may be placed below the cavity mold 420 and used to support the 2D glass-containing sheet prior to the 2D glass-containing sheet being pulled into the cavity 422 by vacuum. Also, the cavity mold 420 may be replaced by a plunger mold, such as shown at 400 in FIG. 4A. The plunger mold used in the forming station 112A would have at least one vacuum port, similar to vacuum port 424, for applying vacuum to the shaping surface of the mold. When vacuum is applied through the vacuum port, the 2D glass-containing

sheet will be pulled up against the shaping surface. In the case of the plunger mold, the shaping surface is not in a cavity but on a protrusion.

[0049] In FIG. 4C, a forming station 112B is configured for forming a 3D article from a 2D glass-containing sheet by vacuum sagging. The forming station 112B has a cavity (sag) mold 430 having a cavity 432 defined by a 3D surface 433. At least one vacuum port 434 is provided in the cavity mold 430 for applying a vacuum to the cavity 432. A 2D glass-containing sheet 436 to be formed into a 3D article is placed on the cavity mold 420. Features such as alignment pins may be used to precisely place the 2D glass-containing sheet 436 on the cavity mold 430.

Vacuum is applied to the cavity 432 to sag the 2D glass-containing sheet 436 into the cavity 432 and thereby form the 3D article. The 2D glass-containing sheet 436 can also be allowed to sag partly into the cavity by gravity. Then, the vacuum can be applied to completely sag the 2D glass-containing sheet 436 into the cavity and thereby form the 3D article. A heater 438 is provided to heat the mold 430. The mold 430 need not be as hot as the 2D glass-containing sheet 436, which when placed on the mold 430 has a temperature in the second temperature range.

[0050] In FIG. 5, the cooling section 108 includes a cooling chamber 500 surrounded by a muffle 502. The muffle 502 is made of an insulating material and controls the rate of heat loss from the cooling chamber 500 when one or more 3D articles 504 are in the cooling chamber 500. The muffle 502 may be equipped with heating elements to prevent rapid or nonuniform loss of heat from the 3D articles 504 in the cooling chamber 500. A conveyor 506, such as a roll conveyor or any other suitable linear travel mechanism, is disposed in the cooling chamber 500 to transport the 3D articles 504 along the cooling chamber 500. The 3D articles 504 are loaded into the upstream end (left end) of the cooling chamber 500 from the forming section 106 and unloaded from the downstream end (right end) of the cooling chamber 500.

[0051] In FIGS. 6A and 6B, a method of unloading a 3D article 600 from the pressing mold arrangement shown in FIG. 4A includes clamping the 3D article 600 to the plunger mold 400 by vacuum. A support 602 is placed below the 3D article 600. Then, the clamping vacuum is removed to release the 3D article 600 onto the support 602. The 3D article 600 is allowed to cool off slightly before it is unloaded so that stickiness between the support 602 and the 3D article 600 is avoided. In addition, the surface of the support 602 may be made of or coated with a suitable non-sticky material. The support 602 and 3D article 600 can be placed on the conveyor (506 in FIG. 5) in the cooling chamber (500 in FIG. 5). An unloading method similar to the one

shown in FIGS. 6A and 6B can also be used for the pressure forming mold arrangement shown in FIG. 4B. In FIG. 7, a method of unloading a 3D article 700 from the sag mold 430 (previously shown in FIG. 4C) includes grabbing the 3D article with a vacuum chuck 702. The 3D article 700 can be released onto a support, such as 602 in FIG. 6B, and the support and 3D article 700 can be transferred to the cooling chamber (500 in FIG. 5).

[0052] The apparatus and method described above allows high-quality 3D articles to be formed from 2D glass-containing sheets at high speeds, e.g., up to around six 3D articles per minute per mold system. Use of a pneumatic bearing system to support the 2D glass-containing sheet in a heating chamber allows the surface quality of the 2D glass-containing sheet to be maintained while the 2D glass-containing sheet is heated in the heating chamber. The number of mold systems needed in the apparatus and method described above is the same as the number of forming stations. Thus, for example, if the apparatus includes four forming stations, only four mold systems would be needed. With a small number of mold systems, 3D articles can be produced substantially continuously from 2D glass-containing sheets using the apparatus and method described above.

[0053] While the invention has been described with respect to a limited number of embodiments, those skilled in the art, having benefit of this disclosure, will appreciate that other embodiments can be devised which do not depart from the scope of the invention as disclosed herein. Accordingly, the scope of the invention should be limited only by the attached claims.

CLAIMS

1. An apparatus for mass producing 3D articles from 2D glass-containing sheets, comprising:
 - a heating section comprising a heating station, the heating station comprising a heating chamber adapted to receive a 2D glass-containing sheet, a pneumatic bearing system proximate to the heating chamber for suspending the 2D glass-containing sheet inside the heating chamber, and a heater system proximate to the heating chamber for supplying heat to the heating chamber;
 - a forming section downstream of the heating section, the forming section comprising a forming station, the forming station comprising a mold system adapted to shape a heated 2D glass-containing sheet into a 3D article; and
 - a cooling section downstream of the forming section, the cooling section comprising a cooling chamber adapted to controllably cool off one or more 3D articles.
2. The apparatus of claim 1, further comprising a preheating section upstream of the heating section, the preheating section comprising a preheating chamber adapted to receive one or more 2D glass-containing sheets and a heating system proximate to the preheating chamber for supplying heat to the preheating chamber.
3. The apparatus of claim 2, further comprising a conveyor disposed inside the preheating chamber for moving the one or more 2D glass-containing sheets along the preheating chamber.
4. The apparatus of claim 2, further comprising means for transferring a preheated 2D glass-containing sheet from the preheating section to the heating section, means for transferring a heated 2D glass-containing sheet from the heating section to the forming section, and means for transferring a 3D article from the forming section to the cooling section.
5. The apparatus of claim 1, further comprising a conveyor disposed inside the cooling chamber for moving the one or more 3D articles along the cooling chamber.

6. The apparatus of claim 1, further comprising means for transferring a heated 2D glass-containing sheet from the heating section to the forming section and means for transferring a 3D article from the forming section to the cooling section.
7. The apparatus of claim 6, wherein the means for transferring a heated 2D glass-containing sheet from the heating section to the forming section includes a mechanism for selectively creating a pneumatic ram effect in the heating chamber that ejects the heated 2D glass-containing sheet from the heating chamber.
8. The apparatus of claim 7, wherein the mechanism for selectively creating a pneumatic ram effect comprises a door, shutter, or gate mounted at an inlet of the heating chamber, the door, shutter, or gate being operable to open or close the inlet of the heating chamber.
9. The apparatus of claim 1, wherein the pneumatic bearing system comprises a pair of opposed pneumatic bearings and the heating system comprises a pair of opposed heaters.
10. The apparatus of claim 1, wherein the heating section comprises at least one additional heating station and means for transferring a heated 2D glass-containing sheet from one heating station to another heating station.
11. The apparatus of claim 1, wherein the forming section comprises at least one additional forming station.
12. The apparatus of claim 11, wherein the forming stations are mounted on a rotatable support to enable selective alignment of each forming station with the heating section.
13. The apparatus of claim 1, wherein the mold system comprises a first mold having a cavity defined by a first 3D surface.
14. The apparatus of claim 13, wherein at least one vacuum port is provided in the mold for applying vacuum to the first 3D surface.
15. The apparatus of claim 13, wherein the mold system comprises a second mold having a protrusion defined by a second 3D surface, the protrusion being adapted to be received in the cavity defined by the first 3D surface.

16. The apparatus of claim 15, wherein at least one vacuum port is provided in at least one of the first and second molds for applying vacuum to at least one of the first and second 3D surfaces.
17. A method of mass producing 3D articles from 2D glass-containing sheets, comprising:
 - (a) periodically loading a 2D glass-containing sheet into a preheating chamber and heating the 2D glass-containing sheet to a first temperature;
 - (b) periodically transferring a preheated 2D glass-containing sheet from the preheating chamber into a heating chamber, suspending the preheated 2D glass-containing sheet inside the heating chamber by pneumatic pressure, and heating the preheated 2D glass-containing sheet to a second temperature higher than the first temperature;
 - (c) periodically ejecting a heated 2D glass-containing sheet from the heating chamber into a mold system and forming the heated 2D glass-containing sheet into a 3D shape in the mold system; and
 - (d) periodically unloading a 3D article from the mold system into a cooling chamber and controllably cooling off the 3D article to a third temperature lower than the second temperature.
18. The method of claim 17, wherein forming of step (c) comprises one of pressing, vacuum sagging, and pressure forming the heated 2D glass-containing sheet.
19. The method of claim 17, wherein unloading of step (d) comprises (i) vacuum clamping the 3D article to a mold surface, releasing the 3D article onto a support, and transferring the support and 3D article to the cooling chamber or (ii) grabbing the 3D article with a vacuum chuck, releasing the 3D article onto a support, and transferring the support and 3D article to the cooling chamber.
20. The method of claim 17, further comprising coordinating timing of steps (a) through (d) such that 3D articles are produced from 2D glass-containing sheets substantially continuously over a selected time period.

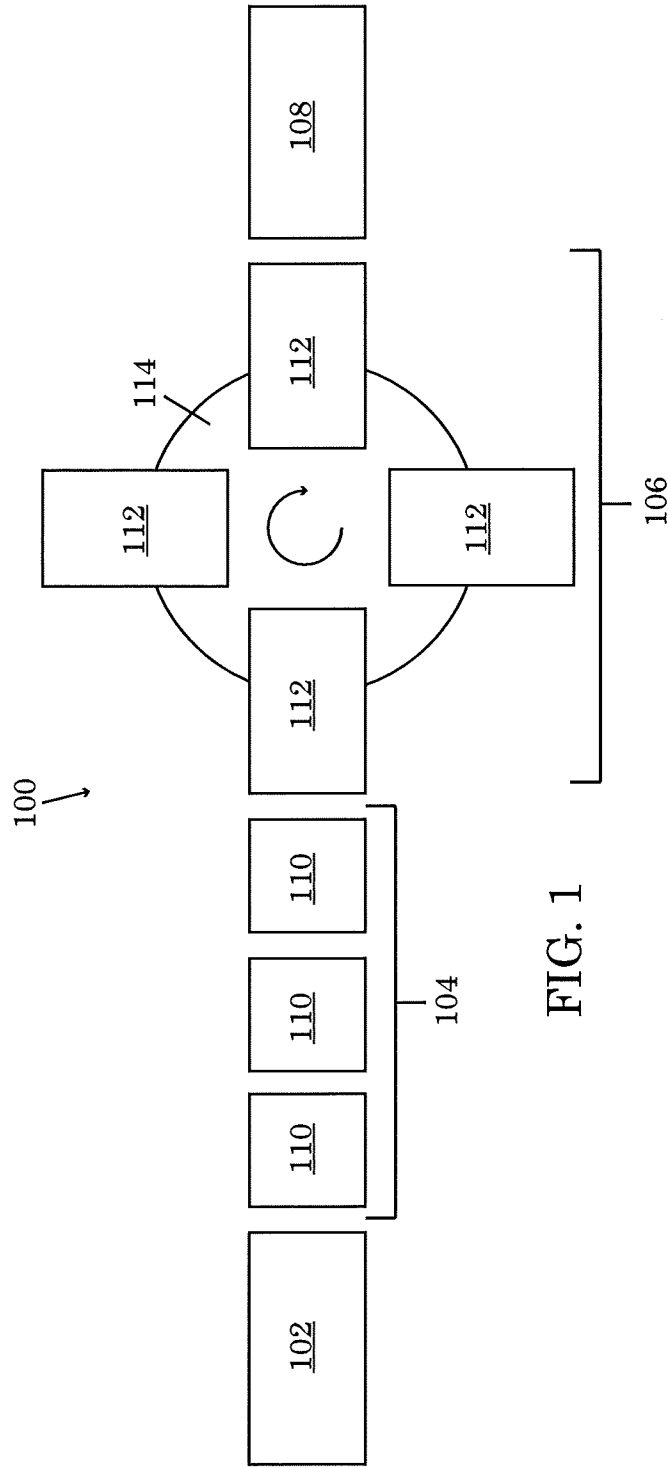


FIG. 1

2/5

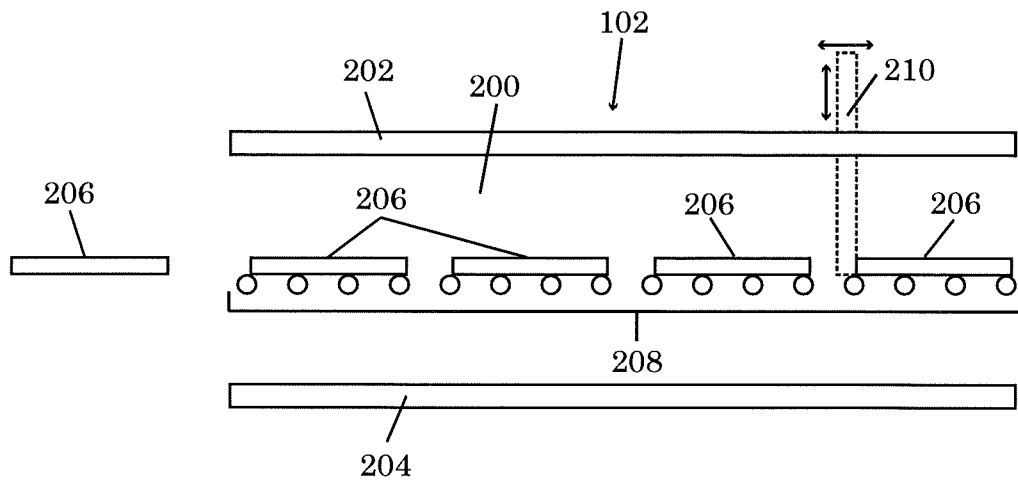


FIG. 2



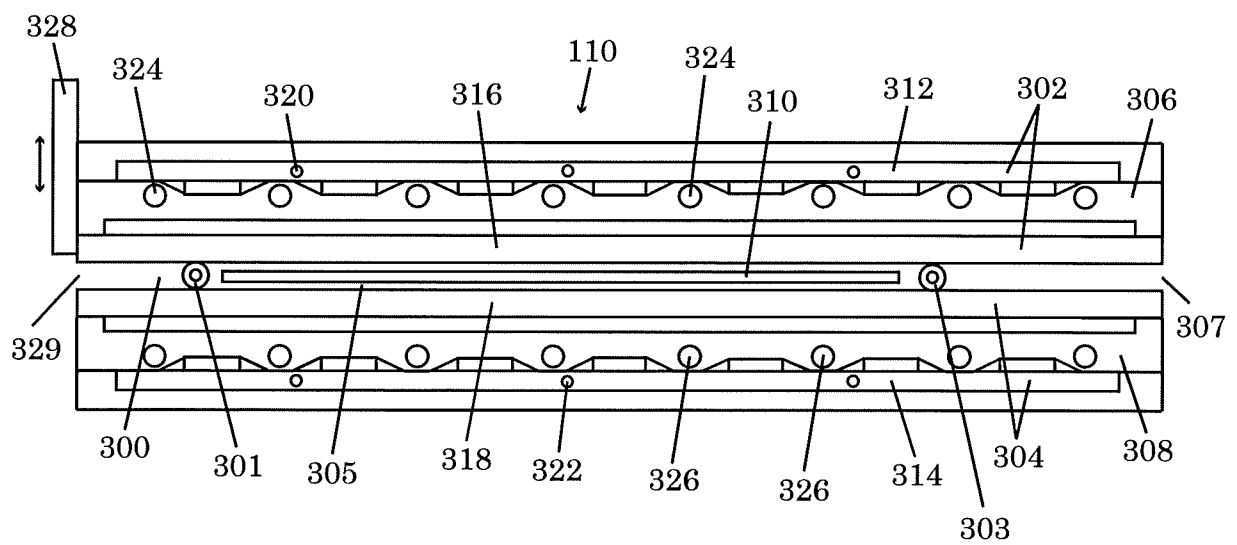


FIG. 3

3/5

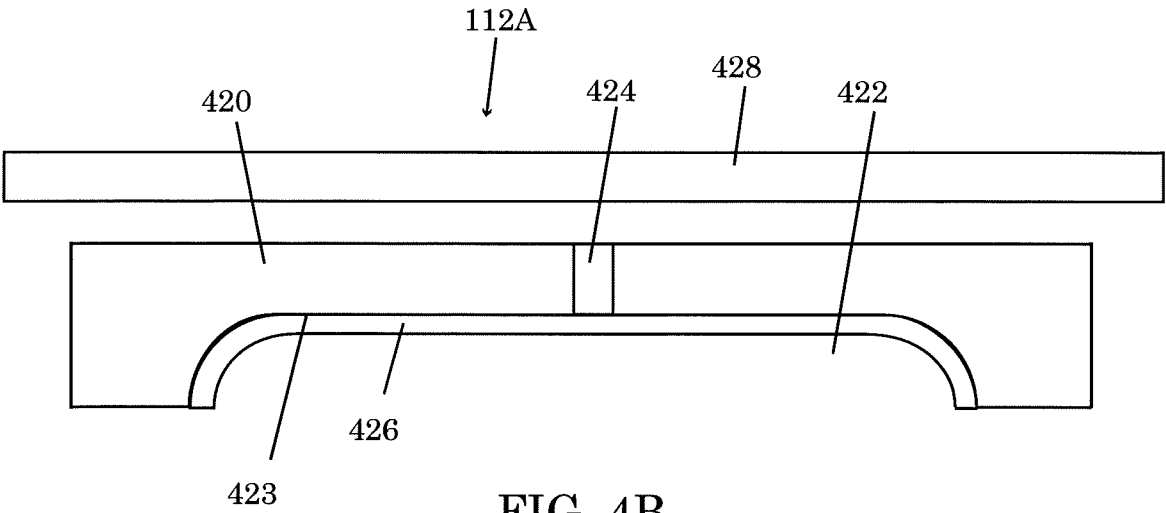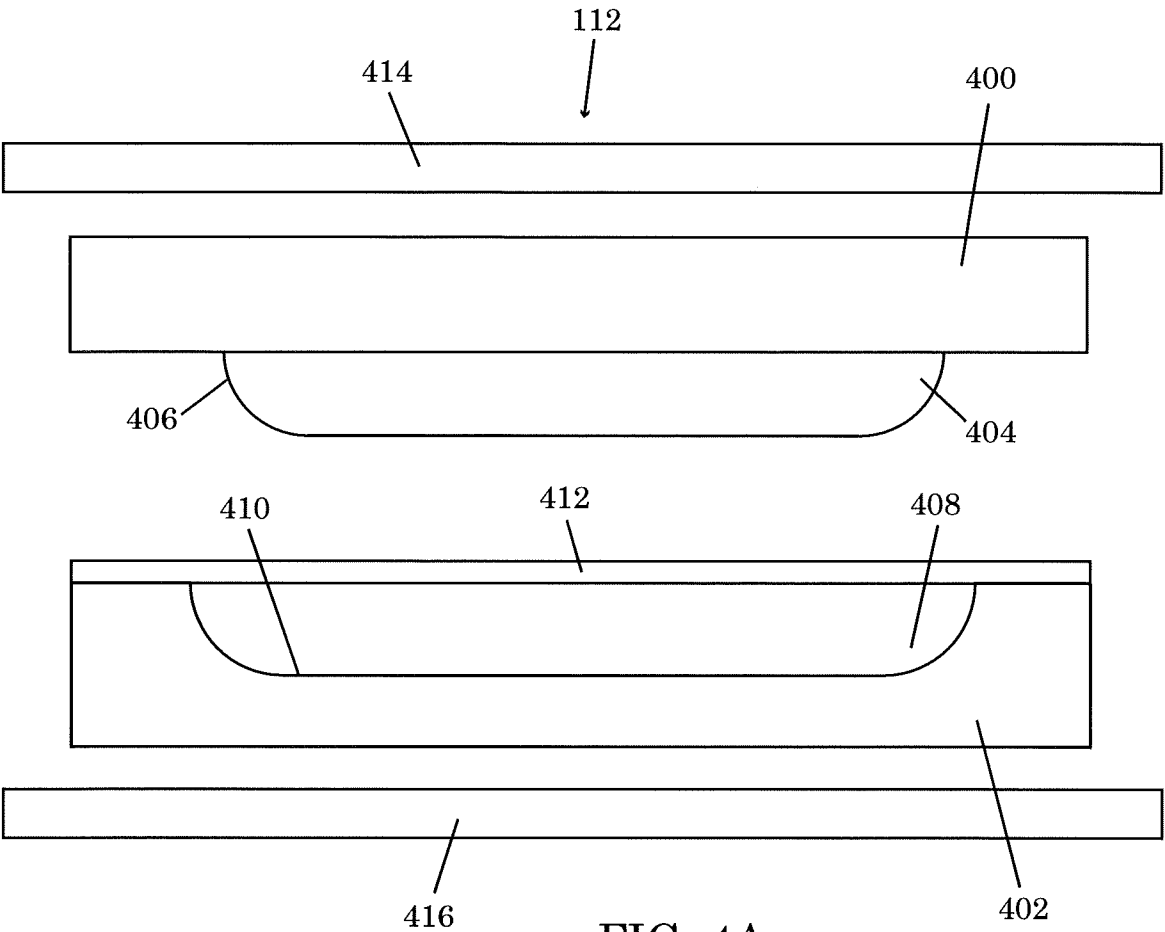

4/5

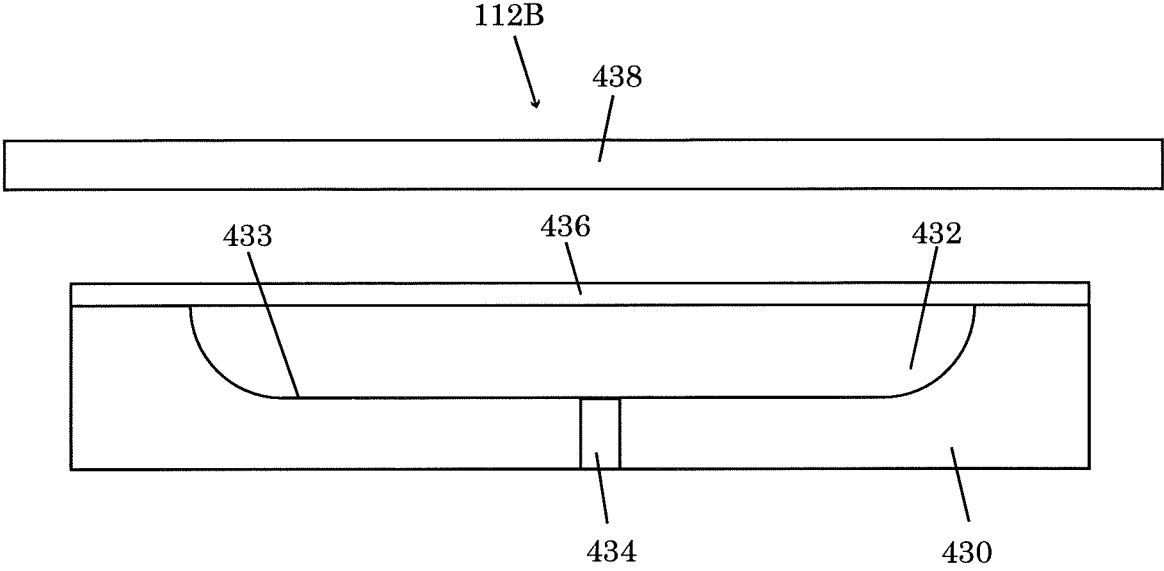


FIG. 4C




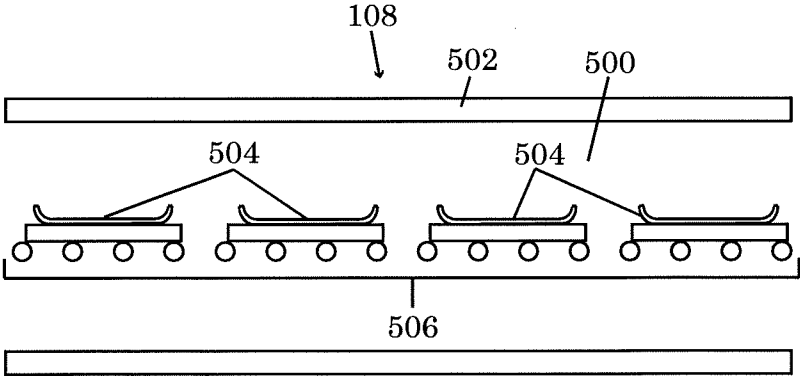


FIG. 5

5/5

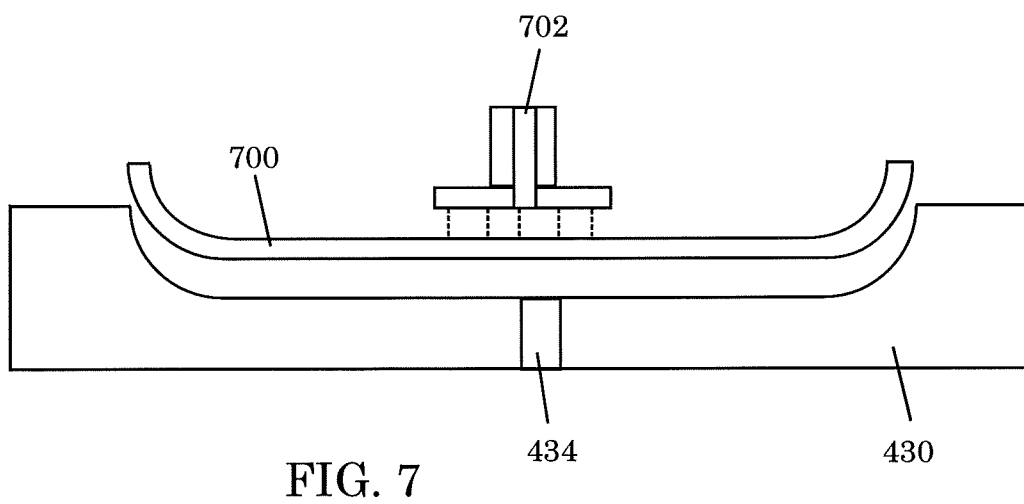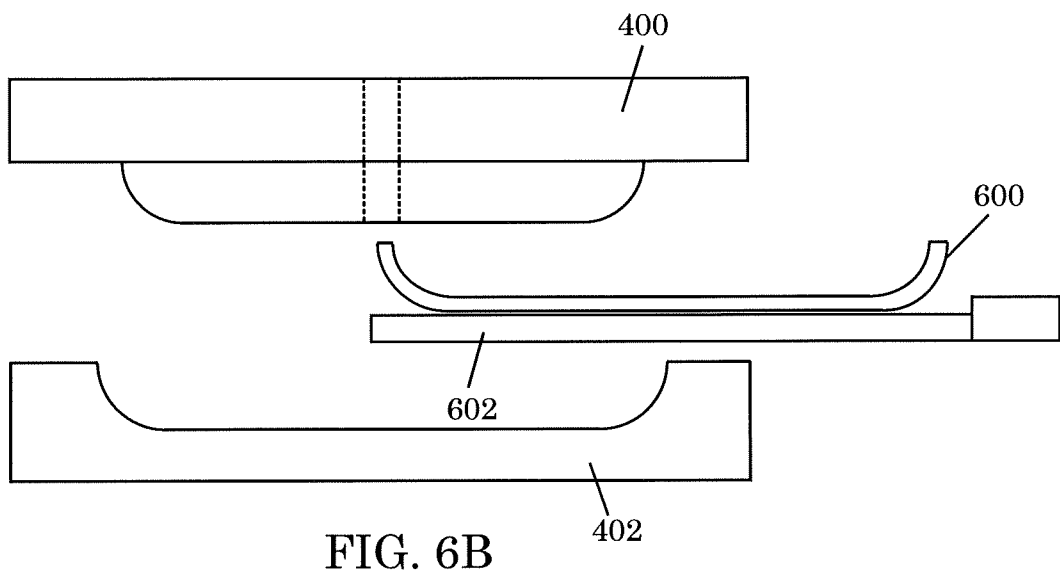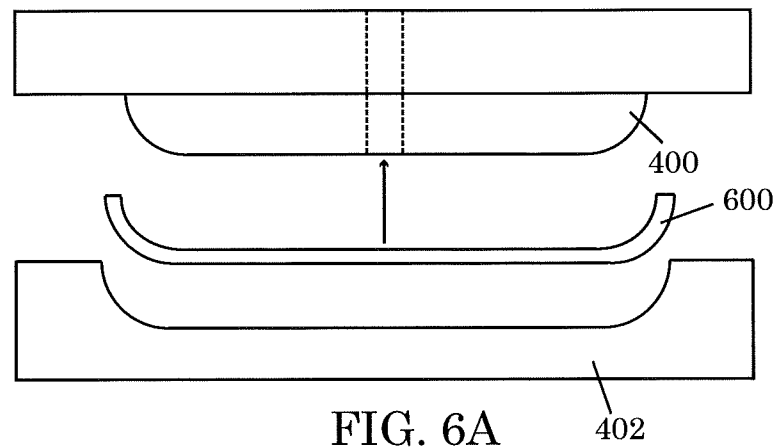

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/023561

A. CLASSIFICATION OF SUBJECT MATTER

INV. C03B23/02 C03B23/025 C03B23/035 C03B23/03 C03B35/24
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C03B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01/62680 A1 (LIBBEY OWENS FORD CO [US]; SURFACE COMB INC [US]) 30 August 2001 (2001-08-30)	1-7,9-20
A	page 4, line 25 - page 13, line 5 page 19, line 28 - page 20, line 23 page 25, line 31 - page 27, line 26 figures 1,2,7	8
X	US 3 723 085 A (MC MASTER H) 27 March 1973 (1973-03-27)	1-6,9-20
A	column 1, line 67 - column 5, line 68 column 9, line 60 - column 10, line 34 column 16, line 9 - column 17, line 2 figures 1,2	7,8
A	US 6 336 775 B1 (MORITA MAKOTO [JP] ET AL) 8 January 2002 (2002-01-08) claims 1-5	1-20
-/--		



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

20 April 2012

Date of mailing of the international search report

02/05/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Kövecs, Monika

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/023561

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 665 730 A (LINZER FREDERICK D) 30 May 1972 (1972-05-30) column 1, line 1 - column 2, line 53 claims 1-15 -----	1-20
A	EP 0 241 355 A1 (SAINT GOBAIN VITRAGE [FR]) 14 October 1987 (1987-10-14) the whole document -----	1-20
A	EP 1 826 186 A2 (ASAHI GLASS CO LTD [JP]) 29 August 2007 (2007-08-29) the whole document -----	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/023561

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0162680	A1	30-08-2001	AU 3292001 A 03-09-2001
			BR 0108619 A 18-03-2003
			CA 2401010 A1 30-08-2001
			CN 1454186 A 05-11-2003
			EP 1257507 A1 20-11-2002
			JP 2003523916 A 12-08-2003
			MX PA02008177 A 06-09-2004
			US 6505483 B1 14-01-2003
			US 2003014997 A1 23-01-2003
			WO 0162680 A1 30-08-2001
US 3723085	A	27-03-1973	US 3607200 A 21-09-1971
			US 3700425 A 24-10-1972
			US 3713799 A 30-01-1973
			US 3723085 A 27-03-1973
US 6336775	B1	08-01-2002	CN 1251419 A 26-04-2000
			CN 1590944 A 09-03-2005
			US 6336775 B1 08-01-2002
US 3665730	A	30-05-1972	NONE
EP 0241355	A1	14-10-1987	BR 8701590 A 26-01-1988
			DE 3760331 D1 24-08-1989
			EP 0241355 A1 14-10-1987
			FI 871523 A 09-10-1987
			FR 2596751 A1 09-10-1987
			JP 2511025 B2 26-06-1996
			JP 62241839 A 22-10-1987
			US 4813993 A 21-03-1989
EP 1826186	A2	29-08-2007	EP 1826186 A2 29-08-2007
			JP 4817113 B2 16-11-2011
			JP 2007230790 A 13-09-2007