



(86) **Date de dépôt PCT/PCT Filing Date:** 2009/11/19  
(87) **Date publication PCT/PCT Publication Date:** 2010/06/03  
(45) **Date de délivrance/Issue Date:** 2016/11/29  
(85) **Entrée phase nationale/National Entry:** 2011/05/20  
(86) **N° demande PCT/PCT Application No.:** EP 2009/065500  
(87) **N° publication PCT/PCT Publication No.:** 2010/060858  
(30) **Priorité/Priority:** 2008/11/27 (DE102008044116.3)

(51) **Cl.Int./Int.Cl. C09C 1/56** (2006.01)

(72) **Inventeurs/Inventors:**

GOETZ, CHRISTIAN, DE;  
TAUBER, GERD, DE;  
MCINTOSH, RALPH, DE;  
KALBITZ, WERNER, DE;  
STENGER, FRANK, DE;  
MERTSCH, RUEDIGER, DE;  
MUEHLBACH, MANDY, DE

(73) **Propriétaire/Owner:**

EVONIK CARBON BLACK GMBH, DE

(74) **Agent:** MARKS & CLERK

(54) **Titre : GRANULES PIGMENTAIRES, PROCEDE DE PRODUCTION ASSOCIE ET LEUR UTILISATION**

(54) **Title: PIGMENT GRANULATE, METHOD FOR PRODUCING THE SAME AND USE THEREOF**

(57) **Abrégé/Abstract:**

The invention relates to a pigment granulate which contains 40 to 65% by weight of pigment and at least 10% by weight of a compound of general formula (I)  $\text{CH}_3-(\text{CH}_2)_n-\text{CH}_2-\text{O}-[(\text{CH}_2)_p-\text{O}]_m-\text{H}$ , wherein  $n=8-18$ ,  $p=1-4$  and  $m=35-100$ , the weight ratio of the compound of general formula I to the pigment being  $\geq$  the STSA surface area of the pigment in  $\text{m}^2/\text{g}$  multiplied by  $0.0021 \text{ g}/\text{m}^2$  and the mass-weighted particle size of the pigment granulate being  $<20 \mu\text{m}$ . The pigment granulate can be produced by dispersing the pigment and the compound of formula I in a solvent and then drying the dispersion obtained. The pigments according to the invention can be used for dyeing and/or the antistatic finishing in water-based paints and lacquer systems, dispersion paints, printing inks, ink systems and coating systems.



## (12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum  
Internationales Büro(43) Internationales Veröffentlichungsdatum  
3. Juni 2010 (03.06.2010)(10) Internationale Veröffentlichungsnummer  
**WO 2010/060858 A3**(51) Internationale Patentklassifikation:  
C09C 1/56 (2006.01)

(21) Internationales Aktenzeichen: PCT/EP2009/065500

(22) Internationales Anmeldedatum:  
19. November 2009 (19.11.2009)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:  
102008044116.3  
27. November 2008 (27.11.2008) DE(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von US): **EVONIK DEGUSSA GMBH** [DE/DE]; Relinghauser Straße 1-11, 45128 Essen (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): **GÖTZ, Christian** [DE/DE]; Lerchenweg 1b, 63500 Seligenstadt (DE). **TAUBER, Gerd** [DE/DE]; Mörikestraße 7, 63500 Seligenstadt (DE). **MCINTOSH, Ralph** [US/DE]; Forsthausstr. 9, 63457 Hanau (DE). **KALBITZ, Werner** [DE/DE]; Hanauer Landstr. 9, 63517 Rodenbach (DE). **STENGER, Frank** [DE/DE]; Drosselweg 33, 63755 Alzenau (DE). **MERTSCH, Rüdiger** [DE/DE]; Fritz-Reuter-Str. 1, 65189 Wiesbaden (DE). **MÜHLBACH, Mandy** [DE/DE]; Sachsenring 1, 65719 Hofheim (DE).

(81) Bestimmungsstaaten (soweit nicht anders angegeben, für jede verfügbare nationale Schutzrechtsart): AE, AG, AL,

AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Bestimmungsstaaten (soweit nicht anders angegeben, für jede verfügbare regionale Schutzrechtsart): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Veröffentlicht:

— mit internationalem Recherchenbericht (Artikel 21 Absatz 3)

— vor Ablauf der für Änderungen der Ansprüche geltenden Frist; Veröffentlichung wird wiederholt, falls Änderungen eingehen (Regel 48 Absatz 2 Buchstabe h)

(88) Veröffentlichungsdatum des internationalen Recherchenberichts:

5. August 2010

(54) Title: PIGMENT GRANULATE, METHOD FOR PRODUCING THE SAME AND USE THEREOF

(54) Bezeichnung : PIGMENTGRANULAT, VERFAHREN ZU DESSEN HERSTELLUNG UND VERWENDUNG

(57) Abstract: The invention relates to a pigment granulate which contains 40 to 65% by weight of pigment and at least 10% by weight of a compound of general formula (I)  $\text{CH}_3\text{-(CH}_2\text{)}_n\text{-CH}_2\text{-O-[(CH}_2\text{)}_p\text{-O]}_m\text{-H}$ , wherein  $n=8-18$ ,  $p=1-4$  and  $m=35-100$ , the weight ratio of the compound of general formula I to the pigment being  $\geq$  the STSA surface area of the pigment in  $\text{m}^2/\text{g}$  multiplied by  $0.0021 \text{ g/m}^2$  and the mass-weighted particle size of the pigment granulate being  $<20 \mu\text{m}$ . The pigment granulate can be produced by dispersing the pigment and the compound of formula I in a solvent and then drying the dispersion obtained. The pigments according to the invention can be used for dyeing and/or the antistatic finishing in water-based paints and lacquer systems, dispersion paints, printing inks, ink systems and coating systems.(57) Zusammenfassung: Pigmentgranulat, enthaltend 40-65 Gew.-% Pigment und mindestens 10 Gew.-% einer Verbindung der allgemeinen Formel (I)  $\text{CH}_3\text{-(CH}_2\text{)}_n\text{-CH}_2\text{-O-[(CH}_2\text{)}_p\text{-O]}_m\text{-H}$  mit  $n=8-18$ ,  $p=1-4$  und  $m=35-100$ , wobei das Gewichtsverhältnis der Verbindung der allgemeinen Formel I zu Pigment größer gleich der STSA Oberfläche des Pigmentes in  $\text{m}^2/\text{g}$  multipliziert mit  $0,0021 \text{ g/m}^2$  ist und die massengewichtete mittlere Korngröße des Pigmentgranulates  $<20 \mu\text{m}$  beträgt. Das Pigmentgranulat kann hergestellt werden indem man das Pigment und die Verbindung der Formel I in einem Lösungsmittel dispergiert und anschließend die erhaltene Dispersion trocknet. Sie können zur Einfärbung und/oder Antistatichausrüstung in wasserbasierenden Farben- und Lacksystemen, Dispersionsfarben, Druckfarben, Tintensystemen und Beschichtungssystemen verwendet werden.

WO 2010/060858 A3

**Pigment granulate, method for producing the same and use thereof**

The invention relates to pigment granules, to a process for producing them and to their use.

5 Powder pigments are used for colouring thermoplastics and thermosets. An advantage of the powder pigments is that they are not dependent on a carrier material. This advantage, however, is often achieved at the expense of dispersibility.

10 To improve the dispersibility the pigments are coated with resin (DE 2540355) or with polymers (US 3133893).

Specific drying methods are known from EP 0036520, and involve heating finely divided pigments and a liquid whose critical temperature is below the decomposition temperature  
15 of the pigment to temperatures above the critical temperature of the liquid, under pressure, and then releasing the pressure, the temperature constantly being held above the dew line of the liquid.

EP 0282855, moreover, discloses pigment preparations which  
20 comprise an organic pigment and/or carbon black and a surfactant from the alkylbenzenesulphonates series or specific sulphosuccinic esters, and which, after wet comminution if appropriate, are dried from aqueous medium by spray drying or freeze drying.

25 EP 1103173 discloses pigment preparations for colouring seed, comprising a pigment and a polyether polyol.

EP 857764 discloses inorganic pigment granules which comprise inorganic pigments and water-soluble, hydrophilic or hydrophobic/hydrophilic auxiliaries in amounts of 0.1%  
30 to 10% by weight, based on pigment, and have an average particle size of 50 to 1500  $\mu\text{m}$ .

Furthermore, EP 1090081 discloses aqueous dispersions which

comprise a pigment and a dispersant of the formula  
 $[\text{CH}_3(\text{CH}_2)_n][\text{CH}_3(\text{CH}_2)_m]\text{CH}[(\text{CH}_2)_p\text{O}(\text{AO})_q\text{H}]$ .


Moreover, pigment preparations are known from US 6063182 and DE 19731572, and ink jet ink from US 5837044.

- 5 WO 2003055959 discloses particulate solids preparations comprising a particulate solid and 0.05% - 9% by weight of a compound selected from the group of the polyglycols or diols having at least one non-hydrogen terminal group, or alkylsulphonates.
- 10 Furthermore, US 2005090609 discloses pigment granules having an average particle size of 50-5000  $\mu\text{m}$  and a BET surface area of  $\leq 15 \text{ m}^2/\text{g}$ , comprising inter alia 10-40% by weight of at least one nonionic surface-active additive based on polyethers.
- 15 The known pigment preparations have the disadvantage that, without addition of additives, the dispersing behaviour in water or water-based surface-coating systems is poor.
- DE 102007026551 discloses a pigment preparation comprising at least one pigment and at least one compound of the  
20 general formula  $\text{CH}_3-(\text{CH}_2)_n-\text{CH}_2-\text{O}-[(\text{CH}_2)_p-\text{O}]_m-\text{H}$ , with  $n=8-18$ ,  $p=1-4$  and  $m=15-25$ .

It is an object of the present invention to provide pigment granules which exhibit good dispersing behaviour in water or water-based surface-coating systems in conjunction with  
25 very good surface-coating coloristics, and for which, in the crosslinked coating film, there is no floating (migration to the surface of the coating film) of any of the components of the pigment granules.

The invention provides pigment granules which are  
30 characterized in that they comprise 40-65%, preferably 43-63%, more preferably 45-60%, very preferably 45-56%, by weight, based on the pigment granules, of pigment, and at least 10%, preferably at least 12%, more preferably at

least 15%, very preferably at least 20%, by weight, based on the pigment granules, of a compound of the general formula I

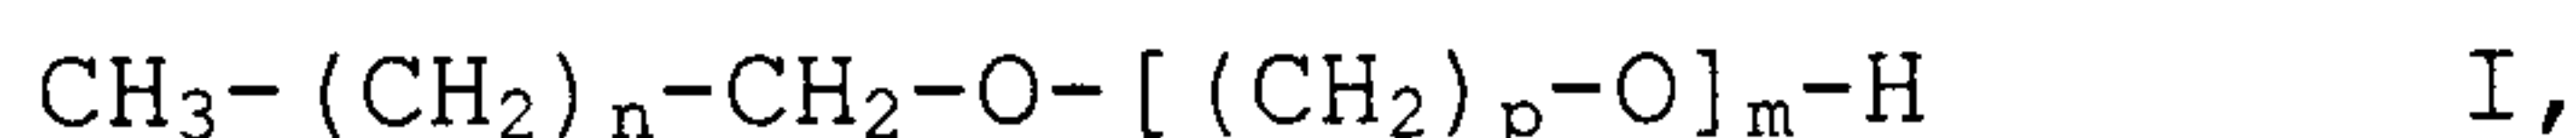

5 with  $n=8-18$ , preferably  $n=10-18$ , more preferably  $n=12-17$ , very preferably  $n=14-16$ ,  $p=1-4$ , preferably  $p=2$ , and  $m=35-100$ , preferably  $m=35-90$ , more preferably  $m=40-80$ , very preferably  $m=45-70$ ; the weight ratio of the compound of the general formula I to pigment is greater than or equal to  
10 the STSA surface area of the pigment in  $\text{m}^2/\text{g}$  multiplied by  $0.0021 \text{ g}/\text{m}^2$ ; and the mass-weighted average particle size of the pigment granules is  $<20 \mu\text{m}$ , preferably  $<15 \mu\text{m}$ , more preferably  $<12 \mu\text{m}$ , very preferably  $<9 \mu\text{m}$ .

Fixing a lower limit for the weight ratio of the compound  
15 of the general formula I to pigment makes it possible to ensure at least a minimum coating of the pigment surface (STSA surface area) with compound of the general formula I.

The STSA surface area of the pigment can be less than or equal to  $385 \text{ m}^2/\text{g}$ , preferably less than or equal to  
20  $380 \text{ m}^2/\text{g}$ .

The STSA surface area is determined for the pigments, except for the pigment blacks, in accordance with ASTM D 6556 (2004). For pigment blacks, in deviation from ASTM D 6556 (2004), the sample is dried at  $105^\circ\text{C}$ .

25 The mass-weighted average particle size of the pigment granules is determined by a laser diffraction spectroscopy method based on ISO 13320-1. The determination takes place in a HELOS laser diffraction spectrometer from Sympatec. The pigment granules are dispersed with a dispersing air  
30 pressure of 1 bar. The particle size distribution is evaluated in accordance with the Fraunhofer theory.

Pigments used can be carbon blacks, carbon aerogels or chromatic pigments.

Examples of chromatic pigments that can be used include yellow, orange, red, magenta, violet, blue, cyan, green or brown pigments. Chromatic pigments that can be used include inorganic blue pigments, such as iron blue, ultramarine blue, cobalt blue or mixed phase blue pigments, or organic blue pigments, for example phthalocyanine blue or indanthrene blue.

Carbon black used may be furnace blacks, gas blacks, lamp blacks, acetylene blacks, Si-containing blacks, known from WO 98/45361 or DE 19613796, inversion blacks, known from DE 19521565, and metal-containing blacks, known from WO 98/42778. As a carbon black it is possible with preference to use pigment blacks having an average primary particle diameter of 8 to 80 nm, preferably 10 to 35 nm, and an OAN number of 40 to 200 ml/100 g, preferably 60 to 150 ml/100 g.

The gas black can have an average primary particle diameter of 8 to 30 nm, preferably 10 to 25 nm. The gas blacks can have a pH of 2 to 5, preferably 3.5 to 4.5

The furnace black can have an average primary particle diameter of 8 to 80 nm, preferably 10-50 nm, and an OAN number of 40 to 200 ml/100 g, preferably 50 to 180 ml/100 g.

The oil absorption number (OAN) of carbon black pigments is determined in a method based on ASTM D 2414. In deviation from ASTM D 2414 (2000), the carbon black pigment is dried to constant weight at 105°C and the oil number is reported in ml/100 g carbon black pigment.

The pH of a pigment black is determined in a method based on DIN ISO 787/9 (1995). In deviation from DIN ISO 787/9 (1995), deionized water is used (not boiled to exhaustion before use), the carbon black pigment concentration operated is 10%, the carbon black pigment suspension is stirred for 1 minute, 5 drops of ethanol always,

consistently, are added for wetting, and the pH is read off when the display is constant.

The average primary particle size is determined in accordance with DIN 53206. This is a direct determination of the average primary particle size on the basis of calibrated TEM micrographs, using the TGZ3 particle size counter.

The carbon aerogels used as pigment can have a BET value of 20-1500 m<sup>2</sup>/g, preferably of 100-1200 m<sup>2</sup>/g, more preferably of 400-900 m<sup>2</sup>/g.

The BET surface area is determined in accordance with DIN ISO 9277 (1995) in a NOVA e2000 sorption measuring instrument from Quantachrome.

The carbon aerogels used as pigment can have a mesopore volume of 0.005 - 5 cm<sup>3</sup>/g, preferably of 0.05 - 3 cm<sup>3</sup>/g, more preferably of 0.2 - 2 cm<sup>3</sup>/g.

The carbon aerogels used as pigment can have an average mesopore diameter of 1.8 - 50 nm, preferably of 5 - 45 nm, more preferably of 10 - 35 nm.

The mesopore volume and the pore radius distribution are determined in accordance with DIN 66134 (1998) by the BJH method from the desorption data of the recorded isotherms in the relative pressure range  $p/p_0$  of 0.99 to 0.34.

Further, the carbon aerogels used as pigment can have a micropore volume of 0.01 - 1.0 cm<sup>3</sup>/g, preferably of 0.05 - 0.5 cm<sup>3</sup>/g, more preferably of 0.1 - 0.35 cm<sup>3</sup>/g.

The micropore volume is determined in accordance with DIN 66135-1, 66135-2, 66135-3 (2001) by the t-plot method. The t-plot is evaluated in accordance with the de Boer equation.

The carbon aerogels used as pigment can have an average

particle size of less than 1  $\mu\text{m}$ , preferably between 0.05 and 1  $\mu\text{m}$ , more preferably between 0.1 and 1  $\mu\text{m}$ , very preferably between 0.5 and 0.95  $\mu\text{m}$ .

The pigment may be a mixture of pigments.

- 5 The compound of the general formula I may be preferably  $\text{CH}_3-(\text{CH}_2)_n-\text{CH}_2-\text{O}-[(\text{CH}_2)_2-\text{O}]_m-\text{H}$ , with  $n=10, 12, 14, 16$  or  $18$  and  $m=35-100$ .


Compounds of the general formula I may be, for example,  
 $\text{CH}_3-(\text{CH}_2)_{10}-\text{CH}_2-\text{O}-[(\text{CH}_2)_2-\text{O}]_{35}-\text{H}$ ,  $\text{CH}_3-(\text{CH}_2)_{12}-\text{CH}_2-\text{O}-[(\text{CH}_2)_2-\text{O}]_{35}-$   
 10  $\text{H}$ ,  $\text{CH}_3-(\text{CH}_2)_{14}-\text{CH}_2-\text{O}-[(\text{CH}_2)_2-\text{O}]_{35}-\text{H}$ ,  $\text{CH}_3-(\text{CH}_2)_{16}-\text{CH}_2-\text{O}-[(\text{CH}_2)_2-\text{O}]_{35}-$   
 $\text{O}]_{35}-\text{H}$ ,  $\text{CH}_3-(\text{CH}_2)_{18}-\text{CH}_2-\text{O}-[(\text{CH}_2)_2-\text{O}]_{35}-\text{H}$ ,  $\text{CH}_3-(\text{CH}_2)_{10}-\text{CH}_2-\text{O}-$   
 $[(\text{CH}_2)_2-\text{O}]_{60}-\text{H}$ ,  $\text{CH}_3-(\text{CH}_2)_{12}-\text{CH}_2-\text{O}-[(\text{CH}_2)_2-\text{O}]_{60}-\text{H}$ ,  $\text{CH}_3-(\text{CH}_2)_{14}-$   
 $\text{CH}_2-\text{O}-[(\text{CH}_2)_2-\text{O}]_{60}-\text{H}$ ,  $\text{CH}_3-(\text{CH}_2)_{16}-\text{CH}_2-\text{O}-[(\text{CH}_2)_2-\text{O}]_{60}-\text{H}$ ,  $\text{CH}_3-$   
 $(\text{CH}_2)_{18}-\text{CH}_2-\text{O}-[(\text{CH}_2)_2-\text{O}]_{60}-\text{H}$ ,  $\text{CH}_3-(\text{CH}_2)_{10}-\text{CH}_2-\text{O}-[(\text{CH}_2)_2-\text{O}]_{90}-\text{H}$ ,  
 15  $\text{CH}_3-(\text{CH}_2)_{12}-\text{CH}_2-\text{O}-[(\text{CH}_2)_2-\text{O}]_{90}-\text{H}$ ,  $\text{CH}_3-(\text{CH}_2)_{14}-\text{CH}_2-\text{O}-[(\text{CH}_2)_2-\text{O}]_{90}-$   
 $\text{H}$ ,  $\text{CH}_3-(\text{CH}_2)_{16}-\text{CH}_2-\text{O}-[(\text{CH}_2)_2-\text{O}]_{90}-\text{H}$  or  $\text{CH}_3-(\text{CH}_2)_{18}-\text{CH}_2-\text{O}-$   
 $[(\text{CH}_2)_2-\text{O}]_{90}-\text{H}$ .

The pigment granules may comprise a biocide, pH regulator, humidifier, adhesion agent, flow assistant or defoamer.

- 20 The pigment granules may comprise a precipitated and/or fumed silica.

The pigment granules of the invention may comprise a dispersant. The dispersant may be a nonionic, a cationic, an anionic or an amphoteric wetting agent. The pigment  
 25 granules of the invention, apart from the compound of the general formula I, may be dispersant-free.

The pigment granules may consist of 40-65%, preferably 43-63%, more preferably 45-60%, very preferably 45-56%, by weight, based on the pigment granules, of pigment, at least  
 30 10%, preferably at least 12%, more preferably at least 15%, very preferably at least 20%, by weight, based on the pigment granules, of a compound of the general formula I

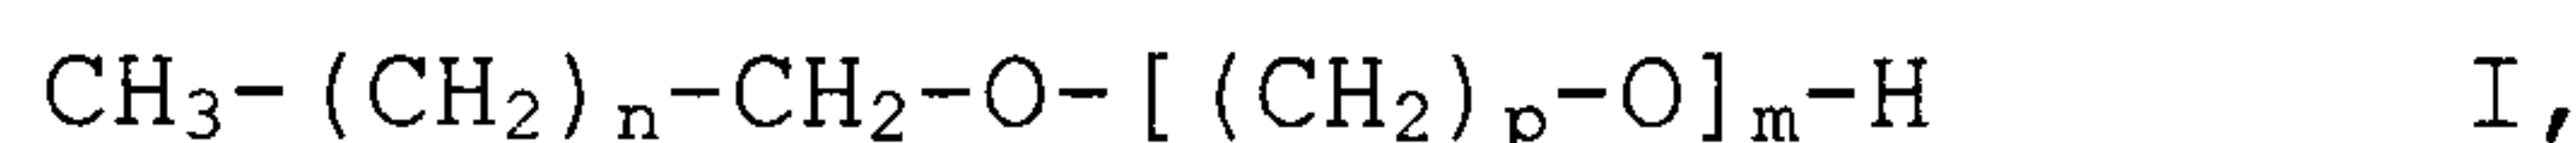

with  $n=8-18$ , preferably  $n=10-18$ , more preferably  $n=12-17$ , very preferably  $n=14-16$ ,  $p=1-4$ , preferably  $p=2$ , and  $m=35-100$ , preferably  $m=35-90$ , more preferably  $m=40-80$ , very preferably  $m=45-70$ , optionally a pH regulator, optionally a  
5 humidifier, optionally an adhesion agent, optionally a defoamer, optionally a flow assistant and optionally a biocide; may have a weight ratio of the compound of the general formula I to pigment of greater than or equal to  
10  $0.0021 \text{ g/m}^2$ ; and may have a mass-weighted average particle size of the pigment granules of  $<20 \text{ }\mu\text{m}$ , preferably  $<15 \text{ }\mu\text{m}$ , more preferably  $<12 \text{ }\mu\text{m}$ , very preferably  $<9 \text{ }\mu\text{m}$ .

The pigment granules may have a residual moisture content of 0% to 20% by weight, preferably 0.1% to 5% by weight, as  
15 measured to DIN ISO 787-2.

The pigment granules may comprise 0% to 5% by weight, preferably 0.1% to 3% by weight, of pH regulator.

The pigment granules may comprise 0% to 5% by weight, preferably 0.1% to 3% by weight, of humidifier.

20 The pigment granules may comprise 0% to 5% by weight, preferably 0.1% to 3% by weight, of adhesion agent.

The pigment granules may comprise 0% to 5% by weight, preferably 0.1% to 3% by weight, of defoamer.

25 The pigment granules may comprise 0% to 5% by weight, preferably 0.1% to 3% by weight, of flow assistant.

The pigment granules may comprise 0% to 5% by weight, preferably 0.1% to 3% by weight, of biocide.

In one embodiment of the invention the pigment granules may consist of 40-65%, preferably 43-63%, more preferably  
30 45-60%, very preferably 45-56%, by weight, based on the pigment granules, of pigment selected from the group consisting of gas black, furnace black, Pigment Yellow 74,

Pigment Blue 15:3 and Pigment Red 122, at least 10%, preferably at least 12%, more preferably at least 15%, very preferably at least 20%, by weight, based on the pigment granules, of a compound of the general formula I



with  $n=8-18$ , preferably  $n=10-18$ , more preferably  $n=12-17$ , very preferably  $n=14-16$ ,  $p=1-4$ , preferably  $p=2$ , and  $m=35-100$ , preferably  $m=35-90$ , more preferably  $m=40-80$ , very preferably  $m=45-70$ , optionally a pH regulator, optionally a  
10 humidifier, optionally an adhesion agent, optionally a defoamer, optionally a flow assistant and optionally a biocide; may have a weight ratio of the compound of the general formula I to pigment of greater than or equal to the STSA surface area of the pigment in  $\text{m}^2/\text{g}$  multiplied by  
15  $0.0021 \text{ g}/\text{m}^2$ ; and may have a mass-weighted average particle size of the pigment granules of  $<20 \mu\text{m}$ , preferably  $<15 \mu\text{m}$ , more preferably  $<12 \mu\text{m}$ , very preferably  $<9 \mu\text{m}$ .

The invention further provides a process for producing the pigment granules of the invention which is characterized in  
20 that 40-65%, preferably 43-63%, more preferably 45-60%, very preferably 45-56%, by weight, based on the pigment granules, of pigment and at least 10%, preferably at least 12%, more preferably at least 15%, very preferably at least 20%, by weight, based on the pigment granules, of a  
25 compound of the general formula I, with a weight ratio of the compound of the general formula I to pigment of greater than or equal to the STSA surface area of the pigment in  $\text{m}^2/\text{g}$  multiplied by  $0.0021 \text{ g}/\text{m}^2$ , are dispersed in a solvent and subsequently the resulting dispersion is dried.

30 Solvents used may be water, glycol, glycerol, alcohols, ketones or mixtures of the aforementioned compounds.

The dispersing may take place by means of bead mills, planetary mills, ultrasound, stirring and mixing elements, dissolvers, shaker mixers, for example Skandex, rotor-

stator dispersing assemblies, for example Ultra-Turrax, or high-pressure homogenizers.

The dispersion may be dried by means of freeze drying, infrared drying, microwave drying or spray drying.

- 5 Spray drying may take place in a spray dryer with nozzle atomization and with cocurrent, half-countercurrent (fountain atomization) or countercurrent gas routing.

Atomization in the spray drier may take place by means of one-fluid or multi-fluid nozzles. The nozzle apertures may  
10 be from 0.01 to 3 mm, preferably from 0.05 to 2 mm, more preferably from 0.1 to 1.5 mm. Atomizing media used may be gaseous substances, for example air, nitrogen, CO<sub>2</sub> and argon. Nozzles used may be full cone, hollow cone, flat jet and straight jet nozzles.

- 15 The spraying of the dispersion that has been obtained into the spray drier may be assisted by external fields. The external fields may be electrical or acoustic fields, ultrasound for example.

The spraying of the dispersion that has been obtained into  
20 the spray drier may take place via rotary atomizers, pressure atomizers, vibratory atomizers or Venturi nozzles.

The droplet size generated by the sprayed introduction into the spray drier may be from 50 nm to 3 mm, preferably from 100 nm to 1 mm, more preferably from 200 nm to 0.5 mm.

- 25 Spray drying may be carried out at an entry temperature of 80 - 500°C, preferably of 80 - 250°C. The exit temperature may be 10 - 150°C, preferably 15 - 90°C.

Spray drying may be carried out at a pressure level downstream of the nozzle of 0.03 to 1.2 bar.

- 30 Spray drying may be carried out at a pressure level in the nozzle of 0.8 to 8 bar.

Drying of the dispersion may be carried out preferably by spray drying at an entry temperature of 80 - 500°C, preferably 80 - 250°C, a pressure level in the nozzle of 0.8 to 8 bar and a nozzle aperture of 0.01 to 3 mm, preferably of 0.05 to 2 mm, more preferably of 0.1 to 1.5 mm.

The pigment granules of the invention may be used for colouring and/or antistatic treatment in water-based paint and surface-coating systems, emulsion paints, printing inks, liquid-ink systems and coating systems.

The invention further provides a surface-coating material comprising at least pigment granules of the invention.

The pigment granules of the invention advantageously have a very good stir-in dispersibility in water or water-based coating systems in conjunction with very good surface-coating material coloristics, and in the crosslinked coating film do not exhibit floating (migration to the surface of the coating film) of any of the components of the pigment granules.

20

### Examples

#### Examples 1-8:

#### Production of the pigment granules for Examples 1-8.

The compositions of the aqueous pigment dispersions are set out in Table 1.

25



Alkanol S 20 is a compound of the general formula I with  $p = 2$ ,  $m = 20$  and  $n = 16$  from Tego (class: *fatty alcohol ethoxylates*).

Alkanol S 60 is a compound of the general formula I with  
5  $p = 2$ ,  $m = 60$  and  $n = 16$  from Tego (class: *fatty alcohol ethoxylates*).

Lutensol AO 30 is a compound of the general formula I with  
 $p = 2$ ,  $m = 30$  and  $n = 11-13$  from BASF AG (class: *oxo alcohol ethoxylates*).

10 Colour black S 160 is a gas black with an average STSA of 123 m<sup>2</sup>/g from Evonik Degussa GmbH.

Colour black FW 171 is a furnace black with an average STSA of 380 m<sup>2</sup>/g from Evonik Degussa GmbH.

AMP 90 is a 2-amino-2-methyl-propanol from Angus Chemie.

15 2-Di-methyl-amino-ethanol is an amine from Merck KGaA.

TEGO Antifoam XP 7001 is a defoamer from Evonik Tego.

Acticide MBS is a biocide from Thor Chemie.

1. Preparation of the wetting agent solutions for  
Examples 1 to 8

20 The compound of the general formula I is first melted and the water to be used is heated to about 45°C. Subsequently, using a dissolver, the two components in the proportion as per Table 1 are mixed for 60 minutes. Subsequently the wetting agent solution of the pH  
25 regulator, optionally defoamer, isopropanol and biocide as specified in Table 1 is added.

2. Incorporation/predispersing of the pigments into the prepared wetting agent solutions

30 To prepare the various pigment dispersions 1 to 8, the corresponding pigment is incorporated with slow stirring into the prepared wetting agent solution.

3. Dispersing

The pigment dispersions 1 to 8 prepared in section 2 are dispersed with a CoBall-Mill MS12 annular gap bead mill (AGBM) from FrymaKoruma using zirconium oxide grinding media (0.75 - 1.0 mm, yttrium-stabilized). The grinding media charge is 60% and the peripheral speed is 12 m/s. 9 passes are run in each case. The pigment dispersions 1-8 after dispersing give rise to highly mobile, homogenous dispersions.

10 4. Spray drying

Pigment dispersions 1 to 8 are subsequently spray dried (Büchi 190 Mini Spray Dryer, nozzle aperture 0.5 mm, pressure level in the nozzle 2 bar). The dispersion is conveyed to the spraying nozzle by means of a peristaltic pump and drying takes place at an entry temperature of 200°C and an exit temperature of 80°C. The granules are deposited via a cyclone. This results in the pigment granule compositions calculated in Table 2. For the calculation it is assumed that the auxiliaries AMP 90, 2-di-methyl-amino-ethanol, Antifoam XP 7001, Acticide MBS and isopropanol, in view of their low proportion and low boiling point, need no longer be taken into account after spray drying. Furthermore, the residual moisture content of the pigment granules is measured and is subtracted from 100%, and so the remainder is divided between the pigment and the compound of the general formula I.

Table 2

Ingredients [% by weight]	Comparative examples					Inventive pigment granules		
	1	2	3	4	5	6	7	8
Example	1	2	3	4	5	6	7	8
Colour black S 160	62.6							
Colour black FW 171		58.7	53.0	58.0	51.7	52.0	53.0	51.1
Alkanol S 20	35.9							
Alkanol S 60				40.6	43.2	43.4	44.2	46.1
Lutensol AO 30		39.2	45.1					
Residual moisture content	1.5	2.1	1.9	1.4	5.1	4.6	2.8	2.8
Total	100	100	100	100	100	100	100	100
Mass-weighted average particle size $d_{50,3}$ [ $\mu\text{m}$ ]	7.61	8.01	7.88	6.75	7.54	6.18	8.12	9.34
Weight ratio compound of the formula I/pigment	0.57	0.67	0.85	0.70	0.84	0.84	0.83	0.90

Coating experiments

Employed as reference coatings A-C to the inventive coatings are coating materials produced by conventional dispersing on the basis of the corresponding pigment blacks  
5 S160 and FW 171.

## a. Production of the reference coatings A-C

The millbase composition of the reference coatings for pigment blacks S160 and FW 171 is as follows:

	1. Distilled water	48.4 g
10	2. Tego Dispers 760W, 35% form	20.8 g
	3. Tego Foamex 830	0.3 g
	4. AMP 90	0.1 g
	5. Pigment black	10.4 g
	Total	80.0 g
15	Carbon black concentration	13%

Tego Dispers 760W™, 35% form is a wetting and dispersing assistant from Tego.

Tego Foamex 830™ is a defoamer from Tego.

20 Items 1 to 4 are weighed out into a Skandex dispersing beaker (180 ml, diameter 5.3 cm, height 12.5 cm) and homogenized with a spatula. The pigment black, dried at 105°C beforehand, is weighed in and incorporated by stirring with a spatula until the entire amount is wetted.

25 The millbase is predispersed with a laboratory dissolver (Pendraulik, LR 34) for 5 minutes at 4000 rpm with a dispersing disc having a diameter of 40 mm.

Preliminary dispersion is followed by a check on the pH. The pH is adjusted to a figure between 8.5 and 9.0 by  
30 addition of AMP 90™.

Then 540 g of Chromanit steel beads, diameter 3 mm, are

added to the millbase.

The pigment black is ground using a laboratory shaker (Skandex disperser BA-S 20). The dispersing time is 60 minutes. The cooling of the laboratory shaker is set at level 2.

After the dispersing operation, the millbase is sieved off using a VA stainless steel sieve and collected in a 350 ml plastic beaker. Then a pH check is carried out again and the pH, where appropriate, is adjusted to a level between 8.2 - 8.7 by addition of AMP 90.

The letdown binder used is a polyurethane dispersion from Alberdingk & Boley, Alberdingk U710™ (30% form).

The millbases produced as described above are letdown as follows:

Letdowns for the reference coatings A and B to Examples 1-3:

1.	Millbase	5.6 g
2.	Alberdingk U710, 30% form	24.4 g
	Total	30 g
20	Carbon black concentration, total	2.4%

Letdowns for the reference coating C to Examples 4-8:

1.	Millbase	5.6 g
2.	Alberdingk U710, 30% form	42.9 g
	Total	48.5 g
25	Carbon black concentration, total	1.5%

The quantities of millbase and binder are weighed out in the order stated into a 180 ml mixing beaker and then vigorously homogenized with a spatula for 10 minutes. After an hour the grindometer value (fineness of grind) is determined with an Erichsen grindometer block in accordance with DIN EN ISO 1524.

b. Production of the coatings based on pigment granules 1-8 (Table 2)

A Skandex dispersing beaker (180 ml, diameter 5.3 cm, height 12.5 cm) is charged with fully demineralized water, and in each case one set of granules 1-8 is incorporated by stirring with the aid of a spatula. This is followed by dispersing using a dissolver at 3000 rpm for 10 minutes, with a dissolver disc having a diameter of 40 mm.

The ratio of fully demineralized water to granules is selected so as to produce a concentration of 15% by weight of pigment. The pastes are left to stand overnight.

The concentrated pastes thus produced are letdown using the letdown binder Alberdingk U710 (30% form) from Alberdingk & Boley.

The carbon black concentration of the letdowns is 2.4% for the coatings of Examples 1-3; the carbon black concentration of the letdowns is 1.5% for the coatings of Examples 4-8.

The quantities of paste and binder are weighed out into the 180 ml mixing beaker and then homogenized vigorously with the spatula for 10 minutes. After an hour the grindometer value (fineness of grind) is determined using an Erichsen grindometer block to DIN EN ISO 1524.

c. Application of reference coatings A-C from a and of the coatings from b, and measurement of the coloristics

The completed coating materials are drawn down onto glass plates (130 x 90 x 1 mm) with a film drawing bar having a slot height of 200  $\mu\text{m}$ , wet, with uniform tension and pressure. For this purpose, 2 ml of the completed coating material are withdrawn using a plastic pipette for the drawdown, and applied to the glass plate in a stripe 5 cm long and about 1 cm wide. Care should be taken to ensure that there are no air bubbles in the coating stripe. The

film drawing bar is placed over the stripe of coating material and drawn uniformly across the plate. A drawdown is produced which is approximately 10 cm long and 6 cm wide.

- 5 After the drawdown procedure, the wet coating film on the glass plate is flashed off at room temperature for 30 minutes and then the coated glass plate is subjected to forced drying at 80°C for 30 minutes.

The coloristics measurements are carried out using the  
10 Pausch Q-Color 35 instrument and the WinQC+ software. All of the measurements take place from behind, through the coated glass.

Calculations of the coloristic data:

Hue-independent black value  $M_y$  and hue-dependent black  
15 value  $M_c$ :

First of all, the hue-independent black value  $M_y$  is calculated (equation 1) from the tristimulus  $Y$  of the measurement (illuminant D65/10):

$$(1) \quad M_y = 100 \cdot \log\left(\frac{100}{Y}\right)$$

20 Subsequently the hue-dependent black value is calculated (equation 2):

$$(2) \quad M_c = 100 \cdot \left( \log\left(\frac{X_n}{X}\right) - \log\left(\frac{Z_n}{Z}\right) + \log\left(\frac{Y_n}{Y}\right) \right)$$

$X_n/Z_n/Y_n$  (DIN 6174) = tristimulus values of the coordinate origin, based on the illuminant and the observer  
25 (DIN 5033/part 7, illuminant D65/10°).

$$X_n = 94.81 \quad Z_n = 107.34 \quad Y_n = 100.0$$

$X/Y/Z$  = tristimulus values calculated from the measurements of the samples.

Absolute hue contribution  $dM$ :

The absolute hue contribution  $dM$  is calculated (equation 3) from the black values  $M_c$  and  $M_y$ :

$$(3) \quad dM = M_c - M_y$$

5 Table 3 compares the results for the coatings tests of pigment granules 1-8 with the corresponding results of the coatings tests for the reference coatings. The greater the value for the colour depth  $M_y$ , the deeper in colour ("blacker") the corresponding coating film. The greater the  
10 value for the undertone  $dM$ , the more stable the pigment distribution in the coating film and the bluer the appearance of the black coating film. For a positive assessment, the values for the colour depth  $M_y$  and the undertone  $dM$  of the coating films based on the  
15 corresponding pigment granules must be at least at the level of the colour depth values  $M_y$  and the undertones  $dM$  of the corresponding reference coating films. Furthermore, the fineness of grind ought to have a value of less than 10  $\mu\text{m}$ , and the surface ought to be visually good, without  
20 inhomogeneities and agglomerated pigment particles, and the compound of the formula I must not migrate to the surface of the coating film (float) after a storage time of 48 hours.

Table 3

Coating material	Pigment granules/ pigment black	My through glass	dM through glass	Fineness of grind [ $\mu\text{m}$ ]	Surface quality, floating
Reference coating A	Colour black S160	267	8	< 10	satisfactory
Reference coating 1	Example 1	254	-1	bitty	matt, bitty, compound of formula I floats
Reference coating B	Colour black FW 171	319	10	< 10	satisfactory
Reference coating 2	Example 2	304	10	> 50	rough surface, visible PB agglomerates
Reference coating 3	Example 3	312	11	<10	compound in formula I floats
Reference coating C	Colour black FW 171	303	10	< 10	satisfactory
Reference coating 4	Example 4	290	8	14 bits up to 20	bitty surface, no floating of compound of the formula I
Inventive coating 5	Example 5	315	13	< 10	satisfactory
Inventive coating 6	Example 6	313	12	< 10	satisfactory
Inventive coating 7	Example 7	304	12	< 10	satisfactory
Inventive coating 8	Example 8	321	13	< 10	satisfactory

Reference coating 1 does not match the coloristics of reference coating A. Colour depth  $M_y$  and blue undertone  $dM$  are not achieved. The surface is not satisfactory and the compound of the formula I with  $m=20$  floats.

Reference coating 2 does not match the coloristics of reference coating B. Colour depth  $M_y$  is not achieved. The surface is rough, with visible pigment agglomerates. The ratio of compound of the formula I to pigment black is too low. Compound I with  $m=30$  floats.


Reference coating 3 almost matches the coloristics of reference coating B. The fineness of grind is satisfactory. The ratio of compound of the formula I to pigment black is satisfactory. However, compound of the formula I with  $m=30$  floats as before.

Reference coating 4 containing compound of the formula I with  $m=60$  no longer floats. However, the ratio of compound of the formula I to pigment black FW 171 is too small. The surface of the coating film is bitty, the fineness of grind is unsatisfactory, and the coloristic data of reference coating C are not achieved.

The inventive coating materials 5 - 8 exceed the coloristic data of reference coating C. The finenesses of grind are  $<10 \mu\text{m}$ , and the surfaces of the coating films are free from bits and satisfactory. The compound of the formula I does not float.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. Pigment granules comprising 40-65% by weight, based on the pigment granules, of pigment and at least 10% by weight, based on the pigment granules, of a compound of formula I:

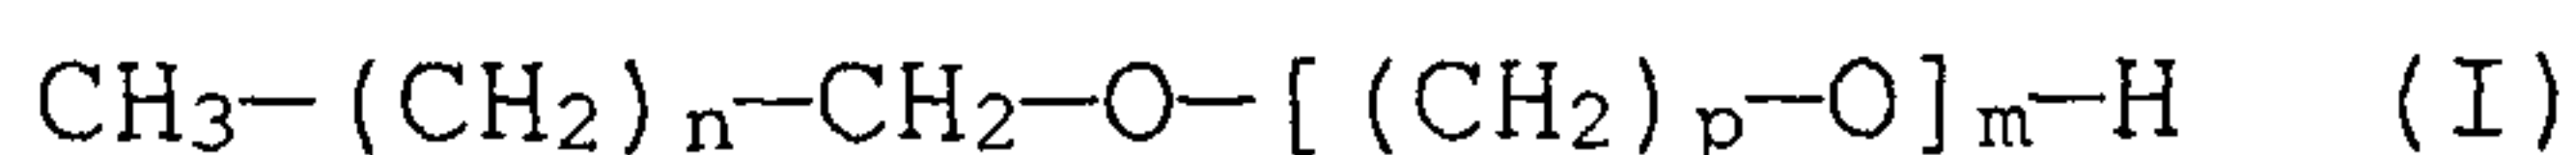

wherein:

$n=8-18$ ,  $p=1-4$ , and  $m=35-100$ ;

the weight ratio of the compound of formula I to pigment is greater than or equal to the STSA (Statistical Thickness Surface Area) surface area of the pigment in  $\text{m}^2/\text{g}$  multiplied by  $0.0021 \text{ g}/\text{m}^2$ ; and

the mass-weighted average particle size of the pigment granules is  $<20 \mu\text{m}$ .

2. The pigment granules of claim 1, wherein the pigment is a chromatic pigment, a carbon aerogel or a carbon black.

3. The pigment granules of claim 1, wherein said pigment is gas black, furnace black, Pigment Yellow 74, Pigment Blue 15:3 or Pigment Red 122.

4. The pigment granules of any one of claims 1 to 3, wherein said pigment granules have a residual moisture content of 0% to 20% by weight.

5. The pigment granules of any one of claims 1 to 4, wherein said pigment granules comprise 45-56% by weight, based on the pigment granules, of pigment.

6. The pigment granules of claim 5, comprising at least 20% by weight, based on the pigment granules, of a compound of formula I.

7. The pigment granules of any one of claims 1 to 6, wherein the mass-weighted average particle size of the pigment granules is  $<9 \mu\text{m}$ .











8. The pigment granules of any one of claims 1 to 7, wherein, apart from said compound of formula I, said pigment granules are dispersant-free.


9. The pigment granules of any one of claims 1 to 8, wherein, in formula I,  $n=14-16$ .

10. The pigment granules of any one of claims 1 to 9, wherein, in formula I,  $p=2$ .

11. The pigment granules of any one of claims 1 to 10, wherein, in formula I,  $m=45-70$ .

12. The pigment granules of any one of claims 1 to 8, wherein the compound of formula I is:

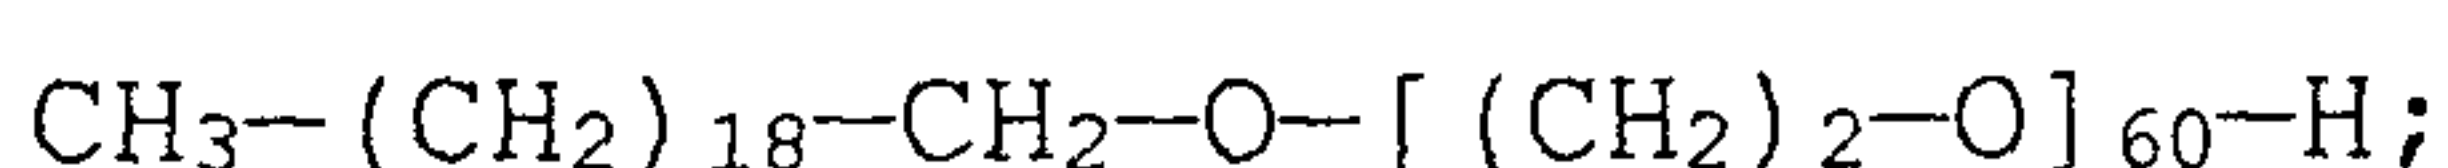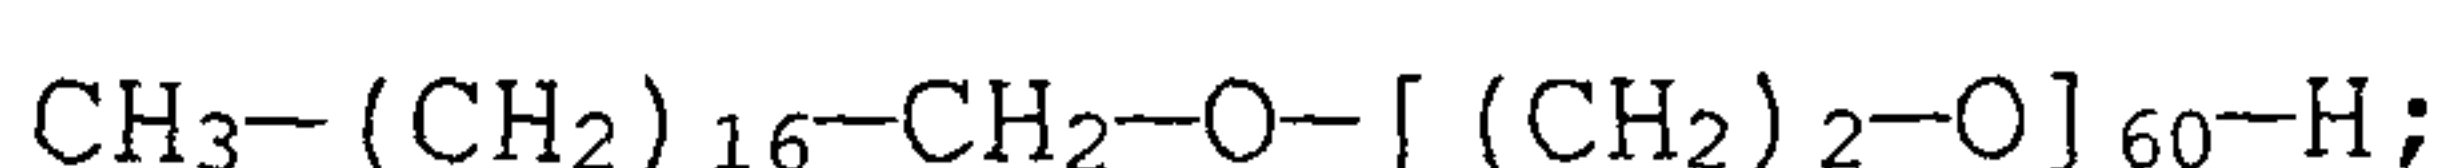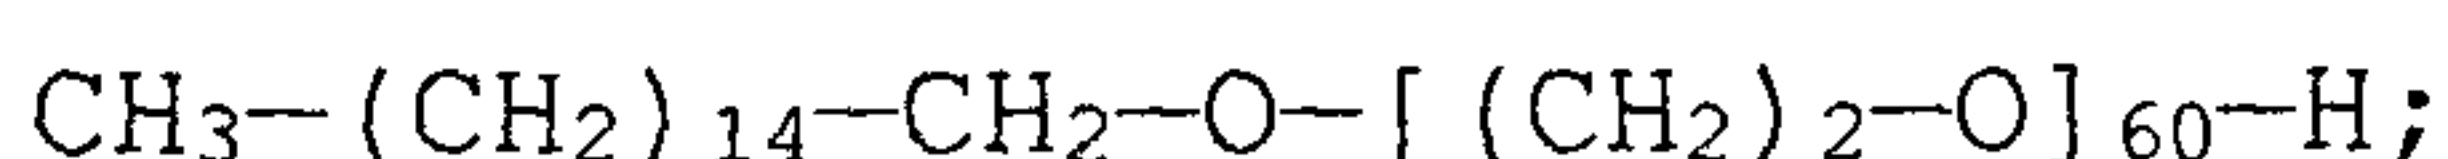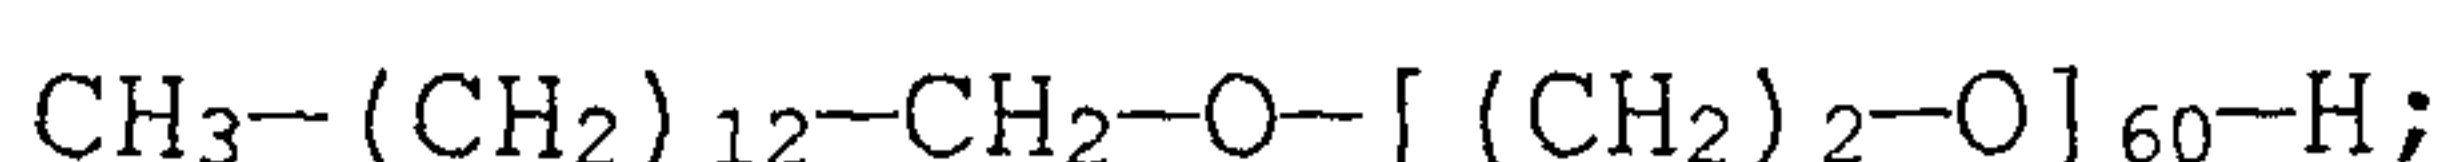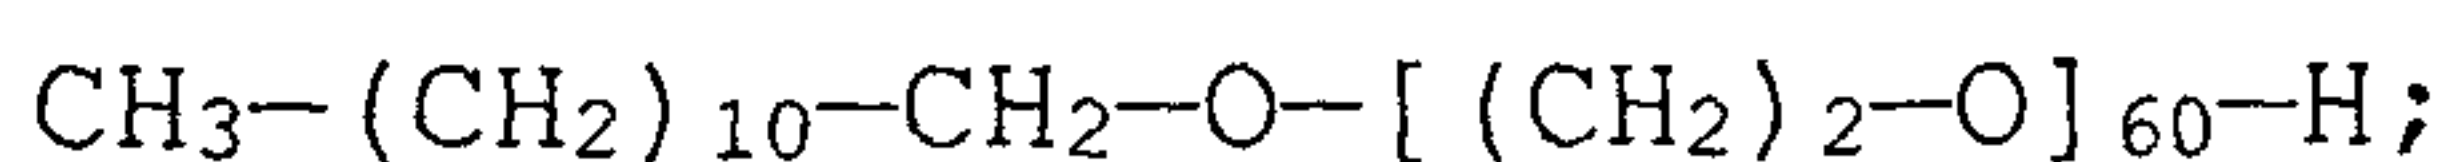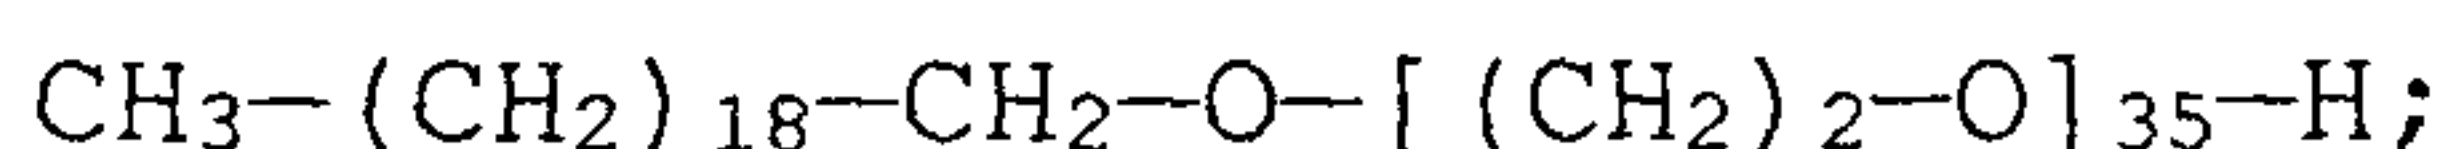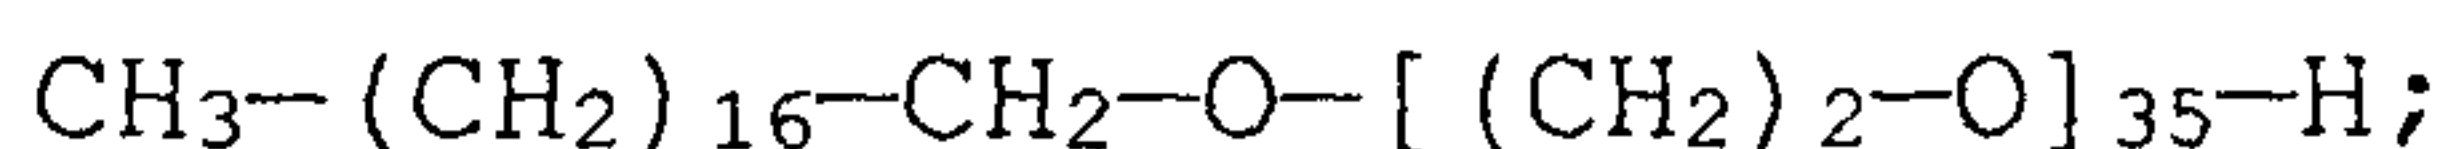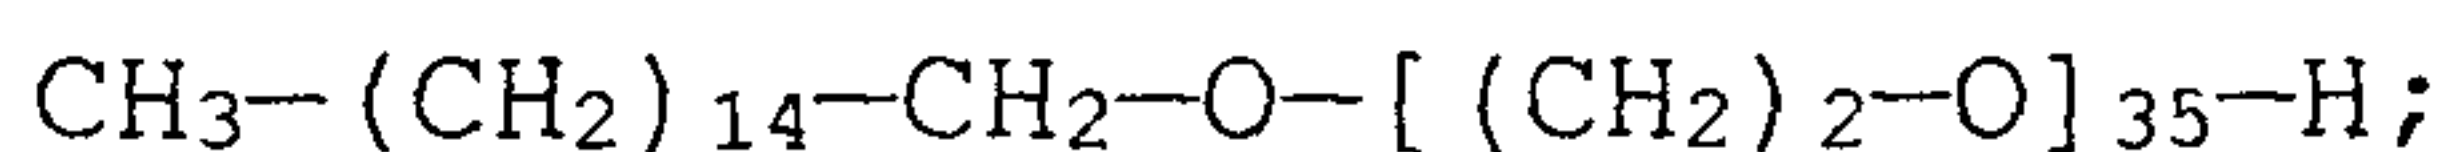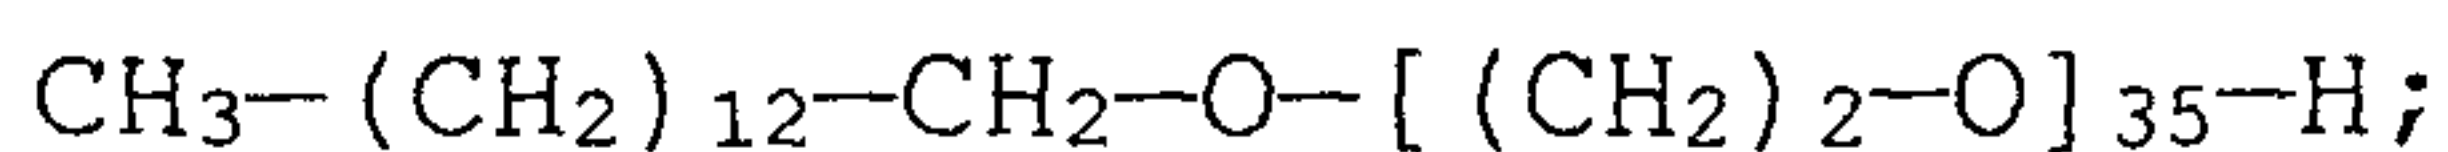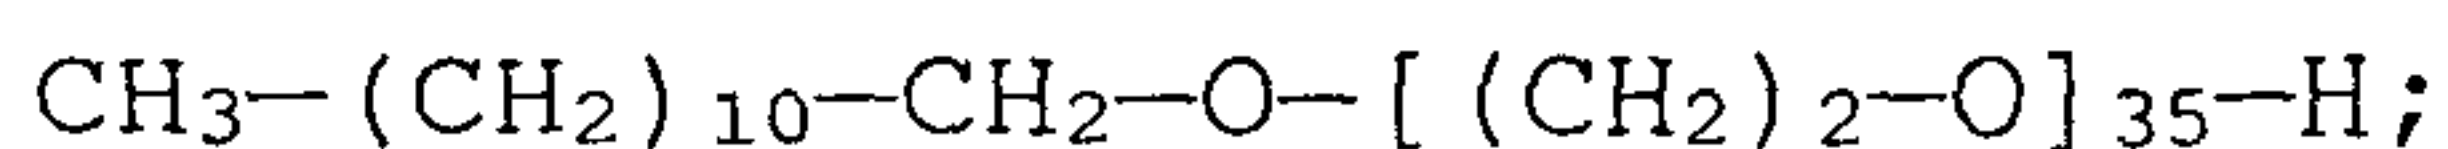

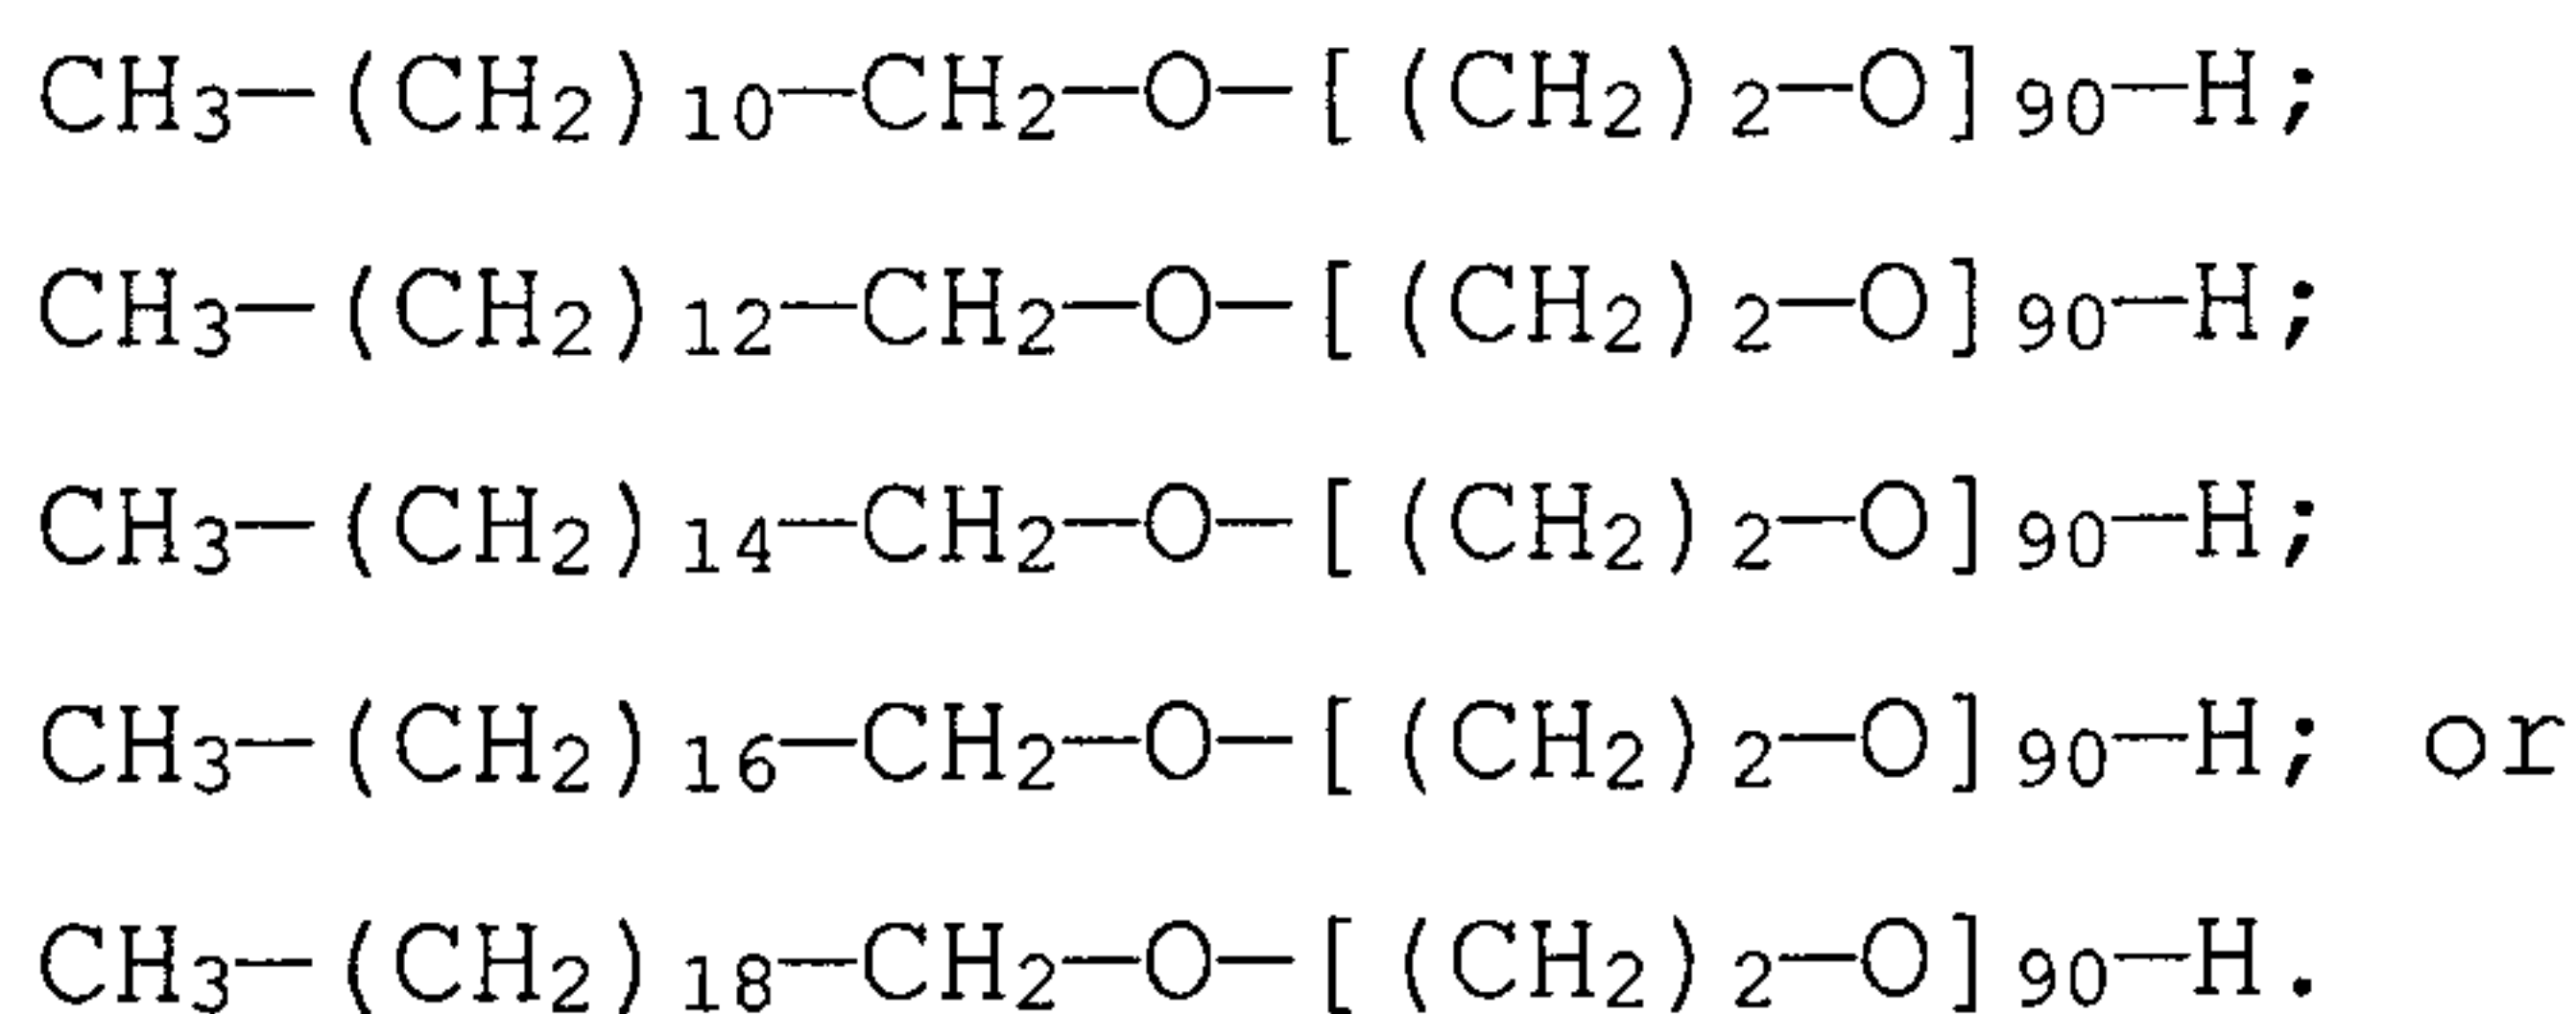

13. A process for producing the pigment granules as defined in any one of claims 1 to 12, comprising:

a) dispersing 40-65% by weight, based on the pigment granules, of pigment and at least 10% by weight, based on the pigment granules, of a compound of formula I, in a solvent, wherein the weight ratio of the compound of formula I to pigment is greater than or equal to the STSA surface area of the pigment in  $\text{m}^2/\text{g}$  multiplied by 0.0021  $\text{g}/\text{m}^2$ , and

b) drying the dispersion of step a).

14. A surface-coating material comprising the pigment granules as defined in any one of claims 1 to 12.