



(86) Date de dépôt PCT/PCT Filing Date: 2003/08/04
 (87) Date publication PCT/PCT Publication Date: 2004/06/24
 (45) Date de délivrance/Issue Date: 2010/09/28
 (85) Entrée phase nationale/National Entry: 2005/02/02
 (86) N° demande PCT/PCT Application No.: US 2003/024342
 (87) N° publication PCT/PCT Publication No.: 2004/054153
 (30) Priorité/Priority: 2002/08/07 (US60/401,697)

(51) Cl.Int./Int.Cl. *H04M 1/00* (2006.01)
 (72) Inventeurs/Inventors:
 CAVE, CHRISTOPHER, CA;
 RUDOLF, MARIAN, CA
 (73) Propriétaire/Owner:
 INTERDIGITAL TECHNOLOGY CORPORATION, US
 (74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : SYSTEME DE COMMUNICATION MOBILE ET PROCEDE POUR ASSURER UNE COUVERTURE DE CANAL
 COMMUNE AU MOYEN D'ANTENNES DE MISE EN FORME DE FAISCEAU
 (54) Title: MOBILE COMMUNICATIONS SYSTEM AND METHOD FOR PROVIDING COMMON CHANNEL COVERAGE
 USING BEAMFORMING ANTENNAS

(57) **Abrégé/Abstract:**

Wireless mobile unit communication initiation is provided in a radio network that has a plurality of base stations, each providing wireless communication services in a respective geographic coverage. The wireless communication is established by first transmitting an omnidirectional sounding pulse from a wireless mobile unit. Information related to the detected sounding pulse is communicated to an interface by each base station detecting the sounding pulse. One of the base stations that detected the sounding pulse is selected for mobile unit communication based on the communicated information and directs a communication beam to the mobile unit to establish wireless communication. Alternatively, one or more of the base stations that detected the sounding pulse direct a communication beam to the mobile unit and the mobile unit selects unit the base station with which it is to establish wireless communication. Preferably, smart antennas, including directional beamforming capability, are employed by the base stations.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 June 2004 (24.06.2004)


PCT

(10) International Publication Number
WO 2004/054153 A3

- (51) International Patent Classification⁷: **H04M 1/00**
- (21) International Application Number:
PCT/US2003/024342
- (22) International Filing Date: 4 August 2003 (04.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/401,697 7 August 2002 (07.08.2002) US
- (71) Applicant: **INTERDIGITAL TECHNOLOGY CORPORATION** [US/US]; 300 Delaware Avenue, Suite 527, Wilmington, DE 19801 (US).
- (72) Inventors: **CAVE, Christopher**; 63 Place Chambord, Candiac, Quebec J5R 4W7 (CA). **RUDOLF, Marian**; 2046 Rue de la Visitation, Montreal, Quebec H2L 3C7 (CA).
- (74) Agents: **VOLPE, Anthony, S.** et al.; Volpe & Koenig, P.C., United Plaza, Suite 1600, 30 South 17th Street, Philadelphia, PA 19103 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- (88) Date of publication of the international search report:
29 December 2004
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: MOBILE COMMUNICATIONS SYSTEM AND METHOD FOR PROVIDING COMMON CHANNEL COVERAGE USING BEAMFORMING ANTENNAS

(57) Abstract: Wireless mobile unit communication initiation is provided in a radio network that has a plurality of base stations, each providing wireless communication services in a respective geographic coverage. The wireless communication is established by first transmitting an omnidirectional sounding pulse from a wireless mobile unit. Information related to the detected sounding pulse is communicated to an interface by each base station detecting the sounding pulse. One of the base stations that detected the sounding pulse is selected for mobile unit communication based on the communicated information and directs a communication beam to the mobile unit to establish wireless communication. Alternatively, one or more of the base stations that detected the sounding pulse direct a communication beam to the mobile unit and the mobile unit selects unit the base station with which it is to establish wireless communication. Preferably, smart antennas, including directional beamforming capability, are employed by the base stations.



WO 2004/054153 A3

MOBILE COMMUNICATIONS SYSTEM
AND METHOD FOR PROVIDING COMMON
CHANNEL COVERAGE USING BEAMFORMING ANTENNAS

[0001] FIELD OF THE INVENTION

[0002] The present invention relates to mobile communication systems. More particularly, the present invention relates to wireless communication systems that supporting mobile unit communications and a method of increasing capacity through the use of base stations with beamforming or "smart" antennas.

[0003] BACKGROUND OF THE INVENTION

[0004] Wireless communication systems are well known in the art. Generally, such systems comprise communication stations which transmit and receive wireless communication signals between each other. Typically, base stations are provided which are capable of conducting wireless concurrent communications with a plurality of subscriber stations generically known as wireless transmit/receive units (WTRUs), which include mobile units. Generally, the term base station includes but is not limited to a base station, Node-B, site controller, access point or other interfacing device in a wireless environment. The term WTRU includes but is not limited to a user equipment, mobile station, fixed or mobile subscriber unit, pager, or any other type of device capable of operating in a wireless environment.

[0005] In Universal Mobile Telecommunications Systems (UMTS) as specified by the Third Generation Partnership Project (3GPP), base stations are called Node Bs, subscriber stations are called User Equipments (UEs) and the wireless CDMA (Code Division Multiple Access) interface between the Node Bs and UEs is known as the Uu interface.

[0006] A typical UMTS system architecture in accordance with current 3GPP specifications is depicted in Figure 1a. The UMTS network architecture includes a Core Network (CN) interconnected with a UMTS Terrestrial Radio

Access Network (UTRAN) via an interface known as Iu which is defined in detail in the current publicly available 3GPP specification documents.

[0007] The UTRAN is configured to provide wireless telecommunication services to users through UEs via the Uu radio interface. The UTRAN has base stations, Node Bs, which collectively provide for the geographic coverage for wireless communications with UEs. In the UTRAN, groups of one or more Node Bs are connected to a Radio Network Controller (RNC) via an interface known as Iub in 3GPP. The UTRAN may have several groups of Node Bs connected to different RNCs. Two RNCs are shown in the example depicted in Figure 1a. Where more than one RNC is provided in a UTRAN, inter-RNC communication is performed via an Iur interface.

[0008] In existing systems, when a mobile unit is first turned on or traverses into a region of multiple base station coverage, a determination must be made as to which base station the mobile unit will be paired for conducting wireless communication. Depending upon system design, the mobile unit, the communications network or the base stations will determine the pairing between each mobile unit and a base station.

[0009] In one type of configuration, a mobile unit monitors common signals from all base stations that it receives and synchronizes itself to the base station with the best quality of service signal (QoS). In such systems, a beacon signal radiated by each base station is an omnidirectional high powered transmission that has a tendency to generate interference.

[0010] Smart antennas that include beamforming capability are widely regarded as a promising technology for enhancing capacity and/or coverage of wireless radio access systems, such as 3GPP mobile communications systems. The distinguishing feature of a wireless radio access system employing smart antennas is that a user can be spatially isolated. Radio transmissions directed toward, or received from, a user are isolated in such a way that to minimize interference to or from other users. Figure 1b illustrates a smart antenna of a Node B focused at a UE of a 3GPP system.

[0011] Wireless radio access systems, such as UMTSs that employ smart antennas, derive two-fold system-level benefits by using highly focused directional antennas. First, the system capacity improves as a result of the reduction in generated interference. Second, the system coverage improves, resulting in an enhanced link budget. The increase in radio coverage from the use of smart antenna technology represents a particularly attractive feature for wireless communications systems. The application of smart antenna technology, including beamforming is rather straightforward once a radio link is established between a mobile and a radio access point to exchange information over a dedicated channel.

[0012] In addition to dedicated radio links, common channels are typically employed in wireless radio access systems. Common channels are established for various purposes, such as: 1) allowing for the temporal or frequency synchronization of mobiles, for example, a 3GPP shared synchronization channel (SCH); 2) broadcasting of system information that is essential for registration to the network upon power-up, for example on a 3GPP broadcast channel (BCH); and 3) paging of idle-mode mobiles, for example on a 3GPP paging indicator channel (PICH), paging channel (PCH) and forward access channel (FACH).

[0013] In a statistical sense, the geographical coverage that is provided by downlink common channels defines the coverage area of a base station, which in UMTS, is commonly referred to as a cell. More specifically, the service area provided by a wireless radio access system is determined from the coverage of common channels.

[0014] A significant increase in cell area covered by a wireless radio access system using smart antenna technology is enabled by employing highly directional antennas that boost the gain of such systems. Directional antenna gain is achievable when the position of an antenna can be estimated by its peer antenna, and vice versa. Such circumstances are generally fulfilled when a dedicated radio link is established between a mobile and a radio access point.

[0015] The usage of smart antennas for the transmission and reception of common channels is not defined in wireless radio access systems existing 3GPP

specifications and the advantages resulting from the use of smart antenna technology have yet to be exploited for the transmission and reception of common channels. A reason for this is that coverage of common channels, such as BCH and PICH must be guaranteed for all mobiles, including those for which the location is unknown. More specifically, a radio access network must ensure that all mobiles can reliably synchronize with the network, read broadcast information, and monitor pages, to name a few. This complication results in wireless radio access systems that transmit common channels using conventional omni-directional antennas that cover entire cells or cell sectors.

[0016] In order to match the extended coverage of dedicated channels using smart antennas, the transmission power of downlink common channels may be increased. However, an increase in transmission power by all radio access points, for example, base stations, also results in an increase in interference. Such a solution is ineffective in wireless radio access systems that are limited by interference. The present preferred solution takes advantage of smart antenna technology to extend coverage while minimizing interference.

[0017] SUMMARY

[0018] The present invention makes use of smart antenna technology, including beamforming for a wireless radio access system. The functionality of smart antennas for radio links is preferably applied to common channels, resulting in a significant increase in cell coverage. An omnidirectional sounding pulse is used in connection with initiating mobile unit wireless communications. The sounding pulse, a radio frequency (RF) signal with or without intelligence, should not be confused with conventional mobile unit uplink channels.

[0019] In one embodiment a radio network is provided that has a plurality of base stations, each providing wireless communication services in a respective geographic coverage area that may or may not overlap with the geographic coverage areas of other of the base stations. An interface is connected to the base stations.

[0020] A wireless communication is established by first transmitting an omnidirectional sounding pulse from a wireless mobile unit located in a geographic coverage area of at least one of the base stations. Information related to the detected sounding pulse is communicated to the interface by each base station detecting the sounding pulse. One of the base stations that detected the sounding pulse is selected for mobile unit communication based on the communicated information. The selected base station directs a communication beam to the mobile unit to establish wireless communication.

[0021] In one non-limiting example of the first embodiment, the radio network is a UMTS Terrestrial Radio Access Network (UTRAN), each base station is a Node B, the interface is a Radio Network Controller (RNC) and the mobile unit is a mobile User Equipment (UE). In such case, the communicating of related sounding pulse information is between Node Bs and the RNC via an Iub or a combination Iub/Iur interface via another RNC. The base station selection is preferably performed by the RNC by selecting a Node B and the communication established between the selected Node B and the UE is via a Uu interface.

[0022] Preferably, each base station has a selectively operable beamforming antenna. The establishment of a wireless communication then includes determining a relative location of the mobile unit with respect to the beamforming antenna of the selected base station based on information related to the detected sounding pulse. Accordingly, in directing of a communication beam the selected base station's antenna is operated to form a communication beam covering a selected portion of the coverage area serviced by the selected base station that encompasses the relative location of the mobile unit.

[0023] The formed communication beam preferably carries common channels. In such case, the selected base station's antenna is operated to form a communication beam that encompasses the relative location of the mobile unit such that other mobile units with which the selected base station is conducting wireless communication are also encompassed within the formed communication

beam so that the formed beam provides common channel service to a plurality of mobile units.

[0024] If the mobile unit does not receive a directed communication beam from a base station within a predefined time period from its transmitting of an omnidirectional sounding pulse, the communication initiation as preferably restarted. Accordingly, the mobile unit is configured to transmit an omnidirectional sounding pulse to initiate communication with a base station and to transmit a subsequent sounding pulse which may be of increased power if a communication beam from a base station that detected a sounding pulse is not established.

[0025] Also, the mobile units are preferably configured to monitor the power level of a communication with a base station and to repeating the communication initiation if the monitored power level falls below a predefined level. Additionally, the mobile units can be configured to transmit a series of omnidirectional sounding pulses of increasing power to initiate communication with a base station.

[0026] An omnidirectional sounding pulse may be transmitted from each of a plurality of mobile units. In such case, information related to each distinguishable sounding pulse from each respective mobile unit detected by a base station is communicated to a respective selecting interface. Each respective interface selects a base station for each respective mobile unit communication based on the information related to the distinguishable detected sounding pulse of the respective mobile unit from each base station that detected a distinguishable sounding pulse of the respective mobile unit. For each respective mobile unit for which at least one base station received a distinguishable sounding pulse, a communication beam from the respective selected base station is directed to the mobile unit to establish wireless communication.

[0027] Preferably, the formed communication beams carry common channels. In some instances, a first base station is selected for communication with a first mobile unit and is also selected for communication with a second mobile unit. The first base station's antenna is then operated to form a

communication beam that encompasses the relative location of both the first and second mobile units so that the formed beam provides common channel service to both first and second mobile units. In other instances a first base station is selected for communication with a first mobile unit by a first selected interface and a second base station is selected for communication with a second mobile unit by a second selected interface.

[0028] When at least one base station receives the sounding pulse, measurements can be made to determine a received power level and an estimate of the angle of arrival to the mobile unit. This information from one or more base stations can be used to determine the mobile unit's relative location and to accordingly direct a communication beam toward the mobile unit.

[0029] In a second embodiment, the mobile unit selects the base station with which it will establish wireless communication. As in the first embodiment, an omnidirectional sounding pulse is transmitted from the mobile unit located in a geographic coverage area of at least one of the base stations. A communication beam is directed from base stations detecting the sounding pulse towards the mobile unit. One of the base stations that detected the sounding pulse is then selected based on the communication beams received by the mobile unit. A wireless communication is then established between the selected base station and the mobile unit.

[0030] The implementing radio network can have a controlling interface connected to the base stations. In such case, the information related to the detected sounding pulse can be communicated to the interface by each base station detecting the sounding pulse. One or more of the base stations that detected the sounding pulse can then be chosen based on the communicated information so that only the chosen base stations direct a communication beam to the mobile unit. In this way the radio access network can selectively limit the selection made by the mobile unit.

[0031] A preferred mobile includes a transmitter configured to transmit an omnidirectional sounding pulse and a receiver for receiving communication beams from base stations that detected a sounding pulse transmitted by the

mobile unit. To implement the second embodiment, the mobile unit includes a processor configured to select a base station with which to establish a wireless communication based on communication beams received by the mobile unit from base stations that detected a sounding pulse transmitted by the mobile unit.

5 Each mobile unit can be equipped with a global positioning system (GPS). In such case, the mobile units are preferably configured to transmit an omnidirectional sounding pulse that includes mobile unit location information determined by its GPS. The mobile units can also be configured to transmit an omnidirectional sounding pulse that includes mobile unit identification information.

10 Other objects and advantages of the present invention will be apparent to those skilled in the art from the following detailed description and related drawings.

 According to an embodiment of the present invention there is provided a method for establishing a wireless communication at a base station. The method comprises: detecting an omnidirectional sounding pulse from a wireless transmit/receive unit (WTRU),
15 communicating information related to the detected omnidirectional sounding pulse to an interface, receiving from the interface a relative location of the WTRU and a notification to establish a wireless communication with the WTRU, using a selectively operable beamforming antenna to direct a common channel toward the relative location of the WTRU, and establishing a wireless communication with the WTRU.

20 According to another embodiment of the present invention there is provided a method for establishing a wireless communication at a base station. The method comprises: detecting an omnidirectional sounding pulse from a wireless transmit/receive unit (WTRU), using a selectively operable beamforming antenna to direct a common channel toward a relative location of the WTRU, and establishing a wireless communication with the WTRU.

25 According to another embodiment of the present invention there is provided a base station comprising: a selectively operable beamforming antenna. The base station is configured to detect omnidirectional sounding pulses from wireless transmit/receive units (WTRUs) and to communicate information related to a detected omnidirectional sounding pulse from a WTRU to an interface. The base station is configured to receive from the
30 interface a relative location of the WTRU and a notification to establish a wireless

communication with the WTRU. The base station is configured to begin a wireless communication with the WTRU in response to receiving a relative location of the WTRU and a notification to establish a wireless communication with the WTRU by selectively operating the beamforming antenna to direct a common channel toward the relative location
5 of the WTRU.

According to another embodiment of the present invention there is provided a base station comprising: a selectively operable beamforming antenna. The base station is configured to detect omnidirectional sounding pulses from wireless transmit/receive units (WTRUs) and to begin a wireless communication with the WTRU in response to detecting
10 an omnidirectional sounding pulse from a WTRU by selectively operating the beamforming antenna to direct a common channel toward a relative location of the WTRU.

According to another embodiment of the present invention there is provided a wireless transmit/receive unit (WTRU) comprising: an antenna configured to transmit an omnidirectional sounding pulse to establish a wireless communication with a base station.
15 The WTRU is configured to receive a directional common channel from the base station and begin the wireless communication with the base station.

BRIEF DESCRIPTION OF THE DRAWING(S)

Figure 1a depicts a typical UMTS system architecture in accordance with
20 current 3GPP specifications.

Figure 1b illustrates a smart antenna of a Node B focused at a UE of a 3GPP system.

Figure 1c illustrates a UE traveling through the cells covered by a network of Node B base stations of a 3GPP system that employ smart antennas.

25 Figure 2 is a flow diagram of a base station selection procedure in accordance with an embodiment of the present invention.

Figure 3 is a flow diagram of a base station selection procedure variation in accordance with an embodiment of the present invention.

30 Figure 4 is a flow diagram of a reselection procedure in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is described with reference to the drawing figures wherein like numerals represent like elements throughout. The present

invention can be applied to some or all of a systems' downlink common channels.

For reason of simplicity, the invention as applied to a UMTS system for downlink common channels is described herein. However, the proposed invention is applicable in any wireless system.

[0043] The present invention provides a wireless radio access network having networked base stations with an improved base station selection mechanism for mobile units, i.e. mobile WTRUs, as they enter and/or travel through the respective areas of geographic coverage provided by the respective base stations. Such mobile units, for example the UEs illustrated in Figure 1a, generally include a transmitter, a receiver and a communication signal processor. The network preferably includes some type of base station interface that makes the selection. Such an interface for node Bs of a 3GPP network is a Radio Network Controller (RNC). However, an alternative embodiment provides for self-selection by the mobile unit.

[0044] In lieu of providing complete uniform coverage throughout an entire cell or cell sector, a base station selectively directs at least some, but preferably all, downlink common channels toward individual mobile units using smart antenna technology, including beamforming. Figure 1b illustrates such coverage in a 3GPP system by a node B for a mobile unit UE1 traveling a cell indicated in phantom. Preferably, coverage by a base station of a downlink common channel or beacon channel matches that of dedicated channels using smart antennas.

[0045] A pattern of mutually exclusive cells can be mapped to denote the overall coverage area of a wireless radio access network as illustrated in phantom in Figure 1c. However, the actual geographic coverage area capable of being serviced by each base station normally extends beyond the nominal cell mapping and overlaps with the actual geographic coverage area of neighboring base stations. For, example in Figure 1c, the mobile unit UE is depicted as being capable of being serviced by at least any of base stations BS₁, BS₂, or BS₄.

[0046] Figure 2 is a flow diagram of a base station selection procedure in accordance with an embodiment of the present invention. In a first step 202, a

mobile unit emits a sounding pulse in a using an omni directional antenna to produce a uniformly radiated radio frequency (RF) pattern. Each base station that receives the sounding pulse, communicates that information to a Radio Network Controller (RAN) as indicated in step 204. For example, a sounding pulse emitted by mobile unit UE in Figure 1c would most likely be received by base stations BS₂ and BS₄, but may also be received by base station BS₁ and possibly base stations BS₆ and BS₇ as well.

[0047] The receiving base stations may or may not be controlled by the same RNC. Where more than one RNC is involved, preferably the one that first receives a communication from one of its associated node B base stations becomes the deciding RNC and has the reception of the sounding pulse information conveyed to it by the RNC(s) associated with the other base station(s) that receive the sounding pulse such as via a standard Iur interface as illustrated in Figure 1a. Where a base station is in another UTRAN, communication to the deciding RNC can be made via the core network of an existing 3GPP system.

[0048] The RAN selects one of the pulse receiving base stations and determines the direction from the selected base station to the mobile unit as reflected in step 206. The selection decision is preferably based on the strength of the received signal. Where more than one base station receives the sounding pulse above a selected minimum strength, other standard quality of service QoS criteria can be compared in the selection process. Also, overall network traffic may be considered in the selection decision such as disclosed in U.S. Patent Appln. No. 10/305,595 owned by the assignee of the present invention.

[0049] Where the deciding RNC is not the RNC directly associated with the selected base station, the selected base station's RNC can be used to determine the direction from the selected base station to the mobile unit. However, where overall network traffic is being evaluated the RNC(s) can communicate all of the data to the core network and the core network can be utilized to assist in or make the base station selection. Such alternatives can be triggered when the communication traffic with respect to an RNC or UTRAN reach certain specified minimum levels. As intimated by Figure 1c, even though base stations BS₂ and

BS₄, are closer to mobile unit UE, base station BS₁ can possibly be selected based on Qos and overall network traffic considerations.

[0050] As indicated in step 208, once selected, the selected base station directs its transmission of downlink common channels towards the mobile unit as shown in Figure 1b. The base station is preferably provided with a beamforming antenna for this purpose and the direction of the beam is preferably based on an estimate of the mobile unit's location. Directional antennas, phased array antennas or other types of antenna systems can be provided so that a beam from a base station antenna for transmission and/or reception covers a particular geographic area of a specific shape and size. The location estimate can be derived in a number of ways, but is preferably based upon information related to reception of the sounding pulse by one or more base stations. Quantitative measurements of beam strength and/or angle of reception from one or more base stations can be used in a conventional manner to calculate a relative mobile unit location. In a 3GPP type system, this may be done at either the RNC or the Node B. Alternatively, geolocation data may be attached to the sounding pulse by the mobile unit and a relative position determined by comparison with the known location of the selected base station's antenna. The mobile unit may be equipped with a Global Positioning System (GPS) for this purpose.

[0051] The sounding pulse is a physical signal that is preferably transmitted using an isotropic antenna, which is an antenna that radiates or receives equally in all directions. The form of the sounding pulse is preferably dependent on the radio access technology. For example, in CDMA-based systems, a very short duration burst spanning multiple chips, a short chip sequence, can represent the sounding pulse.

[0052] The timing for the sounding pulse depends on the implementation and realization of the physical signal, which depends on radio access technology. Each wireless communication medium requires a different pulse timing structure. For example, a FDD-CDMA sounding pulse would be different than a TDD-CDMA sounding pulse.

[0053] The physical signal that defines the sounding pulse itself may be realized with an Aloha or slotted Aloha technique. In an Aloha-like technique, the mobile unit simply transmits the sounding pulse burst whenever it wants to. There are no timing restrictions in the Aloha-like system. If the mobile unit does not get a response from a base station, this is considered a "connect" failure. A back-off procedure is then implemented. This procedure essentially retries to connect after the mobile unit waits a random amount of time until retransmitting.

[0054] In the slotted Aloha-like technique, the mobile unit transmits the sounding pulse at specific timeslots. This technique requires some sort of master timing. In case of failure, the back-off procedure corresponds to a mobile unit waiting a random number of timeslots until which the mobile unit retransmits.

[0055] In some situations, multiple mobile units may pulse at the same time to acquire the attention of the same RAN. When this occurs and the Node Bs can differentiate the signals from both mobile units, the RAN selects node Bs to direct common channels towards each mobile unit. If the Node Bs cannot differentiate the signals from each mobile unit, the RAN cannot make a proper Node B selection to direct the common channels toward each mobile unit. In this case, the selection preferably awaits the next pulse transmitted by each mobile unit. To ensure that subsequent pulses from these mobile units do not collide, a preferred back-off procedure for the mobile units includes waiting a random amount of time before retransmitting a sounding pulse, thus avoiding another collision. Successive pulses may be at increased power as discussed in the variation below.

[0056] A variation of the procedure illustrated in Figure 2 is set forth in Figure 3. Once the mobile unit enters a network service area, step 302, it emits a first sounding pulse at a low power, step 304. However, instead of a single pulse, the mobile unit emits a series of pulses and gradually steps up the transmission power during the emission of the series of sounding pulses, step 306. Preferably, each successive pulse is transmitted with a greater power than its immediate predecessor pulse.

[0057] One or more base stations which each detect at least one sounding pulse communicates its sounding pulse reception information to a RAN, step 308. The RAN selects one of the base stations and calculates the relative location of the mobile unit, step 310. The selected base station then directs one or more down link common channels to the mobile unit using smart antenna technology, step 312. The mobile unit then receives the down link channels and can then commence communications with another unit via the selected base station, step 314.

[0058] In either embodiment, upon detection of a sounding pulse, the radio access network (RAN) preferably uses measurements performed on the sounding pulse to subsequently direct the selected base station's transmission of one or many downlink common channels using a smart antenna. For example, the received signal power of the sounding pulse and the angle of arrival of the signal relative to a single base station can be used to determine the position of the mobile unit and the direction towards which common channels should be radiated using smart antennas. However, the RNC can correlate data received from all of the base stations that communicate reception of the sounding pulse to make a more accurate calculation of the mobile unit's geographic location.

[0059] A mobile unit preferably makes its presence known to a RAN upon power-up or when entering a UTRAN service area. Accordingly, the base stations must listen for sounding pulses at regular time intervals or continuously in order to detect the emergence of new mobile units. In addition, in order to maintain a relationship with a particular base station, mobile units that are camped out on a particular base station, i.e. not actively conducting communications, preferably schedule periodic pulses to ensure tracking of the location of the mobile unit so communications directed to such mobile unit can be promptly connected.

[0060] In order to facilitate the transmission and detection of the sounding pulse, certain downlink common channels providing timing information with respect to access opportunities for the uplink sounding pulse may be transmitted using omnidirectional antennas. However, this is preferably only performed if

the coverage of such synchronization channels can be assured without sacrificing downlink capacity.

[0061] In a variation of the Figure 3 embodiment, a series of sounding pulses are sent according to a power ramp-up procedure as follows. A mobile unit transmits an initial sounding pulse at a low power level as in step 304. After a period of time without reception of a reply from a base station, the mobile unit will step up the transmitted power and retry its sounding pulse. The procedure is repeated until a sufficient downlink communication from a base station is received. In other words, step 306 is skipped, or stopped, once steps 308, 310 and 312 are performed. The amount of time until the transmission of a "stepped-up" higher power sounding pulse can either be fixed or determined from a random back-off process performed by the mobile unit. Additionally, the amount of power increase for each step can also be fixed or variable.

[0062] In addition to or as an alternative to transmitting a sounding pulse upon entry into a service area, the mobile unit can be configured to transmit a sounding pulse when the received signal code power (RSCP) of one or more selected common channels falls below a certain threshold level. Also, once the radio access network has determined the location of the mobile unit, registration and authentication information is preferably exchanged between the network and the mobile unit. Network registration is preferably performed using conventional protocols as in current wireless systems.

[0063] While the invention relates to the usage of smart antennas on the downlink of the common channels, uplink registration and authentication information is not required to be transmitted using smart antennas. During further idle mode operation, which includes monitoring of pages, updates of system and broadcast information, network synchronization and other procedures are ensured through a mechanism that employs sounding pulses to track displaced mobiles. A displaced mobile is a mobile unit that has moved out from beneath the penumbra of the focused antenna of the base station that had been selected for communication with the mobile unit.

[0064] As in discontinuous reception for conventional UMTS systems, an idle-mode mobile unit must "wake-up" and acquire one or many common channels such as a paging channels or updates to system information on a broadcast channel (BCH). If the received power on desired common channel(s) is insufficient, the mobile unit can be configured to transmit a sounding pulse such that the radio access network can redirect the transmission of common channels using a base station's smart antenna.

[0065] Another application is realized for mobile units which employ a conventional DRX cycle. A DRX cycle is a mode a mobile unit reverts to when it loses contact with the network. If a mobile unit becomes disconnected from the network, the mobile unit will preferably periodically transmit a sounding pulse every DRX cycle prior to the acquisition of common channels in accordance with the invention as described above.

[0066] As a mobile unit traverses through a coverage area and more specifically upon leaving the coverage area of a given cell, there is a need for reselection of an appropriate base station for facilitating communications with the mobile unit. This can be done in accordance with the process described above using a base station interface device such as a 3GPP RNC. As an alternative, a mobile unit can be configured to be capable of selecting or reselecting a base station itself.

[0067] While a mobile unit self-selection is equally applicable for initiating wireless communication, a mobile unit self-selecting reselection procedure in accordance with the second embodiment of the present invention is set forth in Figure 4. In the case of reselection, the mobile unit monitors the received power of a downlink common channel transmitted by a currently selected base station to determine if it drops below a pre-selected threshold, step 402. When the threshold is passed, the mobile unit transmits a sounding pulse, step 404. Upon reception of the sounding pulse, neighboring base stations that receive the pulse direct the transmission of downlink common channels toward the mobile unit, step 406.

[0068] Figure 1c represents the case where base station BS₁ was previously selected for servicing communications for mobile unit UE which has emitted a sounding pulse after moving out of the nominal cell serviced by that base station. The figure illustrates base stations BS₂ and BS₄, having received the pulse, directing downlink common channels, for example a beacon channel, toward mobile unit UE. In this alternate embodiment, the mobile unit selects a base station based upon a comparison of the reception of downlink common channels from such neighboring base stations, step 408. Preferably, a cell registration process is then performed via the newly selected base station to properly redesignate the mobile units location with respect to the network, step 410.

[0069] The radio access network can control which cell a mobile unit selects by virtue of its control of the base station transmissions. Upon reception of the sounding pulse from multiple base stations, a RNC can estimate the location of the mobile unit using triangulation techniques and measurements from all base stations on the sounding pulse. The radio network controller can utilize the location of the mobile unit to direct the transmission of common channels from only one base station, i.e. the one to which the RNC chooses that the mobile unit should select. This type of control is particularly useful when evaluating overall network usage and capacity of particular node Bs so in order to provide a better utilization of network resources at a given time.

[0070] The sounding pulses can be generated at a frequency outside normal uplink and downlink telecom frequencies, thereby alleviating frequency congestion. For example, in a current deployment of CDMA, the mobile units are normally assigned channels at least 1.25 MHz apart, providing about 42 channels under current frequency allocation scheme. Typically, the uplink transmit frequency is 45 MHz lower than the downlink transmit frequency. The sounding pulses are preferably then assigned to a frequency in close proximity to the uplink or downlink, but not on the same frequency as either the uplink or downlink transmissions.

[0071] Normally the sounding pulse is preferably a simple short signal, containing no specific information, but optionally the sounding pulse can contain

identification information from the mobile unit. With such information, the base stations can readily determine and distinguish between pulses concurrently received from more than one mobile unit. This information can indicate the reason for which the mobile wants to connect to the network. For example, the mobile unit may want to simply register with the network or it may wish to set up a call.

[0072] Other variations and alternatives will be apparent to those skilled in the art and are considered to be within the scope of the present invention.

* * *

What is claimed is:

1. A method for establishing a wireless communication at a base station, the method comprising:

detecting an omnidirectional sounding pulse from a wireless transmit/receive unit (WTRU);

communicating information related to the detected omnidirectional sounding pulse to an interface;

receiving from the interface a relative location of the WTRU and a notification to establish a wireless communication with the WTRU;

using a selectively operable beamforming antenna to direct a common channel toward the relative location of the WTRU; and

establishing a wireless communication with the WTRU.

2. The method of claim 1 wherein the communicated information related to the detected omnidirectional sounding pulse includes information to facilitate determining the relative location of the WTRU.

3. The method of claim 2 wherein the communicated information related to the detected omnidirectional sounding pulse includes signal strength information, where the signal strength information indicates that the received signal strength crossed a threshold.

4. The method of claim 1 wherein the communicated information related to the detected omnidirectional sounding pulse includes geolocation information.

5. The method of claim 1 further comprising transmitting a cyclic sweeping beacon channel.

6. The method of claim 1 wherein detecting the omnidirectional sounding pulse includes detecting at least one of a plurality of omnidirectional sounding pulses.

7. The method of claim 6 wherein the plurality of omnidirectional sounding pulses includes a first pulse having a first signal strength and a second pulse having a second signal strength, where the second signal strength is greater than the first signal strength.

8. A method for establishing a wireless communication at a base station, the method comprising:

detecting an omnidirectional sounding pulse from a wireless transmit/receive unit (WTRU);

using a selectively operable beamforming antenna to direct a common channel toward a relative location of the WTRU; and

establishing a wireless communication with the WTRU.

9. The method of claim 8 including determining the relative location of the WTRU based on information related to the detected omnidirectional sounding pulse.

10. The method of claim 9 wherein the information related to the detected omnidirectional sounding pulse includes signal strength information, where the signal strength information indicates that the received signal strength crossed a threshold.

11. The method of claim 8 wherein the omnidirectional sounding pulse includes geolocation information.

12. The method of claim 8 further comprising transmitting a cyclic sweeping beacon channel.

13. The method of claim 8 wherein detecting the omnidirectional sounding pulse includes detecting at least one of a plurality of omnidirectional sounding pulses.

14. The method of claim 13 wherein the plurality of omnidirectional sounding pulses includes a first pulse having a first signal strength and a second pulse having a second signal strength, where the second signal strength is greater than the first signal strength.

15. A base station comprising:
a selectively operable beamforming antenna;
the base station configured to detect omnidirectional sounding pulses from wireless transmit/receive units (WTRUs);
the base station configured to communicate information related to a detected omnidirectional sounding pulse from a WTRU to an interface;
the base station configured to receive from the interface a relative location of the WTRU and a notification to establish a wireless communication with the WTRU; and
the base station configured to begin a wireless communication with the WTRU in response to receiving a relative location of the WTRU and a notification to establish a wireless communication with the WTRU by selectively operating the beamforming antenna to direct a common channel toward the relative location of the WTRU.

16. The base station of claim 15 configured to communicate information related to a detected omnidirectional sounding pulse from a WTRU to the interface to facilitate the interface in determining the relative location of the WTRU.

17. The base station of claim 16 configured to communicate information related to a detected omnidirectional sounding pulse from a WTRU including signal strength information, where the signal strength information indicates that the detected omnidirectional sounding pulse signal strength crossed a threshold.

18. The base station of claim 15 configured to detect omnidirectional sounding pulses from wireless transmit/receive units (WTRUs) that include geolocation information.

19. The base station of claim 15 wherein the selectively operable beamforming antenna is configured to transmit a cyclic sweeping beacon channel.

20. A base station comprising:
a selectively operable beamforming antenna;

the base station configured to detect omnidirectional sounding pulses from wireless transmit/receive units (WTRUs); and

the base station configured to begin a wireless communication with the WTRU in response to detecting an omnidirectional sounding pulse from a WTRU by selectively operating the beamforming antenna to direct a common channel toward a relative location of the WTRU.

21. The base station of claim 20 configured to direct a common channel toward a relative location of the WTRU where the relative location of the WTRU is determined from information related to the detected omnidirectional sounding pulse.

22. The base station of claim 21 configured to determine the relative location of the WTRU from signal strength information, where the signal strength information indicates that the detected omnidirectional sounding pulse signal strength crossed a threshold.

23. The base station of claim 20 configured to detect omnidirectional sounding pulses from wireless transmit/receive units (WTRUs) that include geolocation information.

24. The base station of claim 20 wherein the selectively operable beamforming antenna is configured to transmit a cyclic sweeping beacon channel.

25. The base station of claim 20 configured to detect a plurality of omnidirectional sounding pulses from a WTRU and to begin a wireless communication with the WTRU in response to detecting an omnidirectional sounding pulse from the WTRU that has a signal strength greater than a threshold.

26. A wireless transmit/receive unit (WTRU) comprising:
an antenna configured to transmit an omnidirectional sounding pulse to establish a wireless communication with a base station;
the WTRU configured to receive a directional common channel from the base station; and

the WTRU configured to begin the wireless communication with the base station.

27. The WTRU of claim 26 configured to include signal strength information in the omnidirectional sounding pulse.

28. The WTRU of claim 26 configured to include location information in the omnidirectional sounding pulse.

29. The WTRU of claim 26 further comprising:
a global positioning system (GPS) device configured to determine location information.

30. The WTRU of claim 26 wherein the antenna is an isotropic antenna configured to transmit equally in all directions.

31. The WTRU of claim 26 wherein the antenna is a selectively operable beamforming antenna configured to transmit directional beams and omnidirectional sounding pulses comprising a plurality of directional sounding pulses.

32. The WTRU of claim 26 wherein the antenna is configured to transmit a series of omnidirectional sounding pulses to establish a new wireless communication where each pulse is transmitted at a greater signal power than a previous pulse.

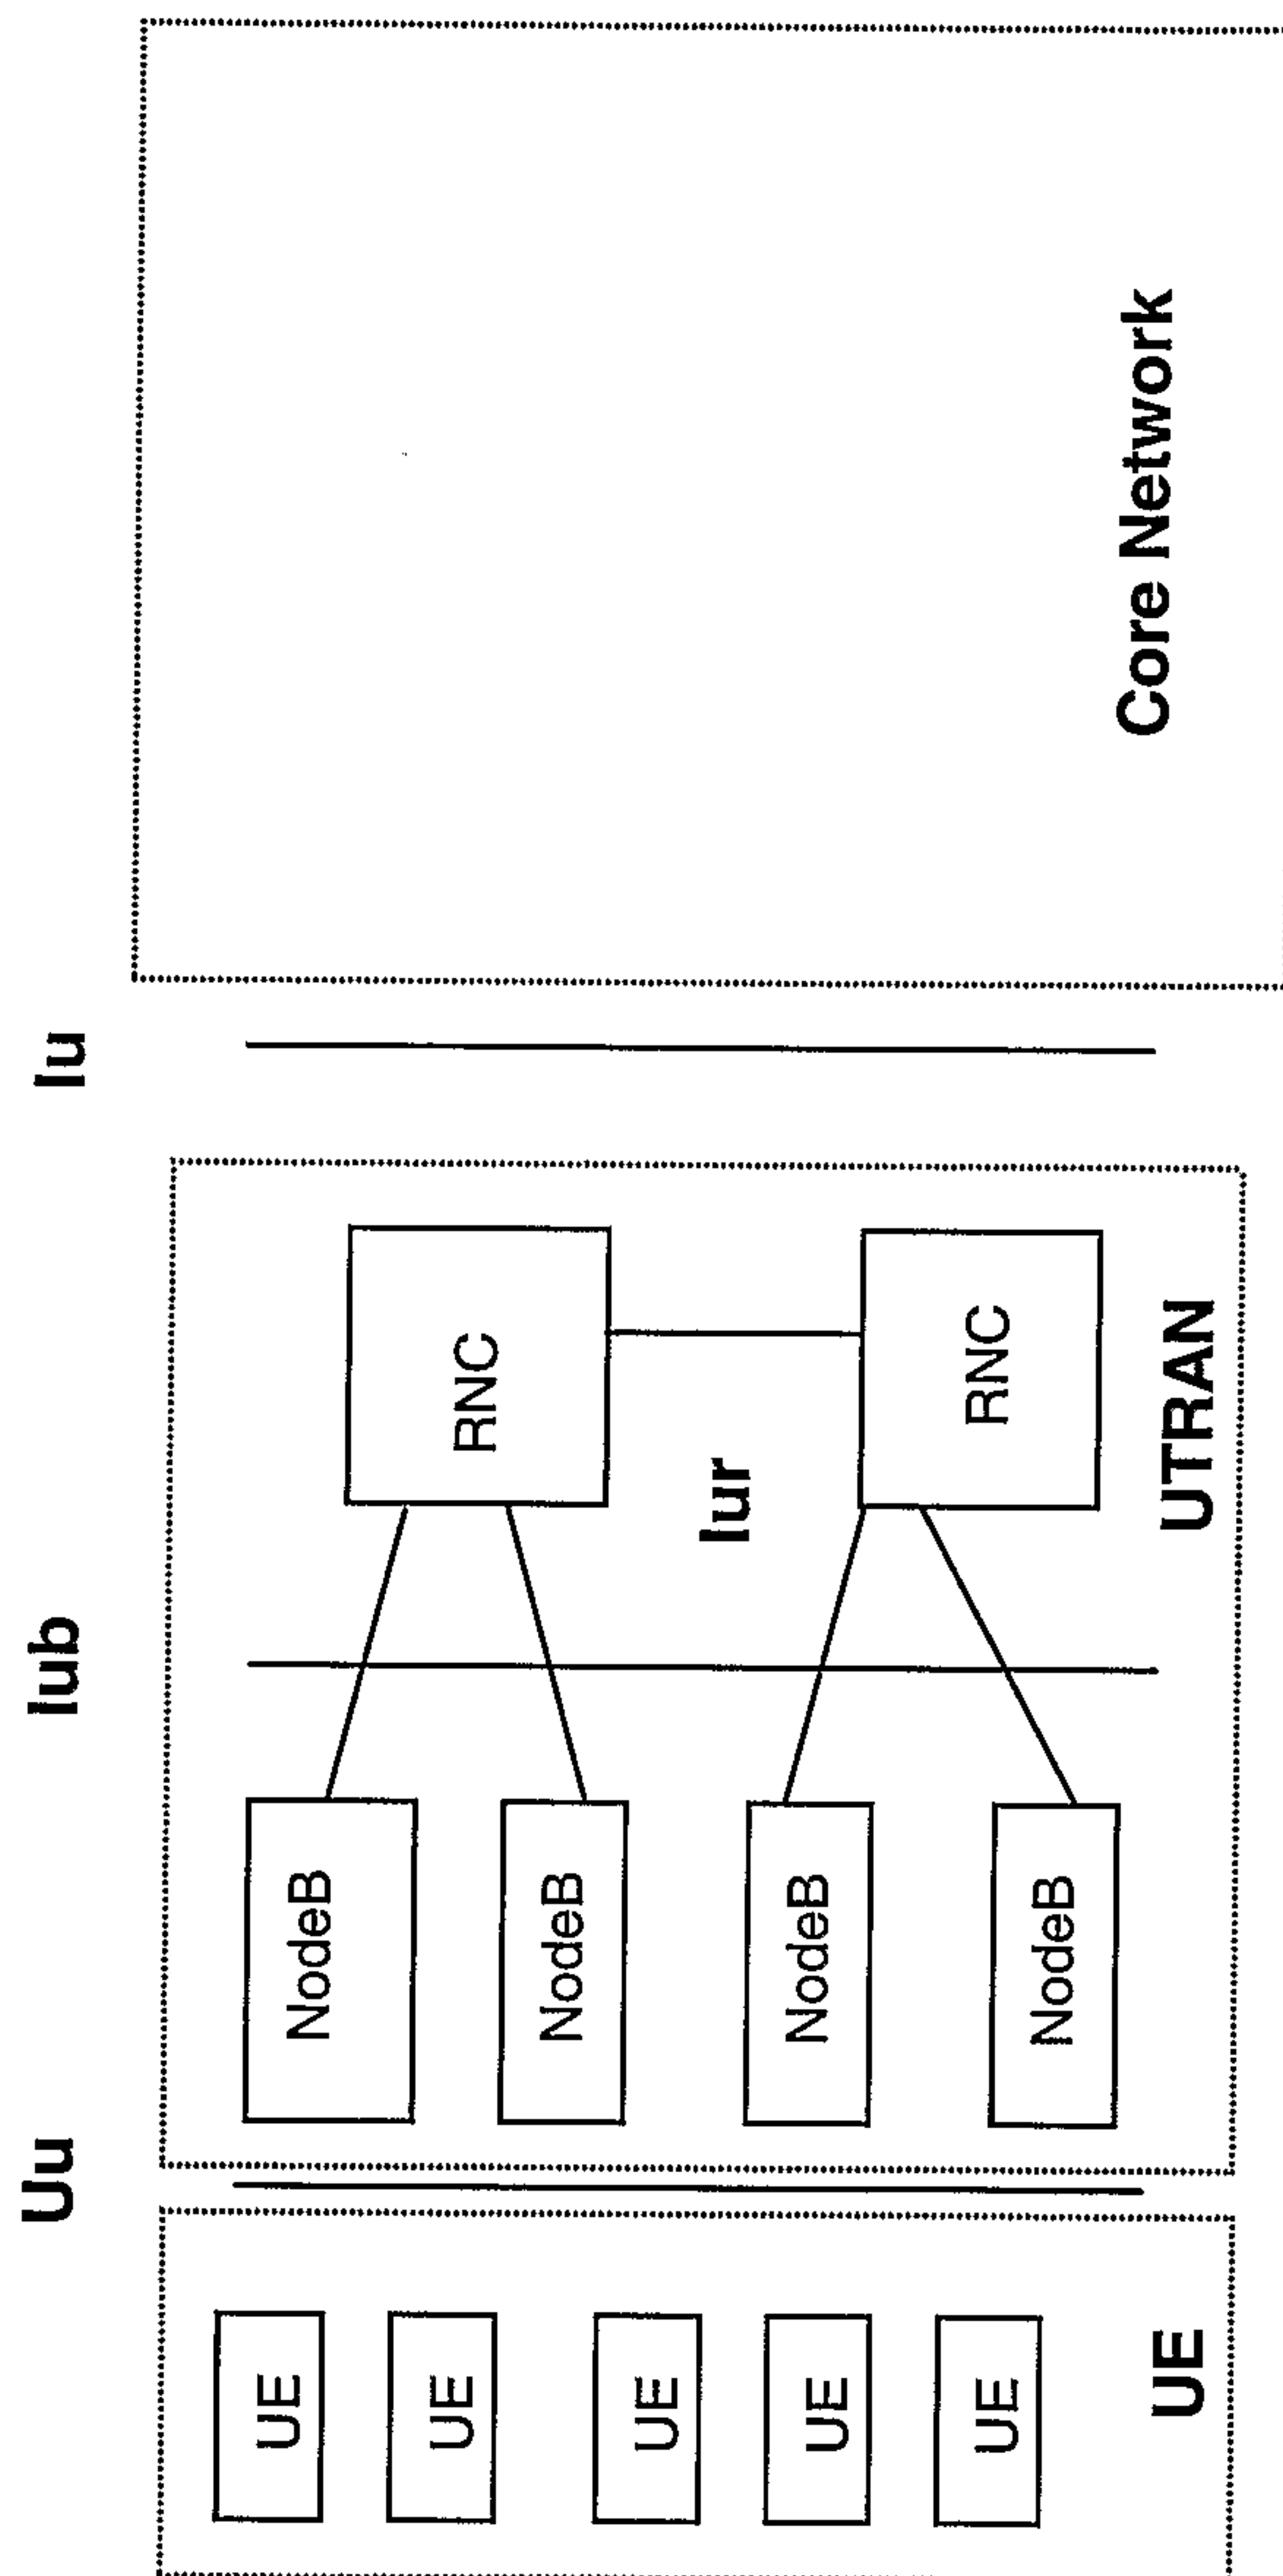


Figure 1a
(Prior Art)

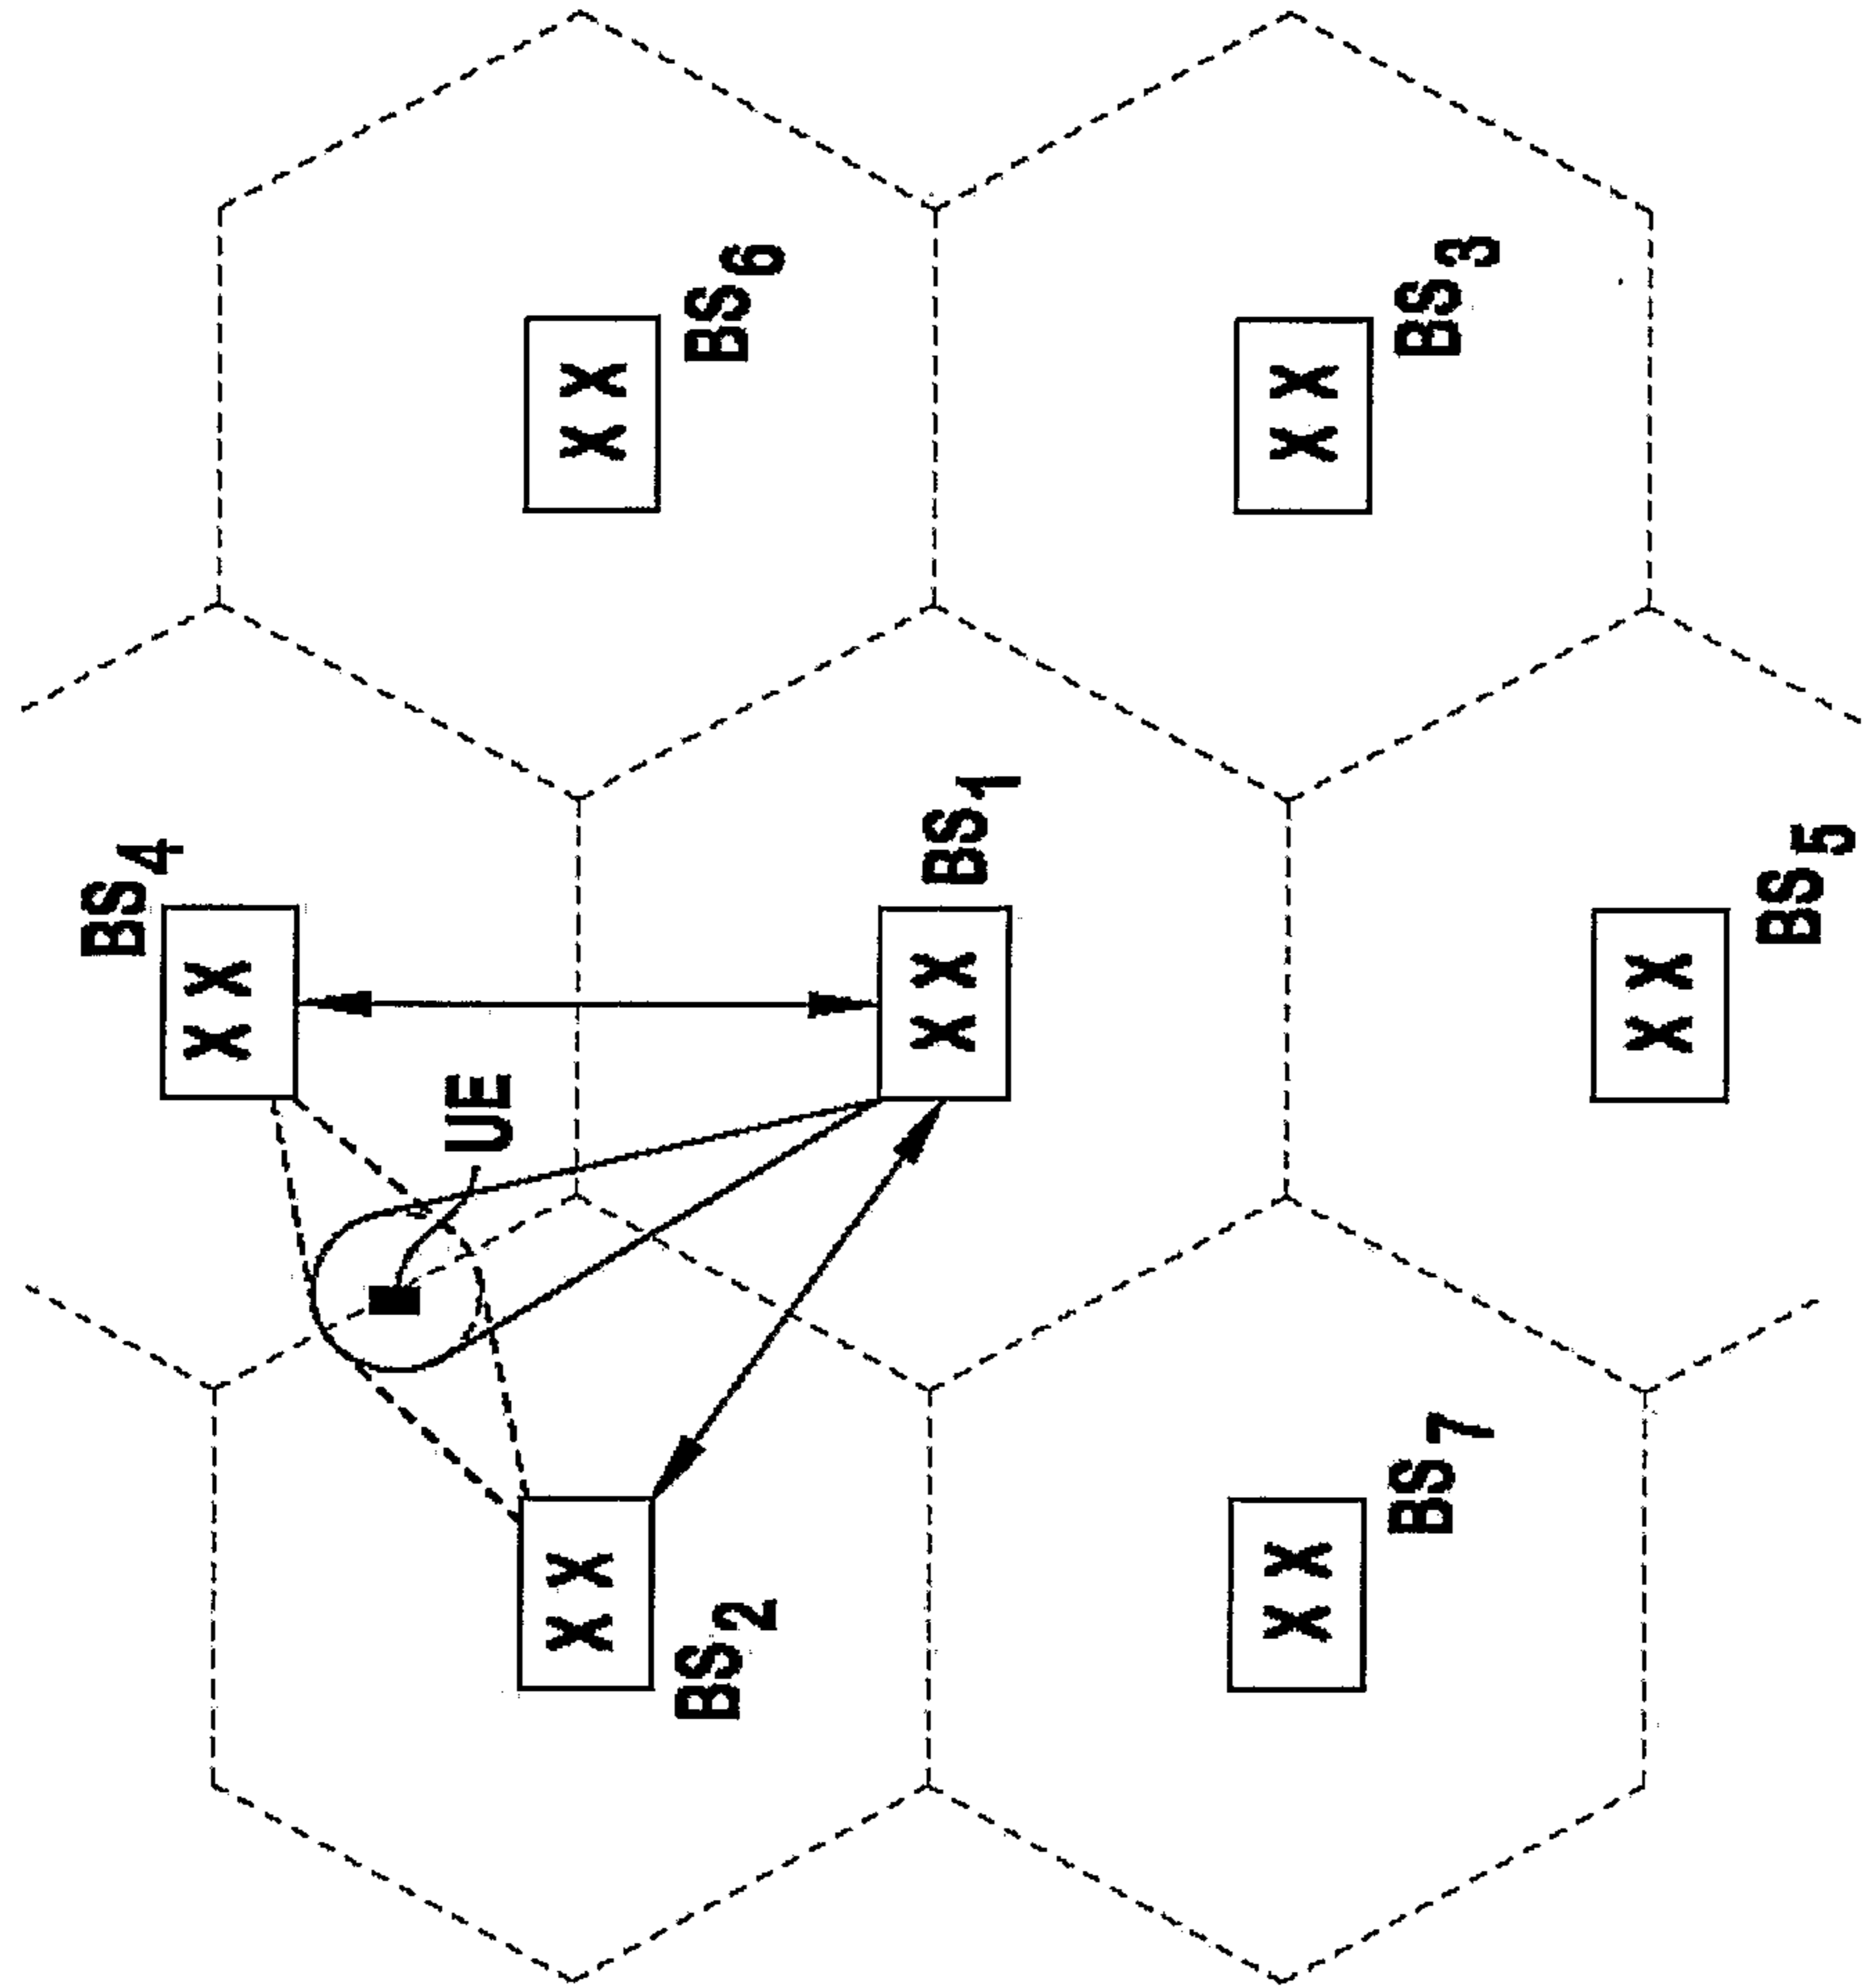


Figure 1c

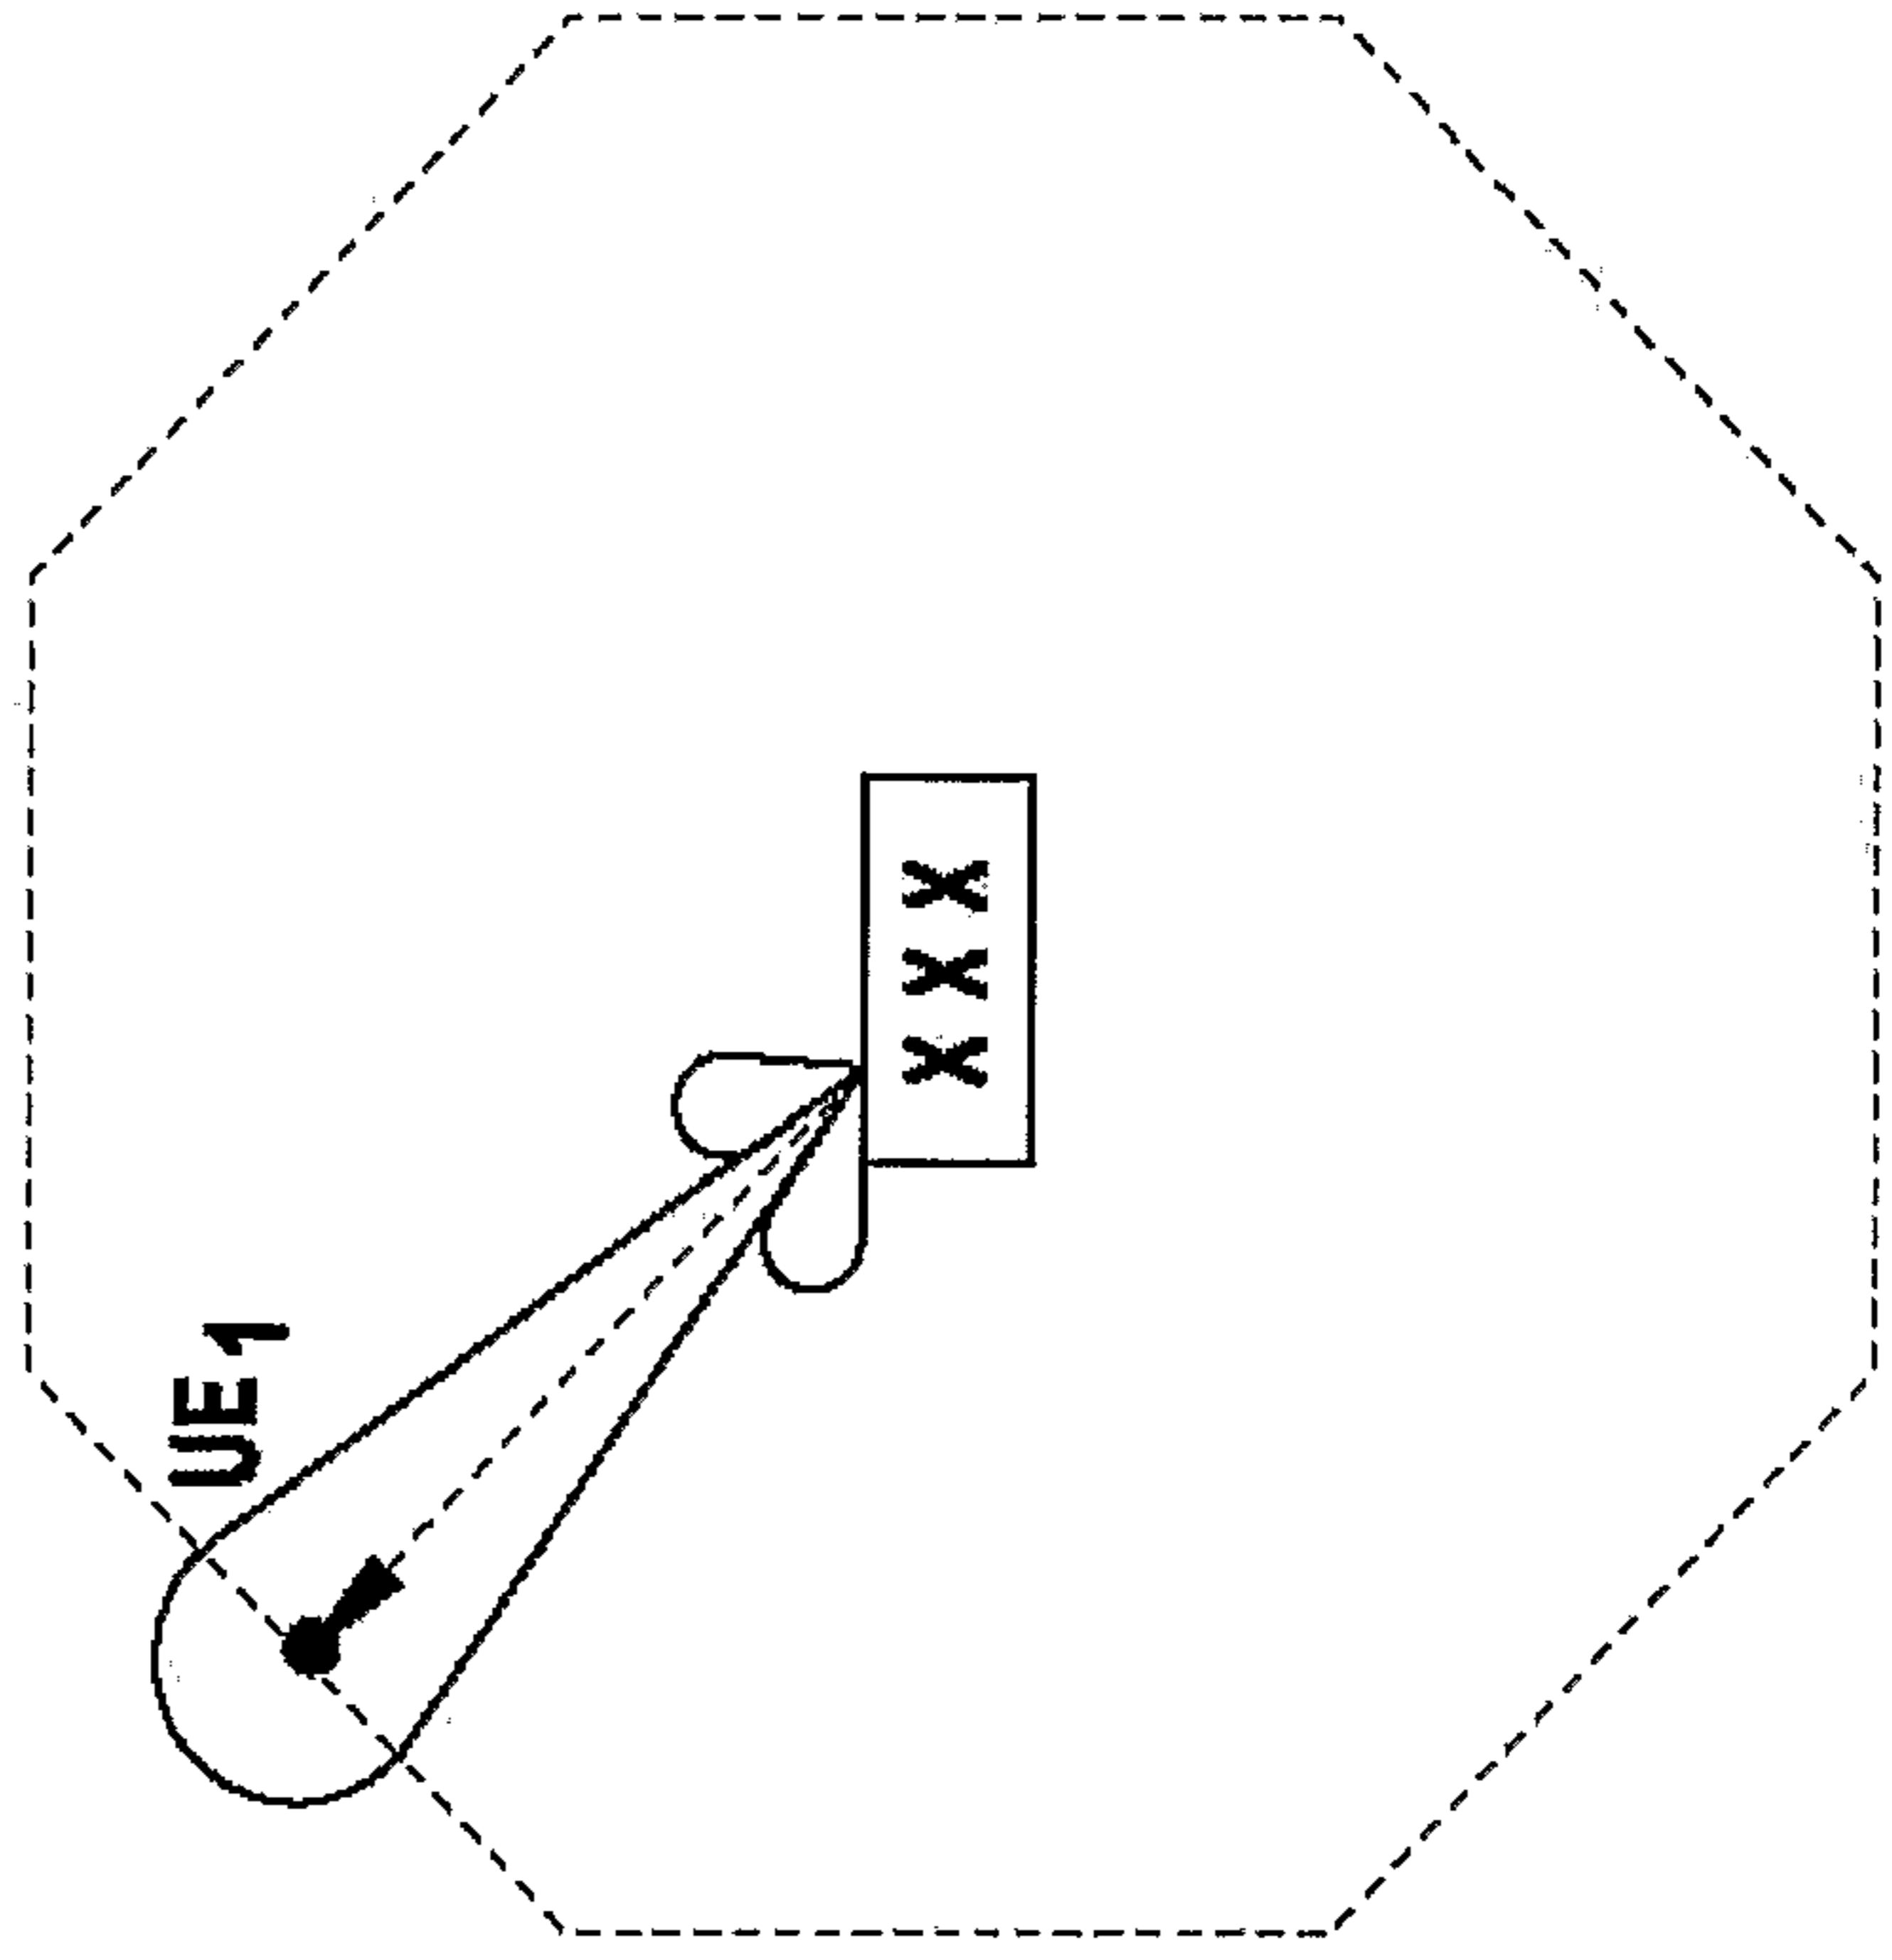
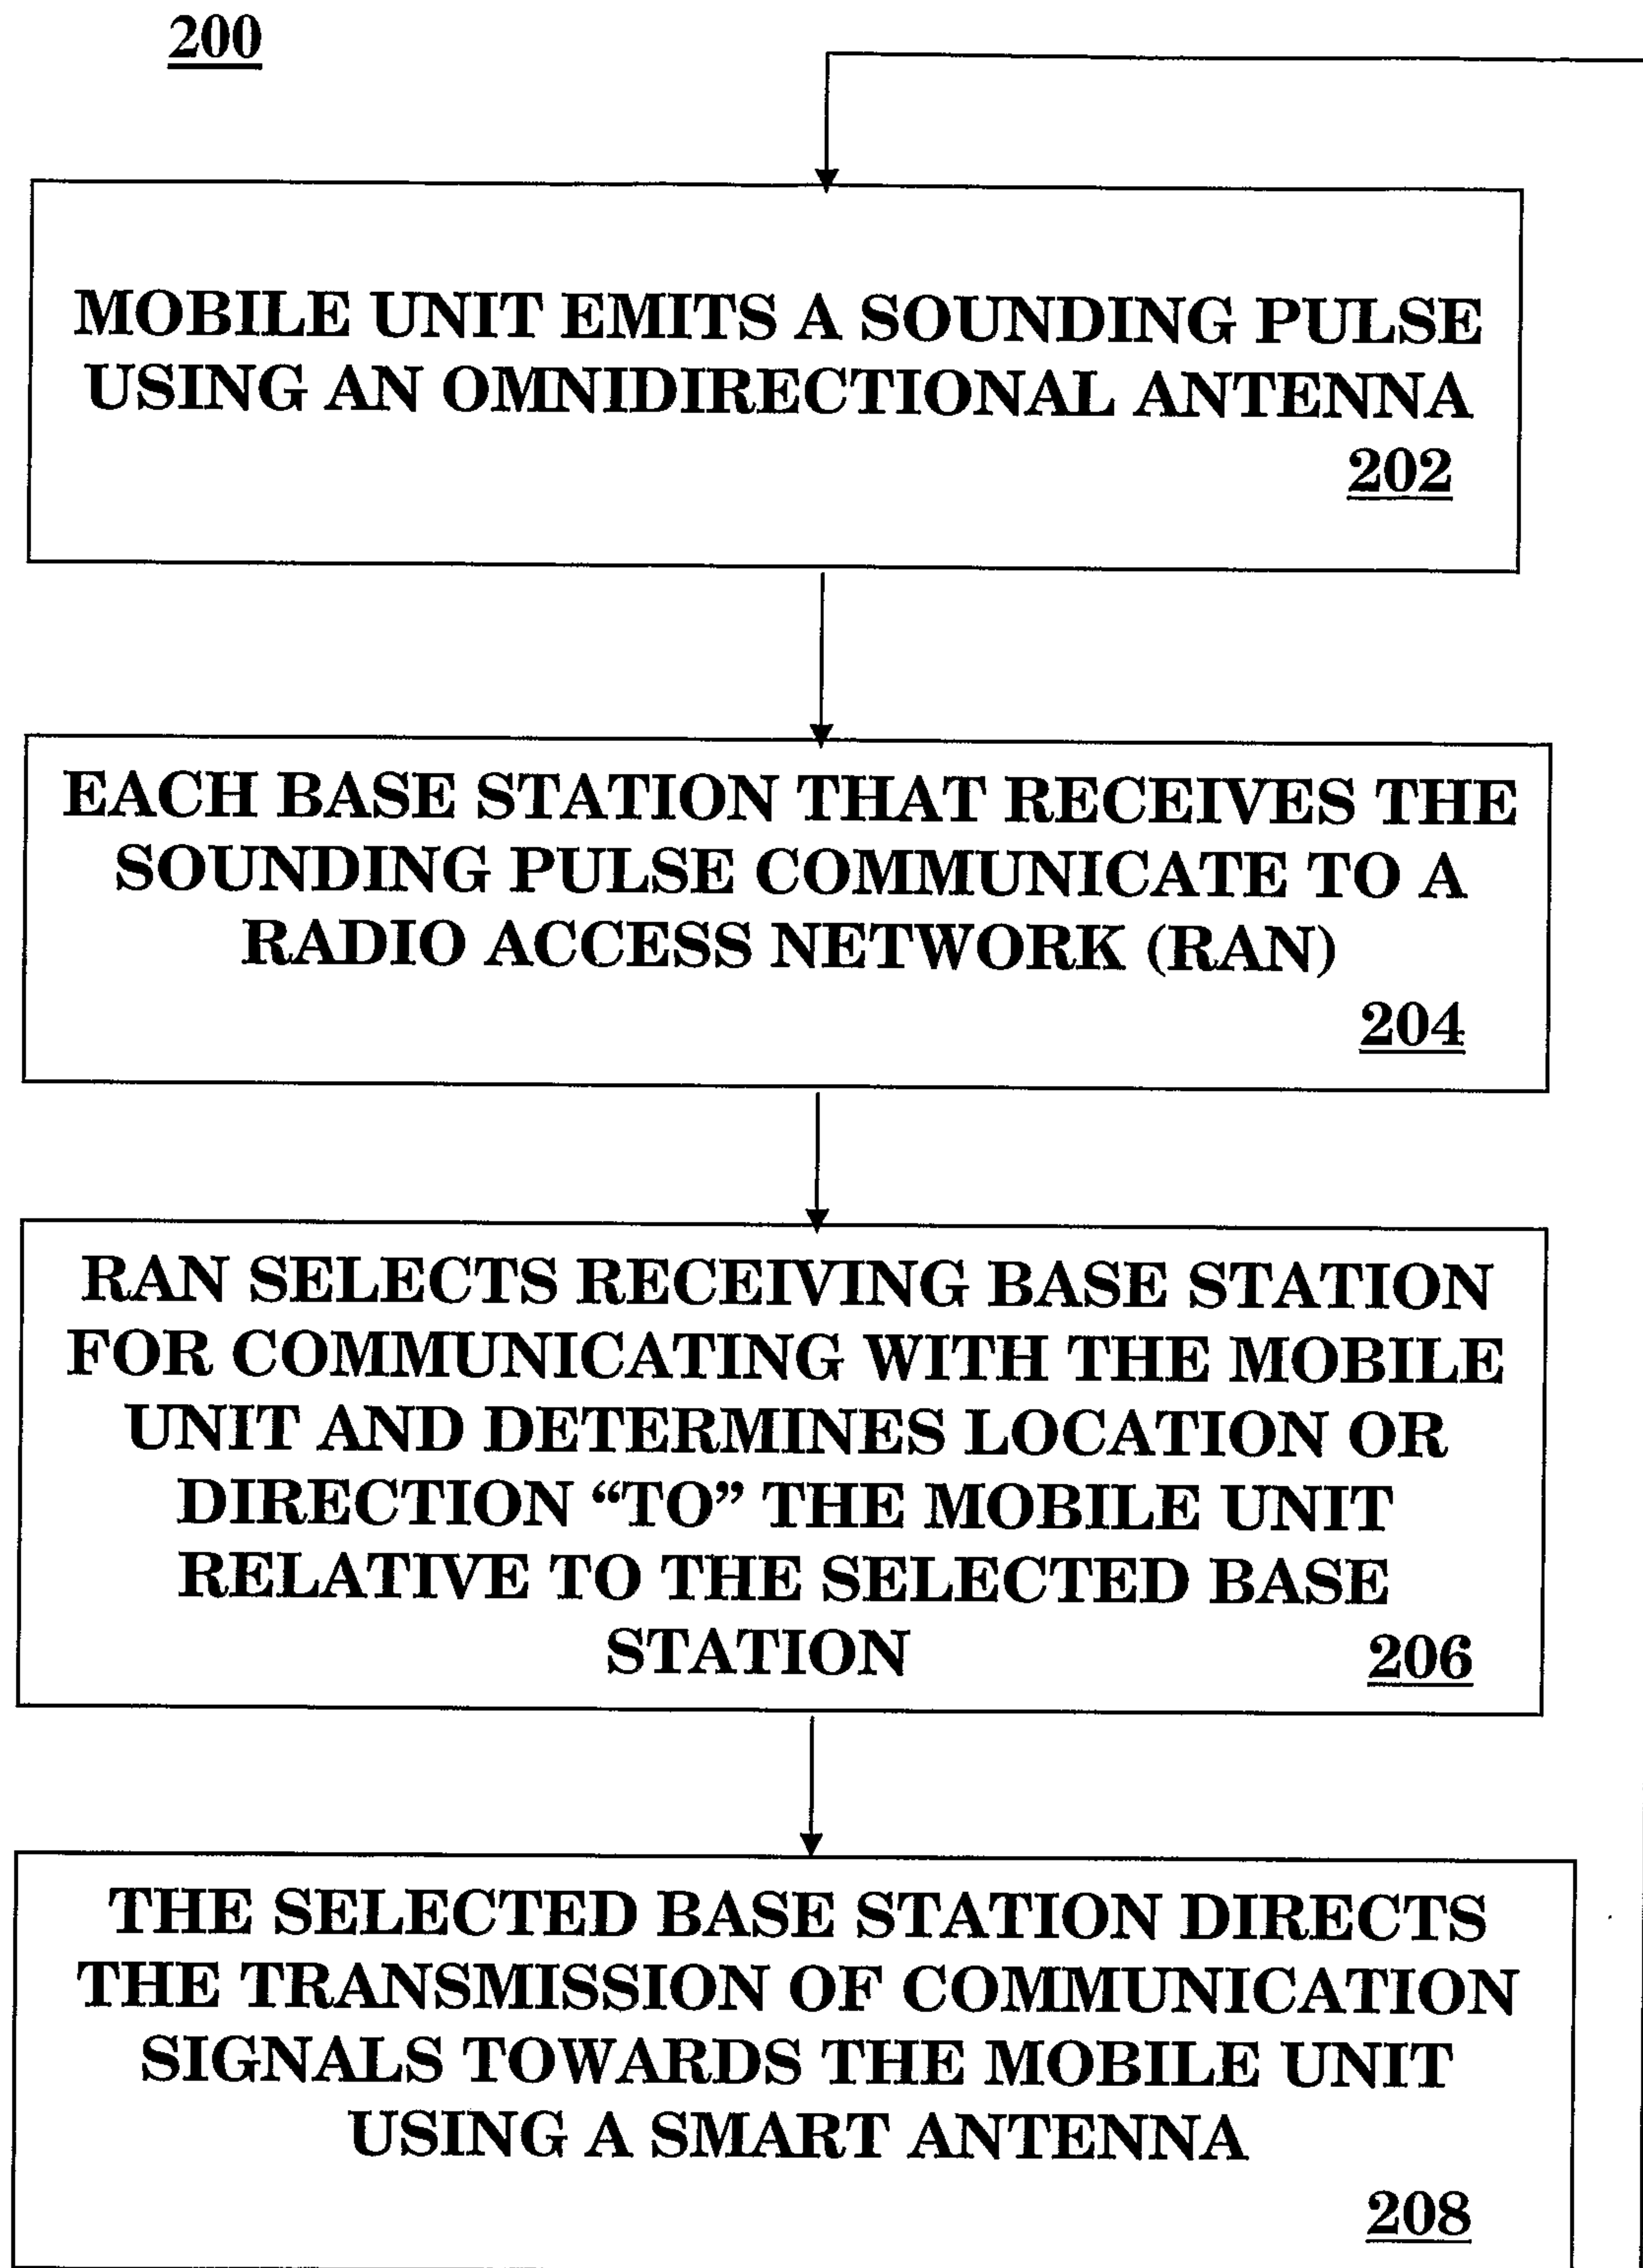
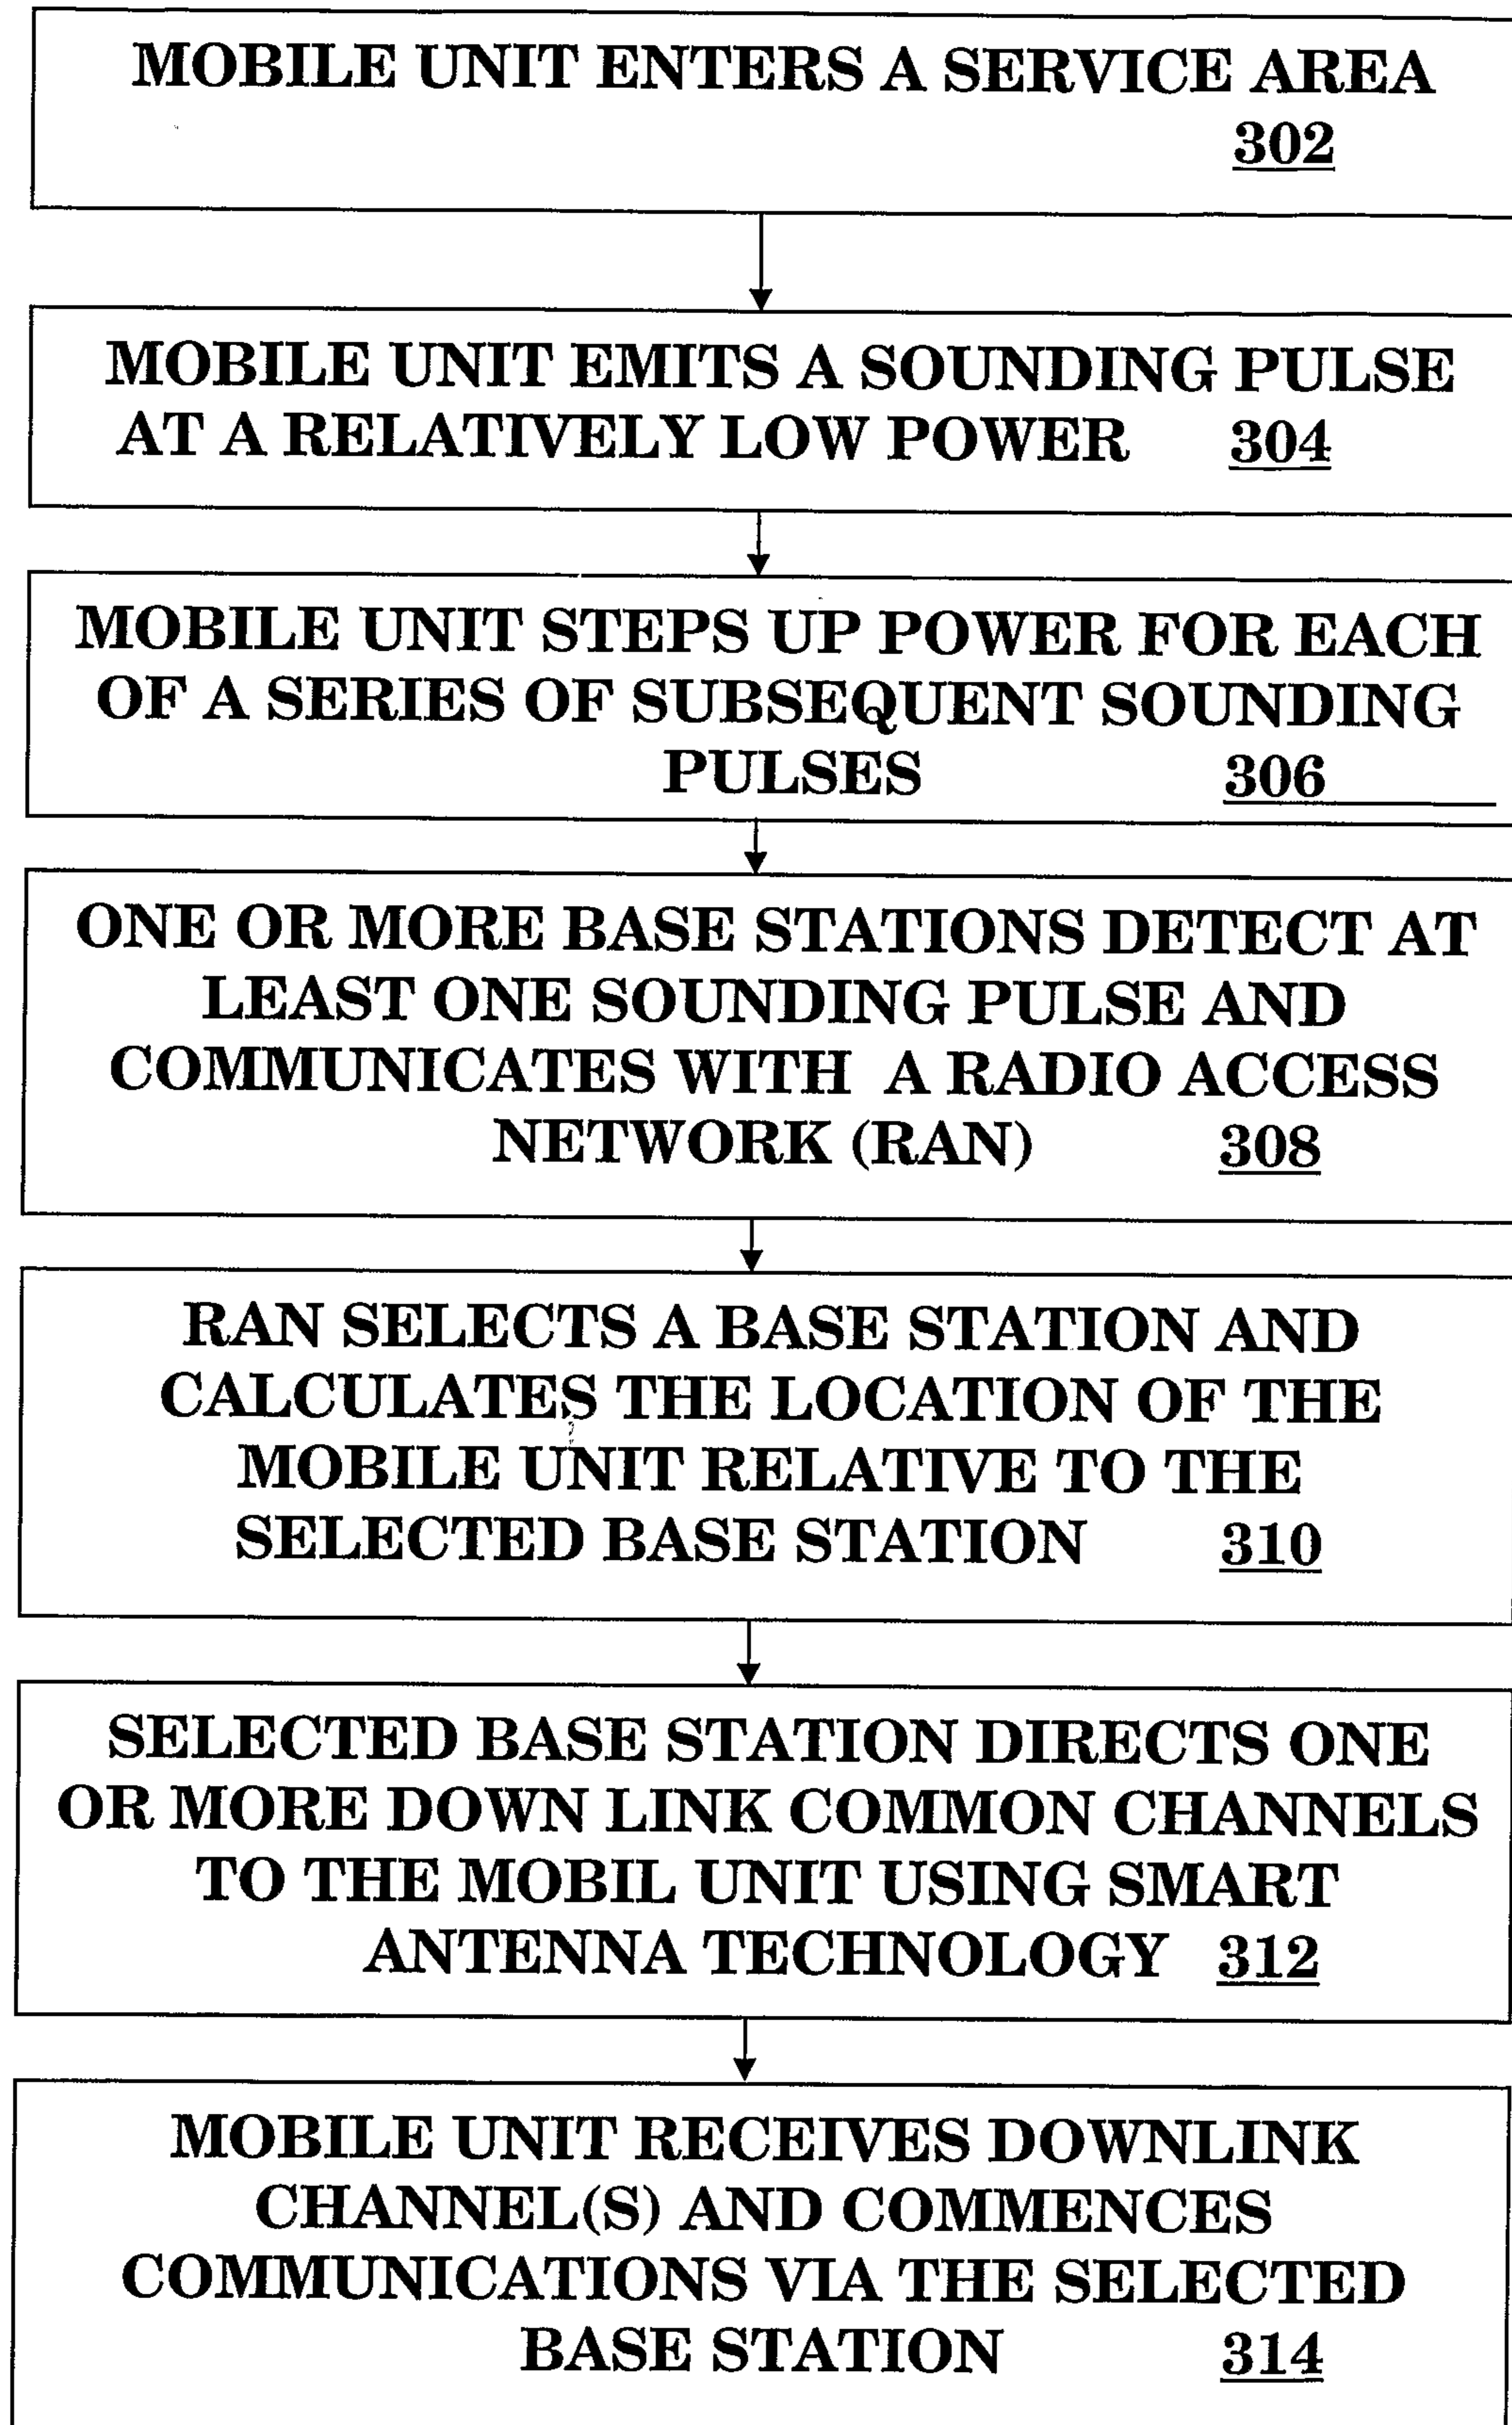
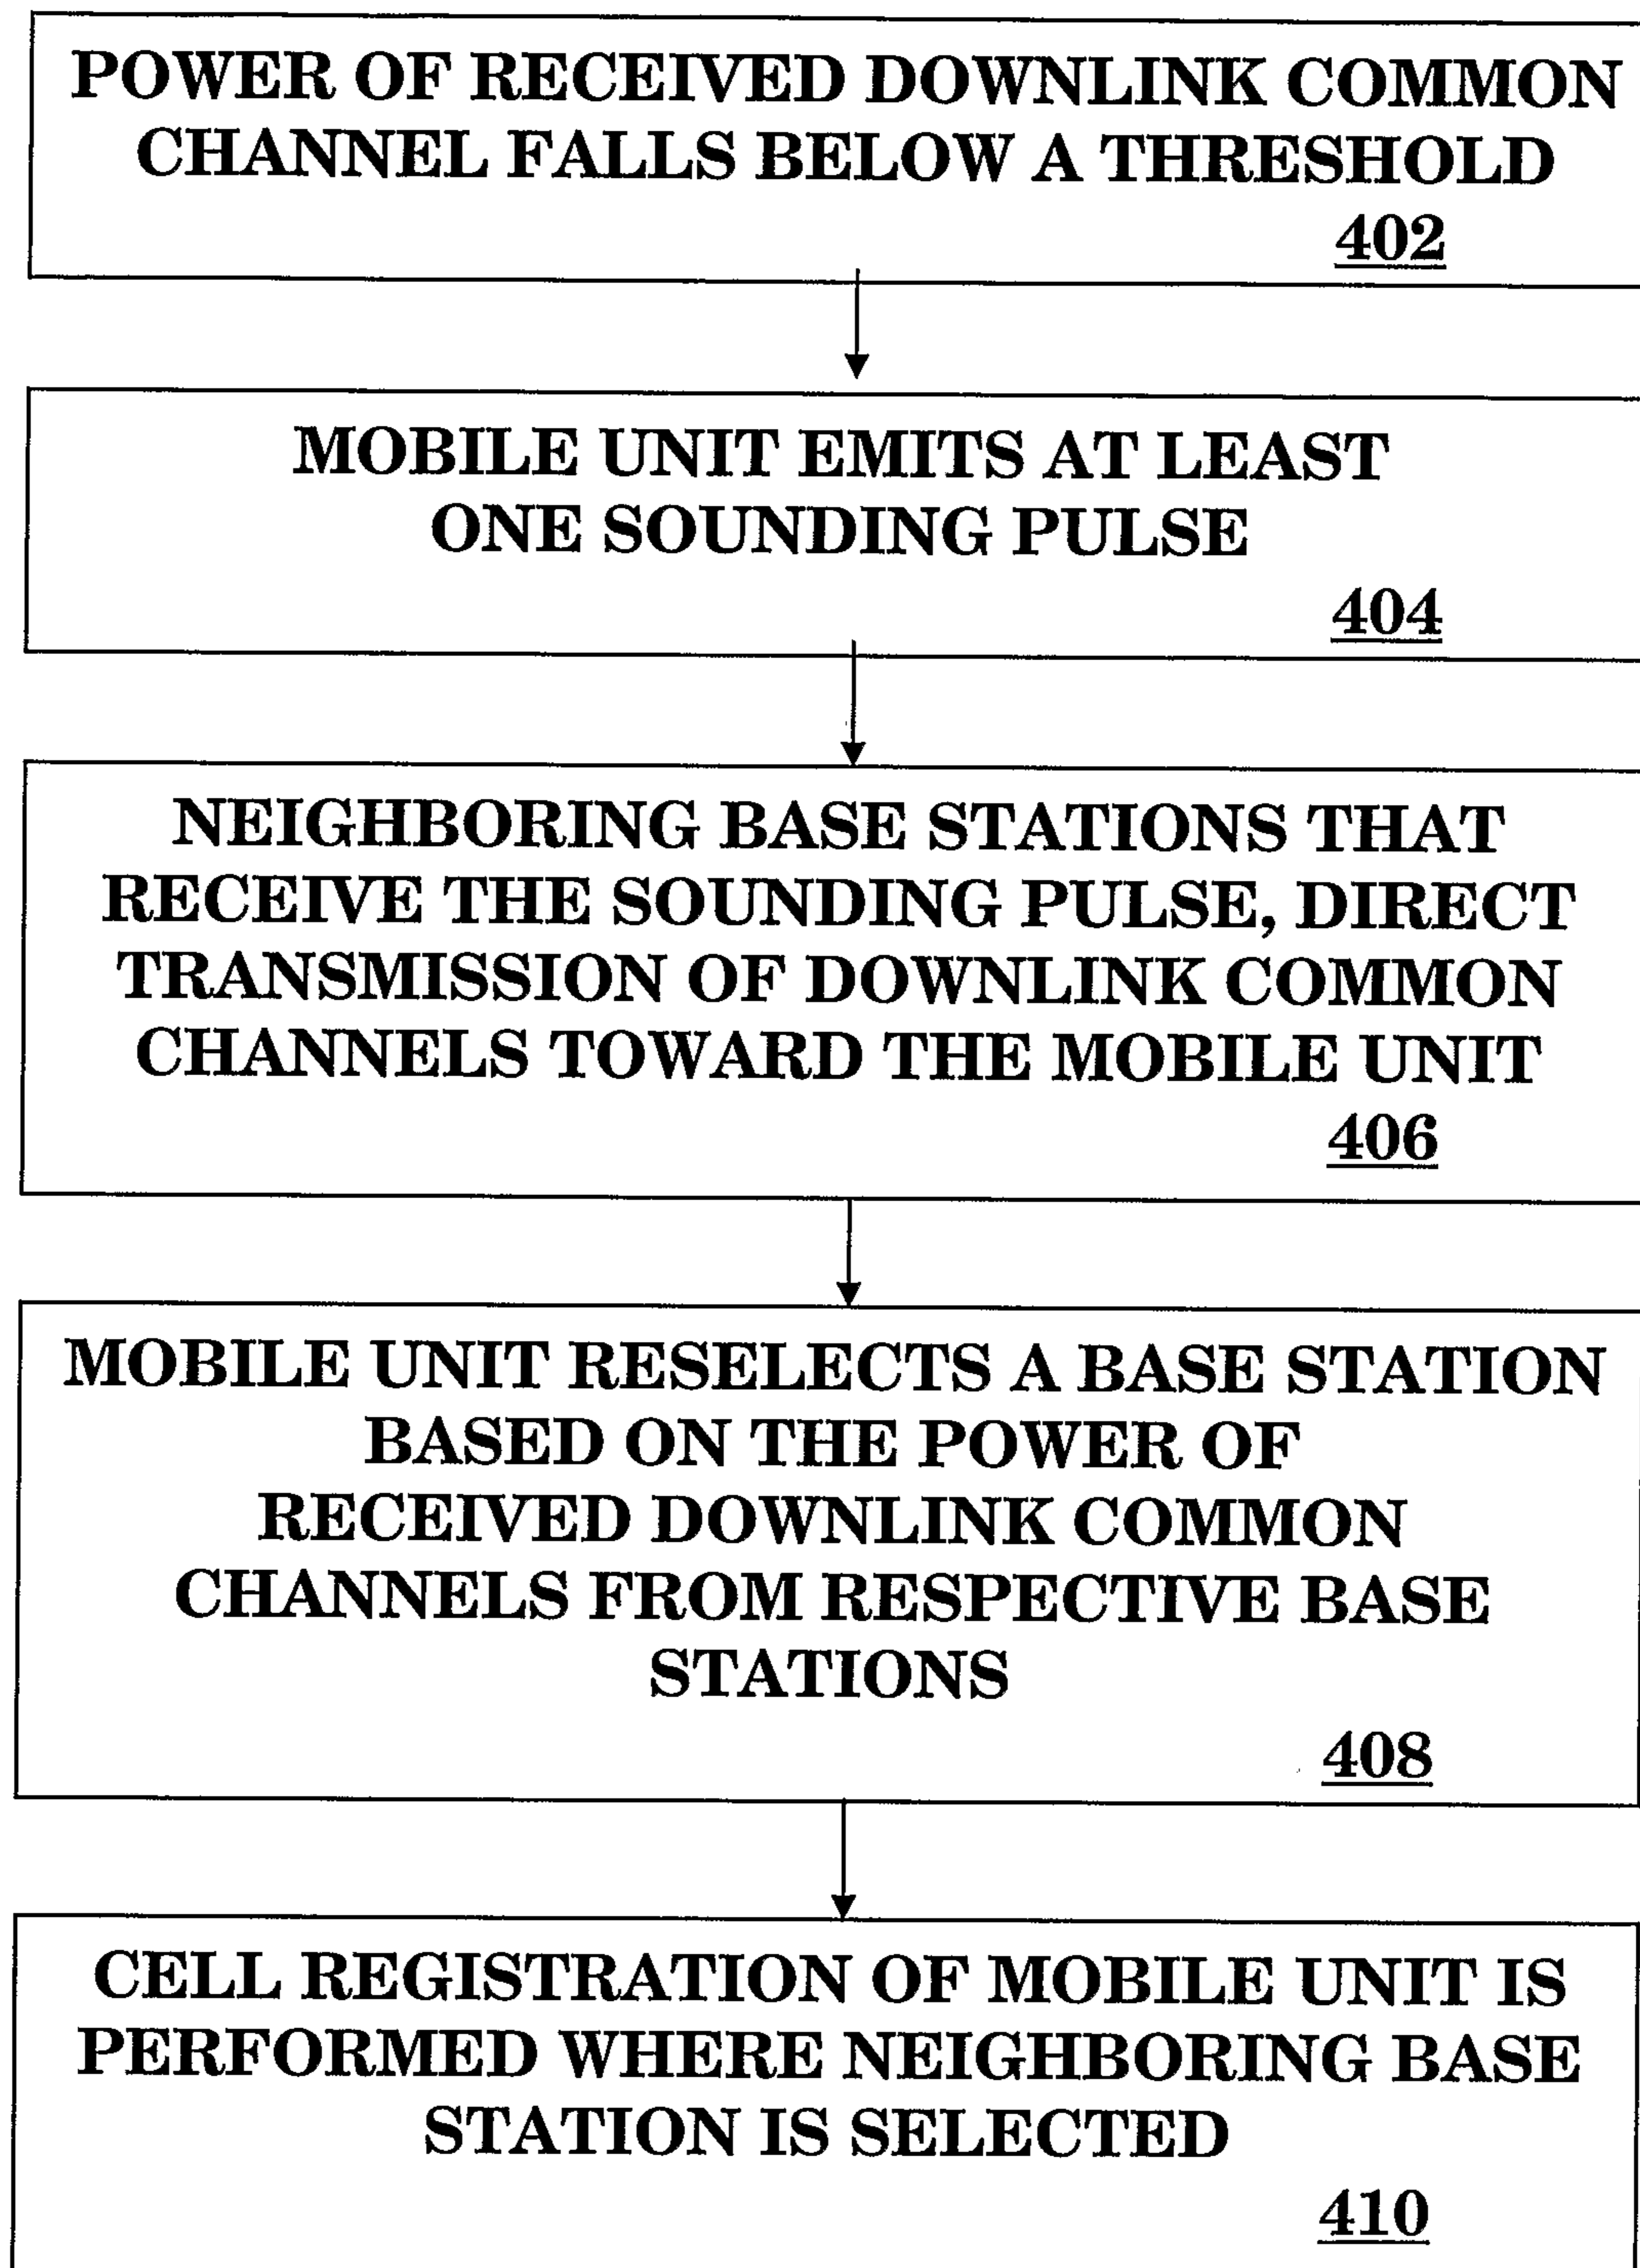


Figure 1b

**Figure 2**

**Figure 3**

**Figure 4**