

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
5 February 2009 (05.02.2009)

PCT

(10) International Publication Number
WO 2009/017936 A1(51) International Patent Classification:
C07C 29/80 (2006.01) *C07C 31/27* (2006.01)
C07C 31/20 (2006.01)

(74) Agent: ZUCKERMAN, Marie, F.; The Dow Chemical Company, P.O. Box 1967, Midland, MI 48641-1967 (US).

(21) International Application Number:
PCT/US2008/069308

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 7 July 2008 (07.07.2008)

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/962,548 30 July 2007 (30.07.2007) US**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(71) Applicant (for all designated States except US): DOW GLOBAL TECHNOLOGIES INC. [US/US]; 2040 Dow Center, Midland, MI 48674 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MILLER, Glenn, A. [US/US]; 2515 Woodland Avenue, South Charleston, WV 25303 (US). YONEMOTO, Edward, H. [US/US]; 2333 Bering Drive, Suite 112, Houston, TX 77057 (US). POTTHAST, Rainer [DE/US]; 713 Riedel, Houston, TX 77024 (US).

WO 2009/017936 A1

(54) Title: PROCESS OF REFINING C6-16 ALIPHATIC DIOLS

(57) Abstract: A process of refining a crude C₆-C₁₆ aliphatic diol, preferably, a C₆-C₁₆ monocyclic aliphatic diol, more preferably, an isomeric mixture of *cis/trans*-(1,3)(1,4)-cyclohexanediethanol, containing in addition to the diol one or more impurities selected from phenols, and aliphatic mono-ols, esters, carboxylic acids, and hemiacetals, and mixtures thereof. The refining process involves distilling the crude C₆-C₁₆ aliphatic diol in the presence of an alkali or alkaline earth metal compound, preferably, an excess thereof relative to acid equivalents present in the diol.

PROCESS OF REFINING C₆-C₁₆ ALIPHATIC DIOLS

CROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit of US Provisional Application Serial No. 5 60/962548, filed July 30, 2007.

BACKGROUND OF THE INVENTION

The present invention relates to a process of refining a C₆-C₁₆ aliphatic diol. More particularly, the process pertains to separating a purified C₆-C₁₆ aliphatic diol from a 10 crude mixture containing the C₆-C₁₆ diol and one or more impurities selected from phenols, and aliphatic mono-ols, esters, carboxylic acids, hemiacetals, and mixtures thereof.

The aliphatic diols refined by the process of this invention find utility in the manufacture of plasticizers and as chain-extenders in the manufacture of polyurethanes.

As synthesized, C₆-C₁₆ aliphatic diols, preferably, C₆-C₁₆ alicyclic diols, such 15 as, *cis/trans* 1,3- and 1,4-cyclohexanedimethanol, typically contain one or more impurities selected from the following classes of aliphatic compounds: mono-ols, esters, carboxylic acids, and hemiacetals, as well as impurity aromatic phenols, and mixtures of the aforementioned compounds. These impurities may be present in the starting materials from 20 which the diol is prepared; or the impurities may be generated as side products during the process of preparing the diol. Diols derived from the hydrogenation of aldehydes, which themselves are generated by hydroformylation of olefins, are particularly susceptible to containing such impurities.

In a commercial example of the above, a *cis,trans* mixture of 1,3 and 1,4- 25 cyclohexanedimethanol isomers (hereinafter referred to as “*cis/trans*-(1,3)(1,4)-cyclohexanedimethanol”) is typically prepared by first reacting 1,3-butadiene with acrolein in a Diels Alder reaction to form 3-cyclohexene-1-carboxaldehyde; and thereafter hydroformylating 3-cyclohexene-1-carboxaldehyde with a mixture of carbon monoxide and 30 hydrogen (synthesis gas or syngas) to prepare *cis/trans*-(1,3)(1,4)-cyclohexane-dicarboxaldehyde, which is then hydrogenated in the presence of a hydrogenation catalyst to the crude aliphatic diol comprising *cis/trans*-(1,3)(1,4)-cyclohexanedimethanol and one or more of the aforementioned mono-ol, ester, carboxylic acid, hemiacetal, and/or phenol

impurities. Preferably, the crude aliphatic diol is distilled to recover a purified *cis/trans*-(1,3)(1,4)-cyclohexanedimethanol product.

By analyzing various steps in the diol synthesis the skilled person may perceive the origins of the various impurities, although the invention described herein should not be bound to such theory. Hydroformylations are usually conducted in the presence of a rhodium-organophosphite ligand complex catalyst. As a side reaction, undesirable hydrolysis of the phosphite ligand may result in formation of impurity phenols. Impurity aliphatic mono-ols, such as cyclohexanemethanol and cyclohexenemethanol, may form as a side product of hydrogenation of the intermediate mono-aldehyde, for example, 10 hydrogenation of cyclohexene-1-carboxaldehyde. Impurity carboxylic acids may be formed by oxidation of the aldehyde compositions or generated by hydrolysis of impurity esters. Impurity esters and hemiacetals may be derived from heavies that are present during distillation of crude aldehyde products.

Distillation of the crude C₆-C₁₆ aliphatic diol does not adequately remove the impurities, which may be sufficiently volatile to distill with the diol. Moreover, at a temperature sufficient for distillation, acidic impurities can catalyze formation of additional impurities through cracking of heavies, thereby increasing the overall quantity of impurities during the very distillation process that is intended to refine the diol. Acid impurities can also lead to corrosion of the distillation equipment. As a consequence, it would be desirable 20 to discover a method of separating a purified C₆-C₁₆ aliphatic diol from a crude C₆-C₁₆ aliphatic diol contaminated with one or more impurities, particularly, those selected from aliphatic mono-ols, esters, carboxylic acids, and hemiacetals, as well as impurity aromatic phenols, and mixtures of the aforementioned compounds.

US 6,632,331 discloses removal of aldehyde compounds contained as 25 impurities in polycyclic diols by distilling the polycyclic diols in the presence of an alkali metal compound and/or an alkaline earth compound.

US 6,117,277 discloses purification of C₃-C₁₀ straight-chain or branched mono-alcohols by distilling the alcohol at 150-200°C in the presence of alkali metal hydroxide so as to remove impurity aldehydes.

US 3,359,335 discloses purification of an alcohol product obtained by the 30 catalytic carbonylation of an olefin with carbon monoxide and hydrogen to give a reaction mixture made up of carbonyl compounds, followed by catalytic hydrogenation to convert the

carbonyl compounds to the alcohol product contaminated with high boiling esters, acetals, ethers, and decomposition products boiling within the boiling range of the alcohol. The purification involves scrubbing the crude alcohol product with an aqueous caustic solution, thereafter washing the scrubbed product to remove the caustic solution, and then distilling 5 the washed product to recover a purified alcohol. Since polyols have appreciable solubility in water, significant product losses can result.

SUMMARY OF THE INVENTION

This invention provides for a process of refining a crude C₆-C₁₆ aliphatic 10 diol. More specifically, the process comprises distilling one or more times a crude C₆-C₁₆ aliphatic diol comprising, in addition to the diol, one or more impurities selected from phenols and aliphatic mono-ols, esters, carboxylic acids, hemiacetals, and mixtures thereof, in the presence of an alkali metal compound and/or an alkaline earth metal compound under conditions sufficient to obtain a purified C₆-C₁₆ aliphatic diol.

According to the invention, there is provided herein a process of refining a crude C₆-C₁₆ aliphatic diol via distillation in the presence of an alkali metal compound and/or an alkaline earth metal compound to recover a purified C₆-C₁₆ aliphatic diol. Surprisingly, the presence of alkali metal compound and/or alkaline earth metal compound under distillation conditions does not increase side reactions or destruction of the diol, but 20 rather facilitates efficient separation and recovery of desired diol product having significantly improved purity as compared with the crude diol. Moreover, the use of alkali metal compound and/or alkaline earth metal compound in the subject distillation described herein may reduce the total number of distillations needed to obtain a diol product of acceptable purity for commercial use. Commercial aliphatic diol beneficially contains a 25 total acidity of less than about 500 parts per million (ppm), calculated as acetic acid and based on the weight of the aliphatic diol product. Moreover, commercial diol product should appear colorless or nearly colorless, as explained hereinafter, because color typically indicates the presence of unwanted impurities. As a further benefit, reduction of acid during distillation can correlate with reduced corrosion of the distillation equipment.

DETAILED DESCRIPTION OF THE INVENTION

References to the Periodic Table of the Elements herein shall refer to the Periodic Table of the Elements, published in *Nomenclature of Inorganic Chemistry: IUPAC Recommendations 2005*, Royal Society of Chemistry, 2005, ed. N. G. Connelly and T. Damhus. Also, any references to a Group or Groups of elements shall be to the Group or Groups reflected in this Periodic Table of the Elements using the IUPAC system for numbering groups.

All percentages, preferred amounts or measurements, ranges and endpoints thereof herein are inclusive, that is, “less than about 10” includes about 10. “At least” is equivalent to “greater than or equal to,” and “at most” is, thus, equivalent “to less than or equal to.” Numbers herein have no more precision than stated. Thus, “115” includes at least from 114.6 to 115.49. All ranges from a parameter described as “at least,” “greater than,” “greater than or equal to” or similarly, to a parameter described as “at most,” “up to,” “less than,” “less than or equal to” or similarly are preferred ranges regardless of the relative degree of preference indicated for each parameter. Thus a range that has an advantageous lower limit combined with a most preferred upper limit is preferred for the practice of this invention. The term “advantageous” is used to denote a degree of preference more than required, but less than is denoted by the term “preferably.”

Except in the examples or where otherwise indicated, all numbers expressing quantities, percentages, properties, functionalities and so forth in the specification are to be understood as being modified in all instances by the term “about.” Those skilled in the art recognize that acceptable limits vary with equipment, conditions, applications, and other variables, but are determinable without undue experimentation in each situation where they are applicable. In some instances, variation or deviation in one parameter is acceptable to achieve another desirable end.

In the detailed description that follows, several chemical terms may be used, which for clarity are defined herein. Where a range in number of carbon atoms is set forth, e.g., C₁-C₂₀, the definition provides these numbers as a preferred general range; however, in the specific formulas described hereinafter, the range on number of carbon atoms for any particular class of radicals, e.g., “alkyl” or “aryl,” may be more narrowly defined.

The term “comprising” is synonymous with “including,” “containing,” or

"characterized by," is inclusive or open-ended, and does not exclude additional, unrecited elements, material, or steps. The term "consisting essentially of" indicates that in addition to specified elements, materials, or steps, unrecited elements, materials or steps are optionally present in amounts that do not unacceptably materially affect at least one basic and novel characteristic of the subject matter. The term "consisting of" indicates that only stated elements, materials, or steps are present, except that unrecited elements, materials or steps are optionally present to an extent that has no appreciable effect or are substantially absent.

10 The term "hydrocarbyl" refers to univalent organic radicals comprised of carbon and hydrogen atoms and, unless otherwise stated, containing from 1 to about 20 carbon atoms; including linear, branched, cyclic, saturated and unsaturated species, such as alkyl, alicyclic, alkenyl, aryl, alkaryl, and aralkyl groups. The term "substituted hydrocarbyl" refers to a hydrocarbyl radical that is substituted with one or more substituents disclosed hereinafter.

15 The term "hydrocarbylene" refers to a divalent hydrocarbyl radical.

The term "aryl" refers to a monovalent aromatic radical containing a single aromatic ring or containing multiple aromatic rings that are fused together or directly linked, or indirectly linked (such that different aromatic groups are bound through a common group, such as methylene or ethylene). Preferred aryl radicals contain one aromatic ring, for example, phenyl, and preferably, unless otherwise stated, from about 6 to about 20 carbon atoms. Closed-ring aromatic or aryl structures contain conjugated carbon-carbon double bonds characterized by $(4\delta + 2)\pi$ -electrons, where δ is an integer greater than or equal to 1.

The term "arylene" refers to a divalent aryl radical.

25 The term "alkaryl" refers to a monovalent aryl radical with one or more alkyl substituents. The term "alkarylene" refers to a divalent aryl radical with one or more alkyl substituents.

The term "aliphatic" refers to an organic compound characterized by a straight or branched chain structure that contains saturated carbon bonds and may also contain one or more unconjugated carbon-carbon double bonds. Aliphatic compounds 30 include paraffins, in which all carbon bonds are saturated, and olefins, in which one or more unconjugated C=C double bonds are present. Preferably, unless otherwise stated, the aliphatic compound contains from 1 to about 20 carbon atoms. For the purposes of this

invention, the term “aliphatic” also includes “alicyclic” compounds defined hereinafter.

The term “alicyclic” refers to an aliphatic organic compound containing a closed ring structure comprising saturated carbon bonds and optionally one or more unconjugated carbon-carbon double bonds. Preferably, unless otherwise stated, the alicyclic compound contains from 4 to about 8 carbon atoms. The alicyclic compound does not have aromatic character as defined hereinabove.

The term “alkyl” refers to a saturated monovalent hydrocarbyl radical, which may be linear, branched, or cyclic (alicyclic). If linear or branched, the radical typically contains, unless otherwise noted, from 1 to about 20 carbon atoms, for example, methyl, ethyl, propyl, isopropyl, butyl, iso-butyl, and tert-butyl. If cyclic (alicyclic), the radical contains from 4 to about 8, preferably, 5 to 7 carbon atoms, such as cyclobutyl, cyclopentyl, cyclohexyl, cycloheptyl, and cyclooctyl, exclusive of carbon-containing substituents.

The term “alkylene” as used herein refers to a linear, branched, or cyclic divalent alkyl radical.

The term “aralkyl” or “arylalkyl” refers to a monovalent alkyl radical substituted with at least one aryl radical. The term “aralkylene” refers to a divalent alkylene radical substituted with at least one aryl radical.

The term “arylalicyclic” refers to an alicyclic radical substituted with at least one aryl group. An example of an arylalicyclic radical is “phenylcyclohexyl” or “phenylcyclopentyl.” .

As used herein, any and all of the terms “hydrocarbyl,” “hydrocarbylene,” “alkyl,” “alkylene,” “aryl,” “arylene,” “aliphatic,” “alkaryl,” “alkarylene,” “aralkyl,” “aralkylene,” “alicyclic” and “arylalicyclic” are intended to include substituted variants thereof. The term “substituted” or the words “substituted variants thereof” generally refer to the replacement of at least one hydrogen atom that is bonded to a carbon atom, for example, an alkyl or aryl carbon atom, with a non-hydrogen moiety. Preferred substituents for this invention include hydroxy, alkyl, aryl, aralkyl, and alkaryl radicals, wherein the aforementioned organic radicals contains from 1 to about 8 carbon atoms.

The term “aliphatic mono-ol” refers to an aliphatic compound having one hydroxyl substituent,

The term “aliphatic ester” refers to an aliphatic compound having at least one ester substituent (-C(O)OR) wherein R is a monovalent hydrocarbyl radical, preferably, C₁-

C₂₀ alkyl or C₆-C₂₀ aryl.

The term “aliphatic carboxylic acid” refers to an aliphatic compound having at least one carboxylic acid substituent (-C(O)OH)).

The term “aliphatic hemiacetal” refers to an aliphatic compound having one of the following structures: RHC(OH)₂ or RHC(OR')(OH), wherein R and R' are monovalent hydrocarbyl radicals, preferably, of 1 to 20 carbon atoms.

The term “aliphatic lactone” refers to an alicyclic compound having an ester functionality as part of the closed ring.

The term “phenol” refers to an organic compound containing an aromatic benzene ring in which one H atom has been replaced by hydroxyl.

In any listing of the words “aliphatic mono-ols, esters, carboxylic acids, and hemiacetals,” it is to be understood that the word “aliphatic” modifies each species in the list.

In a broad concept, this invention provides for a process of refining a crude C₆-C₁₆ aliphatic diol comprising distilling one or more times a crude C₆-C₁₆ aliphatic diol comprising, in addition to the diol, one or more impurities selected from phenols, aliphatic mono-ols, esters, carboxylic acids, and hemiacetals, in the presence of an alkali metal compound and/or an alkaline earth metal compound under distillation conditions sufficient to obtain a purified C₆-C₁₆ aliphatic diol.


In a preferred embodiment of this invention, the C₆-C₁₆ aliphatic diol comprises a C₆-C₁₆ aliphatic monocyclic diol, more preferably, a *cis/trans* isomeric mixture of 1,3- and 1,4-cyclohexanedimethanol.

In a preferred embodiment of this invention, the alkali metal compound comprises an alkali metal hydroxide; and the alkaline earth metal compound comprises an alkaline earth metal hydroxide. In a more preferred embodiment, the alkali metal compound comprises sodium hydroxide or potassium hydroxide.

The crude C₆-C₁₆ aliphatic diol comprises a total of 6 to 16 carbon atoms arranged in a straight-chain or branched structure or arranged in a closed-ring structure (alicyclic), preferably having one ring (monocyclic), wherein the structure further comprises two hydroxy substituents. As relates to straight-chain or branched structures, the term “aliphatic” as used herein refers to compounds wherein each carbon atom in the straight-chain or branched structure is saturated (i.e., bonded to 4 other atoms through single bonds),

and optionally, wherein the straight or branched structure contains one or more isolated (i.e., unconjugated) olefinically-unsaturated carbon-carbon double bonds (C=C). As relates to ring systems, the term “aliphatic” or “alicyclic” as used herein refers to a closed ring system formed from saturated carbon atoms, and optionally, one or more isolated (i.e., unconjugated) carbon-carbon double bonds. The alicyclic structure is differentiated from single closed-ring aromatic or aryl structures containing conjugated carbon-carbon double bonds characterized by $(4\delta + 2)\pi$ -electrons, where δ is an integer greater than or equal to 1. The two hydroxy substituents characterizing the C₆-C₁₆ aliphatic diol advantageously are attached each to a different carbon atom. The hydroxy substituents may be attached directly to carbon atoms in the backbone of the straight-chain or branched structure or attached directly to ring carbon atoms. More preferably, the hydroxy substituents are attached to alkyl radicals that are themselves attached to the backbone carbon atoms in the straight-chain, branched, or ring structure. For example, two “hydroxymethyl” substituents may be attached to a cyclohexane ring to provide the preferred C₆-C₁₆ aliphatic diol employed in this invention, namely, (c_{is},t_{ra}ns)-(1,3)(1,4)-cyclohexanedimethanol.

Preferably, the C₆-C₁₆ aliphatic diol comprises a C₆-C₁₆ monocyclic aliphatic diol represented by the following formula I:

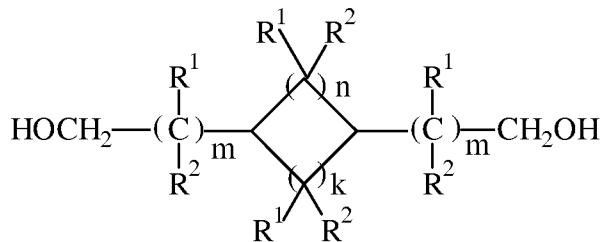

20

(I)


wherein each R¹ is independently selected from hydrogen, hydroxy, and C₁-C₆ monovalent hydrocarbyl radicals, for example, C₁-C₆ alkyl and phenyl, preferably, hydrogen and C₁-C₃ alkyl radicals; each R² is independently selected from hydrogen, hydroxy, and C₁-C₆ hydrocarbyl radicals, for example, C₁-C₆ alkyl and phenyl, preferably, hydrogen and C₁-C₃ alkyl radicals; n is an integer from 0 to 6, preferably, from 0 to 3, more preferably, 2; k is an integer from 0 to 6, preferably, from 0 to 3, more preferably, 2; n + k is greater than 2 and, more preferably, at most 6; and each m is independently an integer from 0 to about 3, preferably, 0 or 1. R¹ and R² may be substituted with one or more inert substituents that do

not interfere with the process of this invention, non-limiting examples of which include hydroxy, alkyl, aryl aralkyl, and alkaryl radicals, wherein the aforementioned organic radicals preferably comprise from 1 to about 8 carbon atoms. Preferably, the inert substituent comprises hydroxy. In the aforementioned preferred formula (I), the selection of 5 R^1 , R^2 , m, n, k, and inert substituents is limited to a total number of carbon atoms in the composition within the range from 6 to 16. It is further noted that if one of n or k is 0, then the two subgroups $-(CR_1R_2)_m-$ are directly linked to each other forming a ring with the n subunits.

The C_6 - C_{16} aliphatic diol can be prepared by any convenient method 10 described in the art. Preferably, the C_6 - C_{16} monocyclic aliphatic diol is prepared in a three-stage synthesis comprising: (1) reacting a diene with a dienophile comprising a formyl-substituted olefin in a Diels Alder addition or condensation reaction to prepare an olefinically-unsaturated monocyclic carboxaldehyde; (2) hydroformylating the olefinically-unsaturated monocyclic carboxaldehyde with carbon monoxide and hydrogen (syngas or 15 synthesis gas) in the presence of a transition metal-organophosphite ligand complex catalyst to obtain a C_6 - C_{16} monocyclic aliphatic dicarboxaldehyde; and (3) hydrogenating the C_6 - C_{16} monocyclic aliphatic dicarboxaldehyde with hydrogen in the presence of a hydrogenation catalyst to obtain the crude C_6 - C_{16} monocyclic aliphatic diol. While such synthetic schemes 20 are not the focus of the present invention, reference is nevertheless made to US-B1-6252121 for a description of suitable dienes, dienophiles, ligands, transition metals, transition metal-ligand complex hydroformylation catalysts, hydrogenation catalysts, and process conditions suitable for the above-described reaction scheme; the aforementioned US patent being incorporated herein by reference.

More preferably, with reference to US-B1-6252121, the C_6 - C_{16} aliphatic diol 25 comprises a mixture of *cis* and *trans* isomers of 1,3- and 1,4-cyclohexanedimethanol (“*cis/trans*-(1,3)(1,4)-cyclohexanedimethanol”), obtained by reacting 1,3-butadiene with acrolein via a Diels Alder reaction to form 3-cyclohexene-1-carboxaldehyde; thereafter hydroformylating the 3-cyclohexene-1-carboxaldehyde with syngas in the presence of a rhodium-triorganophosphite ligand complex catalyst so as to prepare *cis/trans*-(1,3)(1,4)-cyclohexanedicarboxaldehyde, which is subsequently hydrogenated to a crude *cis/trans*-(1,3)(1,4)-cyclohexanedimethanol. Two of the four cyclohexanedimethanol isomers are 30 depicted in Formulas IIa (1,3-isomer, shown as *trans* isomer, but may also exist as *cis*

isomer) and IIb (1,4-isomer, shown as *cis* isomer, but may also exist as *trans* isomer) respectively:

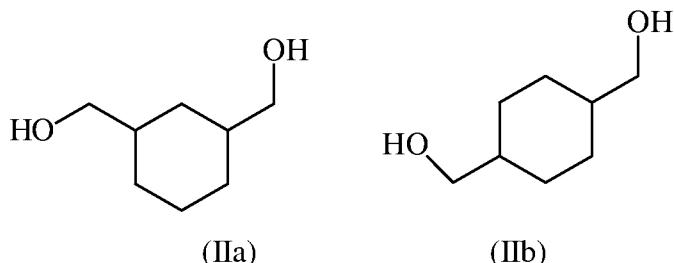

Advantageously, the aforementioned isomeric composition comprises from about 50 to 60 percent by weight of the 1,3-isomer and from about 40 to 50 percent by weight of the 1,4-isomer.

The one or more impurity mono-ols, esters, and carboxylic acids are not

10 limited to any particular structure, although they are generally aliphatic in nature inasmuch as they are derived from the aliphatic compounds used to prepare the aliphatic diol. Of course, the aliphatic mono-ol will have only one hydroxyl (-OH) substituent. As noted hereinbefore, the impurity aliphatic mono-ols can arise from hydrogenation of a saturated or unsaturated mono-aldehyde intermediate in the synthesis of the C₆-C₁₆ diol. Impurity esters and carboxylic acids are characterized by -C(O)OR and -C(O)OH functionality, respectively, wherein R is generically any monovalent hydrocarbyl radical, advantageously, a C₁₋₂₀ alkyl radical or a C₆₋₂₀ aryl radical. Impurity carboxylic acids can arise from oxidation of the product aldehydes that are precursors to the diol. Impurity esters can arise from condensation of any mono-ol or diol with the acid. Lactones are a special class of 15 impurity esters, being characterized as cyclic esters that arise from intra-molecular condensation of an intermediate compound or heavy containing both acid and alcohol functionalities. Hemiacetals are characterized as hydrated aldehydes, RHC(OH)₂ or RHC(OR')(OH), wherein R and R' each represent a monovalent hydrocarbyl radical as noted hereinabove. Hemiacetals can arise from hydrolysis of aldehyde products during 20 hydroformylation or simple condensation of an alcohol with an aldehyde (such as during hydrogenation). In contrast, impurity phenols are characterized as hydroxy-substituted aromatic compounds, the most likely source of which is hydrolysis of the organophosphite 25 ligand(s) used in the hydroformylation catalyst.

The C₆-C₁₆ aliphatic diol and the impurity mono-ol(s), ester(s), carboxylic acid(s), hemiacetals(s), and phenol(s) in the crude diol or at any stage of purification can be identified by conventional analytical methods known to the skilled person, including but not limited to infrared (IR) spectroscopy, ¹H and ¹³C nuclear magnetic resonance spectroscopy (NMR), gas phase chromatography, and mass spectroscopy. American Society for Testing and Materials standard test method ASTM D 1613-96 (ASTM, Conshohocken, PA, 1996, reapproved 1999), incorporated herein by reference, is suitably employed for the determination of total acidity of the diol. (ASTM D 1613-96 reports the acidity in mg KOH per gram sample, which can be converted to equivalents acid per gram sample by dividing by 56,100.) Standard test method ASTM D 1209-00 (ASTM, West Conshohocken, 2000), incorporated herein by reference, is suitably employed to evaluate the color of the crude diol or any stage of purification thereof.

Other impurity components may be present in the crude C₆-C₁₆ aliphatic diol including, for example, water, one or more C₁-C₈ alcohols, such as methanol, ethanol, isopropanol, butanol, and the like; one or more C₅-C₁₀ alkanes, such as pentane, hexane, cyclohexane, n-heptane, octane, and the like; dialdehydes that are precursors to the diol, as well as other unidentified lights, intermediates, and heavies. For the purposes of this invention, the term “lights” refers to compounds that are generally structurally different from the diol (e.g., solvents, volatiles) and that have a normal boiling point more than 50°C lower than the normal boiling point of the diol. As used herein, the term “intermediates” refers to compounds that are structurally similar but not identical to the diol, particularly, hydroxy-substituted compounds including, for example, mono-ols, enols, phenols and other like but unidentified decomposition materials, which have a normal boiling point lower than the normal boiling point of the diol. As used herein, the term “heavies” refers to compounds that have a normal boiling point higher than the normal boiling point of the diol; examples of heavies include dimers, trimers, and various esters. Referring to the diol, the term “normal boiling point” is defined herein as the temperature at which the liquid and gaseous phases of the diol exist in equilibrium at a diol vapor pressure of 1 atmosphere (101 kPa).

The concentration of each impurity in the crude diol will vary depending upon the particular C₆-C₁₆ aliphatic diol under consideration and its method of preparation. Preferably, the crude C₆-C₁₆ aliphatic diol comprises from about 60 to about 80 weight

percent C₆-C₁₆ diol product and one or more of the following impurities in the following percentages by weight:

	Mono-ols	about 0.5 to 10 percent
	Esters	about 1 to 5 percent
5	Carboxylic acids	about 0.5 to 10 percent
	Hemiacetals/Lactones	about 1 to 5 percent
	Phenols	about less than 1 percent
	Lights	about 15 to 25 percent
	Intermediates*	about 0.1 to 5 percent
10	(*other than mono-ols, hemiacetals/lactones)	
	Heavies	about 0.1 to 5 percent

Optionally, dialdehydes can also be present in a quantity less than about 0.1 weight percent.

More preferably, the C₆-C₁₆ diol comprises from about 60 to about 80 weight percent *cis/trans*-(1,3)(1,4)-cyclohexanedimethanol and one or more of the following impurities in the following typical percentages, by weight:

	Cyclohexanemethanol	about 0.5 to 5 percent
	Cyclohexenemethanol	about 0.5 to 5 percent
	Esters	about 0.1 to 5 percent
	Carboxylic acids	about 0.5 to 10 percent
20	Hemiacetals/Lactones	about 1 to 5 percent
	Phenols	about less than 1 percent
	Lights	about 15 to 25 percent
	Intermediates *	about 0.1 to 5 percent
	(*other than mono-ols, hemiacetals/lactones)	
25	Heavies	about 0.1 to 5 percent

The refining process of this invention requires the presence of an alkali metal

compound and/or an alkaline earth metal compound to effect an improved separation of purified C₆-C₁₆ aliphatic diol product. While this invention should not be limited or bound to any theory presented herein, it is believed that the alkali and/or alkaline earth metal compound neutralizes acids, including carboxylic and other acids, which may be present or which may form during distillation and which catalyze the formation of hemiacetals. In the presence of alkali and/or alkaline earth metal compound, the formation and decomposition

of hemiacetals is believed to be inhibited or blocked altogether. Moreover, the alkali and/or alkaline earth metal compound is believed to be capable of converting phenols to non-volatile alkali or alkaline earth metal salts. Likewise, lactones are believed to be converted to non-volatile alkali or alkaline earth metal salts of hydroxyacids. Surprisingly, however, 5 the presence of the alkali metal compound and/or alkaline earth metal compound does not catalyze undesirable side-reactions of the product C₆-C₁₆ diol.

The alkali metal compounds employable in the present invention include all such inorganic and organic alkali compounds and salts having a capacity to neutralize the acidity of the crude diol, the alkali metal comprising the Group 1 metals of the Periodic 10 Table of the Elements, including particularly lithium, sodium, potassium, and cesium. Non-limiting examples of suitable alkali metal compounds include sodium hydroxide, potassium hydroxide, cesium hydroxide, lithium hydroxide, sodium hydrogen carbonate, sodium carbonate, potassium carbonate, cesium carbonate, lithium carbonate, sodium acetate, potassium acetate, cesium acetate, lithium acetate, sodium stearate, potassium stearate, 15 cesium stearate, lithium stearate, sodium borohydride, sodium phenylborate, sodium benzoate, potassium benzoate, cesium benzoate, lithium benzoate, disodium hydrogen phosphate, dipotassium hydrogen phosphate, dilithium hydrogen phosphate, disodium phenylphosphate, disodium salt of bisphenol A, dipotassium salt of bisphenol A, dicesium salt of bisphenol A, dilithium salt of bisphenol A, sodium phenolate, potassium phenolate, 20 cesium phenolate, lithium phenolate, and mixtures thereof. Preferred species include the alkali metal hydroxides, more preferably, sodium hydroxide or potassium hydroxide, and mixtures thereof.

The alkaline earth metal compound employable in the present invention include all such inorganic and organic alkaline earth compounds and salts having a capacity 25 to neutralize the acidity of the crude diol, the alkaline earth metals comprising those of Group 2 of the Periodic Table of the Elements including particularly beryllium, magnesium, calcium, strontium, and barium. Non-limiting examples of suitable alkaline earth metal compounds include magnesium hydroxide, calcium hydroxide, strontium hydroxide, barium hydroxide, magnesium hydrogen carbonate, calcium hydrogen carbonate, strontium hydrogen carbonate, barium hydrogen carbonate, magnesium acetate, calcium acetate, strontium acetate, barium acetate, magnesium stearate, calcium stearate, calcium benzoate, 30

and magnesium phenylphosphate, and mixtures thereof. Preferred species include one or a mixture of alkaline earth metal hydroxides.

The alkali metal compounds and alkaline earth metal compounds can be used alone or in a combination of two or more such compounds, in the form of solid(s) or in solution in water or a C₁-C₆ alkanol, more preferably, methanol or ethanol, or a mixture of alkanol(s) and/or water. The concentration of the solution is not particularly critical. Any concentration of alkali metal compound and/or alkaline earth metal compound can be used up to its solubility limit in water, or the alkanol, or mixture thereof. Preferably, the concentration ranges from about 1 to about 55 weight percent, based on the total weight of the solvent(s) and alkali metal and/or alkaline earth metal compound(s).

The total quantity of alkali metal compound and/or alkaline earth metal compound used in the process of this invention advantageously is greater than about 0.8 equivalent, preferably, greater than about 1.0 equivalent, and more preferably, greater than about 1.2 equivalents, per equivalent of acid in the diol. Advantageously, the total quantity of alkali metal compound and/or alkaline earth metal compound is less than about 2.5, preferably, less than about 2.0, and more preferably, less than about 1.8 equivalents, per equivalent of acid in the diol. In one most preferred embodiment, an excess of alkali and/or alkaline earth metal compound is employed, namely, greater than 1.25 equivalents, up to 2.50 equivalents, per equivalent of acid in the diol, for the purpose of neutralizing any acidity additionally formed by contact of aldehydes present in the diol with oxygen. The amount of alkali metal compound and/or alkaline earth metal compound advantageously is greater than about 100 parts per million (ppm), preferably, greater than about 500 ppm, in total, based on the weight of the crude C₆-C₁₆ diol. The amount of alkali metal compound and/or alkaline earth metal compound advantageously is less than about 5,000 ppm, and preferably, less than about 2,000 ppm, in total, based on the weight of the crude C₆-C₁₆ diol.

As a general practice, the alkali metal compound and/or alkaline earth metal compound, either as a solid(s) or an aqueous or alcohol solution, is dissolved in the crude C₆-C₁₆ aliphatic diol. The dissolution procedure is conventional and can involve any convenient form of addition and mixing known to the skilled person. Thereafter, the crude C₆-C₁₆ diol is fed to a first distillation column and subjected to distillation to remove substantially lights including water, alkanes, and other volatiles and low boiling components, so as to recover a partially-purified C₆-C₁₆ diol having from about 90 to 95

percent purity. The first distillation to remove lights is conventional in design. A column is employed that is not necessarily staged or packed. A simple reflux condenser advantageously is used. A temperature below the normal boiling point of the diol is applied as needed to remove the low boiling components. For the preferred purification of a C₆-C₁₆ aliphatic monocyclic diol, more preferably *cis/trans*-(1,3)(1,4)-cyclohexanedimethanol, the temperature of this first distillation preferably ranges from about 80°C to about 210°C at the bottom of the column and from about 20°C to about 120°C at the top (head) of the column. 5 The first distillation advantageously is conducted at about 1 atmosphere (101 kPa) or slightly higher pressures at about 1 to 2 psig over-pressures (6.9 – 13.8 kPa). The low boiling components are recovered as an overhead or top stream. Since the overhead 10 advantageously contains both water and organics having low water solubility, two substantially-immiscible liquid phases are likely to be recovered. The bottom stream from the first distillation column contains only a partially-purified diol comprising one or more impurity aliphatic mono-ols, esters (including lactones), carboxylic acids, hemiacetals, and/or phenols. The concentration of each impurity in the partially-purified C₆-C₁₆ diol 15 advantageously ranges from greater than about 0.01 to less than about 2 weight percent, preferably, from about 0.1 to about 1.0 weight percent, based on the total weight of the partially-purified diol.

Thereafter, the bottoms stream from the first distillation column is fed to a 20 second distillation column and distilled under conditions sufficient to separate and recover a purified C₆-C₁₆ aliphatic diol. The distillation conditions in the second column generally vary depending upon the specific C₆-C₁₆ diol to be purified, its normal boiling point, and the types and quantities of impurities to be removed. The second distillation column advantageously comprises from about 30 to about 100 theoretical trays. The column can be 25 packed with a suitable packing, including for example, glass beads, stainless steel mesh, ceramics in any form, such as saddles, and like conventional materials. The second distillation column advantageously is operated at a sub-atmospheric pressure suitably ranging from about 15 torr (2.0 kPa) to about 50 torr (6.7 kPa). A reflux ratio ranging from about 1:10 to about 10:1 is suitably employed. In the preferred distillation of a C₆-C₁₆ 30 aliphatic monocyclic diol, more preferably *cis/trans*-(1,3)(1,4)-cyclohexanedimethanol, the bottom temperature of the column advantageously ranges from about 165°C to about 250°C, while the head temperature advantageously ranges from about 160°C to about 180°C. The

impurities are taken as a head stream; whereas the C₆-C₁₆ diol is taken as bottom stream, which also typically contains heavies.

The heavies can be removed in a conventional finishing distillation based upon the boiling point of the diol to yield the C₆-C₁₆ aliphatic diol in purified form as an overhead stream. A preferred process removes the lower boiling impurities, as noted above, and then recycles the bottoms to the same column for the finishing distillation. This preferred method is possible when essentially no additional impurities are being generated during distillation, as per the invention described herein.

Each distillation described hereinabove may be conducted in batch or continuous mode. Preferably, on a commercial scale, a continuous mode of operation is employed wherein a feed comprising crude diol and the desired quantity of alkali and/or alkaline earth metal compound is continuously fed to a sequence of distillation columns with a recycle to any particular column as desired.

The thusly-separated and purified C₆-C₁₆ aliphatic diol advantageously comprises the following composition based on weight percentages:

C ₆ -C ₁₆ Diol	greater than 99 percent
Mono-ols	less than 0.1 percent
Esters	less than 0.1 percent
Carboxylic acids	less than 0.1 percent
Hemiacetals/Lactones	less than 0.1 percent
Phenols	less than 0.1 percent
Lights	less than 0.1 percent
Intermediates*	less than 0.1 percent
(*other than mono-ols and hemiacetals/lactones)	
Heavies	less than 0.1 percent
Dialdehydes	less than 0.1 percent

When the subject invention is conducted as described hereinabove, a purer form of the C₆-C₁₆ diol is recovered at each distillation stage in a yield greater than about 90 percent, preferably, greater than about 95 percent, and more preferably, greater than about 98 percent, by weight, based on the weight of the diol fed to the particular distillation stage, as determined advantageously by a calibrated gas chromatography analysis (GC). It is noted that GC analysis usually cannot determine the quantity of heavies present. The heavies are

usually calculated as the difference in weight between the weight of the sample analyzed and the total weight of the diol and other impurities determined by GC to be present in the sample. Any standard GC column that separates components of a mixture based on differences in boiling points can be employed for the analysis.

5 The purified C₆-C₁₆ aliphatic diol recovered from the final distillation desirably exhibits a total acidity of less than about 500 parts per million (ppm) or less than about 0.05 weight percent, calculated as acetic acid, based on the weight of the diol product and as measured by test method ASTM D 1613-96. Moreover, based on test method ASTM D 1209-00, the color of the purified C₆-C₁₆ aliphatic diol advantageously is rated less than 10 about 10 (numbers of 7 or less being more desirable).

10 The following examples are set forth to illustrate the invention. The examples should not be construed to limit the invention in any manner. Unless otherwise noted, all percentages are given in units of weight percent.

15 **COMPARATIVE EXPERIMENT 1**

A sample of crude C₆-C₁₆ diol comprising a mixture of *cis/trans*-(1,3)(1,4)-cyclohexanedimethanol is purified via three staged distillations. The crude C₆-C₁₆ diol is prepared by the synthesis scheme set forth in US-B1-6252121, by reacting butadiene with acrolein in a Diels Alder addition reaction to form 3-cyclohexene-1-carboxaldehyde; 20 hydroformylating 3-cyclohexene-1-carboxaldehyde with carbon monoxide and hydrogen in the presence of a rhodium-triorganophosphite ligand complex catalyst to prepare *cis/trans*-(1,3)(1,4)-cyclohexane-dicarboxaldehyde, which is then hydrogenated in the presence of a nickel catalyst to the crude aliphatic diol having the following composition as determined by gas chromatography: diol (75.24 percent), water (19.40 percent), isopropanol (0.51 percent), n-heptane (1.00 percent), cyclohexanemethanol (1.99 percent), intermediates 25 including alkylated phenols (0.29 percent), dialdehydes and lactones (0.10 percent), hemiacetals (0.98 percent). Heavies are not detectable. The acidity is 0.51 percent, as determined by ASTM D 1613-96. The first distillation stage consists of an atmospheric distillation to remove volatiles and lights. A bottoms stream from the first distillation 30 column is subjected to a second distillation at elevated temperature and reduced pressure to remove additional lower boiling impurities. Bottoms from the second distillation column are subjected to a third distillation at elevated temperature and reduced pressure to remove

heavies and to obtain in an overhead stream a purified diol product. Distillation conditions of each column are noted in Table 1. Each column contains 15 theoretical trays and operates at a reflux ratio of 1:10. It is noted that no alkali metal compound or alkaline earth metal compound is employed in the distillations.

5

10

(SPACE PURPOSELY LEFT BLANK.)

Table 1. Three Step Distillations (No alkali or alkaline earth metal compound added)

	Initial feed	First Distillation		Second Distillation		Final Distillation	
Head Temperature °C		100	@760 mm Hg (101 kPa)		115-192 @35 mmHg (4.7 kPa)	192	@35 mm Hg (4.7 kPa)
Pot Temperature °C		175	@760 mm Hg (101 kPa)		195-200	202-220	
Composition	wt%	Head	Head	Bottom			
Water	19.4	95.4	2.9	1	0.66	0.02	0.018
Isopropanol	0.51	1.18	1.75	-	-	-	n/a
n-Heptane	1.0	0.23	32.83	-	-	-	n/a
Cyclohexanemethanol	1.99	1.04	48.06	1.09	9.27	-	n/a
Intermediates	0.29	0.16	9.14	0.24	0.661	0.012	0.032
Dialdehydes + Lactones *	0.1	0.42	0.44	0.64	5.287	0.024	0.006
Hemiacetals*	0.98	0.07	0.36	1.46	8.862	0.029	0.032
<i>Cis/trans</i> -(1,3)(1,4) Cyclohexanedimethanol	75.24	1.5	4.52	95.57	75.92	99.935	n/a
Heavies	Non-detectable						
Acidity, % as HAc	0.51	0.06	0.02	0.44	0.024	n/a	0.44
Yields, wt%		19.1	2.3	78.6	9.9	90.1	94.3
Color, APHA						7	Brown

It is seen from Table 1 that during each distillation, the quantities of certain impurities increase as compared with the crude diol feed. This result implies that the distillations themselves produce impurities, thereby rendering it necessary to use three columns to achieve a purified diol product. More specifically, at only 100°C in the first 5 column, the formation of impurities during distillation is evident. The species identified as dialdehydes and lactones dramatically increase in every fraction, and clearly more are present after distillation as compared with the diol feed. While dialdehydes present in the crude diol can be readily removed by distillation without any special treatment or consideration, the production of added dialdehydes during distillation, presumably from 10 splitting of intermediates and heavies impurities, presents a problem for obtaining purified product.

From Table 1 other impurities are also seen to increase including cyclohexanemethanol, hemiacetals, and intermediates including alkylated phenols. A relatively high level of diol in the overhead stream from the second distillation column is 15 needed to remove the increased impurities, but results in an efficiency loss of desired diol product. Even after the third distillation, the acidity of the diol product, resulting presumably from cyclohexanecarboxylic acid, is unacceptably high. Overall diol recovery after the three steps is only 81 weight percent. Moreover, the total acidity of the recovered diol is 0.44 percent (or 4400 ppm). Color is rated 7, per test method ASTM D 1209-00. 20 The results indicate that further distillation is needed in order to reduce the acidity to commercially acceptable levels.

EXAMPLE 1

A sample of a crude C₆-C₁₆ diol comprising a mixture of *cis/trans*-(1,3)(1,4)- 25 cyclohexanedimethanol, prepared in a manner similar to that described in Comparative Experiment 1, is treated with aqueous potassium hydroxide. The crude diol comprises the aforementioned cyclohexanedimethanol (74.02 percent), water (3.8 percent), isopropanol (12.64 percent), n-heptane (2.31 percent), lights (2.88 percent), cyclohexanemethanol (1.15 percent), 3-cyclohexene-1-methanol (0.28 percent), dialdehydes (0.03 percent), 1,3- 30 hemiacetals (1.16 percent), intermediates (1.05 percent), and heavies (0.68 percent). The acidity of the crude diol is 0.129 percent (0.021 equivalents/g), as determined by test method

ASTM D 1613-96. The quantity of potassium hydroxide employed is 1.5 equivalents per acid equivalent of the diol sample. The crude diol with added potassium hydroxide is then subjected to lights removal. The lights are distilled out at atmospheric pressure. Thereafter, the bottoms from the lights removal column are fed to a first distillation column and
5 distilled at elevated temperature and reduced pressure. Distillation conditions and results are set forth in Table 2. In the second distillation, two small head cuts (#1 and #2) are taken before taking the main overhead cut. The bottoms from the second distillation column are recycled to the column and re-distilled in a finishing step to collect an overhead stream of a purified *cis/trans*-(1,3)(1,4)-cyclohexandimethanol, as shown in Table 2.

10

15

(SPACE PURPOSELY LEFT BLANK.)

Example 1 (Distillation with added KOH)

	Initial Feed	Demis-ter	Lights removal Heads	Overhead	First Distillation Bottom	Head #1	Head #2	Bottom	Final Distillation Overhead Product
Head Temperature °C		22-110		168-170		170-172			
Pot Temperature °C		86-205		168-180		172-180			
Pressure mmHg		775-760 (103-101 kPa)		20 (2.7 kPa)		20 (2.7 kPa)			
Color (APHA)	7	7	3	9	Brown	120	48	Brown	7
Acidity (wt.% as Acetic Acid)	0.129	0.0004	0.0009	0.0033	N/A	0.315	0.0121	N/A	0.0017
Water	3.8	15.58	27.69	0.01	0	0.02	0.01	0	0.01
Isopropanol	12.64	61.48	68.96	0	0	0	0	0	0
n-Heptane	2.31	9.32	0.01	0	0	0	0	0	0
Lights	2.88	13.2	0.34	0.02	0	0.3	0	0	0.03
Cyclohexanemethanol	1.15	0.28	2.1	0.72	0.05	53.1	0.56	0	0
3-Cyclohexene-1-methanol	0.28	0.07	0.34	0.17	0	13.29	0.17	0	0
Dialdehydes	0.03	0	0	0.01	0	0.6	1.24	0.06	0
1,3-Hemiacetal	1.16	0	0.04	1.04	0.07	21.79	26.93	0.06	0.02
Cis/trans-(1,3)(1,4)cyclohexane dimethanol	74.02	0	0	97.74	56.18	0	67.88	34.87	99.85
Intermediates	1.05	0.07	0.52	0.29	4.61	10.9	3.21	4.84	0.09
Heavies	0.68	0	0	0	39.09	0	0	60.17	0
% Yield		19	1	74	3	2	6	1	89


It is observed from Table 2 that during this first distillation no additional impurities are formed, in contrast to Comparative Experiment 1 hereinabove. The dialdehydes, hemiacetals, and intermediates do not increase upon the stress of distillation; and consequently, a second Lights distillation step is avoided. The overall recovery of purified 5 diol product from the two distillations is 87 percent, which is superior to the aforementioned comparative experiment. The final acidity level of the purified diol product is low at only 0.0033 percent (33 ppm), and therefore is superior to the diol product recovered in the comparative experiment. The color of the purified diol product is rated 7, per test method ASTM D 1209-00, and therefore comparable to the diol product recovered in the comparative experiment, which however took one further distillation to achieve. 10

Embodiments of the Invention include the following:

1. A process of refining a crude C₆-C₁₆ aliphatic diol comprising distilling one or more 15 times a crude C₆-C₁₆ aliphatic diol comprising, in addition to the diol, one or more impurities selected from phenols and aliphatic mono-ols, esters, carboxylic acids, and hemiacetals, and mixtures thereof, in the presence of an alkali metal compound and/or an alkaline earth metal compound under distillation conditions sufficient to obtain a purified C₆-C₁₆ aliphatic diol.

20

2. A process of any other embodiment wherein the C₆-C₁₆ aliphatic diol comprises a C₆-C₁₆ monocyclic aliphatic diol represented by the following formula:

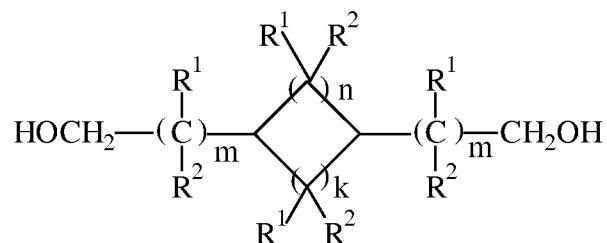

25 wherein each R¹ is independently selected from hydrogen, hydroxy, and C₁-C₆ monovalent hydrocarbyl radicals, preferably, hydrogen and C₁-C₃ alkyl radicals; each R² is independently selected from hydrogen, hydroxy, and C₁-C₆ hydrocarbyl radicals, preferably, hydrogen and C₁-C₃ alkyl radicals; n is an integer from 0 to 6, preferably, from 0 to 3, more

preferably, 2; k is an integer from 0 to 6, preferably, from 0 to 3, more preferably, 2; n + k is greater than 2 and, more preferably, at most 6; and each m is independently an integer from 0 to about 3, preferably, 0 or 1; and optionally wherein R¹ and R² may be substituted with one or more inert substituents including hydroxy, alkyl, aryl aralkyl, and alkaryl radicals, the 5 aforementioned organic radicals preferably comprising from 1 to about 8 carbon atoms.

3. A process of any other embodiment wherein the crude C₆-C₁₆ aliphatic diol comprises from about 60 to about 80 weight percent C₆-C₁₆ aliphatic diol and one or more of the following impurities in the following percentages by weight:

10	Mono-ols	0.5 to 10 percent
	Esters	1 to 5 percent
	Carboxylic acids	0.5 to 10 percent
	Hemiacetals/Lactones	1 to 5 percent
	Phenols	less than 1 percent
15	Lights	15 to 25 percent
	Intermediates*	0.1 to 5 percent

(*other than mono-ols, hemiacetals and lactones)

Heavies	0.1 to 5 percent
---------	------------------

20 4. A process of any other embodiment wherein the crude C₆-C₁₆ aliphatic diol comprises *cis/trans*-(1,3)(1,4)-cyclohexanedimethanol.

25 5. A process of any other embodiment wherein the crude C₆-C₁₆ aliphatic diol comprises from about 60 to about 80 weight percent *cis/trans*-(1,3)(1,4)-cyclohexanedimethanol and one or more of the following impurities in the following typical percentages, by weight:

30	Cyclohexanemethanol	about 0.5 to 5 percent
	Cyclohexenemethanol	about 0.5 to 5 percent
	Esters	about 0.1 to 5 percent
	Carboxylic acids	about 0.5 to 10 percent
	Hemiacetals/Lactones	about 1 to 5 percent
	Phenols	about less than 1 percent
	Lights	about 15 to 25 percent

Intermediates *	about 0.1 to 5 percent
(*other than mono-ols, hemiacetals/lactones)	
Heavies	about 0.1 to 5 percent

- 5 6. A process of any other embodiment wherein the alkali metal compound is selected from the group consisting of sodium hydroxide, potassium hydroxide, cesium hydroxide, lithium hydroxide, sodium hydrogen carbonate, sodium carbonate, potassium carbonate, cesium carbonate, lithium carbonate, sodium acetate, potassium acetate, cesium acetate, lithium acetate, sodium stearate, potassium stearate, cesium stearate, lithium stearate, sodium borohydride, sodium phenylborate, sodium benzoate, potassium benzoate, cesium benzoate, lithium benzoate, disodium hydrogen phosphate, dipotassium hydrogen phosphate, dilithium hydrogen phosphate, disodium phenylphosphate, disodium salt of bisphenol A, dipotassium salt of bisphenol A, dicesium salt of bisphenol A, dilithium salt of bisphenol A, sodium phenolate, potassium phenolate, cesium phenolate, lithium phenolate, and mixtures thereof.
- 10
- 15 7. A process of any other embodiment wherein the alkaline earth metal compound is selected from the group consisting of magnesium hydroxide, calcium hydroxide, strontium hydroxide, barium hydroxide, magnesium hydrogen carbonate, calcium hydrogen carbonate, strontium hydrogen carbonate, barium hydrogen carbonate, magnesium acetate, calcium acetate, strontium acetate, barium acetate, magnesium stearate, calcium stearate, calcium benzoate, and magnesium phenylphosphate, and mixtures thereof.
- 20
- 25 8. A process of any other embodiment wherein the alkali metal compound comprises an alkali metal hydroxide and wherein the alkaline earth metal compound comprises an alkaline earth metal hydroxide.
- 30 9. A process of any other embodiment wherein the quantity of alkali metal compound and/or alkaline earth metal compound is greater than 0.8, preferably greater than 1.0, and more preferably, greater than 1.2, and less than 2.5, preferably less than 2.0, and more preferably less than 1.8 equivalents per equivalent of acid in the diol.
10. A process of any other embodiment wherein the quantity of alkali metal compound

and/or alkaline earth metal compound is greater than 1.25 and less than 2.50 equivalents per equivalent of acid in the diol.

11. A process of any other embodiment wherein the amount of alkali metal compound
5 and/or alkaline earth metal compound is greater than 100 parts per million (ppm), preferably greater than 500 ppm, and less than 5,000 ppm, preferably less than 2,000 ppm, in total, based on the weight of the crude C₆-C₁₆ diol.

12. A process of any other embodiment wherein a first distillation is conducted in a
10 distillation column to remove lights at a bottom temperature from 80°C to 210°C and a top temperature from 20°C to 120°C and at about 1 atmosphere (101 kPa) pressure, optionally, with 1-2 psig overpressures (6.9-13.8 kPa).

13. A process of any other embodiment wherein a second distillation is conducted in a
15 distillation column at a bottom temperature ranging from 165°C to 250°C and a top temperature ranging from 160°C to 180°C at a sub-atmospheric pressure ranging from 15 torr (2.0 kPa) to 50 torr (6.7 kPa).

14. A process of any other embodiment wherein a second distillation is conducted in a
20 distillation column comprising from 30 to 100 theoretical trays.

15. A process of any other embodiment wherein a second distillation is conducted at a
reflux ratio ranging from 1:10 to 10:1.

25 16. A process of any other embodiment wherein the one or more distillations are conducted in a continuous mode of operation.

17. A process of any other embodiment wherein the purified C₆-C₁₆ aliphatic diol is recovered at each distillation stage in a yield of greater than 90 percent, preferably greater
30 than 95 percent, and more preferably, greater than 98 percent by weight, based on the weight of the diol fed to the particular distillation stage.

18. A process of any other embodiment wherein the purified C₆-C₁₆ aliphatic diol comprises the following composition based on weight percentages:

	C ₆ -C ₁₆ Diol	greater than 99 percent
	Mono-ols	less than 0.1 percent
5	Esters	less than 0.1 percent
	Carboxylic acids	less than 0.1 percent
	Hemiacetals/Lactones	less than 0.1 percent
	Phenols	less than 0.1 percent
10	Lights	less than 0.1 percent
	Intermediates*	less than 0.1 percent
	(*other than mono-ols and hemiacetals/lactones)	
	Heavies	less than 0.1 percent
	Dialdehydes	less than 0.1 percent

15 19. A process of any other embodiment wherein the purified C₆-C₁₆ aliphatic diol has a color rated less than 10, preferably 7 or less, per test method ASTM D 1209-00.

20 20. A process of any other embodiment wherein the purified C₆-C₁₆ aliphatic diol has a total acidity of less than 500 parts per million, calculated as acetic acid, and based on the weight of the diol.


25 21. A process of any other embodiment wherein the C₆-C₁₆ aliphatic diol comprises *cis/trans*-(1,3)(1,4)-cyclohexanedimethanol, and wherein the alkali metal compound comprises potassium hydroxide.

CLAIMS

1. A process of refining a crude C₆-C₁₆ aliphatic diol comprising distilling one or more times a crude C₆-C₁₆ aliphatic diol comprising, in addition to the diol, one or more impurities selected from phenols and aliphatic mono-ols, esters, carboxylic acids, and hemiacetals, and mixtures thereof, in the presence of an alkali metal compound and/or an alkaline earth metal compound under distillation conditions sufficient to obtain a purified C₆-C₁₆ aliphatic diol.

5 2. The process of Claim 1 wherein the C₆-C₁₆ aliphatic diol comprises a C₆-C₁₆ monocyclic aliphatic diol represented by the following formula:

10

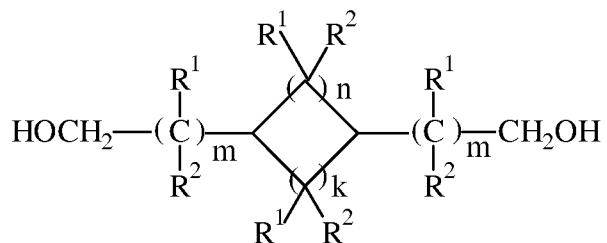

wherein each R¹ is independently selected from hydrogen, hydroxy, and C₁-C₆ monovalent hydrocarbyl radicals; each R² is independently selected from hydrogen, hydroxy, and C₁-C₆ hydrocarbyl radicals; n is an integer from 0 to 6; k is an integer from 0 to 6; n + k is greater than 2; and each m is independently an integer from 0 to 3.

15 3. The process of Claim 1 or Claim 2 wherein the crude C₆-C₁₆ aliphatic diol comprises from about 60 to about 80 weight percent C₆-C₁₆ aliphatic diol and one or more of the following impurities in the following percentages by weight:

20

Mono-ols	0.5 to 10 percent
Esters	1 to 5 percent
Carboxylic acids	0.5 to 10 percent
Hemiacetals/Lactones	1 to 5 percent
Phenols	less than 1 percent
Lights	15 to 25 percent
Intermediates*	0.1 to 5 percent

(*other than mono-ols, hemiacetals and lactones)

Heavies	0.1 to 5 percent
---------	------------------

4. The process of any one of Claims 1 to 3 wherein the crude C₆-C₁₆ aliphatic diol comprises *cis/trans*-(1,3)(1,4)-cyclohexanedimethanol.

5. The process of any one of Claims 1 to 4 wherein the alkali metal compound comprises an alkali metal hydroxide and wherein the alkaline earth metal compound comprises an alkaline earth metal hydroxide.

6. The process of any one of Claims 1 to 4 wherein the alkali metal compound is selected from the group consisting of sodium hydroxide, potassium hydroxide, cesium hydroxide, lithium hydroxide, sodium hydrogen carbonate, sodium carbonate, potassium carbonate, cesium carbonate, lithium carbonate, sodium acetate, potassium acetate, cesium acetate, lithium acetate, sodium stearate, potassium stearate, cesium stearate, lithium stearate, sodium borohydride, sodium phenylborate, sodium benzoate, potassium benzoate, cesium benzoate, lithium benzoate, disodium hydrogen phosphate, dipotassium hydrogen phosphate, dilithium hydrogen phosphate, disodium phenylphosphate, disodium salt of bisphenol A, dipotassium salt of bisphenol A, dicesium salt of bisphenol A, dilithium salt of bisphenol A, sodium phenolate, potassium phenolate, cesium phenolate, lithium phenolate, and mixtures thereof.

7. The process of any one of Claims 1 to 4 wherein the alkaline earth metal compound is selected from the group consisting of magnesium hydroxide, calcium hydroxide, strontium hydroxide, barium hydroxide, magnesium hydrogen carbonate, calcium hydrogen carbonate, strontium hydrogen carbonate, barium hydrogen carbonate, magnesium acetate, calcium acetate, strontium acetate, barium acetate, magnesium stearate, calcium stearate, calcium benzoate, and magnesium phenylphosphate, and mixtures thereof.

8. The process of any one of Claims 1 to 7 wherein the quantity of alkali metal compound and/or alkaline earth metal compound is greater than 1.0 equivalent and less than 2.5 equivalents per equivalent of acid in the diol.

9. The process of any one of Claims 1 to 8 wherein the quantity of alkali metal compound and/or alkaline earth metal compound is greater than 100 parts per million (ppm) and less than 5,000 ppm, based on the weight of the diol.

10. The process of any one of Claims 1 to 9 wherein a first distillation is conducted in a distillation column to remove lights at a temperature from 80°C to 210°C at the bottom of the column and from 20°C to 120°C at the top of the column, and about 1 atmosphere (101 kPa) pressure.

11. The process of any one of Claims 1 to 10 wherein after removal of lights a second distillation is conducted in a distillation column at a bottom temperature ranging from 165°C to 250°C, and a head temperature ranging from 160°C to 180°C at a sub-atmospheric pressure ranging from 15 torr (2.0 kPa) to 50 torr (6.7 kPa).

5 12. The process of Claim 11 wherein the second distillation is conducted in a distillation column comprising from 30 to 100 theoretical trays.

13. The process of Claim 11 or 12 wherein the second distillation is conducted at a reflux ratio ranging from 1:10 to 10:1.

10 14. The process of any one of Claims 1 to 13 wherein the one or more distillations are conducted in a continuous mode of operation.

15. The process of any one of Claims 1 to 14 wherein the purified diol is recovered at each distillation stage in a yield of greater than 90 percent, based on the weight of the diol fed to the distillation.

16. The process of any one of Claims 1 to 15 wherein the purified diol exhibits a total acidity of less than 500 parts per million (ppm) (less than 0.05 weight percent), calculated as acetic acid, based on the weight of the diol.

17. The process of any one of Claims 1 to 16 wherein the purified diol has a color rated less than 10 per test method ASTM D 1209-00.

20 18. The process of Claim 1 wherein the C₆-C₁₆ aliphatic diol comprises *cis/trans*-(1,3)(1,4)-cyclohexanedimethanol, and wherein the alkali metal compound comprises potassium hydroxide.

19. The process of Claim 18 wherein the alkali metal compound is employed in an amount ranging from greater than 1.25 to less than 2.50 equivalents per equivalent of acid in the diol.

25 20. The process of Claim 18 or 19 wherein the process is conducted in a continuous mode of operation.

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/069308

A. CLASSIFICATION OF SUBJECT MATTER
INV. C07C29/80 C07C31/20 C07C31/27

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, BEILSTEIN Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 632 331 B2 (YOSHIDA SHU [JP] ET AL) 14 October 2003 (2003-10-14) cited in the application column 2, line 5 - line 31; column 1, line 15 - line 31; claim 1 -----	1-20
Y	DE 102 58 318 A1 (BASF AG [DE]) 24 June 2004 (2004-06-24) claim 1 -----	1-20
Y	DE 195 06 280 A1 (HOECHST AG [DE]) 29 August 1996 (1996-08-29) page 2, line 35 - line 42 -----	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

9 December 2008

Date of mailing of the international search report

16/12/2008

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Kleidernigg, Oliver

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2008/069308

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 6632331	B2	14-10-2003	DE 10136233 A1	18-07-2002
			JP 2002047225 A	12-02-2002
			US 2002033324 A1	21-03-2002
DE 10258318	A1	24-06-2004	NONE	
DE 19506280	A1	29-08-1996	AT 195503 T	15-09-2000
			AU 702668 B2	25-02-1999
			AU 4876096 A	11-09-1996
			BR 9607105 A	04-11-1997
			CA 2213614 A1	29-08-1996
			CN 1175939 A	11-03-1998
			DK 869936 T3	20-11-2000
			WO 9626173 A1	29-08-1996
			EP 0869936 A1	14-10-1998
			ES 2151147 T3	16-12-2000
			FI 973433 A	21-08-1997
			IN 186279 A1	28-07-2001
			JP 3806146 B2	09-08-2006
			JP 11500437 T	12-01-1999
			PL 321896 A1	22-12-1997
			PT 869936 T	29-12-2000
			RO 117845 B	30-08-2002
			US 6117277 A	12-09-2000
			ZA 9601408 A	24-11-1997