



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>7</sup> : <b>A61B 18/02</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 00/42933</b></p> <p>(43) International Publication Date: 27 July 2000 (27.07.00)</p>
<p>(21) International Application Number: PCT/CA00/00065</p> <p>(22) International Filing Date: 25 January 2000 (25.01.00)</p> <p>(30) Priority Data: 60/117,175 25 January 1999 (25.01.99) US</p> <p>(71) Applicant: CRYOCATH TECHNOLOGIES, INC. [CA/CA]; 16771 Chemin Ste-Marie, Kirkland, Quebec H9H 5H3 (CA).</p> <p>(72) Inventors: ABOUD, Marwan; 18501 Antoine-Faucon, Pierrefonds, Quebec H9K 1M7 (CA). LALONDE, Jean-Pierre; 781 Manning, Verdun, Quebec H4H 1Z7 (CA). AL ASMAR, Johnny; Apartment 1407, 2285 St. Mathieu, Montreal, Quebec H3H 2J7 (CA). LEHMAN, John, W.; 15 Training Field Road, Wayland, MA 01778-1415 (US).</p> <p>(74) Agents: HUNT, John, C. et al.; Blake, Cassels &amp; Graydon, LLP, Commerce Court West, Box 25, Toronto, Ontario M5L 1A9 (CA).</p>		<p>(81) Designated States: CA, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p><b>Published</b> <i>With international search report.</i></p>
<p>(54) Title: LEAK DETECTION SYSTEM</p> <div data-bbox="263 1249 1273 1590"> </div> <p>(57) Abstract</p> <p>A surgical device includes a device body defining a sealed fluid path having a first end and a second end, a refrigerant supply in communication with the first end of the sealed fluid path, and a vacuum source in communication with the second end of the sealed fluid path. Leak detection apparatus can be provided in communication with the sealed fluid path.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## LEAK DETECTION SYSTEM

### CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority from U.S. Provisional Patent Application No. 60/117,175 filed on January 25, 1999.

### STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH

Not applicable.

### FIELD OF THE INVENTION

The invention relates to medical devices, and more particularly to minimally invasive surgical systems.

### BACKGROUND OF THE INVENTION

Medical devices configured for minimally invasive surgery are rapidly becoming the tools of choice for many surgical procedures. Not only do these devices provide an alternative to more invasive surgical tools and procedures, but they have also fostered the development of entirely new procedures.

Devices including highly flexible catheters, as well as rigid and semi-flexible probes have received increased attention in recent years and continue to be refined for cardiovascular, pulmonary, urogenital, and other applications. Devices for each of these applications present different technology and material challenges. Angioplasty catheters, for example, can require fluid-tight passages or channels for circulating a cooling fluid (liquid or gas) through a catheter to cool an electro-surgical structure, such as radio frequency ablation electrode, to prevent overheating of the electrode or of surrounding tissue. Similarly, a cooling or cryogenic fluid can be reduce the temperature of a structure, such as an ablation surface, to a therapeutic temperature. Some cooling fluids, however, can be harmful or fatal to the patient if they unintentionally escape from the surgical device.

Although careful fabrication techniques, quality materials, and thorough testing can reduce the chances of cooling fluid leakage, it would be desirable to

5 provide additional system features that further minimize the occurrence of leaks; and should a leak occur, provide features that detect cooling fluid loss or escape immediately so that use of the surgical device can be terminated and patient remediation efforts can be undertaken if required.

## 10 SUMMARY OF THE INVENTION

The present invention provides an improved surgical device including a device body defining a sealed fluid path having a first end and a second end, a refrigerant supply in communication with the first end of the sealed fluid path, and a vacuum source in communication with the second end of the sealed fluid path. Leak detection apparatus can be provided in communication with the sealed fluid path.

Exemplary leak detection apparatus include an impedance measurement circuit, an infrared sensor, and a pulsed ultrasonic device. A control unit that is in communication with the leak detection apparatus is responsive to output from the leak detection apparatus to control fluid flow through the sealed fluid flow path.

## 20 BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be more fully understood from the following detailed description taken in conjunction with the accompanying drawings in which:

FIG. 1 is a schematic view of a minimally invasive surgical system including a leak detection system in accordance with the invention;

FIG. 2 illustrates an exemplary cryocatheter tip with a leak detection circuit;

FIG. 3 illustrates a porous, insulated, conductive wire within a cryocatheter tip; and

FIG. 4 illustrates another leak detection device.

## 30 DETAILED DESCRIPTION OF THE INVENTION

In the discussion which follows, "surgical device" is intended to encompass any surgical implement used in association with human or animal medical treatment, diagnosis, study, or analysis. More particularly, a surgical device is intended to

5 encompass any implement or portion thereof that is entirely or partially inserted into a human or animal body by any means of entry, such as through a natural body orifice, an incision, or a puncture. The term surgical device is not intended to connote a limitation to treatment of a single body system, organ, or site. The surgical device can be rigid as a thick steel pipe, completely flexible and pliant like a thread, or have  
10 a flexibility between the two extremes. The surgical device can have a diameter that ranges from inches to microns.

As used herein, "fluid" is intended to encompass materials in a liquid state, a gas state, or in a transition state between liquid and gas, and liquid and solid. The fluid can be a "cryogenic fluid" capable of reaching or creating extremely cold  
15 temperatures well below the freezing point of water, such as below minus 20 degrees Centigrade; a "cooling fluid" that does not reach or create temperatures below the freezing point of water; a fluid capable of transferring heat away from a relatively warmer structure or body tissue; a fluid capable of transferring heat to a relatively cooler structure or body tissue; a fluid at or capable of creating a temperature between  
20 the freezing and boiling points of water; and a fluid at or capable of reaching or creating a temperature above the boiling point of water.

A "fluid path" as used herein is intended to encompass any boundary, channel or guide through which a fluid can travel. It can include concentrically disposed catheters, multi-lumen catheters, or a single loop of tubing within a sheath. The fluid  
25 path can also include connectors and valves, as well as passages in support equipment, such as the console disclosed herein.

Referring now to FIG. 1, an exemplary surgical device is illustrated for minimally invasive surgery. The surgical device includes a console 10 and a multi-lumen catheter 12. The console 10 houses electronics and software for controlling  
30 and recording a surgical procedure, such as ablation, and it controls delivery of liquid refrigerant under high pressure from a supply container 13, through an umbilical 14, to the catheter 12. A second umbilical 16 is provided for transferring refrigerant from the catheter 12 to console 10. The console 10 is provided with apparatus 15 for

5 recovery of expanded refrigerant vapor from the catheter and recompression of the vapor.

10 Either or both of the catheter 12 and the console 10 can be provided with detection devices that are in electrical communication with the console and which provide a signal output that can be representative of an event that indicates flow path integrity loss or a leak within a sealed catheter and/or console. As shown in FIG. 1, a first detection device or leak detector 18 can be provided in a body or tip portion of the catheter 12. A second leak detector 20 can be provided in the handle portion 21 of the catheter 12; and a third leak detector 22 can be provided in the console 10. The console 10 can be configured to respond to signal output from the leak detectors and initiate a predetermined sequence of events, such as discontinuing refrigerant injection, changing the pressure within the system, and controlling removal of refrigerant from the catheter 12.

20 The purpose and function of the leak detectors is better understood once another feature of the invention is introduced, namely, a vacuum pump 24, as shown in FIG. 1 in fluid communication with a catheter 12. The third leak detector 22 can be interposed between the vacuum pump 24 and the catheter 16. The vacuum pump 24 is controllable to reduce the pressure within the return lumen of the catheter 12 and the second umbilical 16 to provide a pressure ranging from a pure vacuum to a pressure just below a patient's blood pressure. For example, the vacuum can maintain a selected pressure between 80 mm Hg and 0 mm Hg. The provision of reduced pressure within the return flow path of the catheter significantly enhances patient safety because, should a leak occur, refrigerant will not squirt from the leak into the patient. Rather, bodily fluids in the treatment site will be aspirated into the catheter whereupon they are sensed by one or more of the leak detectors. In one mode of operation, when a leak is detected, the refrigerant injection is turned off automatically and vacuum is kept on to ensure that no refrigerant enters the patient's body.

30 Although a single type of leak detector could be functional, an exemplary embodiment of the invention is provided with three different types of leak detectors for enhanced detection probability. For example, the first leak detector 18 can be a

5 simple circuit formed by a wire, such as a pull-wire used to help steer the catheter tip, and a conductive catheter tip portion. Specifically, as shown in FIG. 2, a wire 26 is electrically isolated from a metal catheter tip 28 and metal electrode rings 29. In the illustrated embodiment, the wire is secured to a non-conductive support element 30. Also shown is a refrigerant injection tube 32. The electrical impedance between the  
10 wire 26 and the catheter tip 28 is monitored. If a liquid enters the catheter 12 and touches the wire 26 and the tip 28, a short is created which is detectable by circuitry in the console. Alternatively, the wire 26 and one or more of the electrode rings 29 can be included in the impedance circuit.

However, some catheters 12 may include multiple conductors running within  
15 one or more lumens and electrical insulation on the conductors is necessary to avoid unwanted electrical connections and interferences. Many such catheters also contain uninsulated wires, for example as mechanical deflectors to alter catheter configuration, or for example as stiffening agents to alter catheter flexibility or pushability. However, if the pull wire (or other wire that is part of the leak detection  
20 circuit) contacts another uninsulated wire, electrode ring or other conductive element, a false leak detection signal could be generated. Accordingly, a form of insulation that provides mechanical insulation while allowing fluid conductivity is desirable.

FIG. 3 discloses a wire 34 (such as a pull wire) that is part of the leak  
25 detection circuit. The wire 34 is covered with a porous material 36, such as a fabric, salt-depleted polymer, or laser drilled polymer, that provides mechanical insulation in the dry state by the physical bulk and separation of the porous material, which allows passage of ionic fluids to the thus insulated wire to complete the electrical leak detection circuit.

Although the first leak detector 18 is well suited for detecting leaks at or near  
30 the distal end of the catheter 12, a leak may develop between the distal end and the handle portion 21 of the catheter and an infrared sensor can be disposed in the handle as the second leak detector 20. As soon as the first and/or second leak detectors output a signal to the console indicative of a leak, the refrigerant injection can be stopped. In an exemplary embodiment, shown in FIG. 4, an infrared sensor 38 with a

5 wavelength sensitive to blood composition is disposed in sensing range with a transparent window 40 or tube along or forming part of the return fluid flow path 42.

Even though refrigerant injection is stopped, it can still be desirable to apply vacuum to the catheter to withdraw refrigerant already introduced into the catheter, along with refrigerant contaminated blood. Thus, a third leak detector 22 (shown in  
10 FIG. 1) is provided further downstream in the fluid flow path to not only provide a last opportunity for detection, but to also detect when a selected volume of blood has been aspirated (a relatively small amount) and to then terminate vacuum operation or aspiration. Depending on placement of the third leak detector, it can prevent blood contamination of the entire fluid flow path within the console 10.

15 Although the invention has been shown with respect to exemplary embodiments thereof, various other changes, omissions and additions in form and detail thereof may be made therein without departing from the spirit and scope of the invention.

20 What is claimed is:



- 5           1.     A surgical device comprising:  
            a device body defining a sealed fluid path having a first end and a second end;  
            a refrigerant supply in communication with the first end of the sealed fluid  
            path; and  
            a vacuum source in communication with the second end of the sealed fluid  
10           path.
2.     The surgical device of claim 1, further comprising a leak detection apparatus  
            in communication with the sealed fluid path.
- 15           3.     The surgical device of claim 2, wherein the leak detection apparatus includes a  
            blood detector.
4.     The surgical device of claim 2, wherein the leak detection apparatus includes  
            an impedance measurement circuit in the fluid path.
- 20           5.     The surgical device of claim 4, wherein the impedance measurement circuit  
            includes a conductive portion of the device body and a wire that is electrically isolated  
            from the conductive portion of the device body.
- 25           6.     The surgical device of claim 4, wherein the conductive portion of the device  
            body is a metal catheter tip and wherein the wire is a catheter steering wire.
7.     The surgical device of claim 5, wherein the wire is provided with a fluid  
            porous coating.
- 30           8.     The surgical device of claim 7, wherein the fluid porous coating includes a  
            fabric.

- 5           9.     The surgical device of claim 7, wherein the fluid porous coating includes a salt-depleted polymer.
10.    The surgical device of claim 7, wherein the porous coating includes a laser drilled polymer.
- 10           11.    The surgical device of claim 2, wherein the leak detection apparatus includes an infrared sensor exposed to the sealed fluid path.
12.    The surgical device of claim 2, wherein the leak detection apparatus includes a pulsed ultrasonic device.
- 15           13.    The surgical device of claim 2, further comprising a control unit that is in communication with the leak detection apparatus, wherein the control unit is responsive to output from the leak detection apparatus to control fluid flow through the sealed fluid flow path.
- 20           14.    The surgical device of claim 1, wherein the device body includes a catheter and the refrigerant is capable of reducing the temperature within a portion of the catheter to a temperature below minus 20 degrees Centigrade.

5           15.    A surgical device comprising:

          a catheter having a proximal end and a distal end, and a fluid path through at least a portion of the catheter, the catheter having a fluid inlet and a fluid exhaust;

          a console including

          a reservoir containing a supply of fluid in communication with the fluid inlet of the catheter,

          a vacuum pump in communication with the fluid exhaust, and

          a control unit for controlling fluid movement from the reservoir;

          a handle unit connecting the catheter to the console;

          a first leak detector in the catheter;

15           a second leak detector in the handle unit; and

          a third leak detector in the console.

20           16.    The surgical device of claim 15, wherein the vacuum pump is operable to maintain at least a portion of the fluid path through the catheter a pressure below a 80 mm Hg.

25           17.    The surgical device of claim 16, wherein the control unit is responsive to a signal output from one of the first and the second leak detector to stop a flow of fluid from the reservoir.

          18.    The surgical device of claim 17, wherein the control unit is responsive to a signal output from the third leak detector to stop operation of the vacuum pump after stopping the flow of fluid from the reservoir.

1/1

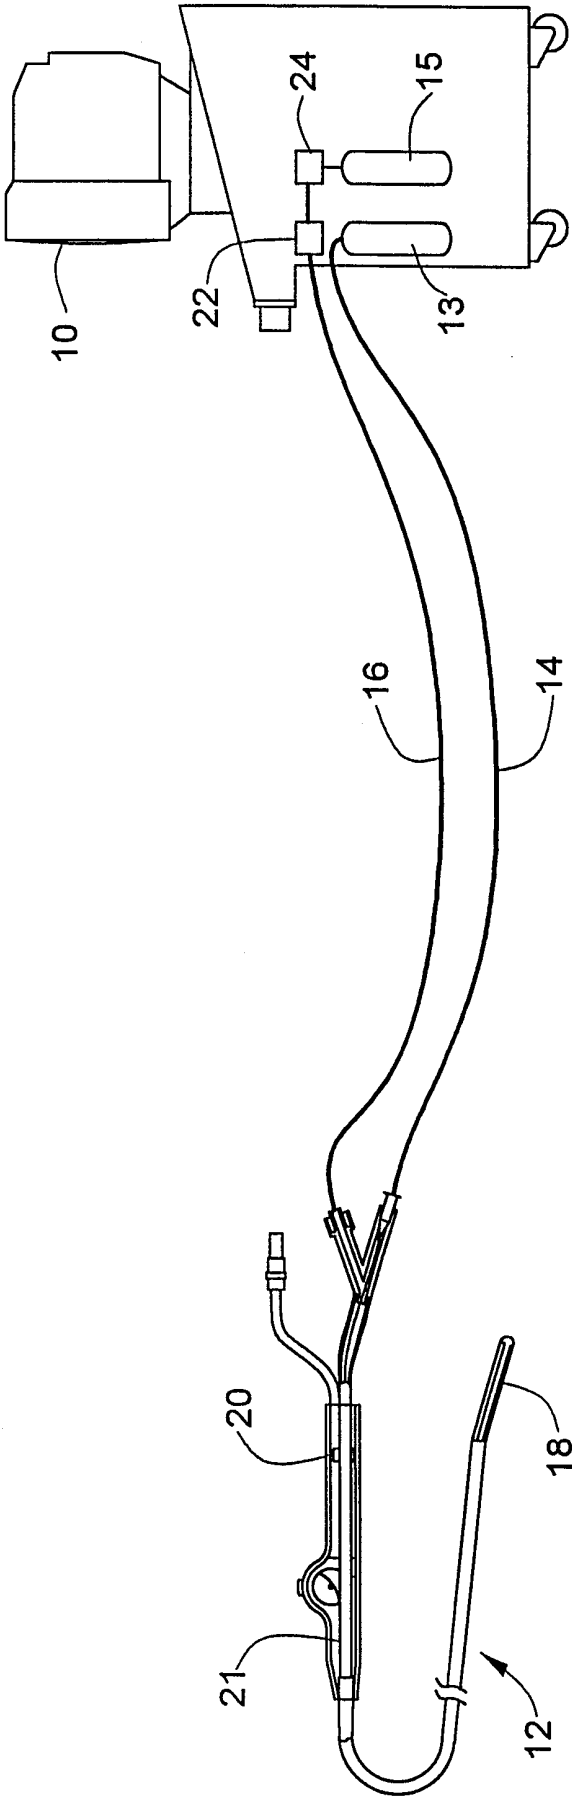


FIG. 1

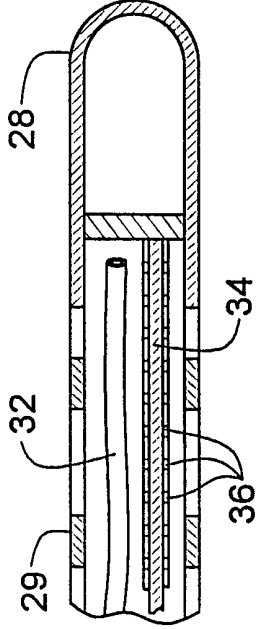


FIG. 2


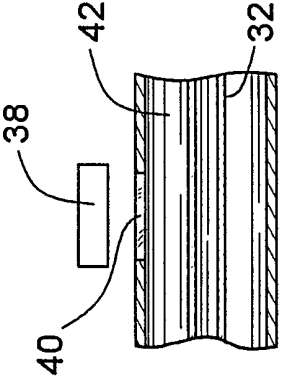


FIG. 3

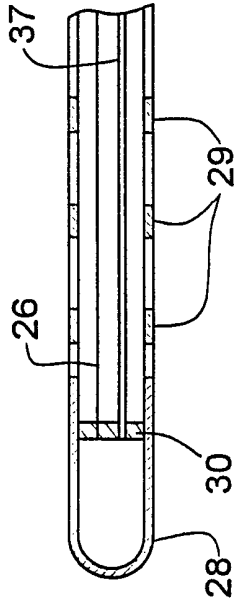

## INTERNATIONAL SEARCH REPORT

Intern. Application No

PCT/CA 00/00065

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 A61B18/02

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 859 986 A (MORI TOSHIYUKI ET AL) 14 January 1975 (1975-01-14) column 1, line 48 -column 2, line 66; figure 1	1,14
X	FR 2 766 083 A (FUTURE MEDICAL SYSTEMS) 22 January 1999 (1999-01-22) page 3, line 31 -page 5, line 17; figure 1	15-18
A	WO 96 25214 A (FELDSEIN THOMAS M ;WILKERSON DOUGLAS L (US); ADOLF WAYNE F (US); A) 22 August 1996 (1996-08-22) page 48, line 15 -page 54, line 2 page 32, line 15 - line 19 page 38, line 4 - line 14	1-3,17, 18

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

3 May 2000

Date of mailing of the international search report

12/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Moers, R

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Internal Application No

PCT/CA 00/00065

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3859986 A	14-01-1975	NONE	
FR 2766083 A	22-01-1999	WO 9903518 A	28-01-1999
WO 9625214 A	22-08-1996	US 5591344 A	07-01-1997
		AU 698545 B	29-10-1998
		AU 4444996 A	22-08-1996
		AU 4977996 A	04-09-1996
		CA 2168629 A	14-08-1996
		DE 19605260 A	28-11-1996
		GB 2299026 A,B	25-09-1996
		GB 2310613 A,B	03-09-1997
		GB 2310614 A	03-09-1997
		GB 2310615 A,B	03-09-1997
		GB 2310602 A,B	03-09-1997
		GB 2310616 A,B	03-09-1997
		GB 2310617 A,B	03-09-1997
		GB 2310618 A,B	03-09-1997
		GB 2320210 A,B	17-06-1998
		GB 2320209 A,B	17-06-1998
		JP 9000618 A	07-01-1997
		US 5674404 A	07-10-1997
		US 5705066 A	06-01-1998
		US 5645734 A	08-07-1997
		US 5690831 A	25-11-1997
		US 5658456 A	19-08-1997
		US 5707086 A	13-01-1998
		US 5674397 A	07-10-1997
		US 5630935 A	20-05-1997
		US 5690821 A	25-11-1997
		US 5725776 A	10-03-1998
		US 5670050 A	23-09-1997
		US 5702606 A	30-12-1997
		US 5674390 A	07-10-1997
		US 5651893 A	29-07-1997
		US 5788099 A	04-08-1998
		US 5714060 A	03-02-1998
		US 5932110 A	03-08-1999
		US 5788851 A	04-08-1998
		US 5783072 A	21-07-1998
		US 5716531 A	10-02-1998
		US 5762782 A	09-06-1998
		US 5863421 A	26-01-1999
		US 5932103 A	03-08-1999