

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
20 October 2005 (20.10.2005)

PCT

(10) International Publication Number
WO 2005/099222 A1

- (51) International Patent Classification⁷: **H04L 29/06**, 12/28, 12/56
- (21) International Application Number: PCT/SE2004/000537
- (22) International Filing Date: 5 April 2004 (05.04.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET LM ERICSSON (publ)** [SE/SE]; S-164 83 Stockholm (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **AXELSSON, Leif** [SE/SE]; Askims Högalid 20, S-436 51 Hovås (SE). **LUNDSTRÖM, Anders** [SE/SE]; Smålandsgatan 4C, S-392 33 Kalmar (SE). **WESTBERGH, Magnus** [SE/SE]; Kämnräsvägen 1B, S-392 35 Kalmar (SE).
- (74) Agent: **STRÖM & GULLIKSSON IP AB**; Lindholmospiren 5, S-417 56 Göteborg (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD, COMMUNICATION DEVICE AND SYSTEM FOR ADDRESS RESOLUTION MAPPING IN A WIRELESS MULTIHOP AD HOC NETWORK.

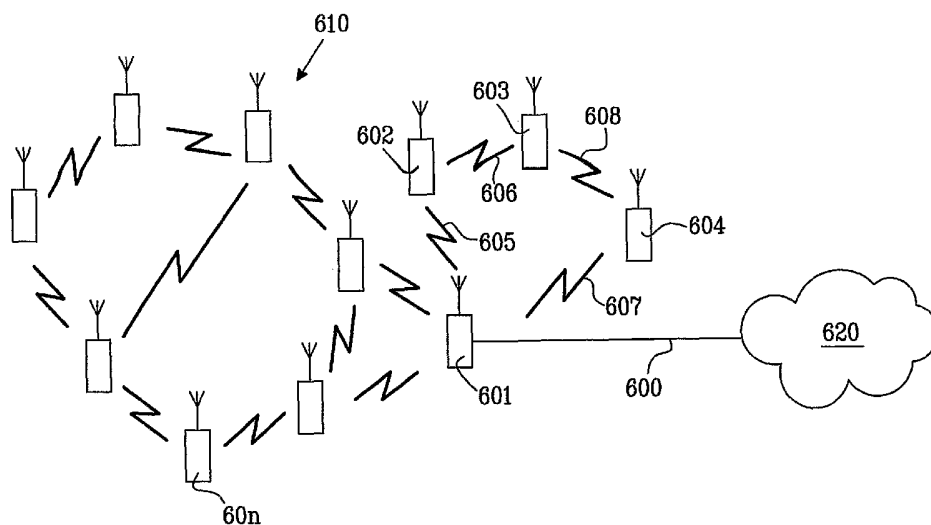

(57) Abstract: A method is presented for address resolution mapping in a wireless multihop communication network wherein the network is built up by client devices and/or infrastructure devices, network traffic is based on using ARP forwarding and rebroadcasting to locate devices in such a network architecture. The invention also includes devices for such a network and the complete communication system is described.

WO 2005/099222 A1

METHOD, COMMUNICATION DEVICE AND SYSTEM FOR ADDRESS
RESOLUTION MAPPING IN A WIRELESS MULTIHOP AD HOC NETWORK

5 *Field of the invention*

The present invention relates to a communication network, specially a computer network in an ad hoc network, and in particular a packet based routing scheme using additional Address Resolution Protocol (ARP) message types.

10

Background of the invention

Wireless communication between mobile users is becoming more and more popular as devices and technology is developed. The infrastructure roll out is expanding within both
15 telecom systems and data network systems. Today also the telecom systems are increasingly using packet switched networks and the trend is clear towards this scheme of packet based routing. This system has been used for many years in the data networks and thus many standardized routing protocols exist for this purpose. However, they are not prepared for rapidly changing network topographies like for instance so
20 called ad hoc networks.

Wireless ad hoc networks are characterized in that they do not have the same static nature as an ordinary wired network infrastructure, the ad hoc based network do not have a centralized control and is often created in a spontaneous manner. It maintains
25 control through a decentralized concept. Nodes can be connected or disconnected in an uncontrolled manner as compared to standard fixed network architectures; the nodes may come and go quickly which leads to a dynamically changing network topology. In some cases such ad hoc networks are formed by user/client devices themselves as infrastructure components. These components are then truly mobile in the sense that
30 the users move around, in and out of a network cell, and therefore the infrastructure will move around and change dynamically accordingly. This is an exciting and promising way of building an infrastructure; however, it sets very high demands on the routing protocol.

35 Other problems in a wireless environment are due to radio specific questions that will degrade the performance and efficiency of the network flow. There may be fading problems due to the movement of infrastructure nodes or movement of objects in the radio environment, and there may be problems due to interference from other radio sources within range.

40

These kinds of network topographies have been used in the military environment but are now migrating into the civilian area as well. Wireless systems are now used to rapidly build infrastructure areas for, e.g. wireless broadband access in residential areas or commercial areas. It may be used for temporary infrastructure build up, for example
5 in an emergency situation, in a disaster area, or on the battlefield for military purposes. It could also be used to build up temporary access coverage areas during events like, for example, concerts, conferences, meetings, or seasonal tourist areas. In these kinds of areas, it is not necessary to have coverage all year around but only during specific periods, thus a fixed infrastructure build up in such a case may prove to be too
10 expensive.

Today, several Internet Service Providers (ISP) offers wireless access at public or semi-public areas such as airports, restaurants, coffee shops, and hotels using fixed wireless infrastructure systems. These systems are often referred to as so called hotspots.
15

As the demand from the users to gain access increases considering coverage and bandwidth, one way of expanding the area of wireless coverage or bandwidth is to install more infrastructure components, however doing this with normal fixed wireless components are expensive and thus the idea to build networks using wireless routers
20 has emerged. In this case ad hoc routing protocols may be used to have a simplified installation procedure.

There are basically two kinds of network usages when discussing ad hoc networks; the first one is the build up of a local area network without any external gateway providing
25 access to an external network, for example Internet. This scheme may be found in installations concerning disaster areas or military installations on the battlefield. The other and probably more common usage is when one or several gateways provide the network with external connections to, for example, an IP (Internet Protocol) based network, private or public, e.g. Internet. In such a network configuration, data packets
30 may take different routes and/or use different gateways depending on, for example, the data traffic type, congestions, or routing cost.

Packet based routing schemes often build their communication network systems around a layered model, for instance the OSI reference model. The communication software or
35 hardware is divided into several smaller sub units, layers, working in a hierarchical manner. Information and communication control parameters are passed up and down locally and between the same layers between the sending and receiving ends. Each such layer is responsible for different tasks in the communication order. In respect to routing the first three layers according to the OSI reference model are the most important.

Layer 1 is responsible for the physical transmission of bits of data; examples of physical means may be, for instance, the wired link in an Ethernet based network or a wireless link in a Wireless Local Area Network (WLAN) .

5

Layer 2 is often called the Link layer or the MAC layer and is responsible of transmitting chunks of data, error detection, and network resource coordination.

10

Layer 3 is often called the Network layer; it is responsible for enabling communication between any pair of nodes in a network. This layer takes, for example, care of routing calculations and some congestion control. For this purpose different routing protocols has been developed depending on the type of network.

15

Packet routing protocols in the IP-based networks are generally based on routing algorithms using distance vector or link state information to find and maintain a route for each pair of source and destination nodes in the network. In principle, in the distance vector routing algorithms, each router broadcasts the distance to all hosts to its neighbor routers, and each router receiving the information calculates the shortest route to each of the hosts in the network. In the link-state routing algorithms, each router broadcasts the status information of each of its adjacent network links to its neighbor routers, and each router receiving the information maintains the database of the entire picture of the network from the link status information and calculates the shortest route to each host based on the link costs in the database. These routing algorithms are designed for relatively static networks and thus new routing algorithms must be designed for ad hoc networks whose topology changes frequently.

20
25

There are basically two categories of existing routing protocols for ad hoc networks. These are "proactive" (table driven) and "reactive" (on-demand) routing protocols. Protocols having combinations of these protocols are also possible.

30

Proactive routing protocols constantly and periodically calculate a route to all hosts in the ad hoc network, and thus a route is always available when a packet needs to be sent to a particular destination host. The results are kept in routing tables in all nodes.

35

In order to maintain routes to each host, control messages are exchanged among the routers to notify changes of the network configuration and link status. Distance vector and link state routing protocols are both categorized as proactive protocols. It should be noted that control messages lead to overhead and may result in reduced network

efficiency. Also, the proactive protocols may have difficulty in maintaining valid routes when the network topology changes frequently.

5 DSDV (Destination-Sequenced Distance Vector Routing) is a proactive routing protocol based on the distance vector algorithm, adapting the Routing Information Protocol (RIP) to ad hoc networks. Each node maintains a routing table in which the node stores the next hop node and hop count to each of all the reachable destination hosts. In DSDV, each node broadcasts or multicasts routing updates periodically, or when it detects changes of the network topology. Incremental updates, which update only information
10 about changes since the last update, are also used in order to reduce control traffic.

A reactive protocol only performs control message exchange to find/update a route when there is a data packet to be sent. When a source node wants to send data packets, it initiates the control protocol to find a route by sending a route request
15 message to its neighbor nodes. By this principle, the reactive approach is good in that network resources are not wasted when there are no packets to be transported. However, it takes longer time to send packets when a route has to be formed for the first time. AODV and DSR are representative reactive protocols.

20 AODV (Ad hoc On-Demand Distance Vector Routing) protocol uses the DSDV algorithm and creates/updates routes on an on-demand basis, that is, only when a source node wants to send a data packet. This leads to reduction of the number of required broadcasts for finding/updating a route.

25 In AODV, each node maintains a list of detected neighbor nodes. The neighbor list is updated in one of the following three ways: a) when a packet is received from the neighbor node, b) by receiving local advertisement, that is, hello message, from the neighbor node, or c) through feedback from the link layer. Hello messages are
30 broadcasted periodically from each node to its neighboring nodes to inform them about its presence.

In AODV, each node maintains a routing table for all the destinations, each of which the node is either communicating with or forwarding data packets to on behalf of other
35 nodes. For each destination, there is an entry in the routing table that contains information about the destination, such as the IP address, the sequence number for the destination node, hop count to the destination, the next hop node to the destination, and lifetime for the route.

When a node wants to communicate with a destination node, that is, to send data packets to the destination, then the source node initiates a route discovery mechanism, where the source node broadcasts a route request (RREQ) to all detected neighbor nodes. When the neighbor node receives the RREQ message and has the entry for a fresh enough route to that destination in its routing table, then it sends back a route reply (RREP) message to the source node. If the neighbor node does not find a route entry for that destination, then it forwards the RREQ message to its own detected neighbor nodes. When the destination node receives the RREQ, it returns the RREP message to the source node.

10

In the process of forwarding the RREQ packet, each intermediate node records the IP address of the neighbor node from which the first copy of the broadcast RREQ is received, by which a reverse route is established. The copies of the same RREQ messages received later are all discarded. The intermediate nodes add an entry to their routing table for the destination, where the neighbor node from which the RREP was received is recorded as the next hop node for that destination. The destination sequence number and lifetime of the route are copied from the RREP and recorded in the entry. When the RREP message is returned to the source node finally, a forward route from the source to destination is formed.

15
20

When a node detects that a route becomes unavailable by failure of the incident link on the route, it sends a route error (RERR) message to all the neighbor nodes, which use the route. The RERR message is sent on to their neighbor nodes and so on until it reaches the source node. The source node can then decide to either stop sending data packets or initiate a new route discovery.

25

DSR (Dynamic Source Routing) protocol uses a source routing mechanism in which the source node determines the complete sequence of nodes along the route on an on-demand basis and sets the list of the intermediate nodes in the packet header to indicate the sequence of nodes for the route. In this way, each packet has to carry the overhead for packet routing. However, the intermediate nodes do not need to maintain any information about the route and they can learn routes when delivering data packets.

30

In DSR, each node stores (caches) the routes it has learned. When a source node wants to send data packets to a destination node and has no entry in the cache for that destination, then it initiates a route discovery mechanism by broadcasting a RREQ message on its link-layer. Each node receiving the RREQ message appends their IP addresses to the RREQ message and then forwards it further. This process is done until

35

the route to the destination is found or another node can provide a route to the destination node. Then a route reply (RREP) message containing the sequence of network hops to the destination node is returned to the source node.

- 5 In DSR, when a link failure is detected at a node (i.e. when the packet has been retransmitted a maximum number of times), that node removes the link from its routes cache and sends a route error (RERR) message to each of the nodes that have used that link since an acknowledgement was last received. Those nodes have to remove the routes including that link. The retransmission of the data packet from the source node is
10 then handled by upper layers such as the Transmission Control Protocol (TCP).

- One problem with the TCP/IP protocol is that it only makes use of IP addresses and in a data link in an Ethernet or token ring example, the network components has its own addressing scheme to which any network layer using the data link must conform. In, for
15 example, an Ethernet several different network layers can cooperate at the same time, several network applications can use the same physical cable. When an Ethernet frame or packet is sent from one location to another it uses a 48 bit Ethernet address for determining the destination and source of the packet. A unique 48 bit Ethernet address is found in all Ethernet networking hardware and often called the MAC address (Media
20 Access Control). This 48 bit address can be compared with the 32 bit IP address used in IPv4 (Internet Protocol version 4). Address resolution provides the mapping scheme between the two different forms of addresses. This mapping is done by the ARP (Address Resolution Protocol). ARP provides the mechanism to dynamically map hardware MAC addresses to IP addresses in a temporary memory space called the ARP
25 cache. In other words the ARP translates the IP address to a MAC address.

- The basic operation of ARP is as follows: when the IP layer wants to communicate with another device on the network, it checks the ARP cache (to see if there is a match with an Ethernet address). If there is no matching entry in the ARP cache, an ARP broadcast
30 datagram is sent out that basically says: "The device with this IP address, reply with your Ethernet address?". The receiving station (that has the IP address) responds with an ARP datagram that says: "This is my IP address and here is my Ethernet address". The ARP cache is updated and the original IP layer information is passed on to the MAC layer for processing.

- 35 This scheme work fine for fixed line networks, but in wireless ad hoc and/or multihop networks not all network units can hear each other, in this case the standard ARP solution will not suffice. For this purpose some different layer 2.5 solutions for mapping IP and MAC addresses have been developed.

There are mainly two different routing protocols working as intermediary between layer 2 and 3, so called layer 2.5 protocols:

- 5 1. Lightweight Underlay Network (LUNAR). Instead of utilizing pure ARP, the ARP traffic is trapped by the Translating Underlay Network (SelNet) and rewritten to the eXtensible Resolution Protocol (XRP). XRP permits a much richer set of expressions than standard ARP. To maintain routes in LUNAR, all routes are cleared every third second and the path discovery procedure is redone.
- 10 2. Layer two DSR (the original version. In the route discovery process the packets used for routing is similar to ARP, but all addresses of the nodes along are recorded. As the protocol is a source routing protocol the whole route will also be added to every header of the data packets. The number of such addresses is limited and thereby results in a limited number of hops. The route maintenance is operating by detecting acknowledgements (ack.) hop by hop for each data
- 15 packet transmitted. When no acknowledgement is achieved, the packet is retransmitted a certain number of times until the link is considered broken and another route is searched for.

20

The problems with the above mentioned solutions can be summarized as follows:

1. Standard ARP can only be used for local peer-to-peer communication in a wireless network.
- 25 2. Packets in the network are normally not reused in ad hoc routing protocols.
3. LUNAR protocol is limited to a maximum of 10-15 nodes in total in a network cell and a maximum of 3 hops. In order to keep updated mapping tables it floods the network often, which results in additional control traffic. Also, it utilizes an external additional protocol to enable multihop functionality.
- 30 4. DSR on layer 2 is limited to a certain number of hops since all network addresses are stored in all packets (both data and control traffic packets). This solution demands additional resources and a new ARP like protocol is introduced.

Accordingly the above mentioned solutions will not be transparent in a standard IP
35 based network and will take up extra resources both from the available network resources and from the computing power of the involved routing components.

Summary of the invention

Thus, it is one object of the preferred embodiment of the present invention to remedy at least some of the above mentioned problems and drawbacks.

5 This is done by introducing new features in the ARP messages without changing the ARP message structure. In this way, network components using standard ARP functionality will not be affected by this new ARP message structure. However, network components using an ARP solution according to the present invention will be able to make use of an efficient ARP mapping.

10

In one preferred embodiment of the present invention, a method for "address resolution mapping" is provided for a wireless multihop data communication network, the method comprising the steps of: broadcasting an address resolution protocol (ARP) request from a first network node to a second node or nodes; the second node receiving the ARP
15 request determining the destination of the ARP message; transmitting the ARP request if the ARP request is determined to be destined to a third node; and forwarding ARP replies from a destination network node to the first network node via intermediary network node or nodes.

20 The method further comprises a pending list of stored detected previous ARP requests and ARP forwards in the nodes.

The method may further comprises the steps of limiting the storage time in the pending list of the stored previous ARP requests or forwards, limiting the rate of ARP forwards a
25 node are allowed to send to a specific destination, measuring link quality between nodes and distributing link quality information to nodes during ARP message procedures, using the link quality information to determine when the ARP table should be updated, comparing the link quality information with a threshold value in order to determine if an update is to be done, and modifying the ARP request prior to rebroadcasting or
30 forwarding the ARP request.

According to the method, ARP error message may be generated and distributed to listening nodes in the network when a node can not communicate with a certain node.

35 In another embodiment of the present invention, a communication device is presented, wherein the device has routing means in a multihop wireless network, and the device comprises: an instruction set memory; at least one wireless transceiver; means for providing address resolution protocol (ARP) instructions in the instruction set memory;

and means for providing ARP message forwarding and rebroadcasting instructions in the instruction set memory.

5 In the device, the means for ARP forwarding and broadcasting may include means for determining the destination of an ARP message.

The device may be a client system, such as, but not limited to, laptop, personal computer (PC), personal digital assistant (PDA), mobile phone, or embedded computer or infrastructure system, such as, but not limited to, WLAN (Wireless Local Area
10 Network) infrastructure devices, and mobile phone infrastructure devices.

The ARP forwarding or rebroadcasting instructions may modify the ARP message to appear to originate from the device modifying the message.

15 In yet another embodiment of the present invention, a system for multihop wireless data communication is presented, the system comprises: a plurality of communication devices; the communication devices comprising: an instruction set memory; at least one wireless transceiver; means for providing address resolution protocol (ARP) instructions in the instruction set memory; and means for providing ARP forwarding and
20 rebroadcasting instructions in the instruction set memory; and a communication network built up by the communication devices.

The communication device in the data communication system further comprises means for determining the destination of the ARP message.

25

The communication device may be a client system, infrastructure system, or a combination of these two types of devices. Examples of client system may be, but not limited to, a laptop, personal computer (PC), personal digital assistant (PDA), mobile phone, or embedded computer. Examples of infrastructure systems may be, but not
30 limited to, a WLAN (Wireless Local Area Network) infrastructure devices, and mobile phone infrastructure devices.

The system may further comprise at least one gateway connected to an external network, such as Internet or a private IP network.

35

The invention also relates to a n instruction set for "address resolution mapping" in a wireless multihop data communication network, the instruction set comprises: a first instruction set for broadcasting an address resolution protocol (ARP) request from a first network node to a second node; a second instruction set in the second node for

receiving the ARP request determining the destination of the ARP message; a third instruction set transmitting the ARP request if the ARP request is determined to be destined to a third node; and a fourth instruction set for forwarding ARP replies from a the third node to the first network node via the second node(s).

5

Brief description of the drawings

In the following the invention will be described in a non-limiting way and in more detail with reference to exemplary embodiments illustrated in the enclosed drawings, in
10 which:

Fig. 1 illustrates in a schematic way a small multihop network.

15 Fig. 2 is a flow diagram over small multihop network with the different communication messages.

Fig. 3 illustrates a schematic message structure of ARP messages.

20 Fig. 4 illustrates a schematic of a larger multihop wireless network in connection with a fixed network.

Detailed description of the invention

25 The present invention relates to the concept of mobile ad hoc networks, wherein a self-organizing wireless network of mobile nodes communicates with each other using a so called multihop routing system. The nodes act as both hosts/client systems and routers, i.e. infrastructure devices. Traffic is routed via the nodes and if necessary routed to external gateways having access to an external IP network, e.g. Internet.

30 In the present invention a new solution for ARP (Address Resolution Protocol) is presented wherein ARP messages are forwarded to recipient nodes using intermediary nodes situated in the path between the ARP requesting node and the final recipient of the ARP message.

35 In fig. 1 a number of network nodes 101, 102, 103, and 104 are illustrated for a multihop wireless network. The nodes 101, 102, 103, and 104 are in communication with each other, however not all nodes have contact with each other. This means that in some situations some nodes will relay messages and act as routing elements. For instance, if node 101 wants to communicate with node 104 nodes 102 or 102 and 103

need to be involved in the packet transactions since the nodes 101 and 104 can not in this situation directly "hear" each other, i.e. can not directly communicate with each other.

5 When a message is to be sent from one node to another node the network addresses of the nodes need to be resolved. In the present invention a new ARP procedure is proposed wherein new ARP messages are added to enable ARP message structure is changed in such a way that ARP forwarding or rebroadcasting. This means that nodes lying in between two nodes that need to know each others network addresses will
10 forward such ARP requests until the ARP request reaches the sought after destination.

Let us illustrate this with a schematic stepwise procedure assuming node 101 wants to communicate with node 104 according to Fig. 1:

- 15 1. Node 101 wants to send data to node 104.
2. Automatically node 101 broadcasts an ARP request: "Who is 104, tell 101?".
3. This message is received by the adjacent node 102, which immediately rebroadcasts the request: "Who is 104, tell 102?".
4. This request is received by the adjacent node 103, which rebroadcasts the
20 request: "Who is 104, tell 103?". However, in this specific case the request is also received by node 104, who replies by sending: "Node 102, I am 104".
5. The request transmitted by node 103 is received by node 104, who replies by sending: "Node 103, I am 104".
6. The reply from node 104 to node 102 is received by node 102.
- 25 7. Node 102 replies to the origin of the request (node 101) by sending an ARP forward: "Node 101, use node 102 as gateway to node 104".
8. The reply from node 104 to node 103 is received by node 103. Node 103 replies to node 102 by sending: "Node 102, use node 103 as gateway to node 104".

30 In another example as shown in Fig. 2, three nodes (201, 202, 203) are connected in a small network. Node 201 wants to communicate with node 203 but can not do so directly. However, node 202 is positioned in such a way that it can relay messages between node 201 and 203. In Fig. 2 node 201 wants to send an ICMP (Internet Control Message Protocol) echo request, commonly referred to as ping, to node 203. The
35 message boxes 205, 207, 211, and 213 in Fig. 2 are indicating the new message types communicated between the nodes according to the present invention.

1. When node 201 starts its communication procedure it first sends an ARP message asking for the location of the IP number it wants to communicate with. This is illustrated in box 204.
- 5 2. This ARP request is received by node 202. Node 202 determines that the message is meant for another node than itself. The message is altered to appear to come from node 202, and rebroadcasted by node 202 as illustrated in box 205.
3. The message is received by node 203 and an ARP reply is sent to node 202 (box 206) and node 202 forwards the ARP reply to node 201 (box 207).
- 10 4. Node 201 then has the coordinates for node 203 and sends the ICMP request to node 203 (box 208) and the ICMP request is relayed by node 202 (box 209).
5. Node 203 receives this ICMP request and then wants to send an ICMP reply. However, it needs to know the MAC address of node 201 in order to send the reply and therefore sends an ARP request for node 201. This is illustrated in box 15 210.
6. This message is received by node 202. Node 202 determines that the message is meant for another node than itself. The message is altered to appear to come from node 202, and rebroadcasted by node 202 as illustrated by box 211.
7. The message is received by node 201 and an ARP reply is sent to node 202 20 (box 212) and node 202 forwards the answer to node 203 (box 213).
8. Node 203 then has the coordinates for node 201 and sends the ICMP reply (box 214) which is relayed by node 202 (box 215) to node 201 and the ICMP communication procedure is finalized.

25 The above described communication method has been illustrated by an ICMP echo request but it should be appreciated by the person skilled in the art that any type of communication procedure, protocol, or scheme may be used within the scope of the present invention. Also, the person skilled in the art should understand that more than three nodes may be involved in the communication network and transaction of traffic.

30

The above mentioned messages are not all part of the standard ARP procedure. However, even the non standard messages may be incorporated into a standard message by using the operation code (op) field. In this manner routing elements conforming to standard ARP requests will be able to handle ARP request made by 35 routing elements using the present invention's new ARP forwarding scheme. Standard routing element will only ignore such new ARP message types. Modified routing elements enabled to handle the present invention's new ARP forwarding scheme will be able to make use of the new codes included in the op field. The op field defines what type of message is transmitted or received. Therefore it is not necessary to change the

ARP standard in order to implement the ARP forwarding scheme. The normal message types used in the op field in the address resolution protocol include ARP request, ARP reply, RARP request, and RARP reply. New message types proposed in the present invention include, ARP forward, ARP error, and ARP link quality. As an example, in Table 1 below three different ARP message types and their respective content and transportation header in an Ethernet message system are shown. Table 1.A shows a standard ARP request message, Table 1.B shows an ARP reply message according to the present invention, and Table 1.C shows an ARP forward message according to the present invention. The actual information contained in the message is found on the right hand side of the tables in Table 1.A-C and in the fields Type, Hardware type, Protocol type, and Operation code both the descriptive term and the actual sent hexadecimal code (in parenthesis) is shown:

Table 1

15 A. ARP Request

Ethernet Header	
Destination:	FF:FF:FF:FF:FF:FF
Source:	00:0D:56:3C:DE:C0
Type:	ARP (0x0806)
Address Resolution Protocol	
Hardware type:	Ethernet (0x0001)
Protocol type:	IP (0x0800)
Hardware address length:	6
Protocol address length:	4
Operation code:	Request (0x0001)
Sender hardware address:	00:0D:56:3C:DE:C0
Sender IP address:	192.168.0.1
Recipient hardware address:	00:00:00:00:00:00
Recipient IP address:	192.168.0.3

B. ARP Reply

Ethernet Header	
Destination:	00:0D:56:3C:DB:9D
Source:	00:0D:56:3C:E2:4C
Type:	ARP (0x0806)
Address Resolution Protocol	
Hardware type:	Ethernet (0x0001)
Protocol type:	IP (0x0800)
Hardware address length:	6
Protocol address length:	4
Operation code:	Reply (0x0002)
Sender hardware address:	00:0D:56:3C:E2:4C
Sender IP address:	192.168.0.3
Recipient hardware address:	00:0D:56:3C:DB:9D
Recipient IP address:	192.168.0.2

20

C. ARP Forward

Ethernet Header	
Destination:	00:0D:56:3C:DE:C0
Source:	00:0D:56:3C:DB:9D

Type:	ARP (0x0806)
Address Resolution Protocol	
Hardware type:	Ethernet (0x0001)
Protocol type:	IP (0x0800)
Hardware address length:	6
Protocol address length:	4
Operation code:	Forward (0x000c)
Sender hardware address:	00:0D:56:3C:DB:9D
Sender IP address:	192.168.0.2
Recipient hardware address:	00:0D:56:3C:E2:4C
Recipient IP address:	192.168.0.3

The new types of ARP message types will now be described:

5 ARP Forward: If this type is included in the op field of an ARP message any routing device with an implementation according to the present invention, understands that this message is an ARP forward message and treats it as an ARP reply with some differences in message handling. It is also a function in the implementation of the ARP forwarding scheme introduced in the present invention. This function relay routes to nodes. The message contains the final destination and who the nearest hop to the final destination is.

10 ARP error is generated when a node realizes that it can not communicate with a certain node. This is generated if the node is unable to find any alternative routes to the certain sought after node. The ARP error message is broadcasted (to adjacent nodes, i.e. single-hop neighbors) and contains information about which node generated the error message and the node that can not be reached. The ARP error generating node removes all entries to routes containing the missing node and all routes where the missing node acts as a gateway. Receivers of the ARP error message broadcasted removes any active routes containing the missing node. If no alternative routes exist in the receiving node an ARP error message is generated and broadcasted.

20 ARP link quality message contains information about the link quality between two nodes.

25 It should also be considered that messages rebroadcasted by intermediary nodes are also received by previous nodes in the communication chain. In the example of Fig. 2, when node 202 rebroadcast an ARP request node 201 will receive the same message. In order to reduce the amount of control traffic every node may keep track of every request and reply by locally storing a pending list at every node. By looking in this list of recent requests and replies before forwarding an ARP request, a node may be able to reduce the amount of control traffic broadcasted on the network infrastructure. If a message received is determined to be concerning a node set already in the pending list,

it will be discarded. In the pending list, information about which node is asking for which node, at what time this request was done, if any reply has been received, and if a reply has been forwarded to another node are stored.

- 5 In the solution it is also possible to introduce a time limit on how quick a node may rebroadcast a request destined for a specific node. When a request travels two or more different paths and is received at a node it should not be forwarded more than one time. This is solved by not allowing a node to forward a request to a specific node within a certain time limit. Vice versa, ARP replies or forward messages are only allowed to be
10 sent once to every origin as long as no rebroadcast has been sent.

- Since the present invention do not change the ARP standard no special ARP initiation routines is necessary. However, in another embodiment of the present invention a link quality supervision system may be introduced together with the above mentioned ARP
15 solution in order to further reduce the amount of control traffic and increasing the traffic speed. By measuring the link quality between nodes, for instance the radio quality, acknowledgement information, bit error rate, or data rate throughput (from for example Transmission Control Protocol, TCP), it is possible to upon a detected link quality
20 reduction, pro-actively update ARP listings. Such a scheme may reduce the amount of lost data packets and reduces the amount of control traffic in the infrastructure. In PCT/SE03/002074 (incorporated herein through reference) a similar scheme for link quality surveillance in an ad hoc network is introduced and incorporated herein by
reference. The same system may be used for deciding when to update the ARP table.

- 25 Controllable parameters in the ARP implementation according to the present invention include, but is not limited to, how often a node may send ARP requests, how long time an entry in the pending list is valid and the amount of time a routing entry not in use stored in the ARP routing table is allowed to remain in the ARP routing table.

- 30 Requests are stored in a receiving node in such a way that the receiving node can send a reply to a requesting node if a reply is received from other nodes.

- A node may be any computational device including, but not limited to, a laptop, personal digital assistant (PDA), embedded computer, or mobile phone. Such a device
35 include at least one wireless transceiver and an instruction set memory with programming code handling address resolution protocol instructions and address resolution protocol forwarding and rebroadcasting instructions. The device also includes means in the instruction set memory for determining the final destination of messages and means for modifying ARP messages according to the present invention.

The invention may be used both for independent networks where no external connection is provided, such as in for instance a disaster area network setup or military network setup on the battlefield, and for a cluster of wireless components connected together and in the cluster there are at least one connection to an external network (e.g. Internet or an independent IP network). The latter embodiment is illustrated in Fig. 4 wherein a plurality of wireless components 602 ... 60n (wherein n is an integer) are connected to a gateway 607 with a connection to an external network, for instance Internet. The external connection 600 may be of any type, including but not limited to, fixed wired connection (e.g. Ethernet, optical fiber, or similar), or fixed wireless (e.g. LMDS).

The communication scheme is independent on the radio-coding scheme used and any radio type may be used. For example, radio standards as of in the IEEE 802.11 series (e.g. IEEE 802.11a, IEEE 802.11b, IEEE 802.11g and so on), IEEE 802.15, IEEE 802.16, HiperLAN, HomeRF, Bluetooth, IR (Infrared), UWB (Ultra WideBand), JTRS (Joint Tactical Radio System), 3G (Third Generation mobile communication), GPRS (General Packet Radio Service), or EDGE (Enhanced Data rate for Global Evolution). However the possible radio standards are not limited to the above mentioned. It may be any suitable electromagnetic radiation based transmission scheme operating within the frequency band of 100 kHz to 100 PHz; this includes radio frequencies, microwave frequencies, and frequencies in the infrared, visible, and ultraviolet regimes.

The ARP method according to the present invention may be used in many different application areas such as, for example, by the police in general or during special events, rescue forces during a disaster or an accident, military forces on the battlefield or in training, or for building wireless access areas for communication purposes both for residential and commercial network access. For example it is possible to use these ad hoc networks to build up broadband access using short range, low cost, wireless equipment in residential areas where other broadband access technology is scarce or too expensive to connect to. It may also be used in commercial districts for either providing broadband access to enterprises or small companies, or for wireless connections at so called hotspots. Hotspots are characterized in that they provide communication access within a certain area, for example at an airport lounge or in hotels, for paying customers or for free depending on business model.

Even though in the examples above three or four nodes have been used for illustrating the present invention, it should be appreciated by the person skilled in the art that more

or less number of nodes may be used in such a network installation. There is no special limit on the number of nodes involved.

5 Although the invention has been described in detail for the purpose of illustration, it is to be understood that such detail is solely for that purpose and that variations can be made therein by those skilled in the art without departing from the spirit and scope of the invention except as it may be limited by the following claims.

Claims

1. A method for "address resolution mapping" in a wireless multihop data communication network, the method comprising the steps of:
- 5 - broadcasting an address resolution protocol (ARP) request from a first network node to a second node;
 - said second node receiving said ARP request determining the destination of said ARP message;
 - transmitting said ARP request if said ARP request is determined to be
10 destined to a third node; and
 - forwarding ARP replies from a said third node to said first network node via said second node(s).
2. The method according to claim 1, wherein said second node comprises a plurality of
15 nodes.
3. The method according to claim 1, further comprising a pending list of stored detected previous ARP requests and ARP forwards in said nodes.
- 20 4. The method according to claim 3, further comprising the step of limiting the storage time in the pending list of the stored previous ARP requests or forwards.
5. The method according to claim 1, further comprising the step of limiting the rate of ARP forwards a node are allowed to send to a specific destination.
25
6. The method according to claim 1, further comprising the step of measuring link quality between nodes and distributing link quality information to nodes during ARP message procedures.
- 30 7. The method according to claim 1, wherein said link quality information comprises at least one of acknowledgement information, radio link quality, data rate throughput, and bit-error rate.
- 8 The method according to claim 6 or 7, further comprising the step of using said link
35 quality information to determine when said ARP table should be updated.
9. The method according to claim 6 or 7, further comprising the step of comparing said link quality information with a threshold value in order to determine if an update is to be done.

10. The method according to claim 1, wherein an ARP error message is generated and distributed to listening nodes in the network when a node can not communicate with a certain node.

5

11. The method according to claim 1, further comprising modifying said ARP request prior to rebroadcasting or forwarding said ARP request.

10

12. A communication device with routing means in a multihop wireless network, said device comprising :

- an instruction set memory;
- at least one wireless transceiver;
- means for providing address resolution protocol (ARP) instructions in said instruction set memory; and
- 15 - means for providing ARP message forwarding and rebroadcasting instructions in said instruction set memory.

20

13. The device according to claim 12, wherein said means for ARP forwarding and broadcasting include means for determining the destination of an ARP message.

14. The device according to claim 12, wherein the communication device is a client system.

25

15. The device according to claim 14, wherein said client system may be one or several of laptop, personal computer (PC), personal digital assistant (PDA), mobile phone, or embedded computer.

30

16. The device according to claim 12, wherein the communication device is an infrastructure system.

17. The device according to claim 16, wherein said infrastructure system is one or several of WLAN (Wireless Local Area Network) infrastructure devices, and mobile phone infrastructure devices.

35

18. The device according to claim 12, wherein said ARP forwarding or rebroadcasting instructions modify said ARP message to appear to originate from the device.

19. A system for multihop wireless data communication, said system comprising:
a plurality of communication devices;

said communication devices comprising:

- an instruction set memory;
- at least one wireless transceiver;
- means for providing address resolution protocol (ARP) instructions in said
5 instruction set memory; and
- means for providing ARP forwarding and rebroadcasting instructions in
said instruction set memory; and
- a communication network built up by said communication devices.

10 20. The system according to claim 19 said communication device further comprising
means for determining the destination of said ARP message.

21. The system according to claim 19, wherein said communication device is a client
system.

15

22. The system according to claim 21, wherein said client system may be one or several
of laptop, personal computer (PC), personal digital assistant (PDA), mobile phone, or
embedded computer.

20 23. The system according to claim 19, wherein said communication device is an
infrastructure system.

24. The system according to claim 23, wherein said infrastructure system may be one
or several of WLAN (Wireless Local Area Network) infrastructure devices, and mobile
25 phone infrastructure devices.

25. The system according to claim 19, further comprising at least one gateway
connected to an external network.

30 26. An instruction set for "address resolution mapping" in a wireless multihop data
communication network, the instruction set comprising:

- a first instruction set for broadcasting an address resolution protocol (ARP)
request from a first network node to a second node;
- a second instruction set in said second node for receiving said ARP request
35 determining the destination of said ARP message;
- a third instruction set transmitting said ARP request if said ARP request is
determined to be destined to a third node; and
- a fourth instruction set for forwarding ARP replies from a said third node to
said first network node via said second node(s).

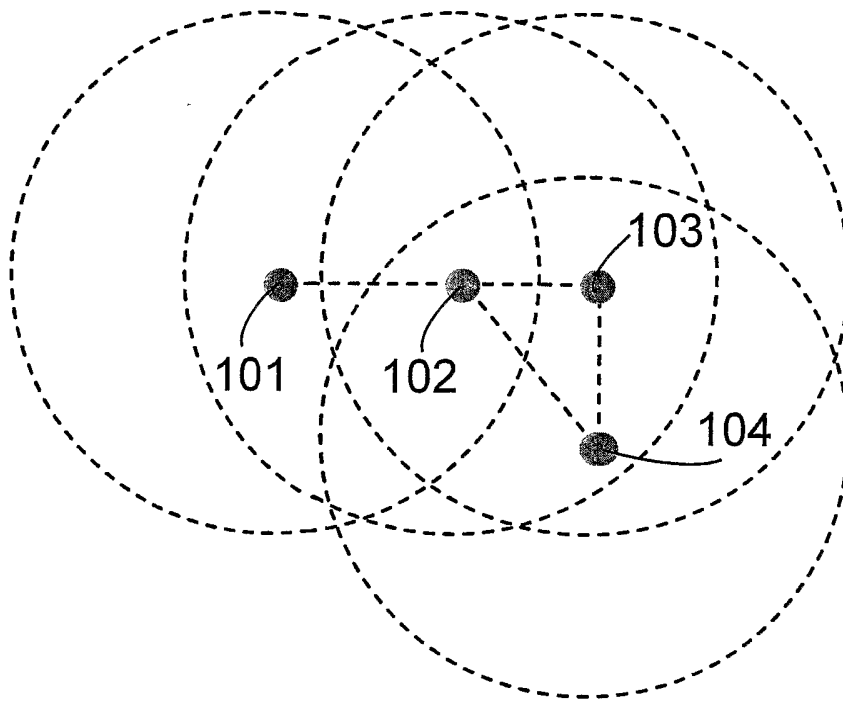


Fig.1

ARP Enabled Ad Hoc Routing

Node: 1	Node: 2	Node: 3
IP Address: 192.168.0.1	IP Address: 192.168.0.2	IP Address: 192.168.0.3
MAC Address: 00-0D-56-3C-DE-C0	MAC Address: 00-0D-56-3C-DB-9D	MAC Address: 00-0D-56-3C-E2-4C

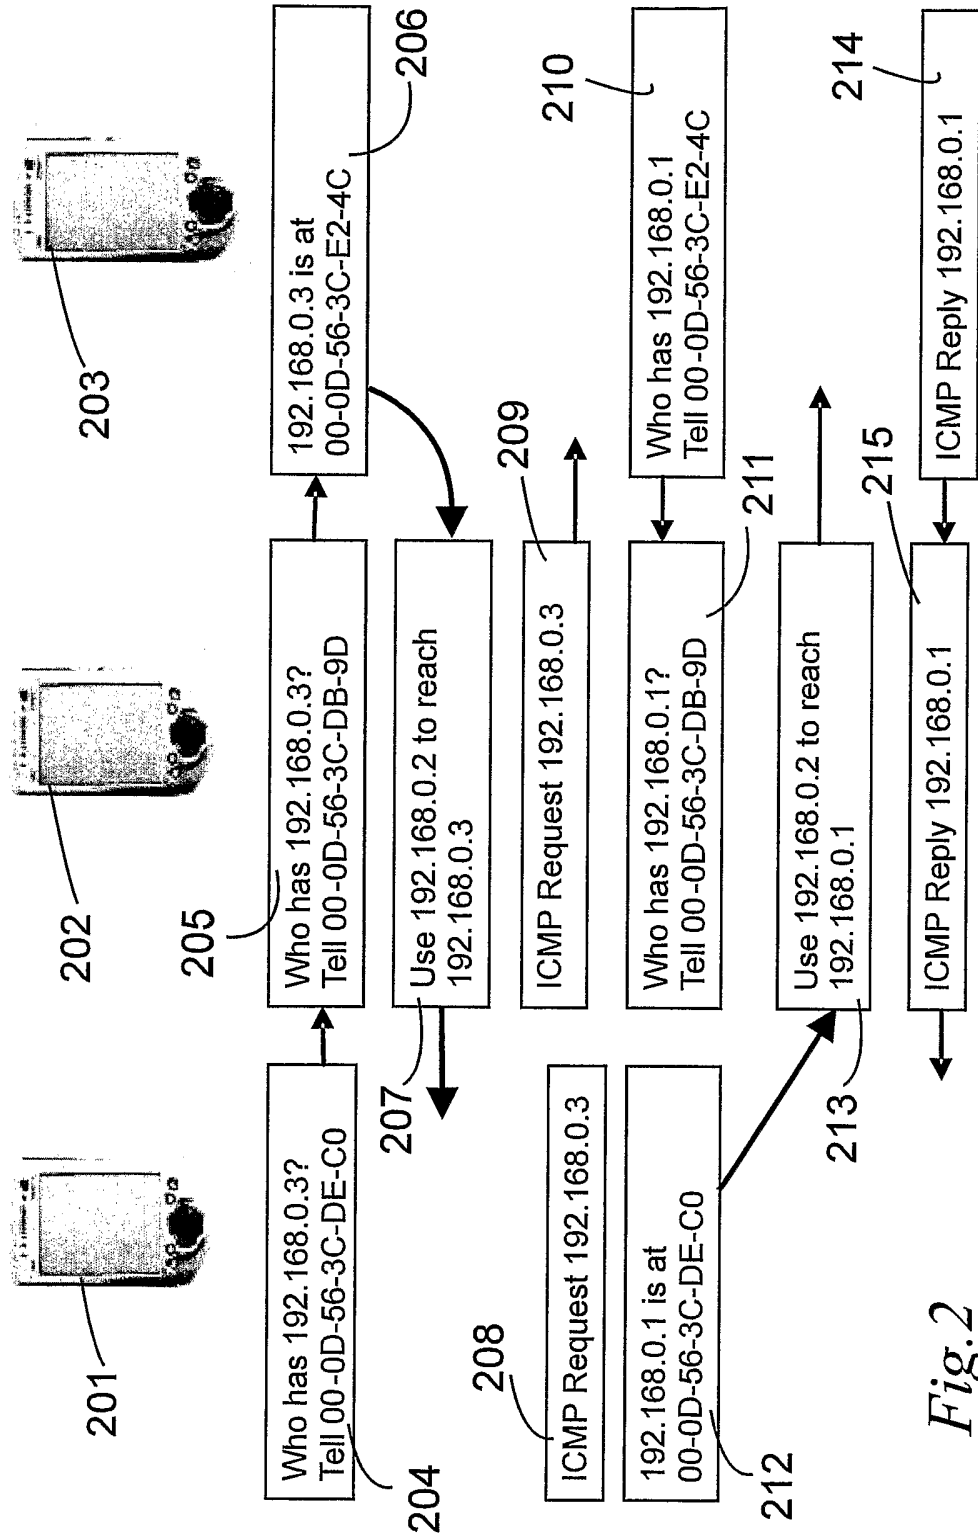


Fig. 2

3/4

Hardware Type	
Protocol Type	
Hardware Address Len	Protocol Address Len
Operation Code	
Sender Hardware Address	
Sender IP Address	
Recipient Hardware Address	
Recipient IP Address	

Fig.3

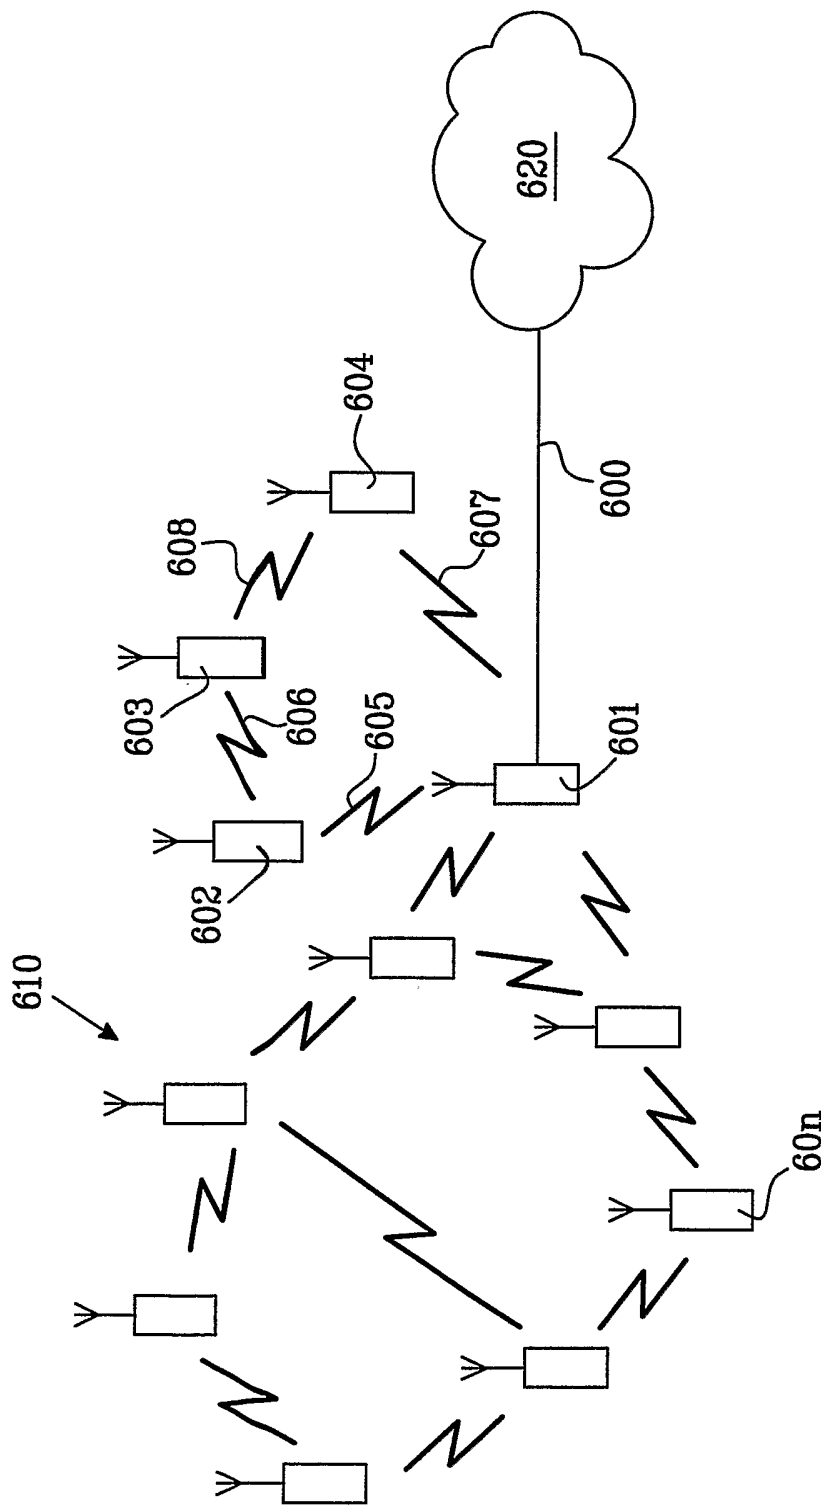


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/000537

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04L 29/06, H04L 12/28, H04L 12/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6704293 B1 (LARSSON, T ET AL), 9 March 2004 (09.03.2004), column 1, line 40 - line 44; column 4, line 10 - line 25; column 5, line 45 - line 50, column 6, line 18 - line 34; column 7, line 36 - column 9, line 29, column 11, line 14 - line 18, figure 6A, claims 1-2,19-20, abstract	1-5,10-26
Y	--	6-9
Y	US 20020013856 A1 (GARCIA-LUNA-ACEVES, J J ET AL), 31 January 2002 (31.01.2002), abstract	6-9
Y	US 20020071395 A1 (REDI, J K ET AL), 13 June 2002 (13.06.2002), abstract	6-9
	--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15 November 2004

Date of mailing of the international search report

16-11-2004

Name and mailing address of the ISA/

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Nabil Sebaa /LR
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/000537

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 20030063607 A1 (ADACHI, T ET AL), 3 April 2003 (03.04.2003), paragraphs [0012]-[0016]; [0045]; [0145], claims 1,3, abstract --	1-26
A	WO 03021817 A1 (MESH-NETWORKS, INC), 13 March 2003 (13.03.2003), abstract --	1-26
A	US 20030072306 A1 (HUNZINGER, J F), 17 April 2003 (17.04.2003), claim 1, abstract --	1-26
A	US 20030202524 A1 (CONNER, W S ET AL), 30 October 2003 (30.10.2003), paragraphs [0001]-[0002]; [0025]; [0029], abstract -- -----	1-26

INTERNATIONAL SEARCH REPORT

Information on patent family members

30/10/2004

International application No.

PCT/SE 2004/000537

US	6704293	B1	09/03/2004	AU	2037201	A	12/06/2001
				CN	1408159	T	02/04/2003
				EP	1250777	A	23/10/2002
				JP	2003516034	T	07/05/2003
				WO	0141378	A	07/06/2001

US	20020013856	A1	31/01/2002	AU	774602	B	01/07/2004
				AU	2142600	A	31/07/2000
				CA	2356947	A	06/07/2000
				EP	1142227	A	10/10/2001
				JP	2002534842	T	15/10/2002
				US	20020049561	A	25/04/2002
				US	20030028668	A	06/02/2003
				US	20030037167	A	20/02/2003
				WO	0039967	A	06/07/2000

US	20020071395	A1	13/06/2002	NONE			

US	20030063607	A1	03/04/2003	JP	2003174452	A	20/06/2003

WO	03021817	A1	13/03/2003	US	20030060202	A	27/03/2003

US	20030072306	A1	17/04/2003	JP	2003234686	A	22/08/2003

US	20030202524	A1	30/10/2003	NONE			
