



(51) International Patent Classification:
E21B 29/00 (2006.01) *E21B 29/04* (2006.01)

(21) International Application Number:
PCT/US2010/035512

(22) International Filing Date:
20 May 2010 (20.05.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/469,388 20 May 2009 (20.05.2009) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77210-4740 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZAVEKY, Anthony, C.** [US/US]; 7714 Log Hollow Drive, Houston, TX 77040 (US). **BLAIR, Steve, G.** [US/US]; 8719 Sorrel Meadows Drive, Tomball, TX 77375 (US). **GUIDRY, Christopher, W.** [US/US]; 2826 Cottonwood Walk Court, Spring, TX 77388 (US). **ROSENBLATT, Steve** [US/US]; 3600 Montrose Boulevard, No. 502, Houston, TX 77006 (US).

(74) Agent: **PORTER, Andre, J.**; Baker Hughes Incorporated, P.O. Box 4740, Houston, TX 77210-4740 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

[Continued on next page]

(54) Title: AUXILIARY CONDUIT CUTTING APPARATUS

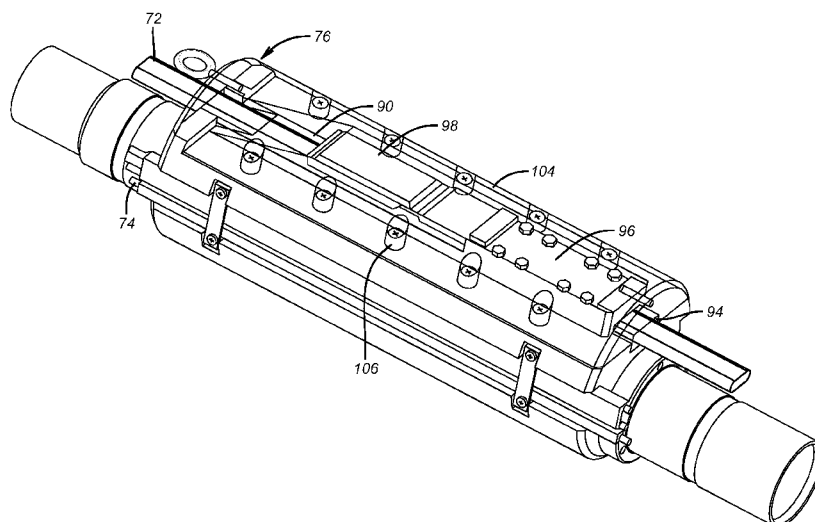


FIG. 9

(57) Abstract: A cutting assembly for external conduits on a tubing string features a breakaway in the string that can be severed with a tensile force. Preferably each external conduit is run through a cutter housing. Upon severing of the string and applying a pickup force, a tension is applied to each external conduit since the severing of the string happens above all the cutter housings. Each housing cuts at least one conduit and the upper portion of the string brings with it the upper portion of the external conduit while the lower portions of each cut external conduit are retained in the cutter housings that remain downhole below the breakaway. In that manner there are no loose external conduit ends to interfere with and/or disturb subsequent fishing or other wellbore operations.



Published:

- *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

AUXILIARY CONDUIT CUTTING APPARATUS

INVENTORS: ANTHONY C. ZAVESKY; STEVEN G. BLAIR;
CHRISTOPHER W. GUIDRY AND STEVE ROSENBLATT

FIELD OF THE INVENTION

[0001] The field of the invention is cutting auxiliary conduits associated with a bottom hole assembly when the string supporting the bottom hole assembly is separated and pulled out of the ground.

BACKGROUND OF THE INVENTION

[0002] In many applications in oil or gas wells, a main tubular conduit, such as production tubing, is run into the wellbore with a bottom hole assembly attached. The bottom hole assembly may have a wireline, control line, vent line, or other such longitudinal member(s) attached to it. Typically, these wireline, control line, vent line, or other such longitudinal member(s) will be run externally to the production tubing. Such longitudinal members will be referred to as external longitudinal members herein. Often, there may be several such external longitudinal members run into the wellbore along with, and external to, the production tubing or other main tubular conduit.

[0003] In some circumstances, it becomes necessary to cut or sever the main tubular conduit at a point downhole, and to pull the tubular conduit back out of the hole, leaving the severed lower portion of tubular conduit, and the bottom hole assembly attached thereto, in the wellbore. This also necessitates the cutting of the external longitudinal members, preferably without a separate operation for running specialized cutting equipment into the wellbore. It is also desirable to be able to cut the wireline, control line, vent line, or other such longitudinal member(s) somewhere downhole as close as possible to the point at which the tubular conduit is cut, to salvage as much as possible of the external longitudinal member and keep the wellbore as open as possible.

[0004] A prior design described in USP 6,997,262 provided a method and apparatus for severing one or more external longitudinal members, with a cutting tool attached to the main tubular conduit, above the bottom hole assembly. The cutting tool consisted of a cutter body which was clamped in place on the external surface of the main tubular conduit, such as by capturing the cutter body between two couplers threaded onto the tubular conduit.

Inside the cutter body are cutter knives which slide longitudinally relative to the cutter body. These cutter knives are fixedly attached to the external longitudinal member, such as by being clamped thereto. The external longitudinal member or members are routed through the cutter body so as to be exposed to the cutting edge of the knife or knives. If there are several knives, they can be oriented facing each other, and the external longitudinal member or members are routed between the cutting edges on the cutter knives. A surface on each cutter knife abuts an actuating surface on the cutter body, with this actuating surface sloping downwardly and transversely to the longitudinal axis of the cutting tool. If there are several cutter knives, there can be a single conical actuating surface, or several actuating surfaces.

[0005] If it became necessary to sever the main tubular conduit and retrieve the upper portion, this operation was first accomplished below the cutting tool. The upper portion of the tubular conduit is then pulled upwardly, or uphole, to retrieve it from the well.

[0006] After the tubular conduit is severed, pulling upwardly on the tubular conduit will also lift the cutter body upwardly, or in an uphole direction. At the same time, the external longitudinal member to which the cutter knives are attached is still attached to the bottom hole assembly, thereby holding the cutter knives in place longitudinally in the well bore. The uphole movement of the cutter body relative to the cutter knives caused the sloping actuating surfaces on the cutter body to engage the abutting surfaces on the cutter knives and forced the cutter knives toward each other, or inwardly. This drove the cutting edges of the cutter knives through the external longitudinal member or members, severing them. This allowed the external longitudinal member or members and the cutting tool to be simultaneously retrieved from the well bore.

[0007] As shown in FIG. 1, a preferred embodiment of the apparatus **10** of the present invention includes generally a cutter body **12**, and one or more cutter knives **18**, **20**. The cutter body **12** has a longitudinal bore **14** therethrough, for passage of a tubular conduit **TC** to which the apparatus **10** of the present invention may be attached. For example, the cutter body **12** can be captured in place longitudinally on the tubular conduit **TC** by threading of

couplers (not shown), as is known in the art, on the ends of the section of tubular conduit **TC**, above and below the cutter body **12**.

[0008] The cutter body **12** has a generally longitudinal knife chamber **16** in which the cutter knives **18, 20** are slidably positioned. The cutter knives **18, 20** have clamping bodies **22, 24** near their upper ends. The clamping bodies **22, 24** can be fastened together, as shown better in FIG. 2, to clamp tightly around a longitudinal member, such as a wireline **WL**, which is positioned externally to the tubular conduit **TC**. The clamping bodies **22, 24** can be bolted together at mating surfaces **50**, as is well known in the art. The bolts and bolt holes are omitted in these views, for the sake of clarity.

[0009] The cutter knives **18, 20** have thinner mid-sections **26, 28**, which can flex to allow the lower ends of the knives **18, 20** to deflect inwardly, as will be explained below. Cutter blades **30, 32** are mounted on the knives **18, 20** near their lower ends, with the blades **30, 32** having cutting edges **34, 36** facing each other, or facing inwardly. FIG. 3 shows this orientation of the cutting edges **34, 36**. Stiffeners **52, 54** can be provided on the cutter knives **18, 20** if required.

[0010] As seen in FIGS. 1 through 3, a wireline passage **38** is provided longitudinally through the cutter body **12**, as is a vent line passage **40**. Similarly, a passage could be provided for a control line or any other kind of external longitudinal member that may be in use next to the tubular conduit **TC**. These longitudinal member passages, **38** and **40**, position the external longitudinal members **VL, WL** between the cutter knives **18, 20**, and specifically between the cutting edges **34, 36**. As shown in FIG. 3, one cutting edge **36** can be V-shaped to centralize the vent line **VL** and the wireline **WL** between the cutting edges **34, 36**.

[0011] A set of teeth or serrations **42** can be provided within the wireline passage **38**, to facilitate holding the cutter knives **18, 20** in position longitudinally relative to the wireline **WL**, when the clamping bodies **22, 24** are bolted together. The portion of the wireline passage **38** between the clamping bodies **22, 24** is dimensioned to slightly squeeze the wireline **WL**, without collapsing it or otherwise damaging it. The vent line passage **40** is dimensioned to allow passage of the vent line **VL** without squeezing it. As

shown in FIG. 2, bolts and bolt holes **44** are provided to bolt together the two halves **12A**, **12B** of the cutter body **12**, in a similar fashion to that contemplated for the clamping bodies **22**, **24**. Bolting together of the two cutter body halves **12A**, **12B** facilitates positioning of the cutter knives **18**, **20** within the knife chamber **16**.

[0012] As shown best in FIG. 1, one or more sloping surfaces **46,48** are provided at the lower end of the knife chamber **16**, sloping longitudinally and inwardly toward the longitudinal members **VL,WL** passing through the cutter body **12**. The lower ends of the cutter knives **18**, **20** abut these sloping surfaces **46**, **48**. Rather than having two distinct sloping surfaces, a conical sloping surface could be used with a plurality of inwardly facing knives.

[0013] The configurations shown in FIGS. 1 and 3 represent the made-up or run-in configuration of the apparatus **10**. After the tubular conduit **TC** and the bottom hole assembly (not shown) are positioned in the wellbore, it may become necessary to sever the tubular conduit **TC**, the vent line **VL**, and the wireline **WL** above the bottom hole assembly and retrieve them from the wellbore. After the tubular conduit **TC** is severed, by any means known in the art, the upper portion of the tubular conduit **TC** is pulled upwardly, or in the uphole direction.

[0014] As shown in FIG. 4, this lifts the cutter body **12** in the uphole direction. Since the cutter knives **18**, **20** are clamped in position longitudinally on the wireline **WL**, the lower end of which is still attached to the bottom hole assembly, the cutter knives **18**, **20** are forced inwardly by the sloping surfaces **46**, **48** in the cutter body **12**, as the cutter body **12** rises. This forces the cutting edges **34**, **36** of the blades **30**, **32** toward each other, through the longitudinal members **VL**, **WL**, severing them. FIG. 5 shows the overlapping of the cutter blades **30**, **32** after the cutter knives **18**, **20** have been forced fully inwardly by the sloping surfaces **46**, **48**. After the severing operation, the upper portions of the external longitudinal members **VL**, **WL** can be retrieved from the wellbore.

[0015] There were two main issues with the technique described above and the associated FIGS. One issue was the need to run a line cutter into the string to cut it as the preferred technique to sever a portion of the string from

the bottom hole assembly (BHA). This added time, cost, and risk to the operation. Apart from this, was that after the string was cut and picked up and the members **VL** and **WL** were cut, what remained below the cut location fell into the well and made subsequent fishing operations more difficult, if not impossible, by getting in the way of the retrieving or fishing tools.

[0016] The present invention addresses these problem areas in the prior design. It uses a breakaway coupling that comes apart by a tensile force on the string to part the string. Having parted the string, the cutter assembly has the housing and cutter location inverted from the previous design. When the string is parted and is pulled up, what happens is that the external longitudinal conduit(s) are tensioned, pulling the knives into the cutting mode, but hanging on to the lower cut portion of the external longitudinal conduit(s) from just below the cut location to the fixation location in the BHA, so that there is no loose end that can fall into the wellbore and disturb subsequent fishing or other operations. Those skilled in the art will better understand the invention from a review of the preferred embodiment and the associated drawings while recognizing that the full scope of the invention is given by the appended claims.

SUMMARY OF THE INVENTION

[0017] A cutting assembly for external conduits on a tubing string features a breakaway in the string that can be severed with a tensile force. Preferably each external conduit is run through a cutter housing. Upon severing of the string and applying a pickup force, tensile force is applied to each external conduit since the severing of the string happens above all the cutter housings. Each housing cuts at least one conduit and the upper portion of the string brings with it the upper portion of the external conduit, while the lower portions of each cut external conduit are retained in the cutter housings that remain downhole below the breakaway. In that manner there are no loose external conduit ends to fall in the wellbore.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 is a longitudinal section view of a prior art apparatus (couplers not shown), showing its attachment to a tubular conduit, a vent line, and a wireline;

[0019] FIG. 2 is a transverse section view of the apparatus shown in FIG. 1, taken at the line 2--2;

[0020] FIG. 3 is a transverse section view of the apparatus shown in FIG. 1, taken at the line 3--3;

[0021] FIG. 4 is a longitudinal section view of the apparatus showing the actuation of the cutter knives;

[0022] FIG. 5 is a transverse section view of the apparatus shown in FIG. 4, showing the actuation of the cutter knives;

[0023] FIG. 6 is a view of the present invention shown in a run-in position with multiple cutters for external conduits or lines;

[0024] FIG. 7 is the detailed view of FIG. 6 showing a close-up view of a cutter assembly;

[0025] FIG. 8 is a view of the apparatus shown in FIG. 7 showing the breakaway separated and the cutter knives actuated;

[0026] FIG. 9 is a perspective of a cutter housing showing a line going to another cutter housing passing through and bypassing the knife assembly.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0027] Referring to FIG. 6, a string **60** on a part of which is shown and those skilled in the art will know extends to the surface of a wellbore features a schematically illustrated breakaway **62** that has an upper component **64** and a sealingly nested lower component **66**. As used herein, "breakaway" includes any feature of the string designed to come apart when force is applied as well as the use of external tools that accomplish the same result of separation. They are releaseably secured together preferably by one or more shear fastener(s) **68**. The invention contemplates a variety of designs with the ultimate objective of separation in the string **60**. Accordingly, the separation can be accomplished with an axial force or rotation or combinations of movements such as when a j-slot assembly is used. Alternatively there can be a ball seat on a sleeve that accepts a dropped object to allow pressuring up to accomplish the separation by, for example, breaking a shear fastener in the breakaway **62**. Using fluid pressure for the separation can make the assembly serviceable in wells that have some deviation or are non-vertical. In an application using an electric submersible pump (ESP) there is generally little

deviation and a breakaway **62** that separates by a pulling force will generally be workable. More deviated applications will likely require a way to hydraulically disconnect the breakaway **62** in the manner discussed above or equivalent techniques.

[0028] The upper component **64** has a guide **70** through which an external conduit or conduits can be guided. In FIG. 6 conduits **72** and **74** are shown, but to make the FIG. 6 clear, only a part of conduit **74** is illustrated. Conduit **72** extends into a cutter housing **76**, it then continues at lower end **78** and bypasses cutter housing **80** to extend to the BHA, which is not shown. Conduit **74** bypasses cutter housing **76** as best shown in FIG. 9, and continues to cutter housing **80**. It then has a lower end **82** that continues to the BHA which is not shown. To list a few possibilities, the term “conduit” as used herein can include a variety of structures such as fiber optic cable, power and signal lines, or control lines that convey fluid pressure. While individual conduits are shown associated with a cutter housing **76** and **80**, those skilled in the art will appreciate that a single housing can cut one or more conduits.

[0029] The inset in FIG. 7 shows cutter housing **76** in more detail. Preferably, all the cutter housings are identical, but they need not be. A tubular **84**, which is part of the string **60**, has a housing **86** surrounding it with a through passage **88** so that the tubular **84** can go through the housing **86** and support it. The housing **86** can be supported by collars positioned on each end, or it can be supported by other means. A second passage **90** has an uphole opening **92** and a downhole opening **94** to allow the conduit **72** to pass through. Contained within passage **90** is a grip assembly **96** used to hold the conduit **72** fixed relative to said grip assembly. Above the grip assembly **96** is the knife assembly **98** which has an opening allowing the conduit **72** to be fed continuously through in a direction from opening **92** toward opening **94** while allowing clearance between the knife assembly **98** and the conduit **72** to avoid damaging the conduit **72**. The knife assembly **98** is designed to slide up taper **100** when there is a pull force on the conduit **72** to bring the opposed knives together to cut the conduit **72**. Grip assembly **96** moves in tandem with knife assembly **98** by virtue of connecting links **102**. When the breakaway **62** separates, the lower ends of the conduits, such as **72** remain fixed to the BHA,

not shown. Continuously pulling on the string **60** will take out any slack and put tension on all the conduits such as **72** and **74** either at the same time or at delayed time intervals and forces the opposed knives in the knife assembly **98** to come together to cut every conduit, such as **72** and **74**, at the same time or at different times. The grip assembly **96** holds on to the lower conduit just cut, such as **72**, so that it cannot come out of the lower opening **94** and obstruct the wellbore. After the conduit, such as **72**, is cut, the upper portion of the cut conduit, such as **72**, will be pulled away from the cutter housing **76** through opening **92**. This is shown in FIG. 8 with the breakaway **62** apart and the upper portion **64** at a distance from the fixed lower portion **66**.

[0030] FIG. 9 shows that a cover **104** is secured with fasteners **106** to secure the grip assembly **96** and the knife assembly **98** in chamber **90** and allow moveability such that when a pull force is applied to the conduit, such as **72**, as in the case of FIG. 9, The movement of the knife assembly **98** will cut the conduit **72** while the grip assembly **96** will move with the conduit **72** until the prescribed cut is made, at which point it will slide back in chamber **90** while retaining the conduit **72** and preventing it from coming out of opening **94**, which has remained stationary during the cutting operation.

[0031] Those skilled in the art will appreciate that using a breakaway **62** above the cutter housings **76**, **80** allows the removal of the upper string **60** to be used to apply tension to the conduits, such as **72**, **74** whose lower extensions **78**, **82** are fixed by attachment at the BHA, not shown. Applied tension on the conduit **72** advances knife assembly **98** in chamber **90** and actuates the knife assembly **98** to cut said conduit **72**. The lower remnants of conduit **72**, after the cut, are retained in chamber **90** by the grip assembly **96**. While a single conduit is shown to be cut and retained in a dedicated housing, those skilled in the art will appreciate that a single housing can cut multiple conduits. While it is preferred that the workings of the assemblies in the housings **76** and **80** are identical, variations among them can be made to suit the need of the specific conduit that needs to be cut in a given housing. The breakaway **62** can be actuated with a variety of mechanical movements of string **60** that break shear fasteners, for example, or it can be hydraulically actuated with a sleeve that can be shifted with fluid pressure to break a

fastener that holds the breakaway **62** together and can thereafter be blown through as a ball on seat assembly or the ball can be blown through the seat to the BHA. The end result of the invention is that the string **60** can be quickly separated and there are no cut conduit remnants that can fall in the wellbore and obstruct it to make subsequent fishing or other operations more difficult.


[0032] The above description is illustrative of the preferred embodiment and many modifications may be made by those skilled in the art without departing from the invention whose scope is to be determined from the literal and equivalent scope of the claims below.

We claim:

1. A tubular string assembly comprising:
a tubular string having at least one external conduit extending alongside, said conduit being retained at a predetermined location to said string;
said conduit extending through at least one cutter housing supported by said string;
a breakaway in said string located closer to the surface than said cutter housing, whereupon actuation of said breakaway to separate said string into an upper and lower portion, upper portion movement actuates cutting of said conduit in said cutter housing.
2. The assembly of claim 1, wherein:
said upper portion pulls tension of said conduit when moved away from said lower portion.
3. The assembly of claim 1, wherein:
movement of said conduit with respect to said cutter housing cuts said conduit.
4. The assembly of claim 3, wherein:
movement of said conduit in tandem with said upper portion cams a cutter to cut said conduit.
5. The assembly of claim 4, wherein:
a portion of said conduit is retained against falling out of said cutter housing.
6. The assembly of claim 5, wherein:
said cutter comprises opposed knives that are moved to cut said conduit when said conduit moves said knives along a tapered surface.
7. The assembly of claim 6, wherein:
said cutter comprises a retainer for said conduit that moves in tandem with said knives when an axial force is applied to said conduit.
8. The assembly of claim 1, wherein:
said breakaway comprises nested tubulars in said string sealingly held together with a breakable member.

9. The assembly of claim **8**, wherein:
said nested tubulars are separated with a mechanical force delivered through said string.
10. The assembly of claim **8**, wherein:
said nested tubulars are separated with fluid pressure delivered through said string.
11. The assembly of claim **8**, wherein:
said nested tubulars are located below the surface in a substantially vertical orientation.
12. The assembly of claim **8**, wherein:
said nested tubulars are located below the surface in an inclined or non-vertical orientation.
13. The assembly of claim **1**, wherein:
said at least one conduit comprises a plurality of conduits passing through a common cutter housing.
14. The assembly of claim **13**, wherein:
at least one conduit is positioned to be cut in said common cutter housing and another conduit is positioned where it will not be cut by said common cutter housing.
15. The assembly of claim **1**, wherein:
said at least one conduit comprises a plurality of conduits and said at least one cutter housing comprises a plurality of cutter housings with one conduit passing through a unique housing where it can be cut.
16. The assembly of claim **15**, wherein:
one conduit extends through a cutter housing where it will be cut and another housing where it will not be cut.
17. The assembly of claim **1**, wherein:
said breakaway further comprises a guide for said conduit.
18. The assembly of claim **7**, wherein:
said breakaway comprises nested tubulars in said string sealingly held together with a breakable member.

19. The assembly of claim **18**, wherein:
said nested tubulars are separated with a mechanical force delivered through said string.
20. The assembly of claim **18**, wherein:
said nested tubulars are separated with fluid pressure delivered through said string.
21. The assembly of claim **20**, wherein:
said at least one conduit comprises a plurality of conduits and said at least one cutter housing comprises a plurality of cutter housings with one conduit passing through a unique housing where it can be cut.
22. The assembly of claim **21**, wherein:
one conduit extends through a cutter housing where it will be cut and another housing where it will not be cut.

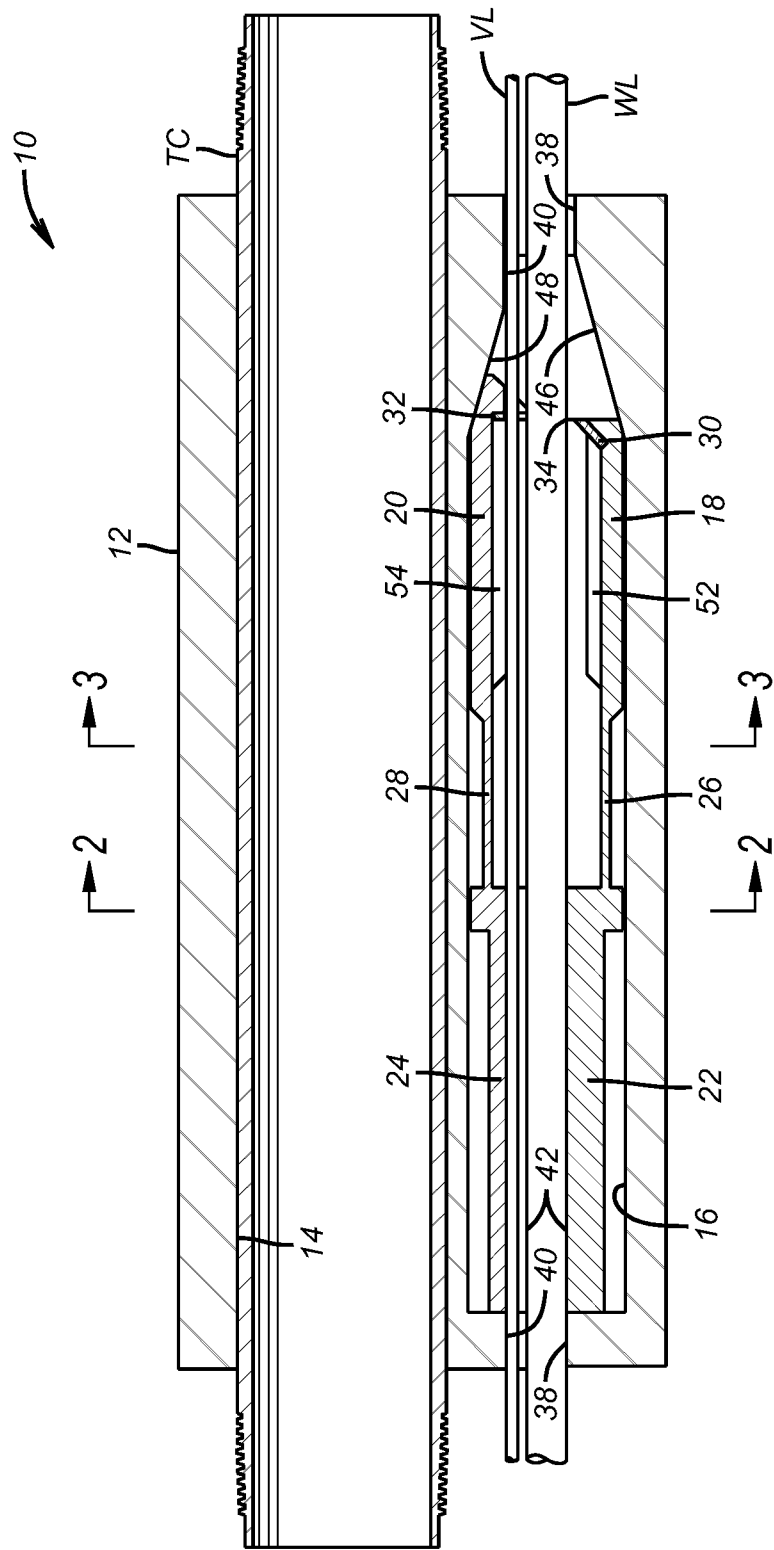

(PRIOR ART)
FIG. 1

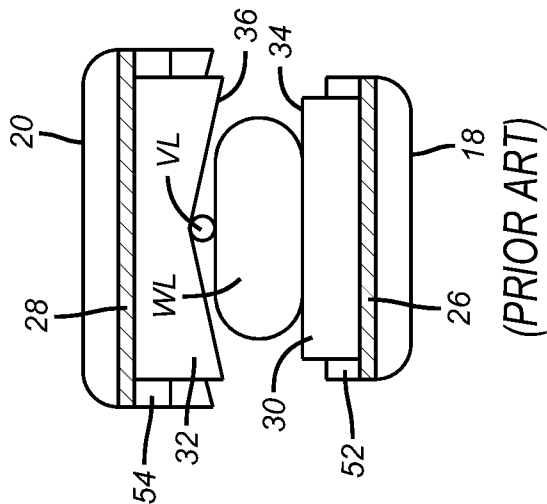


FIG. 3

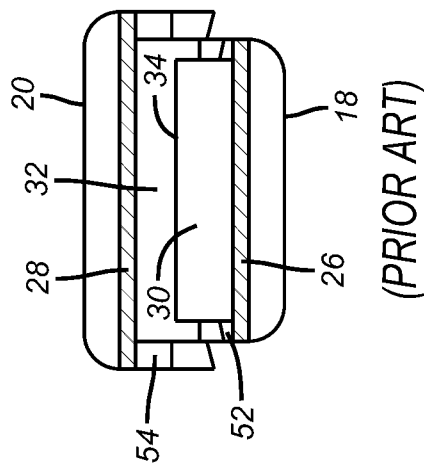


FIG. 5

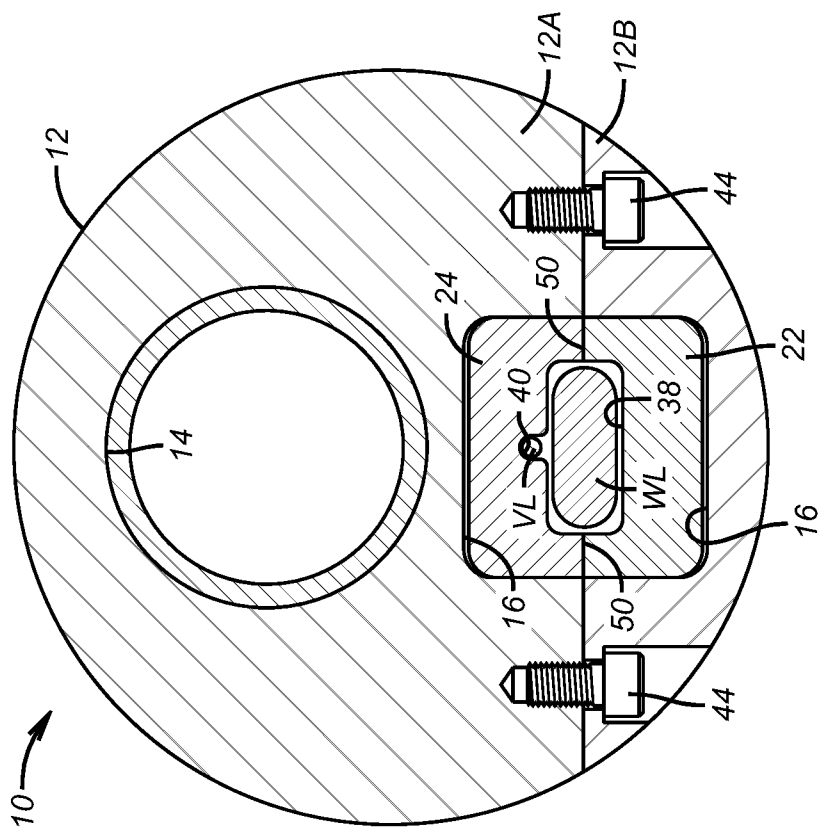


FIG. 2

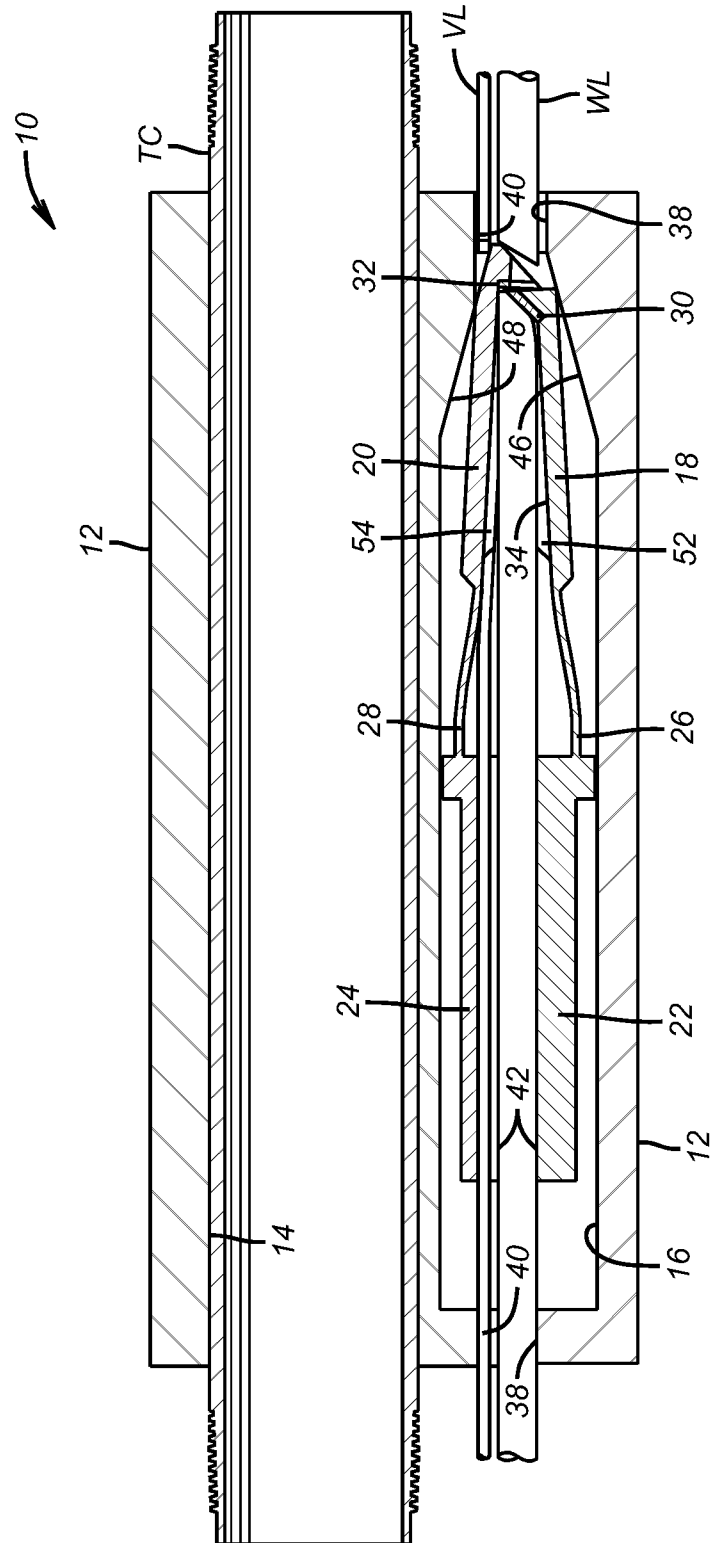


FIG. 4
(PRIOR ART)

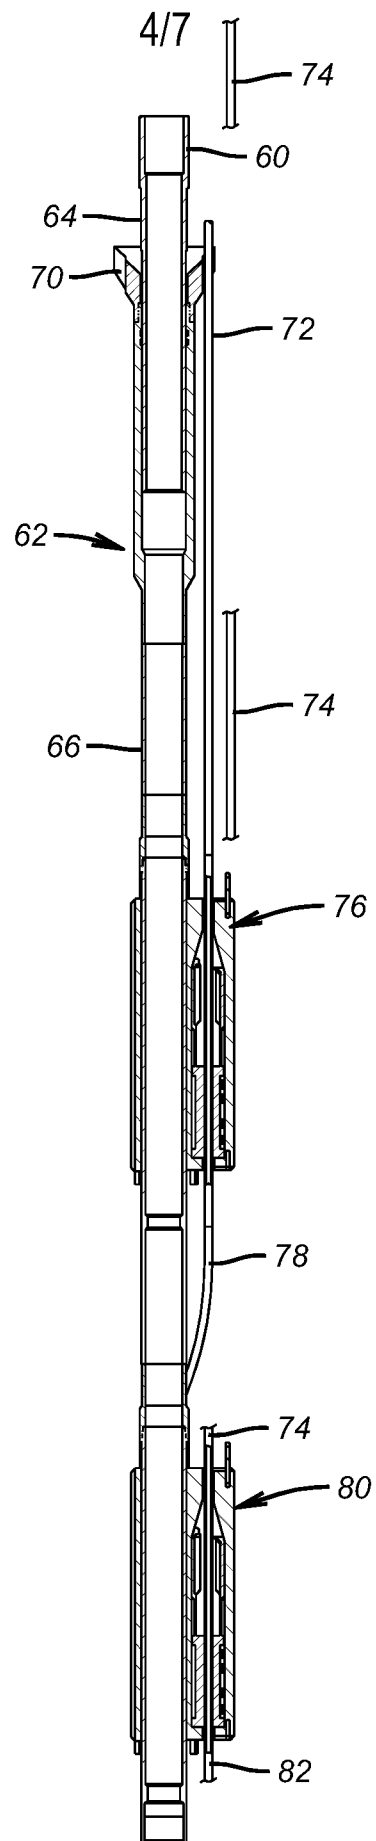
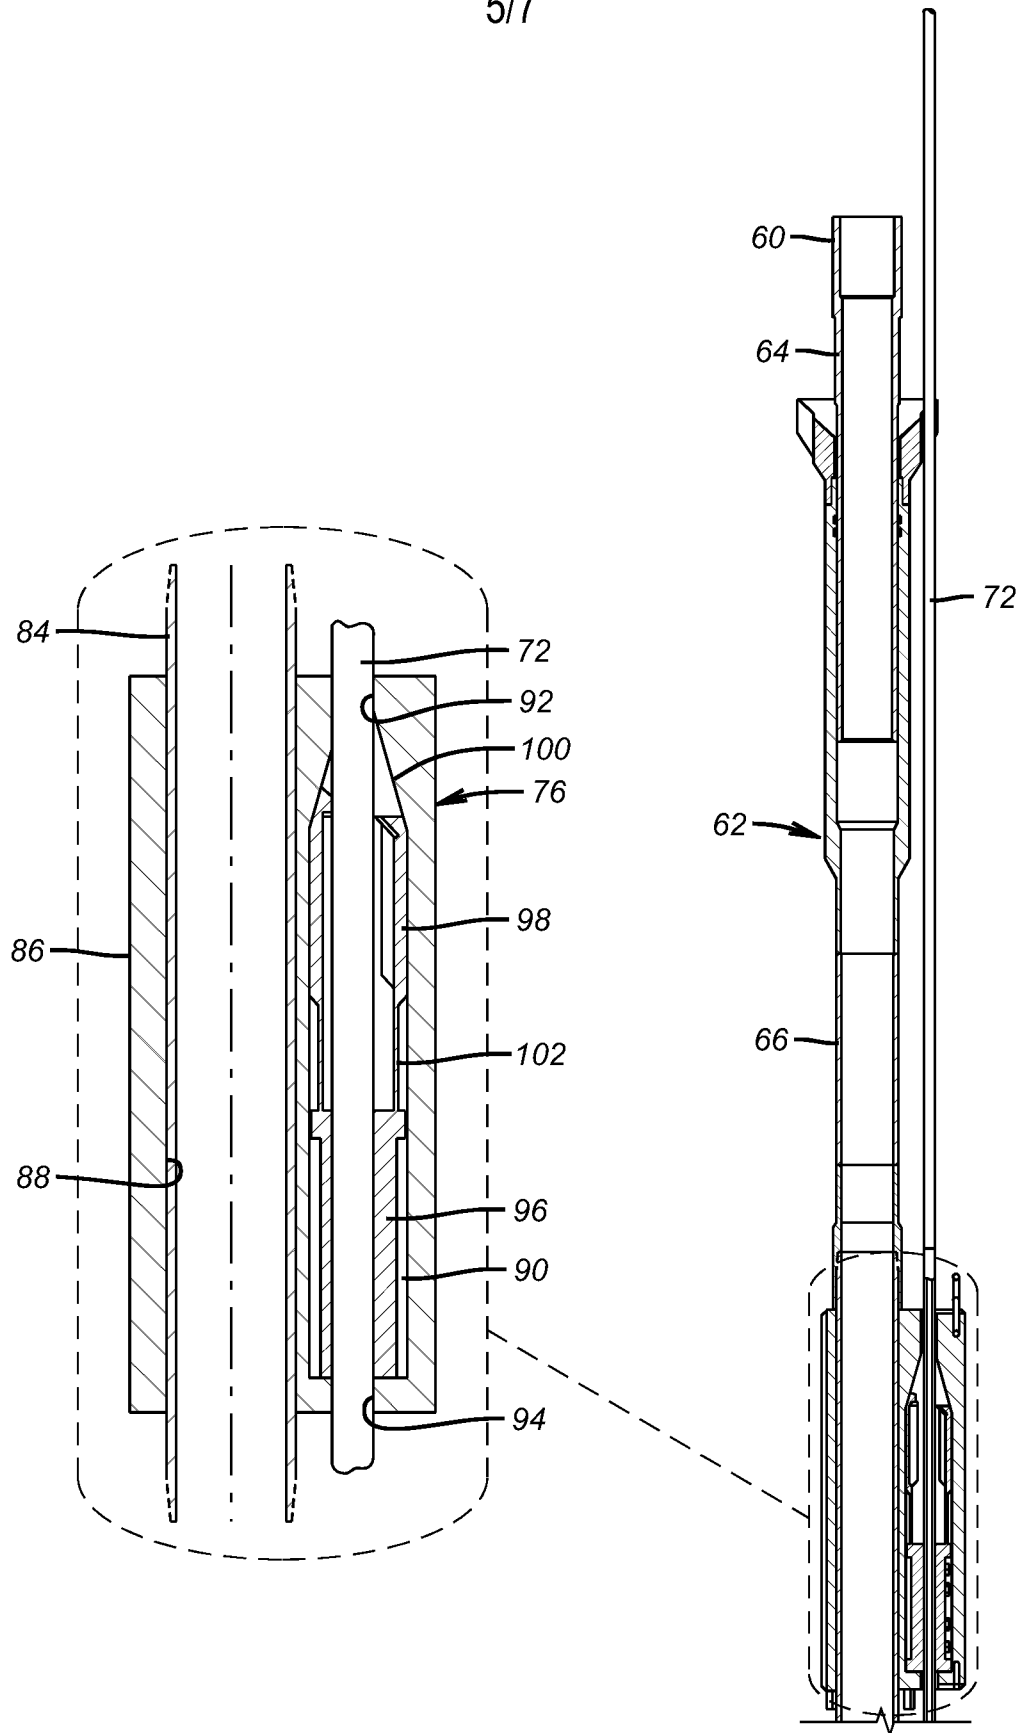


FIG. 6

5/7

**FIG. 7**

6/7

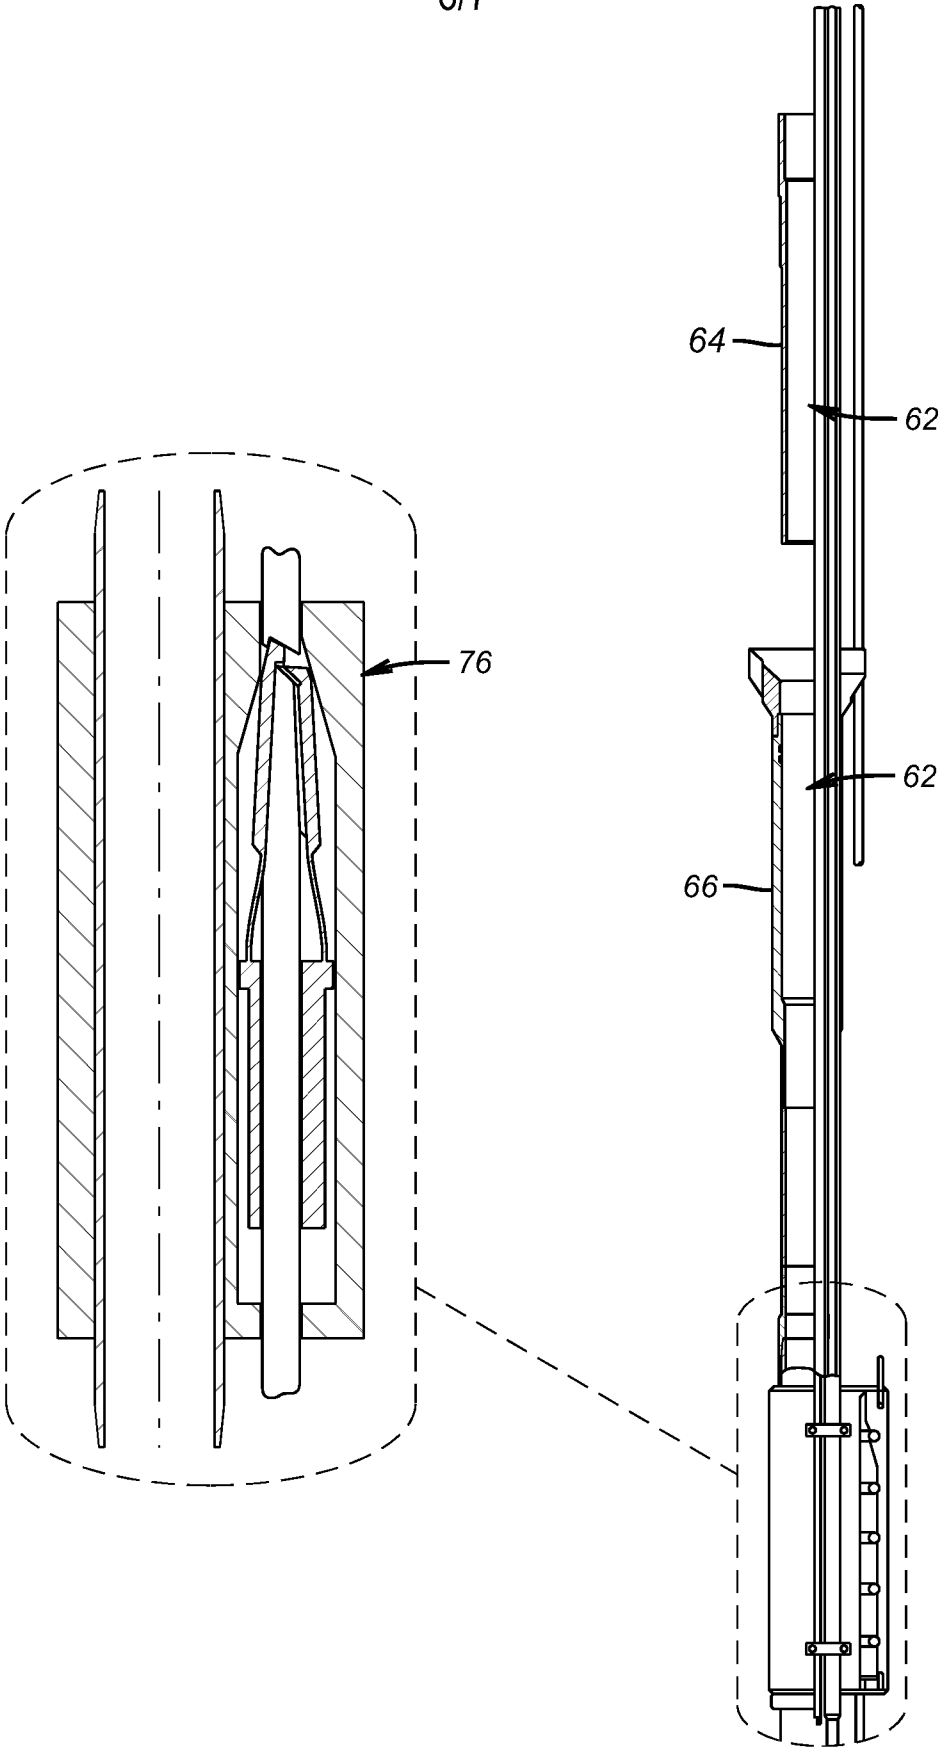


FIG. 8

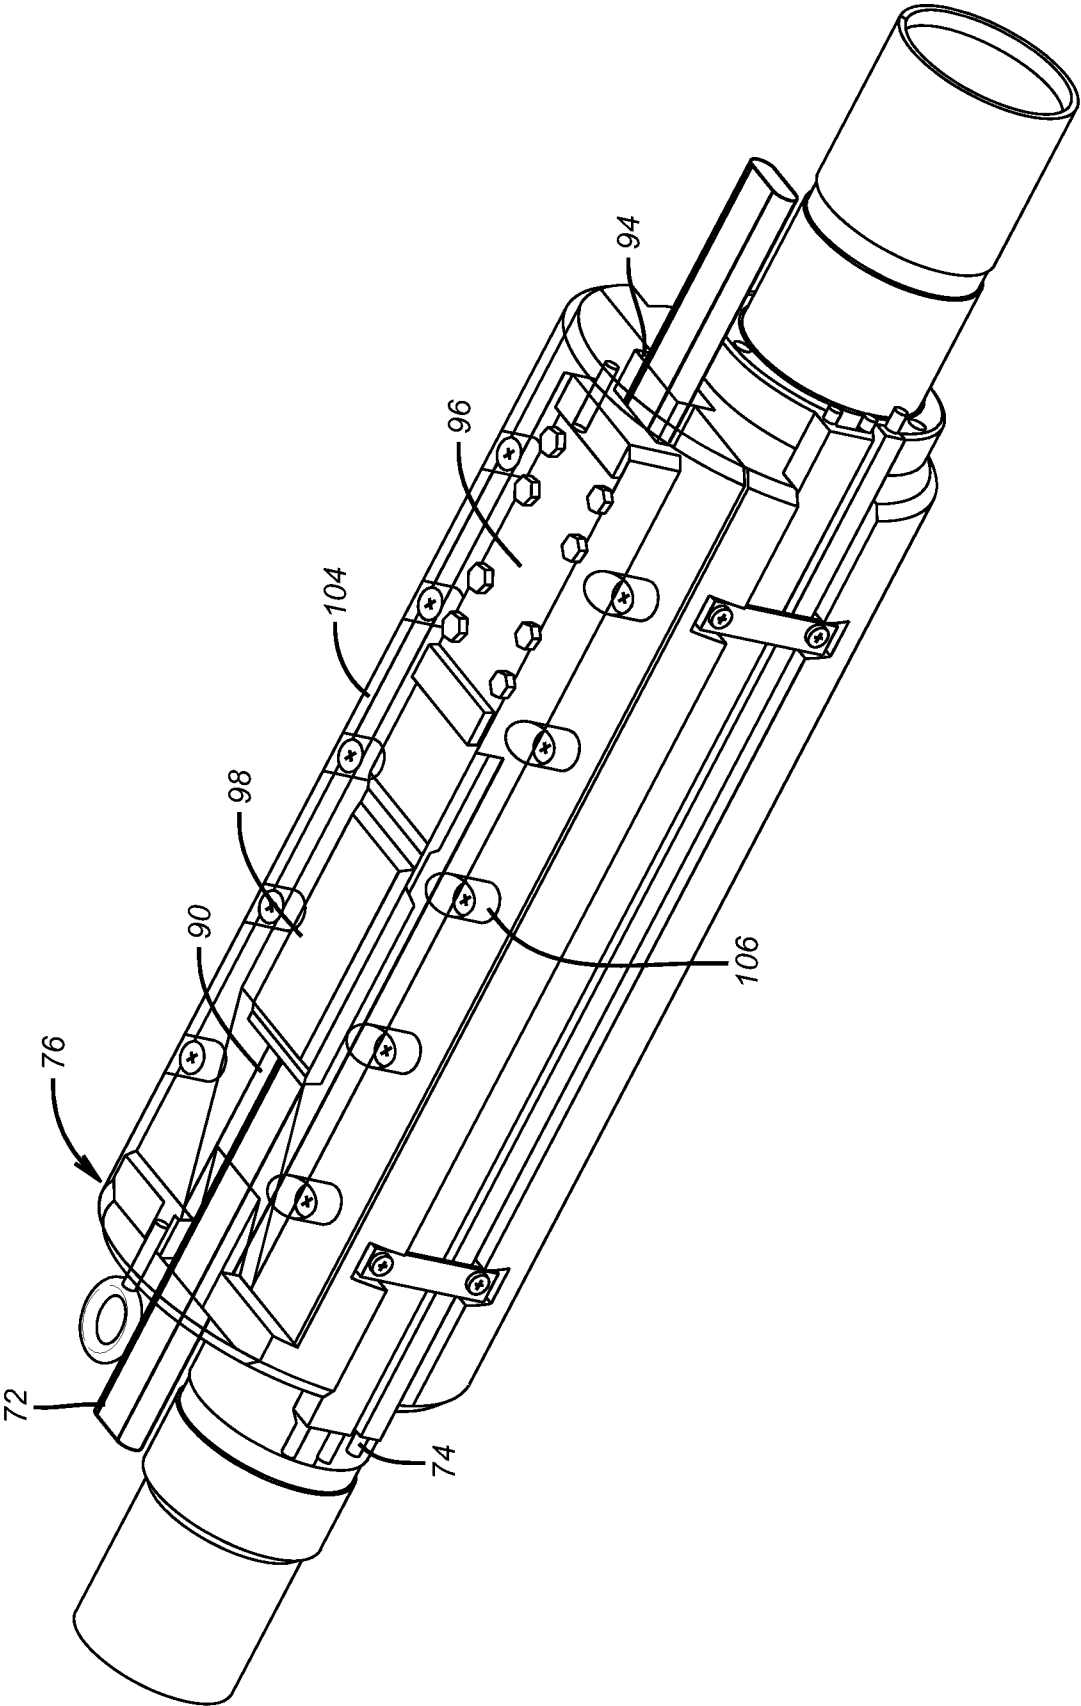


FIG. 9