CORRECTED VERSION

(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 21 August 2008 (21.08.2008)

PCT

(10) International Publication Number WO 2008/099268 A8

(51) International Patent Classification: *F16H 57/04* (2006.01)

(21) International Application Number:

PCT/IB2008/000326

(22) International Filing Date:

13 February 2008 (13.02.2008)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2007-033304

14 February 2007 (14.02.2007) JP


- (71) Applicants (for all designated States except US): TOY-OTA JIDOSHA KABUSHIKI KAISHA [JP/JP]; 1, Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP). AISIN AW CO., LTD [JP/JP]; 10, Takane, Fujii-cho, Anjo-shi, Aichi-ken 444-1192 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): TOKAI, Norihiko

[JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, 1, Toyotacho, Toyota-shi, Aichi-ken 471-8571 (JP). **KATO, Naoki** [JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, 1, Toyotacho, Toyota-shi, Aichi-ken 471-8571 (JP). **GOSHIMA, Hiroki** [JP/JP]; c/o Aisin Aw Co., Ltd., 10, Takane, Fujii-cho, Anjo-shi, Aichi-ken 444-1192 (JP).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: TRANSMISSION FOR VEHICLE

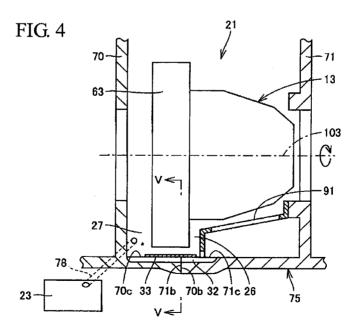

(57) **Abstract:** An automatic transmission (10) includes: a differential mechanism (13) which includes a ring gear (63); a case (75) which forms a differential chamber (21) that houses the differential mechanism (13); and an oil pan (73) which is fitted to the case (75), and which stores oil. The differential chamber includes a first space (26) in which the oil supplied from the oil pan is gathered, and a second space (27) which is formed on the opposite side of the first space with respect to the ring gear in the direction in which the rotational axis of the ring gear extends, and which is communicated with a space inside the oil pan. An oil passage (32), through which the oil is introduced from the first space to the second space, is formed in the case. The oil passage is formed in a bottom portion of the differential chamber.



WO 2008/099268 A8



FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

(48) Date of publication of this corrected version:

12 March 2009

 $(15) \ \ Information \ about \ Correction:$

see Notice of 12 March 2009