

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 October 2008 (30.10.2008)

PCT

(10) International Publication Number
WO 2008/129138 A1

- (51) International Patent Classification:
D04H 3/14 (2006.01) **D04H 3/16** (2006.01)
- (21) International Application Number:
PCT/FI2008/050220
- (22) International Filing Date: 24 April 2008 (24.04.2008)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
11/739,348 24 April 2007 (24.04.2007) US
- (71) Applicant (for all designated States except US):
AHLSTROM CORPORATION [FI/FI]; P.O.Box 329, Salmisaarenaukio 1, FI-00101 Helsinki (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BAIS-SINGH, Smita** [IN/US]; 4 Penfield Place, Farmington, Connecticut CT 06032 (US). **ERDOS, Valeria** [US/US]; 12 Avonridge, Avon, Connecticut CT 06001 (US). **KIM, Kyuk Hyun** [KR/US]; 28 Red Stone Drive, Weatogue, Connecticut CT 06089 (US).
- (74) Agent: **COOR SERVICE MANAGEMENT KARHULA OY**; Intellectual Property Department, P.O.Box 18, Antintie 4, FI-48601 Kotka (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: NONWOVEN BONDING PATTERNS PRODUCING FABRICS WITH IMPROVED ABRASION RESISTANCE AND SOFTNESS

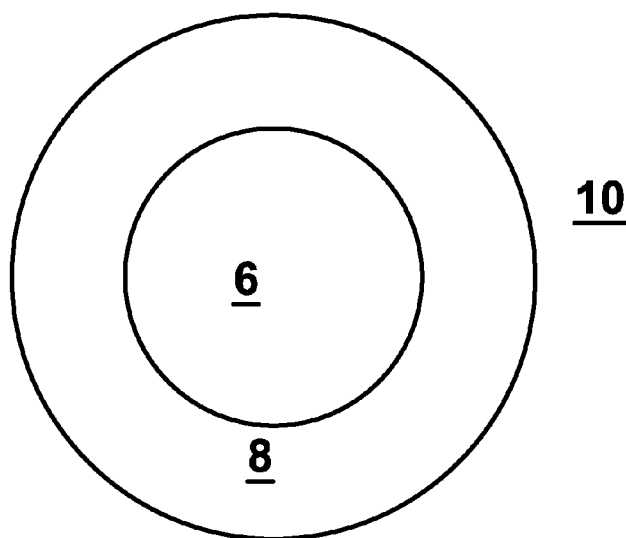


Fig. 3

(57) Abstract: A thermal bonding pattern for nonwoven fabric possessing improved abrasion resistance while retaining softness, comprising a basket-weave pattern or other pattern having a transition region area (8) equal to at least 10% of bonding region area 5 (6), more preferably a transition region area (8) equal to at least 50% of bonding region (6) area, and most preferably a transition region (8) area equal to at least 100% of bonding region (6) area.

WO 2008/129138 A1



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

NONWOVEN BONDING PATTERNS PRODUCING FABRICS WITH IMPROVED ABRASION RESISTANCE AND SOFTNESS

FIELD OF THE INVENTION

5

(001) The present invention relates to the field of nonwoven fabrics such as those produced by the meltblown and spunbonding processes. Such fabrics are used in a myriad of different products, e.g., garments, personal care products, infection control products, outdoor fabrics and protective covers.

10

BACKGROUND OF THE INVENTION

(002) Bicomponent fibers are fibers produced by extruding two polymers from the same spinneret with both polymers contained within the same filament. The advantage of the bicomponent fibers is that it possesses capabilities that can not be found in either of the polymers alone. Depending on the arrangement and relative quantities of the two polymers, the structure of bicomponent fibers can be classified as core and sheath, side by side, tipped, microdenier, mixed fibers, etc.

20 (003) Sheath-core bicomponent fibers are those fibers where one of the components (core) is fully surrounded by the second component (sheath). The core can be concentric or eccentric relative to the sheath and possessing the same or different shape compared to the sheath. Adhesion between the core and sheath is not always essential for fiber integrity. The sheath-core structure is employed when it is desirable for the surface of the fiber to have the property of the sheath such as luster, dyeability or stability, while the core may contribute to strength, reduced cost and the like. A highly contoured interface between sheath and core can lead to mechanical interlocking that may be desirable in the absence of good adhesion.

30 (004) Generally, composite bicomponent sheath-core fibers have been used in the manufacture of non-woven webs, wherein a subsequent heat and pressure treatment to the non-woven web causes point-to-point bonding of the sheath components, which is of a lower melting point than the core, within the web matrix to enhance strength or other such desirable properties in the finished web or fabric product.

35

- (005) Poor abrasion resistance of Polyethylene/Polyethylene Terephthalate (PE/PET) sheath/core bicomponent spunbond has been an industry recognized problem since the last 10-15 years. The major problem was found when the point bonded nonwovens were used as garments. When the garments are made as drapeable and soft as desired, their abrasion resistance was found to be very weak, i.e. they abrade easily. Another problem that was encountered was that individual fibers got off the nonwoven easily, i.e. for instance, even small rubbing of two nonwovens against each other caused the de-attachment of one or both garment's fibers. Various approaches have been devised attempting to solve these problems. Similar problems also affect many other frequently used sheath/core structures such as PE/Polyesters (for example, Polybutylene Terephthalate (PBT), Polytrimethylene Terephthalate (PTT), Polylactide (PLA)), PE/Polyolefins, PE/Polyamide, PE/Polyurethanes.
- (006) A first method attempting to solve the problems is directed to the modification of fiber structure to improve adhesion between the sheath and core component. For example, a mixture of EVA (ethyl vinyl acetate) and PE was suggested for a sheath component in US-4,234,655. US-A-5,372,885 teaches the use of a blend of maleic anhydride grafted HDPE and un-grafted LLDPE (linear low density polyethylene). A mixture of PE and acrylic acid copolymer was suggested in US-A-5,277,974 and a blend of HDPE (high density polyethylene) with LLDPE was claimed in WO-A1-2004/003278 as a sheath component.
- (007) Another proposed approach for improving abrasion resistance is by increasing the bond area of the spunbond. For example, US-A1-20020144384 teaches a non-woven fabric with a bond area of at least about 16%, 20% or 24%. However, higher bond area samples result in loss of softness and drapeability of bicomponent spunbond, which is not desirable for many applications especially for medical apparel such as surgical gowns. In other words, higher bond areas make the product very stiff, even paper- or board-like, which is, naturally, not a desirable feature for a garment whose main requirement is to be comfortable. At the other extreme, nonwovens with small bond areas tend to make soft feeling but very weak fabric.
- (008) Yet another approach involves the use of a number of treatments, such as multiple washings and/or chemical treatments.

(009) Still another approach, which is of particular relevance to the subject matter of this application, is directed to adopting a specific thermal bonding pattern for nonwoven fabric comprising a pattern having an element aspect ratio between about 2 and about 20 and non-bonded fiber aspect ratio of between about 3 and about 10, as disclosed in US-A-5,964,742. Such a pattern has been found to possess a higher abrasion resistance and strength than a similar fabric bonded with different bond patterns of similar bond area.

(0010) There remains a need for a nonwoven fabric without resort to chemical treatments having good bonding strength (i.e. tensile strength and abrasion resistance) yet also having good fabric softness, particularly at relatively high bonding area.

(0011) Accordingly, it is an object of this invention to provide a nonwoven fabric with a high bonding area yet having greater softness and comparable or better tensile strength and abrasion resistance compared to fabrics bonded with known point bonding means.

(0012) It is another object of this invention to provide a method of preparing a nonwoven fabric with a high bonding area yet having greater softness and comparable or better tensile strength and abrasion resistance.

SUMMARY OF THE INVENTION

(0013) Thus, in order to avoid the trade-off between the abrasion resistance and softness seen in conventional point bonded products, the inventors have discovered a novel nonwoven, which comprises a large transition region interconnecting bonded and non-bonded regions. Such a pattern results in a soft nonwoven web with high abrasion resistance with a bond area as high as 50%, typically in the range of 5 to 50%, preferably in the range of 10 – 45%, more preferably in the range of 15 – 40%. It should be understood that the transition region increases the effective bond area from the above figures, which reflect the area of the full bond or of the bond region.

(0014) The transition region works as a connection for both bonded and non-bonded regions, and contributes to building-up the network structure, which strengthens the resistance of the fibers against the applied shear or normal stress during the abrasion

process, without compromising softness and drapeability. It is also found that the integrity and the area of the transition region is critical for both abrasion resistance and softness, as the pattern with relatively large transition region gives this effect but prior art patterns with negligible transition region compromise softness greatly for similar improvement in abrasion resistance.

(0015) While not to be bound by theory, it is hypothesized that abrasion resistance is improved by the pattern of the invention because more fibers are tied down by the existence of the transition region. However, since in the transition region, fibers are not fully melted and fixed, they have enough freedom to move, and because of the flexibility of the fibers softness does not deteriorate. It has been observed by the inventors that the key parameter for improving abrasion resistance while maintaining softness is proper selection of the area of the transition region for the embossing bonding step.

15

(0016) The method of conducting the thermal point bonding is also shown to affect the properties of the products. Examples of suitable calendering methods include single pass, double pass, S-wrap etc. In most instances, it was found that double pass calendering is preferred and especially suited for generating the desirable combination of properties.

20

(0017) Thus at least some objects of the present invention are met by a pattern bonded nonwoven fabric having bonded and non-bonded regions, where the nonwoven fabric has a pattern of bonds formed of bond regions, and transition regions between said bond regions and non-bonded region, wherein an area of said transition regions is equal to at least 10% of an area of said bond regions.

25

(0018) In accordance with a more preferred embodiment of the present invention the transition region area is equal to at least 50% of said bond area.

30

(0019) And, in accordance with the most preferred embodiment of the present invention the transition region area is equal to at least 100% of said bond area.

(0020) It has been unexpectedly found that such a fabric has a higher abrasion resistance and strength than a similar fabric bonded with different bond patterns without the attendant loss of softness. The nonwoven fabric of this invention can be

35

prepared using calendering and embossing processes. Although single pass, double pass, s wrap and 3 stack with idler set ups can all be used, double pass set up is most preferred.

- 5 (0021) The present invention also includes a laminate, which is formed of the above discussed nonwoven fabric and a film, bonded together by thermal, mechanical or adhesive means.

- (0022) The present invention includes further a method of manufacturing the pattern
10 bonded nonwoven fabric, where the method includes the steps of
spinning and stretching the fibers as in a spunbonded process,
laying these down to form a web,
bonding the fibers by thermal calendering, and
applying either at the step of thermal calendering or at another step after the
15 thermal calendering a bond pattern provided with a transition region.

BRIEF DESCRIPTION OF THE DRAWINGS

- (0023) The invention will be discussed in the following in more detail by citing to the
20 attached drawing figures of which

FIG. 1 is a schematic drawing of a prior art cross-hatch bonding pattern.

FIG. 2 is a partial radial cross-sectional drawing of an embossing roll designed to create the cross-hatch pattern of Fig. 1.

- FIG. 3 is a schematic drawing of an exemplary single bond spot surrounded by
25 a transition region in accordance with a preferred embodiment of the present invention,

FIG. 4 is a schematic drawing of a basket-weave bonding pattern, where the transition region of the present invention has been taken into use.

- FIG. 5 is a top view of an embossing roll with a basket-weave pattern including
30 the transition region in accordance with a preferred embodiment of the present invention.

FIG. 6 is a partial radial cross-sectional drawing of an embossing roll designed to create a basket-weave pattern with the transition region in accordance with a preferred embodiment of the present invention.

FIG. 7 is an SEM (Scanning Electron Microscope) cross-sectional image of a nonwoven web using a basket weave pattern showing the transition region and the bond spot.

FIG. 8 is an SEM cross-sectional image of a nonwoven web made by using a cross-hatch pattern of prior art.

DEFINITIONS

(0024) The term "spunbond" filaments as used herein means filaments which are formed by extruding molten thermoplastic polymer material as filaments from a plurality of fine capillaries of a spinneret with the diameter of the extruded filaments then being rapidly reduced by drawing. Spunbond filaments are generally continuous and usually have an average diameter of greater than about 5 microns. The spunbond filaments of the current invention preferably have an average diameter between about 5 to 60 microns, more preferably between about 10 to 20 microns. Spunbond nonwoven fabrics or webs are formed by laying spunbond filaments randomly on a collecting surface such as a foraminous screen or belt. Spunbond webs can be bonded by methods known in the art such as hot-roll calendering, through air bonding (generally applicable to multiple component spunbond webs), or by passing the web through a saturated-steam chamber at an elevated pressure. For example, the web can be thermally point bonded at a plurality of thermal bond points located across the spunbond fabric.

(0025) The term "nonwoven fabric, sheet or web" as used herein means a structure of individual fibers, filaments, or threads that are positioned in a random manner to form a planar material without an identifiable pattern, as opposed to a knitted or woven fabric.

(0026) The term "filament" is used herein to refer to continuous filaments whereas the term "fiber" is used herein to refer to either continuous or discontinuous fibers.

(0027) The term "multiple component filament" and "multiple component fiber" as used herein refer to any filament or fiber that is composed of at least two distinct polymers which have been spun together to form a single filament or fiber. Preferably the multiple component fibers or filaments of this invention are bicomponent fibers or filaments which are made from two distinct polymers arranged in distinct substantially

constantly positioned zones across the cross-section of the multiple component fibers and extending substantially continuously along the length of the fibers. Multiple component fibers and filaments useful in this invention include sheath-core and island-in-the-sea fibers.

5

(0028) As used herein "thermal point bonding" involves passing a fabric or web of fibers to be bonded between a heated calender roll and an anvil roll. The calender roll (sometimes termed the embossing roll) is usually, though not always, patterned in some way so that the entire fabric is not bonded across its entire surface. The pattern on the calender roll surface may be formed of individual protrusions (for instance round, oval, rectangular, triangular, diamond shaped, etc.) arranged in desired fashion to either fill the surface as evenly as possible or to form desired geometrical patterns or figures. The pattern may also be formed of continuous protrusions that run in a desired fashion on the roll surface. Most often the continuous protrusions are very thin (of the order of 1 – 3 mm) ridges. For example, the protrusions may run in zig-zag fashion on the roll surface either side by side such that the protrusions are always parallel or the protrusions may be arranged side by side such that they form a diamond-shaped or other desired pattern on the roll surface. Naturally, also curved or linear protrusions may be applied. Thus the term "point bonding" should be understood broadly so that it covers both individual spot bonds, where the non-bonded regions form a continuous network in between the bond spots, continuous bond lines, where the non-bonded regions run as continuously as the bond lines therebetween, and crossing bond lines, where the non-bonded regions are left as individual islands between the bond lines. Thereby also the terms "spot bonding", "spot bond" or "bond spot" should be understood to cover all the three bond types discussed above. In fact, the term "bond region" describes best the various shapes of bonds. The anvil roll is usually flat, and is conventionally identified as a smooth roll. Several roll configurations (the single pass, double pass, S-wrap and the three stack idler) are well known in the art.

30

(0029) The roll set up for a single pass set up is such that the non-bonded web is passed between the nip formed between an embossed and a flat roll to provide a bonded web.

(0030) In the case of a double pass set up, the bonded web, as for example obtained from a single pass set up, is passed between an embossed and flat roll at an elevated temperature and elevated pressure to form a double pass thermally bonded fabric.

- 5 (0031) In the S-wrap configuration, the non-bonded web is passed between a pattern bonding roll and a flat roll, and then directly through the upper nip formed between another flat roll and the embossing roll.

- 10 (0032) In the three (3) stack idler configuration, the arrangement of rollers is the same as in the S-Wrap configuration, except that after passage through the point bonding and flat roll, the web is passed around the idler rolls before being passed for the second pass between the nip formed between another flat roll and the embossing roll.

- 15 (0033) Point bonding is sometimes called spot bonding and results from the application of heat and pressure so that a discrete pattern of fiber bonds is formed.

- (0034) As a result, various patterns for calender rolls have been developed for functional as well as aesthetic reasons. One example of a pattern has points and is the
20 Hansen-Pennings or "H&P" pattern with about a 30% bond area with about 200 pins/square inch (31 pins/cm^2) as taught in US-3,855,046 to Hansen and Pennings. The H&P pattern has square point or pin bonding regions. Another typical point bonding pattern is the expanded Hansen-Pennings or "EHP" bond pattern which produces a 15% bond area. Another typical point bonding pattern designated "714"
25 has square pin bonding regions where the resulting pattern has a bonded area of about 15%. Other common patterns include a diamond pattern with repeating and slightly offset diamonds with about a 16% bond area and wire weave pattern looking as the name suggests, e.g. like a window screen, with about an 18% bond area. Typically, the percent bonding area varies from around 10% to 30% of the area of the
30 fabric laminate web. As is well known in the art, the spot bonding holds the laminate layers together as well as imparts integrity to each individual layer by bonding filaments and/or fibers within each layer.

- (0035) As used herein, the term "garment" means any type of non-medically oriented
35 apparel which may be worn. This includes industrial work wear and coveralls, undergarments, pants, shirts, jackets, gloves, socks, and the like.

(0036) As used herein, the term "infection control product" means medically oriented items such as surgical gowns and drapes, face masks, head coverings like bouffant caps, surgical caps and hoods, footwear like shoe coverings, boot covers and slippers, 5 wound dressings, bandages, sterilization wraps, wipers, garments like lab coats, coveralls, aprons and jackets, patient bedding, stretcher and bassinet sheets, and the like.

(0037) As used herein, the term "personal care product" means diapers, training 10 pants, absorbent underpants, adult incontinence products, and feminine hygiene products.

(0038) As used herein, the term "protective cover" means a cover for vehicles such as cars, trucks, boats, airplanes, motorcycles, bicycles, golf carts, etc., covers for 15 equipment often left outdoors like grills, yard and garden equipment (mowers, rototillers, etc.) and lawn furniture, as well as floor coverings, table cloths and picnic area covers.

(0039) As used herein, the term "outdoor fabric" means a fabric which is primarily, 20 though not exclusively, used outdoors. Outdoor fabric includes fabric used in protective covers, camper/trailer fabric, tarpaulins, awnings, canopies, tents, agricultural fabrics and outdoor apparel such as head coverings, industrial work wear and coveralls, pants, shirts, jackets, gloves, socks, shoe coverings, and the like.

(0040) As used herein, the term "transition region" refers to a region in substrate 25 surrounding the bond point, where the fibers are sufficiently heated and compressed to exhibit some amount of bonding. This region serves as a connection for both bonded and non-bonded regions, and contributes to building up the network structure which strengthens the resistance of the fibers against shear or normal stress during the 30 abrasion process.

DETAILED DESCRIPTION OF THE INVENTION

(0041) Figure 1 illustrates, as an example of various bonding patterns known from 35 prior art, a cross-hatch bonding pattern. In the cross hatch pattern the bond spots 2 and 4 are very sharply limited and are not surrounded by any substantial presence of

transition regions. Such an abrupt transition from a fully bonded state to a fully non-bonded state (regions 10 between the bond spots 2 and 4) is apt to create problems, which have already been discussed earlier in this application. In other words, since the bond spots have a limited area, the fibers outside them are easy to loosen from the nonwoven. In a similar manner, if an object hits the surface of the product, it penetrates the product easily, as the loose fibers are able to move easily, and allow the object to move forward. This far the only way to fight the described problems has been to increase the number of bond spots and/or their area i.e. increase the effective bonded area of the product. However, this has lead to stiffening of the entire product so that it starts to resemble cardboard. Thus, today's products have hardly acceptable stiffness and abrasion resistance properties, which are, however, far from the desired or ideal ones.

(0042) Figure 2 shows a partial radial cross-section along the axis of an embossing roll having a typical cross hatch bonding pattern on its surface used for producing the bonding pattern of Fig. 1. The cross-section shows such a part of a roll surface that forms (when compared to Figure 1) two horizontally extending bond spots 2 (see Fig. 1) and one vertically extending bond spot 4 (see Fig. 1) therebetween. The embossing pins or protrusions are truncated pyramids having a rectangular bottom in shape. The tip angle of the pyramid is very sharp, normally of the order of less than 30 degrees. The highest surface protrusion region A having a length L and width W creates the bond spots 2 and 4 of Fig. 1. Since the side surfaces of the truncated pyramid slope steeply, no additional compression, in practice, takes place outside of region A, resulting in no transition region between the bonded and the non-bonded regions, whereby no partial bonding may take place. Thus the side surface between the protruded region A and the depressed region C is unable to generate transition region in the embossed product. The width of the depressed region C (seen as the non-bonded region 10 in Fig. 1) between two bond spots is W_b . In a practical example L is 2,36 mm, W is 0,48 mm, and W_b is 0,2 mm.

(0043) Figure 3 illustrates schematically, as a preferred embodiment of the present invention, in connection with a single round bond spot, or bond region 6 a transition region 8, which surrounds the bond region. The transition region 8 connects the fully bonded (by the bond spot 6) and non-bonded regions 10 of the product. As a result, in the transition region 8, the fully bonded state of the nonwoven (bond region or spot 6) is transformed gradually to fully non-bonded state of the nonwoven (region 10 outside

the transition region 8). This means that the bonds between the fibers in the nonwoven get weaker and weaker when coming towards the outer circumference of the transition region 8. This type of change in the bonding results in gradually increasing bendability of the fibers in the nonwoven whereby, for instance, the abrasion resistance is better than when using the prior art bond spots having no transition region, and the product feels softer than the prior art products. In other words, the transition region area increases, in practice, the effective bond area, but in such a manner that the drapeability and softness of the product are not sacrificed.

10 (0044) Figure 4 illustrates schematically a practical application of the bond spot or region 6 together with the transition region 8 of the present invention arranged in connection with a basket weave pattern, where the bond spots 6 are oval of their shape and have been surrounded by transition regions 8. In this specification, the transition region 8 and its effect in the properties of a nonwoven has been studied in connection with a basket weave pattern. In other words, in the examples a roll having a basket weave pattern provided with a transition region having an area of about 100 % of the bond region or bond spot area has been used as an example of patterns including a transition region. Other patterns used in the examples were of ordinary configuration i.e. without a transition region.

20

(0045) Figure 5 shows a photo taken as a top view of an embossing roll with a basket-weave pattern including the transition regions according to the present invention. FIG. 6 is a partial cross-sectional radial view along the axis an embossing roll of Fig. 5. The roll surface is specifically designed to create a basket-weave pattern with bond spots 6 and transition regions 8 basically as shown in Fig. 4. It has to be understood that the upper i.e. the working surface of the roll in Fig. 6 forms, when compared to Figs. 4 or 5, two horizontally extending bond regions and one vertically extending bond region or spot therebetween. The protruded surface portion A of this bond geometry creates the bond spot 6 (see Fig. 4) having a length L1 and width W1 with highest or full bonding, while the convex shaped portion B between the protruded region A and the depressed region C creates the transition region 8 (see Fig. 4) where the bonding between the fibers gets weaker towards the depressed region C. In this practical example having a transition region, the length L1 of the bond spot or region 6 is 1,4 – 2,1 mm, and the width W1 is 0,8 – 1,1 mm. The depth D of the depressed region is 1 mm. The radius R1 in the convex shaped portion B at the longer side of the protrusion is 0,5 mm, and the radius R2 at the ends of the protrusion is 1,8 mm.

(0046) For the basket weave geometry in accordance with a preferred embodiment of the present invention shown in Figures 4, and 6, the transition region 8 of the product surrounding the bond spot 6 is created by means of a convex portion B in the embossing roll geometry, which connects the region A with highest surface protrusion and the depressed region C. A spot bond 6 is created between the parallel roll surfaces (in practice, another roll having normally a smooth surface is positioned against the highest surface protrusions when performing the bonding), in presence of heat, where highest amount of pressure is created between the two opposite roll surfaces. The convex geometry of the region B in basket-weave pattern, allows compression of nonwoven product in this zone as well, although not with the same amount of pressure as in region A. This compression in presence of heat contributes to the existence of noticeable transition regions in the nonwoven product where partial bonding of fibers has taken place. The radius of the convex portion B and its size compared to the size of flat protruded portion A determines the area of the transition region 8 relative to the area of the bond spot or region 6.

(0047) In the present invention, the transition region 8 in combination with the basket weave pattern (see FIGS. 4, 5 and 6), which has a special bond geometry, contributes to improving the abrasion resistance without compromising softness and drapeability.

(0048) The nature of the transition region 8 in a basket weave non-woven product can be seen from Figure 7 while its absence can be seen from the cross-hatch product of Figure 8. Figures 7 and 8 are SEM cross-sectional images of the two mentioned nonwoven products. In Figure 7, both the bond region or spot 6 and the transition region 8 on both sides of the bond spot 6 can be clearly seen before the non-bonded part 10 of the product begins. Figure 8 merely shows the bond spot 6, and at the right hand side of the photo an abrupt change from the fully bonded state 6 to non-bonded state 10.

(0049) At this stage it has to be understood that the basket weave pattern with the transition region has been discussed above as an example only. There are many other patterns, like for instance the cross hatch, square or diamond patterns with which the transition region may as well be applied. In a similar manner, the teaching of Figure 6 can also be taken as an example, as many other configurations of the protrusions or bond pins are available. The basic requirement for the existence of the transition

region is that the transition from full bonding to non-bonded state needs a certain distance. The longer the distance is the wider is the transition region. To have a wide transition region sets some requirements to the shape of the side surfaces of the bond pins or protrusions. In accordance with performed tests the sides of the protrusions should be rounded or convex as shown in Figure 6, or the tip angle of a truncated cone or pyramid forming the bond pin should be more than 100 degrees, preferably more than 135 degrees, more preferably more than 150 degrees. Naturally, it is also possible to arrange the top of the bond pin ball shaped so that only a small part of the pin is able to form a full bond, whereby most of the bond belongs to the transition region. Further, it is also possible to arrange the protrusions or bond pins have rounded or gradually sloping portions on only some of their sides, whereby as a result of the bonding operation the transition region does not surround the bond spot but is formed on only some sides of the bond spot. For instance, the protrusions illustrated in Figure 6 show two types of convex portions. While the convex portion at the longer sides of the protrusion has a substantially long radius, the corresponding radius at the ends of the protrusion is so small that only a short transition region is formed to the ends of the bond spots or regions.

(0050) The specification and the drawings have this far discussed point bonding in its narrow sense i.e. including only individual protrusions on the roll surface creating individual bond spots or regions on the product. However, the present invention is by no means limited literally to spot bonding only, but may also be applied to cases where several bond spots have been merged to form a line, curve, or figure on the product, i.e. a bond region of desired shape. In other words, a more or less continuous bond is formed. In practice, lengthy or continuous protrusions or ridges arranged on the roll surface may replace the individual protrusions or pins discussed earlier. The ridges may run in any desired fashion on the calender roll surface. They may run parallel to each other, or they may cross each other in a desired fashion. In accordance with the present invention the protrusions or ridges have at least on one of their side surfaces a convex or gradually sloping portion, which is able to form the transition region in the final product. Thus, it is clear that not only the bond regions are lengthy or continuous, but also the transition regions, too. However, it is also possible to alter the shape of the side surfaces of the ridges such that the transition regions are discontinuous though the ridges may be continuous. Also, it should be understood that the above described bonding style makes it possible to form on the final product numerous different patterns, of which a pillow-like pattern is discussed in the following as an

example. On the calender roll surface, the ridges are straight or somewhat curved lines that cross each other forming, for instance, a square or diamond shaped pattern. Now the bond lines, and the transition regions adjacent thereto leave a, correspondingly, square or diamond-shaped non-bonded regions therebetween, which
5 appear as raised regions, pillows, in the final product.

(0051) Finally, the performed tests have revealed that the area of the transition region in relation to the bond region area should be at least 10%, preferably between 10 and 50 %, and more preferably at least 50%. However, it is also possible and even
10 preferred in some specific occasions that the transition region area may be at least 100% of the bond area.

Test Methods

15 (0052) The Stoll Abrasion Test was used for measuring the relative resistance to abrasion of a fabric in the examples presented hereinafter. The test results are reported on a scale of 0 to 5 with 5 being the most wear and 0 the least, after 100 cycles with a weight of 2.5 lbs (1,13 kg). The test is carried out with a Stoll Quatermaster Abrasion tester such as model no. CS-22C-576 available from SDL Inc.
20 or Testing Fabrics Inc. The abradant cloth used is 3 inches (76,2 mm) by 24 inches (609,6 mm) with the longer dimension in the warp direction. The test specimen size is 4 inches (101,6 mm) by 4 inches (101,6 mm).

(0053) The softness of a nonwoven fabric was measured according to the "Handle-O-Meter" test. The test used here is: 1) the specimen size was 4 inches by 4 inches
25 and 2) five specimens were tested. The test was carried out on Handle-O-Meter model number 211-5 from Thwing Albert Instrument Co., 10960 Dutton Road, Philadelphia, PA 19154.

30 (0054) Tests of fabrics bonded with an example of the inventive pattern (basket weave pattern) and with representative conventional patterns are presented herewith showing the advantageous properties of the inventive pattern.

EXAMPLE 1

35

(0055) A nonwoven base material was produced using 40/60 PE/PET sheath/core bicomponent spunbond fibers through pressure bonding with cold calender rolls at room temperature at a nip pressure of 400 pli (70 N/mm). The base material has a basis weight of 40 gsm (m^2).

5

(0056) For the test samples, the base material was thermally point bonded in a single thermal bonding step using a basket-weave pattern with 30% bond spot area and having a transition region area of at least another 30% surrounding the bond spot area as shown in Figure 4 or using a diamond pattern with 40% bond spot area without transition region. Both bonding experiments were conducted at various calender temperatures (239-266 °F of both top and bottom rolls i.e. 115 – 130 °C), and speeds (10-200 ft/min; 0,05 – 1,0 m/s), and range of nip pressures (75-1500 pli; 13 – 263 N/mm).

10

15

(0057) The thermal point bonding was performed using an embossing roll and a smooth roll in a single pass set up. Both the test samples and the control samples have a basis weight of 40 gsm.

20

(0058) The test data are summarized in Table 1.

25

(0059) In Table 1, results are presented for two test samples against a control sample. A first test sample BW1 was processed through a top roll of steel with smooth surface and a bottom roll of steel with a basket-weave pattern including the transition region of the invention in a single pass configuration. The second test sample Dia1 was processed through a top roll of steel with smooth surface and a bottom roll of steel with diamond pattern without transition region in a single pass configuration. The control sample was also processed in a single pass configuration.

30

(0060) It can be concluded that when the samples are bonded at single bonding step, basket-weave pattern including the transition region of the invention at 30% bonding area not only showed better abrasion resistance than standard bonding pattern (oval, 18% bonding area), but also better than a diamond bonding pattern with 40% bonding area. As a surprising side effect, samples acquired a texture and bulkiness when embossed with basket-weave pattern including the transition region of the invention with single pass (29% increase of thickness from 245 to 316 μm).

35

Additional Treatment Step			Bonding Area (%)	Temp. (°F/°C)	Pressure (pli/ N/mm)	Result	
						Abrasion Resistance	Softness
Material	Top Roll	Bottom Roll					
Test BW1	Smooth	Basket- Weave	30	252/122	350/61	0.8	39.3
Test Dia1	Smooth	Diamond	40	266/130	75/13	1.3	23.9
Control 1	NA	NA	18	265/129	600/105	2.5	43.3

Table 1

(0061) When the basket weave pattern including the transition region of the invention was used in a second bonding step, in combination with a standard bonding pattern (18% bonding area) as in the first step, the improvement in the abrasion resistance was even higher. The basket weave pattern accomplished this without compromising
5 softness.

EXAMPLE 2

(0062) A nonwoven base material was produced using 40/60 PE/PET sheath/core
10 bicomponent spunbond fibers through thermal bonding on a calender roll with an oval pattern with 18% bonding area at 265 °F (120 °C) and at a nip pressure of 600 pli (105 N/mm). The base material has a basis weight of 40 gsm.

(0063) For the test samples, the base material was then thermally point bonded
15 using basket-weave pattern with a 30% bonding area and having a transition region area of at least another 30% surrounding the bond area as shown in Figure 4. The bonding was conducted at various calender temperatures (239-266 °F of both top and bottom rolls; i.e. 115 – 130 °C), and a fixed speed of 10ft/min and a nip pressure of 750 pli (131 N/mm).

20

(0064) Therefore, the thermal point bonding was performed using embossing roll and smooth rolls in a double pass set up for the test sample.

(0065) The control sample was prepared in a single pass set up under the conditions
25 specified in Example 1. Both the test and the control samples have a basis weight of 35 gsm.

(0066) The test data are summarized in Table 2.

30 (0067) The basket weave pattern (30% bonding area) including the transition region of the invention is able to provide the desired improvement in abrasion resistance at a speed of 200 ft/min while retaining softness by the double pass configuration.

Additional Treatment Step			Bonding Area (%)	Temp. (°F/°C)	Pressure (pli/ N/mm)	Result	
						Abrasion Resistance	Softness
Material	Top Roll	Bottom Roll					
Test BW2	Smooth	Basket- Weave	30	250/121	750/131	0.0	28.6
Control 2	NA	NA	18	265/129	600/105	2.3	30.6

Table 2

(0068) In Table 2, results are presented for the test sample BW2 processed through a top roll of steel with smooth surface and a bottom roll of steel with basket-weave patterns including the transition region of the invention in a double pass configuration and a control sample processed in a single pass configuration.

5

(0069) It can be concluded that when the basket weave pattern including the transition region of the invention was used in the second bonding step, in conjunction with standard bonding pattern (oval, 18%) as the first step, the improvement in abrasion resistance was even greater compared to the basket-weave sample bonded in a single step (Example 1). As a surprising side effect, samples acquired a texture and bulkiness when embossed with basket-weave pattern including the transition region of the invention with double pass (36% increase of thickness from 250 to 340 μm) configuration.

15 EXAMPLE 3.

(0070) A nonwoven base material was produced using 40/60 PE/PET sheath/core bicomponent spunbond fibers through thermal bonding on a calender roll with an oval pattern with 18% bonding area at 265°F (129 °C) and at a nip pressure of 600 pli (105N/mm). The base material has a basis weight of 40 gsm.

20

(0071) For the test samples, the base material was thermally point bonded using basket-weave pattern with 30% bond area and having a transition region area of at least another 30%. The bonding was conducted at a fixed temperature 276°F (136 °C), at a fixed speed of 200 ft/min (1,02 m/s) and at a nip pressure of 750 pli (131 N/mm).

25

(0072) The thermal point bonding was performed using embossing and smooth rolls in a double pass set up for the test sample.

(0073) The control sample was prepared in a single pass set up under the same conditions as the test material except that a single pass is used. Both the test samples and control samples have a basis weight of 40 gsm.

30

(0074) The test data are summarized in Table 3.

35

Additional Treatment Step			Bonding Area (%)	Temp. (°F/ °C)	Pressure (pli/N(mm)	Result	
Material	Top Roll	Bottom Roll				Abrasion Resistance	Softness
Test BW3	Smooth	Basket- Weave	30	235/113	400/70	0.5	29.1
Control 3	NA	NA	18	265/129	600/105	2.5	43.3

Table 3

(0075) In Table 3, results are presented for the test sample BW3 processed through a top roll of steel with smooth surface and a bottom roll of steel with basket-weave patterns including the transition region of the invention in a double pass configuration and a control sample in a single pass configuration.

5

(0076) It can be concluded that the basket weave pattern contributed to improving the abrasion resistance at the speed of 200 ft/min (1,02 m/s) in a double pass setup while retaining softness.

10 EXAMPLE 4

(0077) A nonwoven base material was produced using 40/60 PE/PET sheath/core bicomponent spunbond fibers through thermal bonding on a calender roll with an oval pattern with 18% bonding area at 265°F (129 °C) and at a nip pressure of 600 pli (105 N/mm). The base material has a basis weight of 30 gsm.

15

(0078) For the test samples, the base material was thermally point bonded using a cross-hatch pattern without transition region with 22.7% bond area, using a diamond pattern without transition region with 17.1% bond area, and using a square pattern without transition region with 19% bond area at various speeds (98-656 ft/min; 0,5 – 3,3 m/s), at a fixed temperature 257°F (125 °C) for both top and bottom rolls and at a fixed nip pressure of 286 pli (50 N/mm).

20

(0079) The thermal point bonding was performed using double pass or S- wrap setups as shown in Table 4. The bottom roll is either absent or a Cold Steel Smooth Roll. The top roll, when present, is a steel roll bearing the respective patterns. All the samples have a basis weight of 40 gsm.

25

(0080) The test data are summarized in Table 4.

30

(0081) In Table 4, results are presented for the test samples processed using cross-hatch, diamond or square patterns without transition regions on a double pass or S wrap setup, compared to a control sample prepared using single pass setup.

35

(0082) It can be concluded that the cross-hatch pattern, despite its similarity in shape to basket-weave pattern, did not contribute to a noticeable improvement in the

Additional Treatment Step				Bonding Area (%)	Process Setup	T. (°F/ °C)	P. (pli/N/mm)	Result	
Material	Top Roll	Middle Roll	Bottom Roll					Abrasion Resistance	Softness
Control 14	NA	Smooth steel	NA	18	Single pass	265/129	600/105	2.0	13.3
Test CH1	Cross Hatch	Smooth steel	Cold Smooth	23	S wrap	257/125	286/50	1.8	21.4
Test CH2	Cross Hatch	Smooth steel	NA	23	Double Pass	257/125	286/50	1.0	25.1
Test Dia4.1	Diamond	Smooth steel	Cold Smooth	17	S Wrap	257/125	286/50	1.3	32.8
Test Dia4.2	Diamond	Smooth steel	NA	17	Double Pass	252/122	286/50	2.3	22.3
Test S4.1	Square	Smooth steel	Cold Smooth	19	S Wrap	266/130	286/50	2.0	31.2
Test S4.2	Square	Smooth steel	NA	19	Double Pass	257/125	286/50	0.5	49.1

Table 4

abrasion resistance with S Wrap configuration, but gave an improvement using double pass. Improvement in the abrasion resistance did not take place in diamond pattern for the cases of double pass configuration. Some improvement was noticed in abrasion resistance with S Wrap, but softness deteriorated. Improvement in an abrasion resistance took place in square pattern in case of double pass at the expense of softness.

EXAMPLE 5

10

(0083) Three nonwoven base materials, classified as "DG", "LG" and "White", were produced using 40/60 PE/PET sheath/core bicomponent spunbond fibers and possess a density of 30 gsm. "DG" and "LG" are fully bonded samples, which are thermally bonded on a calender roll (oval pattern, 18% bond area) at 275°F (135 °C), at a nip pressure of 600 pli (105 N/mm) and at a speed of 550 ft/min (2,8 m/s). "White" is a lightly bonded sample, which is thermally bonded on calender roll (oval pattern, 18% bond area) at 215°F (102 °C), at a nip pressure of 400 pli (70 N/mm) and at a speed of 550 ft/min (2,8 m/s).

20

(0084) For the test samples with basket-weave patterns, the base material was thermally bonded using a basket-weave pattern with 30% bond area and having a transition region area of at least another 30% surrounding the bond spot area as shown in Figure 4 at various configurations (double pass, s wrap, and 3 stack with idler), at a temperature range of 230-275°F (110 - 135 °C), at a nip pressure of 400-629 pli (75 – 110 N/mm) and at a fixed speed of 656 ft/min (3,3 m/s).

25

(0085) For the test samples with patterns other than basket-weave, the base material was thermally bonded using square-patterned sleeves with 33% bond area and without transition region, square-patterned sleeves with 13% bond area and without transition region, or square-patterned sleeves with 27% bond area and without transition region, at a double pass, at a temperature range of 257-266°F (125 - 130 °C), at a nip pressure of 343-514 pli (60 – 90 N/mm) and at a fixed speed of 98 ft/min (0,5 m/s).

30

35 (0086) All the samples have a basis weight of 30 gsm.

Additional Treatment Step				Bonding Area (%)	Process Setup	T. (°F/°C)	P. (pli /N/mm))	Result	
Material	Top Roll	Middle Roll	Bottom Roll					Abrasion Resistance	Softness
Control 5	NA	NA	NA	18	Single pass	265/129	600/105	2.5-3.5	12-13
Test White 1	Basket Weave	Smooth	Diamond, 19%	30	S wrap	266/130	400-629/70 - 110	0.4-0.5	30-35
Test DG	Basket Weave	Smooth	Diamond, 19%	30	S wrap	266/130	400-629/70 - 110	0.2-0.4	33-46
Test White 2	Basket Weave	Smooth	Diamond, 19%	30	3 stack with idlers	266/130	400-629/70 - 110	0.5-1.5	17-18
Test White 3	Basket Weave	Smooth	NA	30	Double Pass	266/130	75/13	0.5-2.0	12-15
Test LG	Basket Weave	Smooth	NA	30	Double Pass	266/130	400-629/70 - 110	0.4-0.5	13-16
Test White 3	Square	Smooth	NA	33	Double Pass	266/130	343/60	0.5	57.3
Test White 4	Square	Smooth	NA	13	Double Pass	257/125	514/90	1.8	23.6
Test White 5	Square	Smooth	NA	27	Double Pass	257/125	343/60	0.4	33.7

Table 5

(0087) The test data are summarized in Table 5.

(0088) It can be concluded that the basket-weave pattern at 30% bonding area including the transition region of the invention contributed to the improvement in the abrasion resistance significantly for processes of a double pass and a 3 stacks with idlers without compromising softness at the calender speed of 656 ft/min (3,3 m/s). Softness deteriorated in case of an S wrap whereas it was maintained in case of both a double pass and a double pass of 3 stacks with idlers. Square patterns of similar bond area (about 30%) with negligible transition region showed good abrasion resistance but with softness deteriorated. Square pattern with smaller bond area (13%) showed not only less improvement in abrasion resistance but also deteriorated softness. Strip tensile property was reserved after double pass of calendering with LG.

(0089) As hypothesized earlier, the existence of discernible transition region, as evidenced in FIG. 4, in the thus produced basket-weave pattern is responsible for improving the abrasion resistance and the softness at the same time. In contrast, the lack of discernible transition region in the cross-hatch pattern, as shown in FIG. 1, is responsible for its failure to improve softness while improving abrasion resistance.

(0090) The nonwoven sheets/webs with the advantageous patterns can of course be further processed or improved. For example, a laminate can be generated by laminating the nonwoven sheets bearing the patterns with a film and bonded together by thermal, mechanical or adhesive means. The nonwoven sheets/webs or the laminates can be stretched to generate perforations as desired for certain applications such as those described in US-A-5,964,742.

(0091) Although only a few exemplary embodiments of this invention have been described in detail above, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the following claims.

We claim:

1. A pattern bonded nonwoven fabric having bonded and non-bonded regions, **characterized** in that the nonwoven fabric has a pattern of bonds formed of bond regions (6), and transition regions (8) between said bond regions (6) and non-bonded regions (10), wherein an area of said transition regions (8) is equal to at least 10% of an area of said bond regions (6).
5
2. A pattern bonded nonwoven fabric according to claim 1, **characterized** in that said pattern has a transition region area equal to at least 50% of said bond region area.
10
3. A pattern bonded nonwoven fabric according to claim 1 or 2, **characterized** in that said pattern has a transition region area equal to at least 100% of said bond region area.
15
4. A pattern bonded nonwoven fabric according to any one of the claims 1 to 3, **characterized** in that the bond regions (6) are formed of individual spots (8), a series of spots connected to each other, or discontinuous or continuous bond lines.
20
5. A pattern bonded nonwoven fabric according to any one of the claims 1 to 4, **characterized** in that the transition region (8) surrounds the bond region (6) either fully or partially.
- 25 6. A pattern bonded nonwoven fabric according to any one of the claims 1 to 5, **characterized** in that said bond region area is between about 5% and 50% of the total area of the fabric.
7. A pattern bonded nonwoven fabric according to claim 6, **characterized** in that
30 said bond region area is between about 10% and 45%.
8. A pattern bonded nonwoven fabric according to claim 7, **characterized** in that said bond region area is between about 15% and 40%.
- 35 9. A pattern bonded nonwoven fabric according to any one of claims 1 - 8, **characterized** in that the fabric is thermally bonded.

10. A pattern bonded nonwoven fabric according to any one of claims 1 - 9, **characterized** in that said pattern is one of a basket-weave, a diamond, a square, and a cross hatch pattern.
- 5
11. A pattern bonded nonwoven fabric according to any one of claims 1 - 10, **characterized** in that the fabric is stretched to produce perforations therein.
- 10
12. A pattern bonded nonwoven fabric according to any one of claims 1 - 11, **characterized** in that the fabric is formed at least partially of Polyethylene/Polyethylene Terephthalate (PE/PET) or PE/Polyesters (for example, Polybutylene Terephthalate (PBT), Polytrimethylene Terephthalate (PTT), Polylactide (PLA)) or PE/Polyolefins or PE/Polyamide or PE/Polyurethanes bicomponent spunbond sheath/core structures.
- 15
13. The use of the fabric of claim 1 in a garment.
14. The use of the fabric of claim 1 as a wiper.
- 20
15. The use of the fabric of claim 1 as an incontinence product.
16. The use of the fabric of claim 1 as a feminine hygiene product.
17. The use of the fabric of claim 1 as an infection control product.
- 25
18. A laminate, **characterized** in that it is formed of a nonwoven fabric of claim 1 and a film, bonded together by thermal, mechanical or adhesive means.
19. The laminate of claim 18, **characterized** in that it has been stretched to produce perforations.
- 30
20. A method of manufacturing the pattern bonded nonwoven fabric of claim 1, **characterized** in the steps of
- 35
- spinning and stretching the fibers as in a spunbonded process,
laying these down to form a web,
bonding the fibers by thermal calendering, and

applying either at the step of thermal calendering or at another step after the thermal calendering a bond pattern provided with a transition region (8).

21. The method of claim 20, **characterized** in that the bond pattern is one of a
5 basket-weave, a diamond, a square, and a cross hatch pattern. (57)

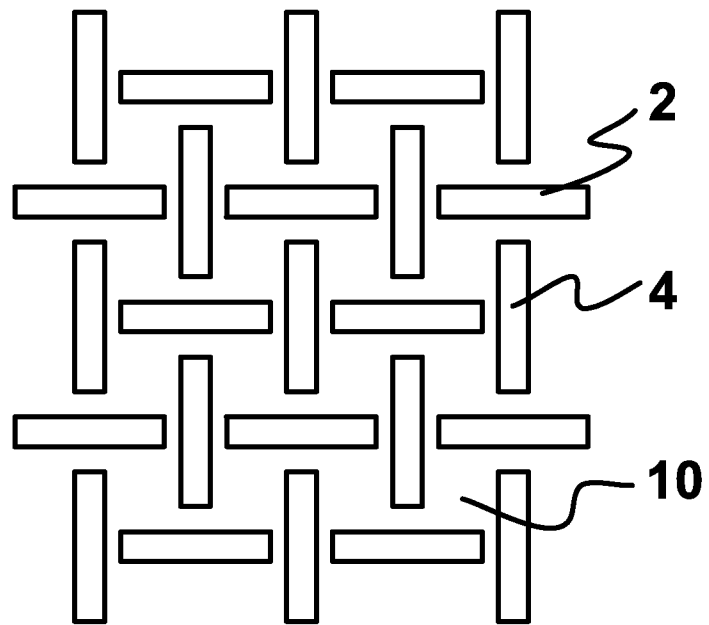


Fig. 1

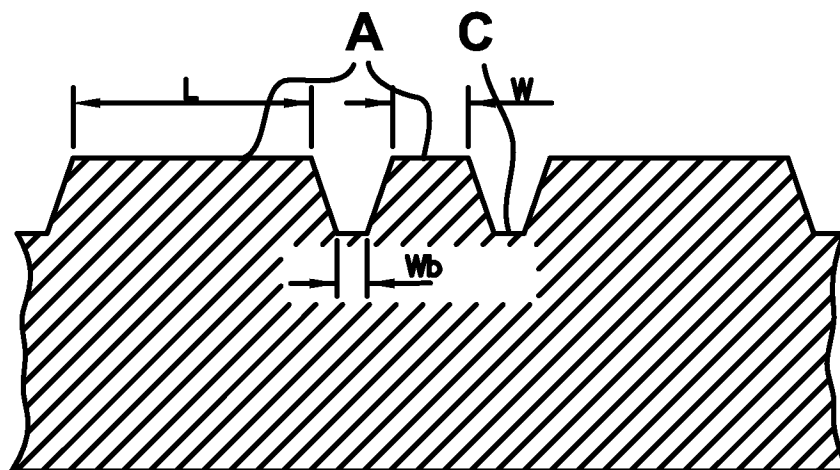


Fig. 2

2/4

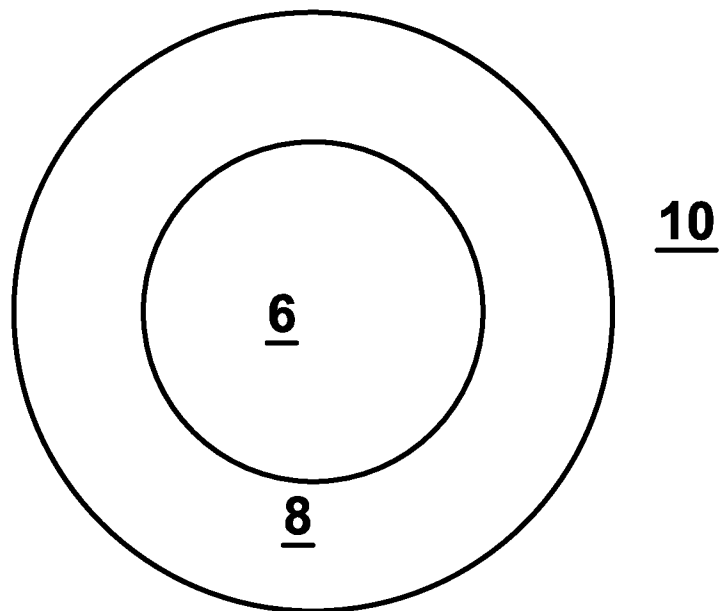


Fig. 3

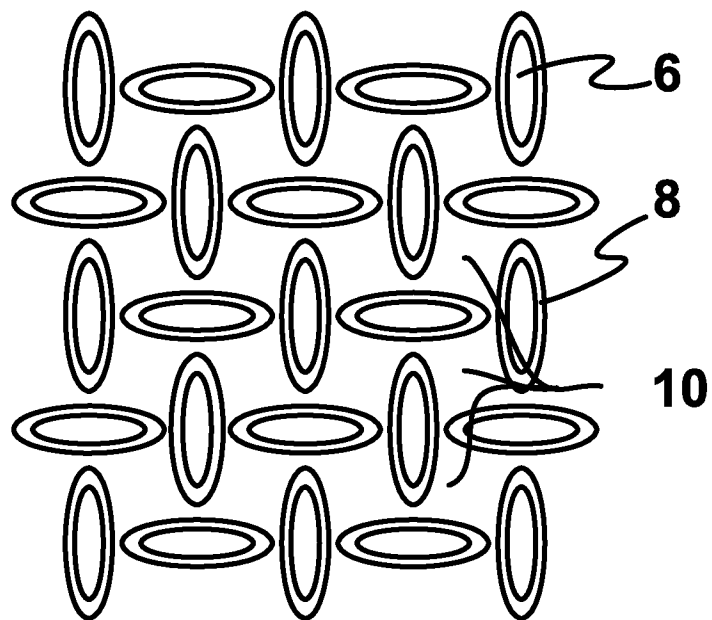


Fig. 4

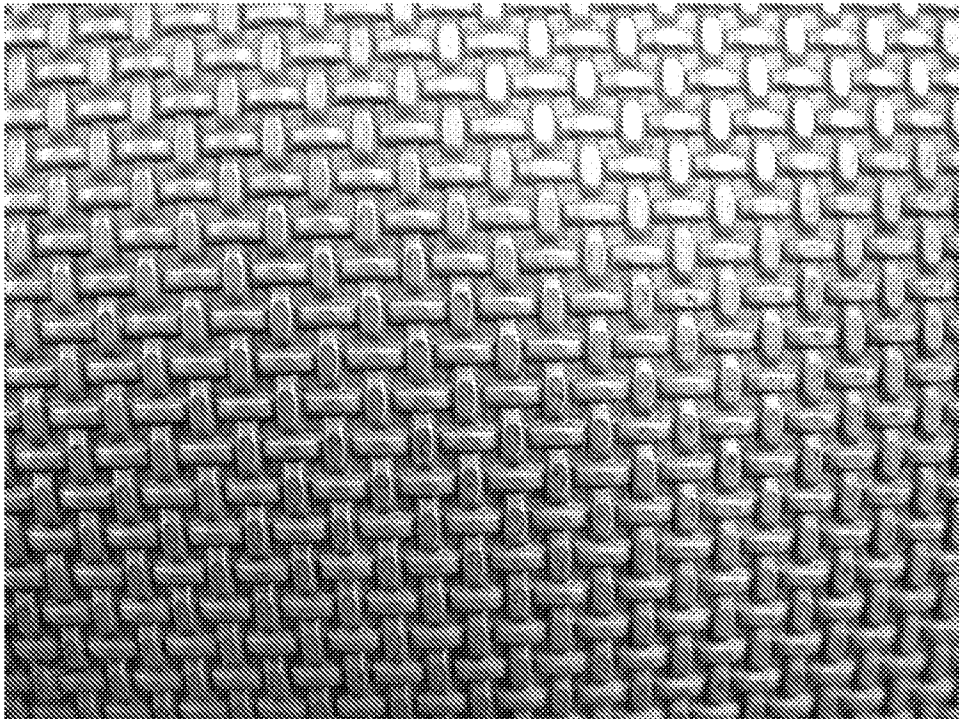


Fig. 5

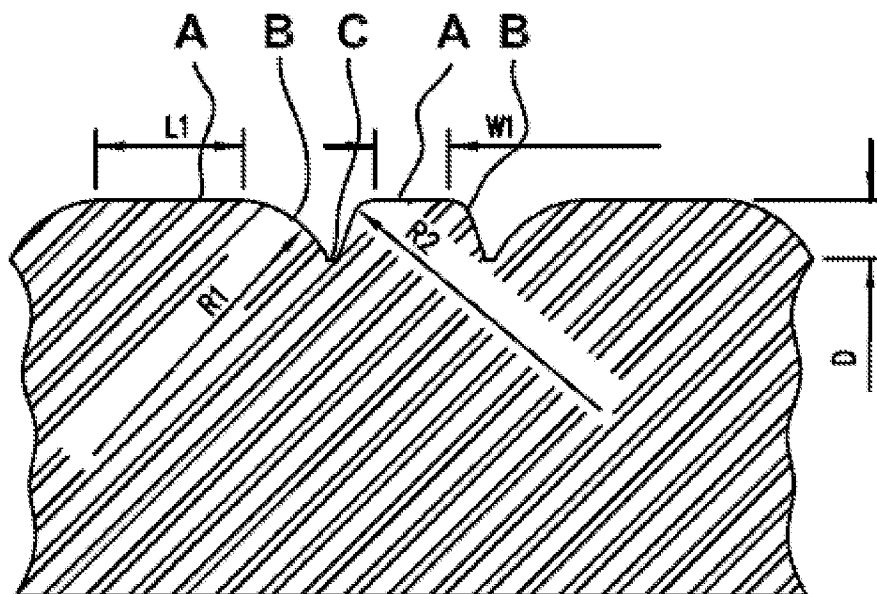
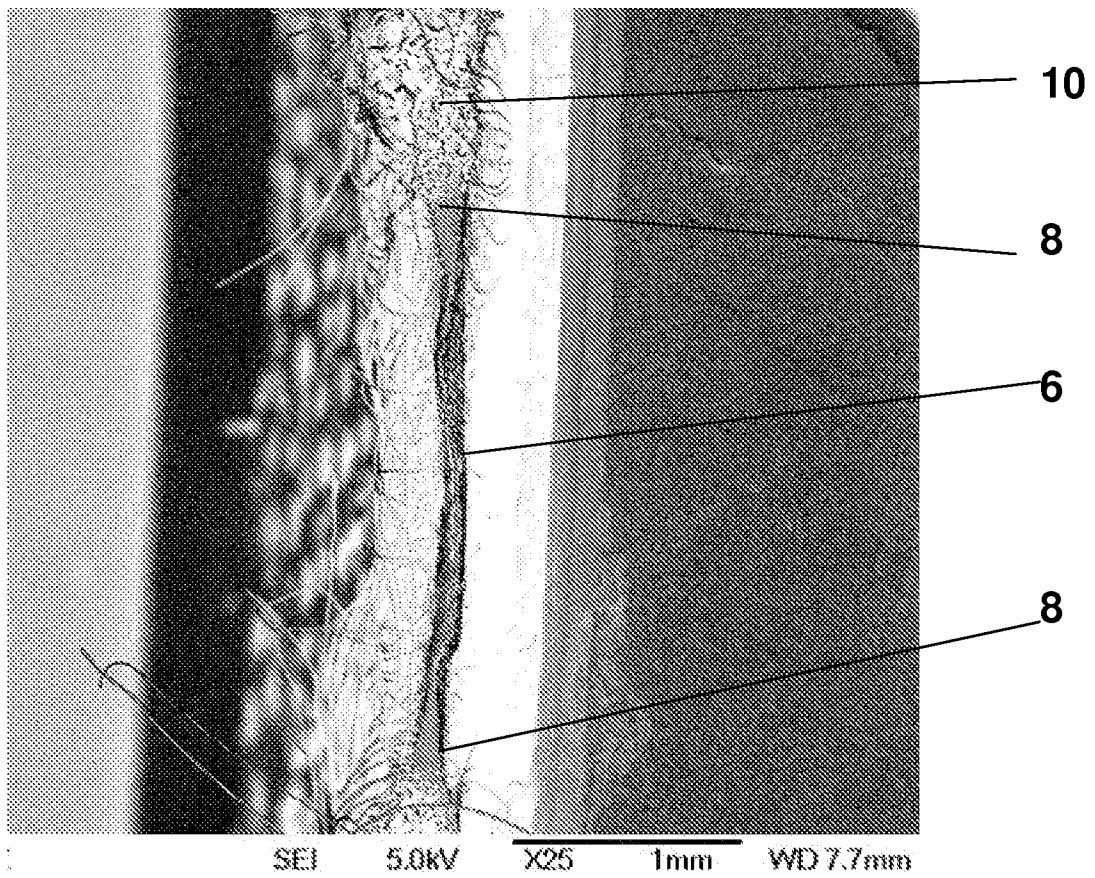
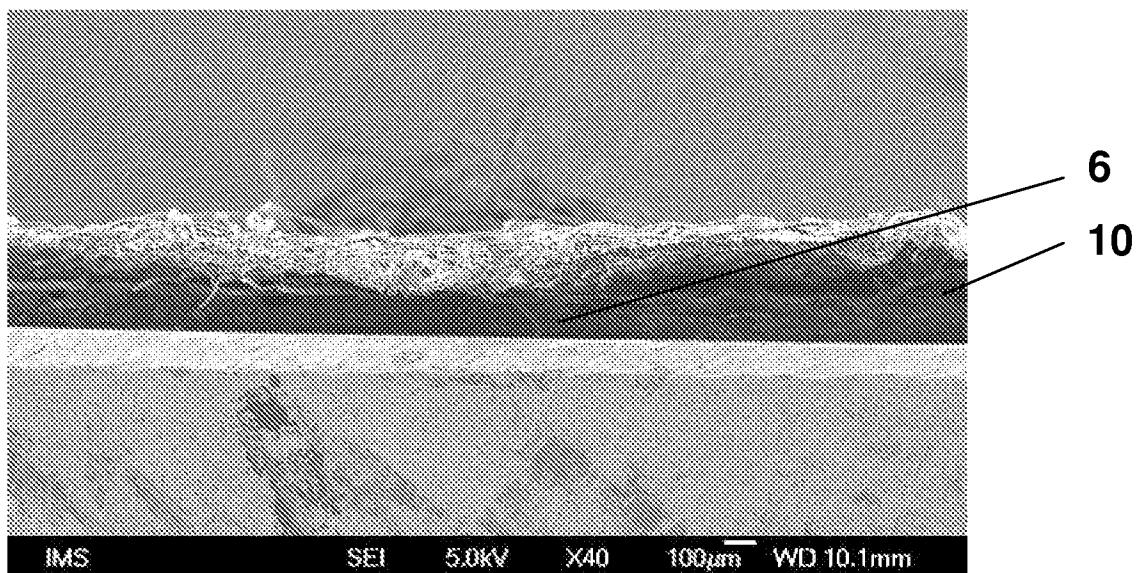


Fig. 6

4/4

**Fig. 7****Fig. 8**

INTERNATIONAL SEARCH REPORT

International application No

PCT/FI2008/050220

A. CLASSIFICATION OF SUBJECT MATTER

INV. D04H3/14 D04H3/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

D04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 035 219 A (CUMBERS DAVID CHARLES) 12 July 1977 (1977-07-12) column 4, line 36 - column 5, line 2; claims 1,2 column 5, line 55 - line 61 column 5, line 35 column 1, line 65 - column 2, line 17 column 2, lines 34-36,63-65 column 3, line 49 - line 55 column 5, lines 31-36,53-63	1-12,20
X	US 2002/144384 A1 (MAUGANS REXFORD A [US]) 10 October 2002 (2002-10-10) cited in the application paragraphs [0011], [0012], [0028], [0031] - [0034], [0051], [0085], [0160]; claims 2,10,28,29; figures 1-3 ----- -/--	1,13-17; 20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

7 August 2008

Date of mailing of the international search report

20/08/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Elsässer, Ralf

INTERNATIONAL SEARCH REPORT

International application No
PCT/FI2008/050220

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 198 51 667 A1 (CORONOR COMPOSITES GMBH [DE]) 18 May 2000 (2000-05-18) column 1, line 39 - line 47; figures 1-6 column 2, lines 20-29, 48-55 column 3, line 10 - line 54 column 4, line 19 - column 5, line 29 -----	1, 20
X	WO 99/14415 A (KIMBERLY CLARK CO [US]) 25 March 1999 (1999-03-25) cited in the application claims 7-14, 19, 20 -----	11, 18, 19

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/FI2008/050220

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4035219	A	12-07-1977	DE 2327721 A1	20-12-1973
			FR 2186561 A2	11-01-1974
			GB 1437601 A	03-06-1976
			NL 7307562 A	04-12-1973
US 2002144384	A1	10-10-2002	NONE	
DE 19851667	A1	18-05-2000	AT 346745 T	15-12-2006
			AU 1548200 A	29-05-2000
			WO 0027626 A1	18-05-2000
			EP 1144187 A1	17-10-2001
			US 6607810 B1	19-08-2003
WO 9914415	A	25-03-1999	AU 734612 B2	21-06-2001
			AU 9390198 A	05-04-1999
			BR 9815649 A	16-10-2001
			CA 2301123 A1	25-03-1999
			CN 1270645 A	18-10-2000
			EP 1023477 A1	02-08-2000
			US 5964742 A	12-10-1999
			ZA 9807678 A	25-02-1999