




(22) **Date de dépôt/Filing Date:** 2004/07/08
(41) **Mise à la disp. pub./Open to Public Insp.:** 2005/01/08
(62) **Demande originale/Original Application:** 2 473 264
(30) **Priorités/Priorities:** 2003/07/08 (CA2,434,603);
2003/07/31 (CA2,436,327); 2003/12/24 (CA2,454,472)

(51) **Cl.Int./Int.Cl.** *B61F 5/14* (2006.01),
B61F 5/04 (2006.01), *B61F 5/12* (2006.01),
B61F 5/38 (2006.01)
(71) **Demandeur/Applicant:**
NATIONAL STEEL CAR LIMITED, CA
(72) **Inventeurs/Inventors:**
FORBES, JAMES W., CA;
HEMATIAN, JAMAL, CA
(74) **Agent:** BERESKIN & PARR LLP/S.E.N.C.R.L., S.R.L.

(54) **Titre : BOGIE ET ELEMENTS CONNEXES**
(54) **Title: RAIL ROAD CAR TRUCK AND FITTINGS THEREFOR**

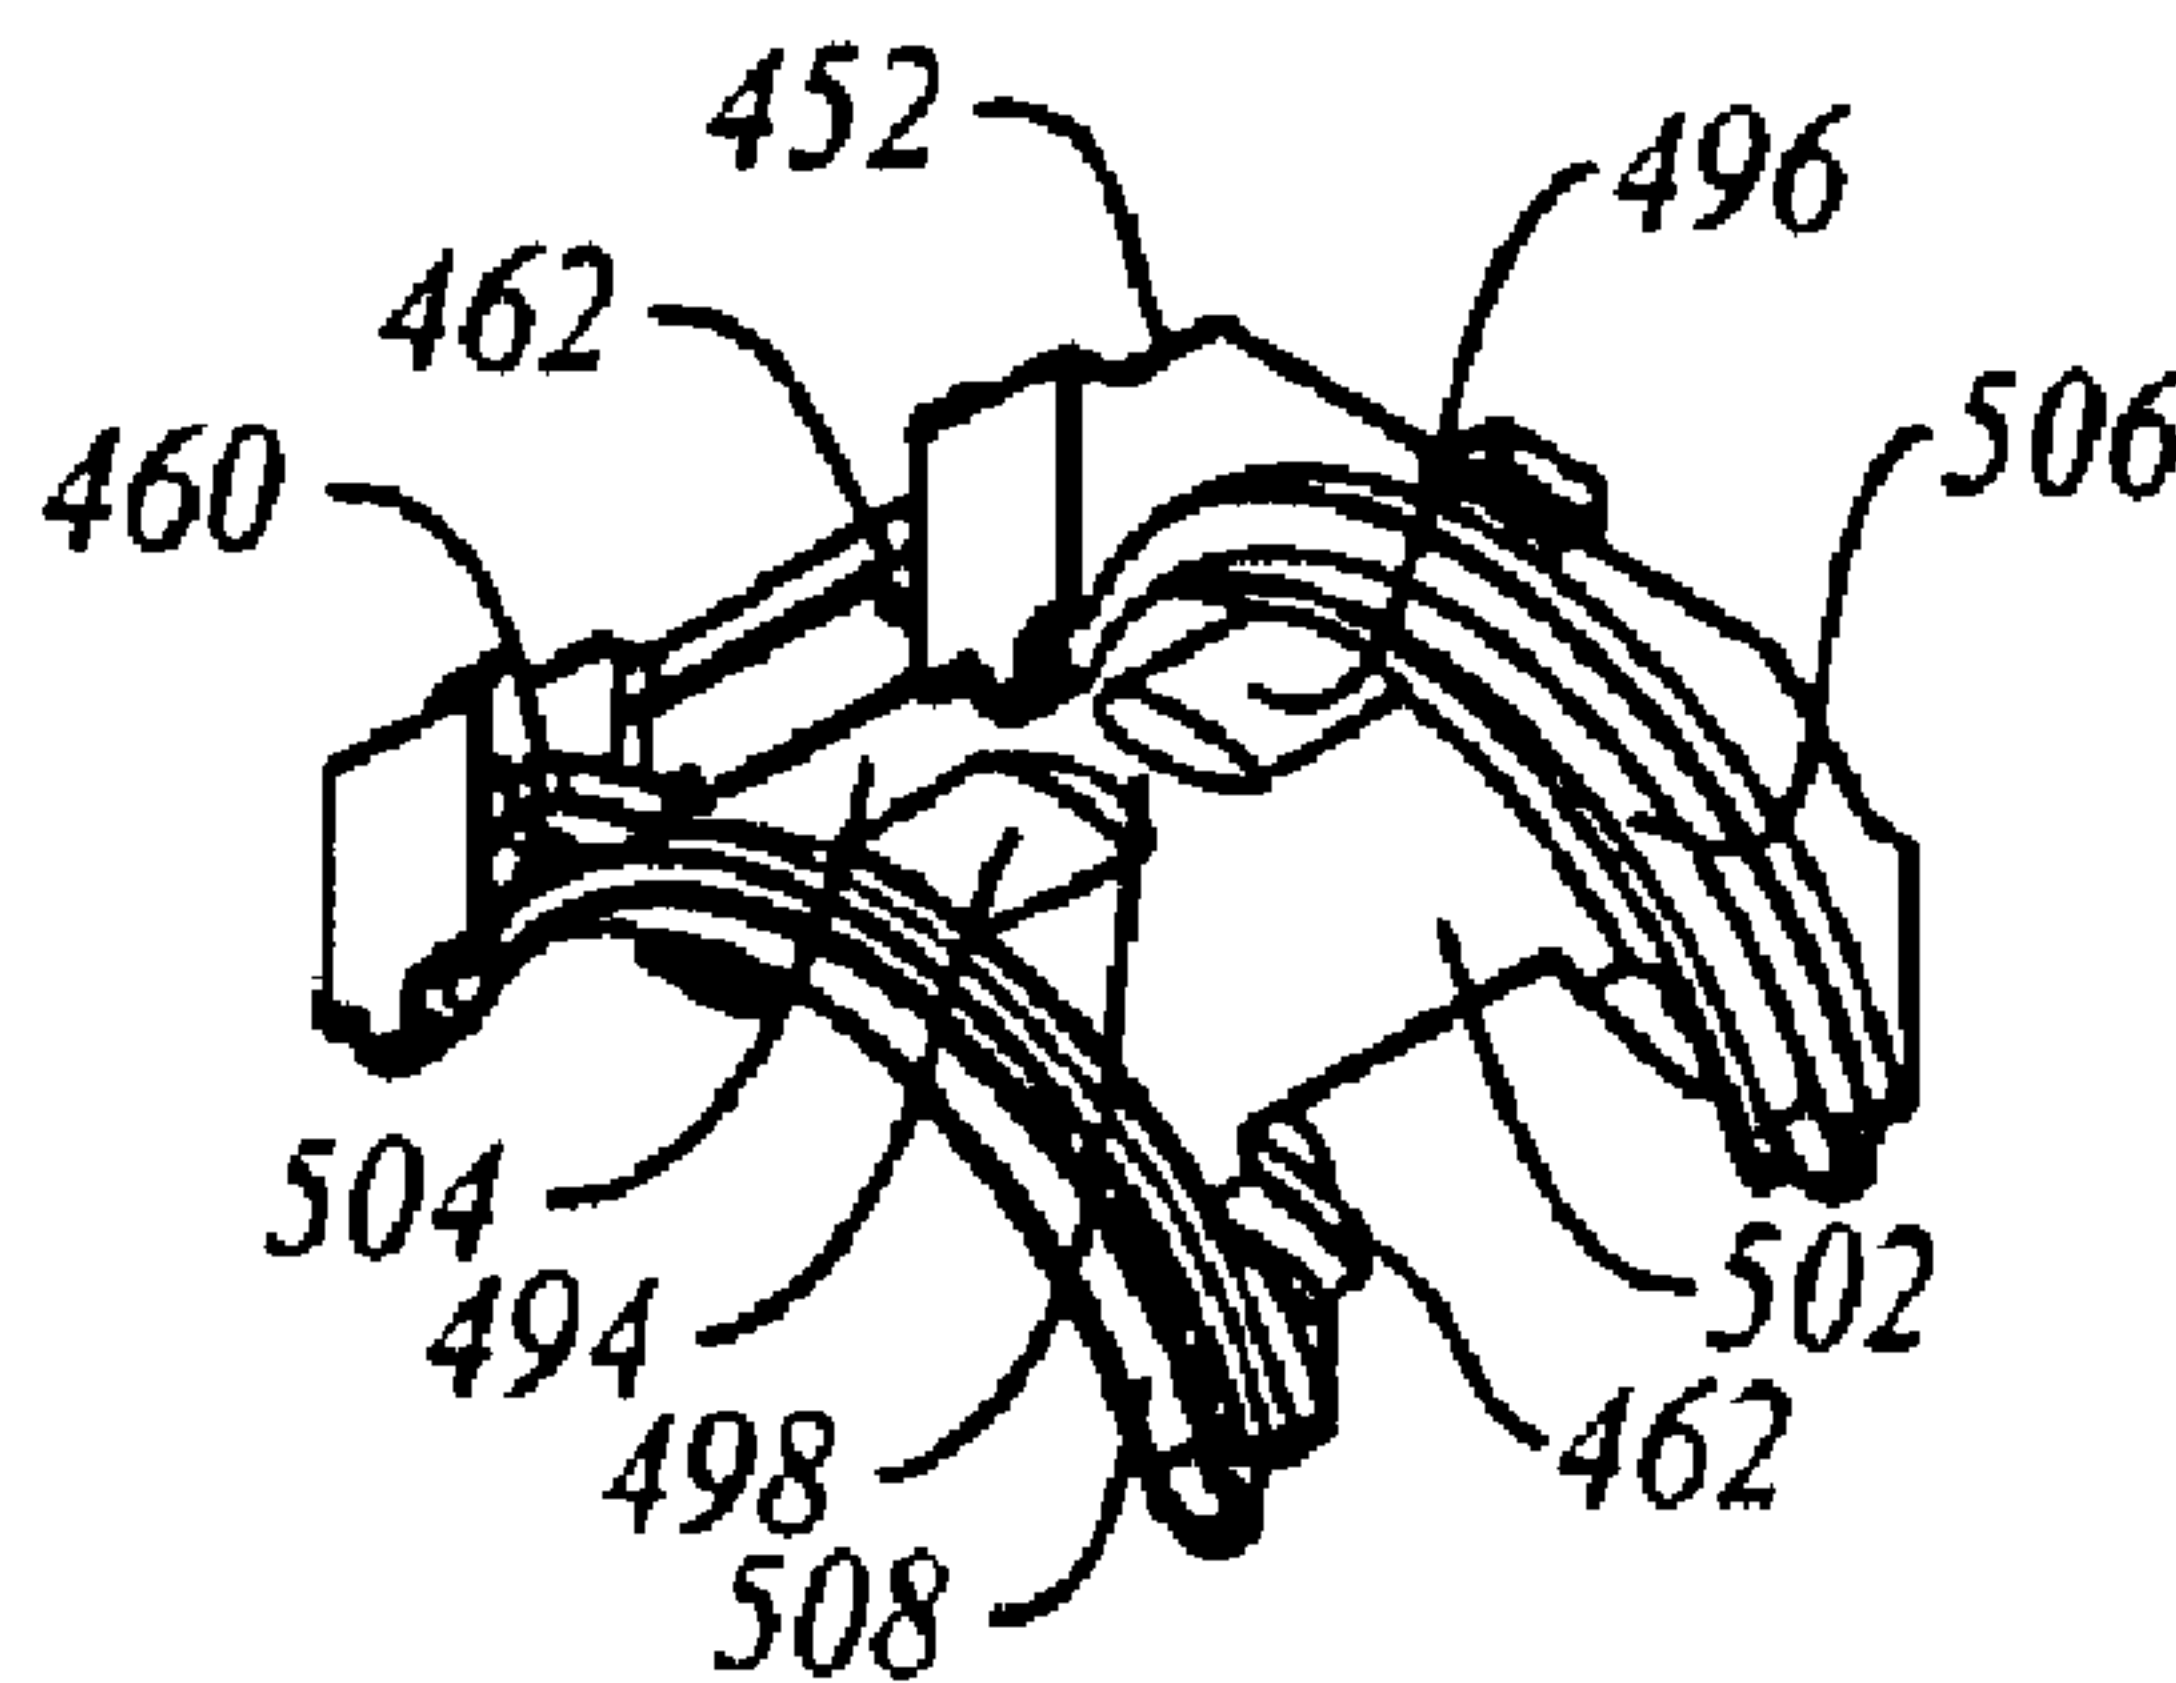

(57) **Abrégé/Abstract:**

A rail road freight car truck has a truck bolster and a pair of side frames, the truck bolster being mounted transversely relative to the side frames. The mounting interface between the ends of the axles and the sideframe pedestals allows lateral rocking motion of the

(57) Abrégé(suite)/Abstract(continued):

sideframes in the manner of a swing motion truck. The lateral swinging motion is combined with a longitudinal self steering capability. The self steering capability may be obtained by use of a longitudinally oriented rocker that may tend to permit resistance to deflection that is proportional to the weight carried across the interface. The truck may have auxiliary centering elements mounted in the pedestal seats, and those auxiliary centering elements may be made of resilient elastomeric material. The truck may also have friction dampers that have a disinclination to stick-slip behaviour. The friction dampers may be provided with brake linings, or similar features, on the face engaging the sideframe columns, on the slope face, or both. The friction dampers may operate to yield upward and downward friction forces that are not overly unequal. The friction dampers may be mounted in a four cornered arrangement at each end of the truck bolster. The spring groups may include sub-groups of springs of different heights.

RAIL ROAD CAR TRUCK AND FITTINGS THEREFOR**Abstract of the Disclosure**

A rail road freight car truck has a truck bolster and a pair of side frames, the truck bolster being mounted transversely relative to the side frames. The mounting interface between the ends of the axles and the sideframe pedestals allows lateral rocking motion of the sideframes in the manner of a swing motion truck. The lateral swinging motion is combined with a longitudinal self steering capability. The self steering capability may be obtained by use of a longitudinally oriented rocker that may tend to permit resistance to deflection that is proportional to the weight carried across the interface. The truck may have auxiliary centering elements mounted in the pedestal seats, and those auxiliary centering elements may be made of resilient elastomeric material. The truck may also have friction dampers that have a disinclination to stick-slip behaviour. The friction dampers may be provided with brake linings, or similar features, on the face engaging the sideframe columns, on the slope face, or both. The friction dampers may operate to yield upward and downward friction forces that are not overly unequal. The friction dampers may be mounted in a four-cornered arrangement at each end of the truck bolster. The spring groups may include sub-groups of springs of different heights.

RAIL ROAD CAR TRUCK AND FITTINGS THEREFOR

Field of the Invention

5 This invention relates to the field of rail road cars, and, more particularly, to the field of three piece rail road car trucks for rail road cars.

Background of the Invention

10 Rail road cars in North America commonly employ double axle swivelling trucks known as “three piece trucks” to permit them to roll along a set of rails. The three piece terminology refers to a truck bolster and pair of first and second sideframes. In a three piece truck, the truck bolster extends cross-wise relative to the sideframes, with the ends of the truck bolster protruding through the sideframe windows. Forces are transmitted
15 between the truck bolster and the sideframes by spring groups mounted in spring seats in the sideframes. The sideframes carry forces to the sideframe pedestals. The pedestals seat on bearing adapters, whence forces are carried in turn into the bearings, the axle, the wheels, and finally into the tracks. The *1980 Car & Locomotive Cyclopedia* states at page 669 that the three piece truck offers “interchangeability, structural reliability and
20 low first cost but does so at the price of mediocre ride quality and high cost in terms of car and track maintenance.”

 Ride quality can be judged on a number of different criteria. There is longitudinal ride quality, where, often, the limiting condition is the maximum expected longitudinal
25 acceleration experienced during humping or flat switching, or slack run-in and run-out. There is vertical ride quality, for which vertical force transmission through the suspension is the key determinant. There is lateral ride quality, which relates to the lateral response of the suspension. There are also other phenomena to be considered, such as truck hunting, the ability of the truck to self steer, and, whatever the input perturbation may be,
30 the ability of the truck to damp out undesirable motion. These phenomena tend to be inter-related, and the optimization of a suspension to deal with one phenomenon may yield a system that may not necessarily provide optimal performance in dealing with other phenomena.

35 In terms of optimizing truck performance, it may be advantageous to be able to obtain a relatively soft dynamic response to lateral and vertical perturbations, to obtain a measure of self steering, and yet to maintain resistance to lozenging (or

parallelogramming). Lozengeing, or parallelogramming, is non-square deformation of the truck bolster relative to the side frames of the truck as seen from above. Self steering may tend to be desirable since it may reduce drag and may tend to reduce wear to both the wheels and the track, and may give a smoother overall ride.

5

Among the types of truck discussed in this application are swing motion trucks. An earlier patent for a swing motion truck is US Patent 3,670,660 of Weber et al., issued June 20, 1972. This truck has unsprung lateral cross bracing, in the nature of a transom that links the sideframes together. By contrast, the description that follows describes several embodiments of truck that do not employ lateral unsprung cross-members, but that may use of damper elements mounted in a four-cornered arrangement at each end of the truck bolster. An earlier patent for dampers is US Patent 3,714,905 of Barber, issued February 6, 1973.

10

15

Summary of the Invention

In an aspect of the invention, there is a wheelset-to-sideframe interface assembly for a railroad car truck. The interface assembly has a bearing adapter and a mating pedestal seat. The bearing adapter has first and second ends that form an interlocking insertion between a pair of pedestal jaws of a railroad car sideframe. The bearing adapter has a first rocking member. The pedestal seat has a second rocking member. The first and second rocking members are matingly engageable to permit lateral and longitudinal rocking between them. There is a resilient member mounted between the bearing adapter and pedestal seat. The resilient member has a portion formed that engages the first end of the bearing adapter. The resilient member has an accommodation formed to permit the mating engagement of the first and second rocking members.

20

25

30

35

In a feature of that aspect of the invention, the resilient member has the first and second ends formed for interposition between the bearing adapter and the pedestal jaws of the sideframe. In another feature, the resilient member has the form of a Pennsy Pad with a relief formed to define the accommodation. In a further feature, the resilient member is an elastomeric member. In yet another feature, the elastomeric member is made of rubber material. In still another feature, the elastomeric member is made of a polyurethane material. In yet a further feature, the accommodation is formed through the elastomeric material and the first rocking member protrudes at least part way through the

accommodation to meet the second rocking member. In an additional feature, the bearing adapter is a bearing adapter assembly which includes a bearing adapter body surmounted by the first rocker member. In another additional feature, the first rocker member is formed of a different material from the bearing body. In a further additional
5 feature, the first rocker member is an insert.

In yet another additional feature, the first rocker member has a footprint with a profile conforming to the accommodation. In still another additional feature, the profile and the accommodation are mutually indexed to discourage mis-orientation of the first
10 rocker member relative to the bearing adapter. In yet a further additional feature, the body and the first rocker member are keyed to discourage mis-orientation between them. In a further feature, the accommodation is formed through the resilient member and the second rocking member protrudes at least part way through said accommodation to meet the first rocking member. In another further feature, the pedestal seat includes an insert
15 with the second rocking member formed in it. In yet another further feature, the second rocker member has a footprint with a profile conforming to the accommodation.

In still a further feature, the portion of the resilient member that is formed to engage the first end of the bearing adapter, when installed, includes elements that are
20 interposed between the first end of the bearing adapter and the pedestal jaw to inhibit lateral and longitudinal movement of the bearing adapter relative to the jaw.

In another aspect of the invention the ends of the bearing adapter includes an end wall bracketed by a pair of corner abutments. The end wall and corner abutments define
25 a channel to permit the sliding insertion of the bearing adapter between the pedestal jaw of the sideframe. The portion of the resilient member that is formed to engage the first end of the bearing adapter is the first end portion. The resilient member has a second end portion that is formed to engage the second end of the bearing adapter. The resilient member has a middle portion that extends between the first and second end portions. The
30 accommodation is formed in the middle portion of the resilient member. In another feature, the resilient member has the form of a Pennsy Pad with a central opening formed to define the accommodation.

In another aspect of the invention, a wheelset-to-sideframe interface assembly for
35 a rail road car truck has an interface assembly that has a bearing adapter, a pedestal seat and a resilient member. The bearing adapter has a first end and a second end that each

have a end wall bracketted by a pair of corner abutments. The end wall and corner abutments co-operate to define a channel that permits insertion of the bearing adapter between a pair of thrust lugs of a sidewall pedestal. The bearing adapter has a first rocking member. The pedestal seat has a second rocking member to make engagement with the first rocking member. The first and second rocking members, when engaged, are operable to rock longitudinally relative to the sideframe to permit the rail road car truck to steer. The resilient member has a first end portion that is engageable with the first end of the bearing adapter for interposition between the first end of the bearing adapter and the first pedestal jaw thrust lug. The resilient member has a second end portion that is engageable with the second end of the bearing adapter for interposition between the second end of the bearing adapter and the second pedestal jaw thrust lug. The resilient member has a medial portion lying between the first and second end portions. The medial portion is formed to accommodate mating rocking engagement of the first and second rocking members.

In another feature, there is a resilient pad that is used with the bearing adapter which has a rocker member for mating and the rocking engagement with the rocker member of the pedestal seat. The resilient pad has a first portion for engaging the first end of the bearing adapter, a second portion for engaging a second end of the bearing adapter and a medial portion between the first and second end portions. The medial portion is formed to accommodate mating engagement of the rocker members.

In a feature of the aspect of the invention there is a wheelset-to-sideframe assembly kit that has a pedestal seat for mounting in the roof of a rail road car truck sideframe pedestal. There is a bearing adapter for mounting to a bearing of a wheelset of a rail road car truck and a resilient member for mounting to the bearing adapter. The bearing adapter has a first rocker element for engaging the seat in rocking relationship. The bearing adapter has a first end and a second end, both ends having an endwall and a pair of abutments bracketing the end wall to define a channel, that permits sliding insertion of the bearing adapter between a pair of sideframe pedestal jaw thrust lugs. The resilient member has a first portion that conforms to the first end of the bearing adapter for interpositioning between the bearing adapter and a thrust lug. The resilient member has a second portion connected to the first portion that, as installed, at least partially overlies the bearing adapter.

In another feature, the wheelset-to-sideframe assembly kit has a second portion of

the resilient member with a margin that has a profile facing toward the first rocker element. The first rocker element is shaped to nest adjacent to the profile. In a further feature, wheelset-to-sideframe assembly kit has a bearing adapter that includes a body and the first rocker element is separable from that body. In still another feature, the wheelset-to-sideframe assembly kit has a second portion of the resilient member with a margin that has a profile facing toward the first rocker element which is shaped to nest adjacent the profile. In yet still another feature, the wheelset-to-sideframe assembly kit has a profile and first rocker element shaped to discourage mis-orientation of the first rocker element when installed. In another feature, the wheelset-to-sideframe assembly kit has a first rocker element with a body that is mutually keyed to facilitate the location of the first rocker element when installed. In still another feature, the wheelset-to-sideframe assembly kit has a first rocker element and body that are mutually keyed to discourage mis-orientation of the rocker element when installed. In yet still another feature, the wheelset-to-sideframe assembly kit has a first rocker element and a body with mutual engagement features. The features are mutually keyed to discourage mis-orientation of the rocker element when installed.

In a further feature, the kit has a second resilient member that conforms to the second end of the bearing adapter. In another feature, the wheelset-to-sideframe assembly kit includes a pedestal seat engagement fitting for locating the resilient feature relative to the pedestal seat on the assembly. In yet still another feature, the resilient member includes a second end portion that conforms to the second end of the bearing adapter.

In an additional feature, there is a bearing adapter for transmitting load between the wheelset bearing and a sideframe pedestal of a railroad car truck. It has at least a first and second land for engaging the bearing and a relief formed between the first and second land. The relief extends predominantly axially relative to the bearing. In another additional feature, the lands are arranged in an array that conforms to the bearing and the relief is formed at the apex of the array. In still another additional feature, the bearing adapter includes a second relief that extends circumferentially relative to the bearing. In yet still another additional feature, the axially extending relief and the circumferentially extending relief extends along a second axis of symmetry of the bearing adapter.

In a further feature, the radially extending relief extends along a first axis of symmetry of the bearing adapter and the circumferentially extending relief extends along

a second axis of symmetry of the bearing adapter. In still a further feature, the bearing adapter has lands that are formed on a circumferencial arc. In yet still another feature, the bearing adapter has a rocker element that has an upwardly facing rocker surface. In yet still a further feature, the bearing adapter has a body with a rocker element that is separable from the body.

In another aspect of the invention, there is a bearing adapter for installation in a rail road car truck sideframe pedestal. The bearing adapter has an upper portion engageable with a pedestal seat, and a lower portion engageable with a bearing casing. The lower portion has an apex. The lower portion includes a first land for engaging a first portion of the bearing casing, and a second land region for engaging a second portion of the bearing casing. The first land lies to one side of the apex. The second land lies to the other side of the apex. At least one relief located between the first and second lands.

In an additional feature, the relief has a major dimension oriented to extend along the apex in a direction that runs axially relative to the bearing when installed. In another feature, the relief is located at the apex. In another feature there are at least two the reliefs, the two reliefs lying to either side of a bridging member, the bridging member running between the first and second lands.

In another aspect of the invention there is a kit for retro-fitting a railroad car truck having elastomeric members mounted over bearing adapters. The kit includes a mating bearing adapter and a pedestal seat pair. The bearing adapter and the pedestal seat have co-operable bi-directional rocker elements. The seat has a depth of section of greater than 1/2 inches.

These and other aspects and features of the invention may be understood with reference to the detailed descriptions of the invention and the accompanying illustrations as set forth below.

Brief Description of the Figures

The principles of the invention may better be understood with reference to the accompanying figures provided by way of illustration of an exemplary embodiment, or embodiments, incorporating principles and aspects of the present invention, and in which:

Figure **1a** shows an isometric view of an example of an embodiment of a railroad car truck according to an aspect of the present invention;

Figure **1b** shows a top view of the railroad car truck of Figure **1a**;

Figure **1c** shows a side view of the railroad car truck of Figure **1a**;

5 Figure **1d** shows an exploded view of a portion of a truck similar to that of Figure **1a**;

Figure **1e** is an exploded, sectioned view of an example of an alternate three piece truck to that of Figure **1a**, having dampers mounted along the spring group centerlines;

10 Figure **2a** is an enlarged detail of a side view of a truck such as the truck of Figure **1a**, **1b**, **1c** or **1e** taken at the sideframe pedestal to bearing adapter interface;

Figure **2b** shows a lateral cross-section through the sideframe pedestal to bearing adapter interface of Figure **2a**, taken at the wheelset axle centerline;

15 Figure **2c** shows the cross-section of Figure **2b** in a laterally deflected condition;

Figure **2d** is a longitudinal section of the pedestal seat to bearing adapter interface of Figure **2a**, on the longitudinal plane of symmetry of the bearing adapter;

Figure **2e** shows the longitudinal section of Figure **2d** as longitudinally deflected;

Figure **2f** shows a top view of the detail of Figure **2a**;

20 Figure **2g** shows a staggered section of the bearing adapter of Figure **2a**, on section lines '**2g – 2g**' of Figure **2a**;

Figure **3a** shows an exploded isometric view of an alternate sideframe pedestal to bearing adapter interface to that of Figure **2a**;

25 Figure **3b** shows an alternate bearing adapter to pedestal seat interface to that of Figure **3a**;

Figure **3c** shows a sectional view of the assembly of Figure **3b**; taken on a longitudinal-vertical plane of symmetry thereof;

Figure **3d** shows a stepped sectional view of a detail of the assembly of Figure **3b** taken on **3d – 3d'** of Figure **3c**;

30 Figure **3e** shows an exploded view of another alternative embodiment of bearing adapter to pedestal seat interface to that of Figure **3a**;

Figure **4a** shows an isometric view of a retainer pad of the assembly of Figure **3a**, taken from above, and in front of one corner;

Figure **4b** is an isometric view from above and behind the retainer pad of Figure **4a**;

Figure **4c** is a bottom view of the retainer pad of Figure **4a**;

Figure **4d** is a front view of the retainer pad of Figure **4a**;

Figure **4e** is a section on '4e – 4e' of Figure **4d** of the retainer pad of Figure **4a**;

5 Figure **5** shows an alternate bolster, similar to that of Figure **1d**, with a pair of spaced apart bolster pockets, and inserts with primary and secondary wedge angles;

Figure **6a** is a cross-section of an alternate damper such as may be used, for example, in the bolster of the trucks of Figures **1a**, **1b**, **1c**, **1d** and **1f**;

Figure **6b** shows the damper of Figure **6a** with friction modifying pads removed;

10 Figure **6c** is a reverse view of a friction modifying pad of the damper of Figure **6a**;

Figure **7a** is a front view of a friction damper for a truck such as that of Figure **1a**;

Figure **7b** shows a side view of the damper of Figure **7a**;

Figure **7c** shows a rear view of the damper of Figure **7b**;

Figure **7d** shows a top view of the damper of Figure **7a**;

15 Figure **7e** shows a cross-sectional view on the centerline of the damper of Figure **7a** taken on section '7e – 7e' of Figure **7c**;

Figure **7f** is a cross-section of the damper of Figure **7a** taken on section '7f – 7f' of Figure **7e**;

20 Figure **7g** shows an isometric view of an alternate damper to that of Figure **7a** having a friction modifying side face pad;

Figure **7h** shows an isometric view of a further alternate damper to that of Figure **7a**, having a "wrap-around" friction modifying pad;

Figure **8a** shows an exploded isometric installation view of an alternate bearing adapter assembly to that of Figure **3a**;

25 Figure **8b** shows an isometric, assembled view of the bearing adapter assembly of Figure **8a**;

Figure **8c** shows the assembly of Figure **8b** with a rocker member thereof removed;

Figure **8d** shows the assembly of Figure **8b**, as installed, in longitudinal cross-section;

30 Figure **8e** is an installed view of the assembly of Figure **8b**, on section '8e – 8e' of Figure **8d**;

Figure **8f** shows the assembly of Figure **8b**, as installed, in lateral cross section;

Figure **9a** shows an exploded isometric view of an alternate assembly to that of Figure **3a**;

Figure **9b** shows an exploded isometric view similar to the view of Figure **9a**, showing a bearing adapter assembly incorporating an elastomeric pad;

5 Figure **10a** shows an exploded isometric view of an alternate assembly to that of Figure **3a**;

Figure **10b** shows a perspective view of a bearing adapter of the assembly of Figure **10a** from above and to one corner;

Figure **10c** shows a perspective of the bearing adapter of Figure **10b** from below;

10 Figure **10d** shows a bottom view of the bearing adapter of Figure **10b**;

Figure **10e** shows a longitudinal section of the bearing adapter of Figure **10b** taken on section '10e – 10e' of Figure **10d**; and

Figure **10f** shows a transverse section of the bearing adapter of Figure **10b** taken on section '10f – 10f' of Figure **10d**;

15 Figure **11a** is an exploded view of an alternate bearing adapter assembly to that of Figure **3a**;

Figure **11b** shows a view of the bearing adapter of Figure **11a** from below and to one corner;

Figure **11c** is a top view of the bearing adapter of Figure **11b**;

20 Figure **11d** is a lengthwise section of the bearing adapter of Figure **11c** on '11d – 11d';

Figure **11e** is a cross-wise section of the bearing adapter of Figure **11c** on '11e – 11e'; and

Figure **11f** is a set of views of a resilient pad member of the assembly of Figure **11a**;

25 Figure **11g** shows a view of the bearing adapter of Figure **11a** from above and to one corner;

Figure **12a** shows an exploded isometric view of an alternate bearing adapter to pedestal seat assembly to that of Figure **3a**;

Figure **12b** shows a longitudinal central section of the assembly of Figure **12a**, as assembled;

30 Figure **12c** shows a section on '12c – 12c' of Figure **12b**; and

Figure **12d** shows a section on '12d – 12d' of Figure **12b**.

DETAILED DESCRIPTION OF THE INVENTION

The description that follows, and the embodiments described therein, are provided by way of illustration of an example, or examples, of particular embodiments of the principles of the present invention. These examples are provided for the purposes of explanation, and not of limitation, of those principles and of the invention. In the description, like parts are marked throughout the specification and the drawings with the same respective reference numerals. The drawings are not necessarily to scale and in some instances proportions may have been exaggerated in order more clearly to depict certain features of the invention.

In terms of general orientation and directional nomenclature, for each of the rail road car trucks described herein, the longitudinal direction is defined as being coincident with the rolling direction of the rail road car, or rail road car unit, when located on tangent (that is, straight) track. In the case of a rail road car having a center sill, the longitudinal direction is parallel to the center sill, and parallel to the side sills, if any. Unless otherwise noted, vertical, or upward and downward, are terms that use top of rail, **TOR**, as a datum. The term lateral, or laterally outboard, refers to a distance or orientation relative to the longitudinal centerline of the railroad car, or car unit. The term “longitudinally inboard”, or “longitudinally outboard” is a distance taken relative to a mid-span lateral section of the car, or car unit. Pitching motion is angular motion of a railcar unit about a horizontal axis perpendicular to the longitudinal direction. Yawing is angular motion about a vertical axis. Roll is angular motion about the longitudinal axis.

This description relates to rail car trucks and truck components. Several AAR standard truck sizes are listed at page 711 in the 1997 *Car & Locomotive Cyclopedia*. As indicated, for a single unit rail car having two trucks, a “40 Ton” truck rating corresponds to a maximum gross car weight on rail (GWR) of 142,000 lbs. Similarly, “50 Ton” corresponds to 177,000 lbs., “70 Ton” corresponds to 220,000 lbs., “100 Ton” corresponds to 263,000 lbs., and “125 Ton” corresponds to 315,000 lbs. In each case the load limit per truck is then half the maximum gross car weight on rail. Two other types of truck are the “110 Ton” truck for railcars having a 286,000 lbs. GWR and the “70 Ton Special” low profile truck sometimes used for auto rack cars. Given that the rail road car trucks described herein tend to have both longitudinal and transverse axes of symmetry, a description of one half of an assembly may generally also be intended to describe the other half as well, allowing for differences between right hand and left hand parts.

This application refers to friction dampers for rail road car trucks, and multiple friction damper systems. There are several types of damper arrangements, some being shown at pp. 715 - 716 of the *1997 Car and Locomotive Cyclopedia*. Double damper arrangements are shown and described US Patent Application Publication No. US 2003/0041772 A1, March 6, 2003, entitled "Rail Road Freight Car With Damped Suspension". Each of the arrangements of dampers shown at pp. 715 to 716 of the *1997 Car and Locomotive Cyclopedia* can be modified to employ a four cornered, double damper arrangement of inner and outer dampers in conformity with the principles of aspects of the present invention.

Damper wedges are discussed herein. In terms of general nomenclature, the wedges tend to be mounted within an angled "bolster pocket" formed in an end of the truck bolster. In cross-section, each wedge may then have a generally triangular shape, one side of the triangle being, or having, a bearing face, a second side which might be termed the bottom, or base, forming a spring seat, and the third side being a sloped side or hypotenuse between the other two sides. The first side may tend to have a substantially planar bearing face for vertical sliding engagement against an opposed bearing face of one of the sideframe columns. The second face may not be a face, as such, but rather may have the form of a socket for receiving the upper end of one of the springs of a spring group. Although the third face, or hypotenuse, may appear to be generally planar, it may tend to have a slight crown, having a radius of curvature of perhaps 60". The crown may extend along the slope and may also extend across the slope. The end faces of the wedges may be generally flat, and may have a coating, surface treatment, shim, or low friction pad to give a smooth sliding engagement with the sides of the bolster pocket, or with the adjacent side of another independently slidable damper wedge, as may be.

During railcar operation, the sideframe may tend to rotate, or pivot, through a small range of angular deflection about the end of the truck bolster to yield wheel load equalisation. The slight crown on the slope face of the damper may tend to accommodate this pivoting motion by allowing the damper to rock somewhat relative to the generally inclined face of the bolster pocket while the planar bearing face remains in planar contact with the wear plate of the sideframe column. Although the slope face may have a slight crown, for the purposes of this description it will be described as the slope face or as the

hypotenuse, and will be considered to be a substantially flat face as a general approximation.

In the terminology herein, wedges have a primary angle α , being the included angle between (a) the sloped damper pocket face mounted to the truck bolster, and (b) the side frame column face, as seen looking from the end of the bolster toward the truck center. In some embodiments, a secondary angle may be defined in the plane of angle α , namely a plane perpendicular to the vertical longitudinal plane of the (undeflected) side frame, tilted from the vertical at the primary angle. That is, this plane is parallel to the (undeflected) long axis of the truck bolster, and taken as if sighting along the back side (hypotenuse) of the damper. The secondary angle β is defined as the lateral rake angle seen when looking at the damper parallel to the plane of angle α . As the suspension works in response to track perturbations, the wedge forces acting on the secondary angle β may tend to urge the damper either inboard or outboard according to the angle chosen.

General Description of Truck Features

Figures 1a to 1d show a truck 22 that is symmetrical about both the longitudinal and the transverse, or lateral, centreline axes. In each case, where reference is made to a sideframe, it will be understood that the truck has first and second sideframes, first and second spring groups, and so on. Truck 22 has a truck bolster 24 and sideframes 26. Each sideframe 26 has a generally rectangular window 28 that accommodates one of the ends 30 of the bolster 24. The upper boundary of window 28 is defined by the sideframe arch, or compression member identified as top chord member 32, and the bottom of window 28 is defined by a tension member identified as bottom chord 34. The fore and aft vertical sides of window 28 are defined by sideframe columns 36. The ends of the tension member sweep up to meet the compression member. At each of the swept-up ends of sideframe 26 there are sideframe pedestal fittings, or pedestal seats 38. Each fitting 38 accommodates an upper fitting, which may be a rocker or a seat, as described and discussed below. This upper fitting, whichever it may be, is indicated generically as 40. Fitting 40 engages a mating fitting 42 of the upper surface of a bearing adapter 44. Bearing adapter 44 engages a bearing 46 mounted on one of the ends of one of the axles 48 of the truck adjacent one of the wheels 50. A fitting 40 is located in each of the fore and aft pedestal fittings 38, the fittings 40 being longitudinally aligned so the sideframe can swing sideways relative to the truck's rolling direction.

The relationship of the mating fittings **40** and **42** is described at greater length below. The relationship of these fittings determines part of the overall relationship between an end of one of the axles of one of the wheelsets and the sideframe pedestal. That is, in determining the overall response, the degrees of freedom of the mounting of the axle end in the sideframe pedestal involve a dynamic interface across an assembly of parts, such as may be termed a wheelset to sideframe interface assembly, that may include the bearing, the bearing adapter, an elastomeric pad, if used, a rocker if used, and the pedestal seat mounted in the roof of the sideframe pedestal. Several different embodiments of this wheelset to sideframe interface assembly are described below. To the extent that bearing **46** has a single degree of freedom, namely rotation about the wheelshaft axis, analysis of the assembly can be focused on the bearing to pedestal seat interface assembly, or on the bearing adapter to pedestal seat interface assembly. For the purposes of this description, items **40** and **42** are intended generically to represent the combination of features of a bearing adapter and pedestal seat assembly defining the interface between the roof of the sideframe pedestal and the bearing adapter, and the six degrees of freedom of motion at that interface, namely vertical, longitudinal and transverse translation (i.e., translation in the z, x, and y directions) and pitching, rolling, and yawing (i.e., rotational motion about the y, x, and z axes respectively) in response to dynamic inputs.

The bottom chord or tension member of sideframe **26** may have a basket plate, or lower spring seat **52** rigidly mounted thereto. Although trucks **22** may be free of unsprung lateral cross-bracing, whether in the nature of a transom or lateral rods, in the event that truck **22** is taken to represent a “swing motion” truck with a transom or other cross bracing, the lower rocker platform of spring seat **52** may be mounted on a rocker, to permit lateral rocking relative to sideframe **26**. Spring seat **52** may have retainers for engaging the springs **54** of a spring set, or spring group, **56**, whether internal bosses, or a peripheral lip for discouraging the escape of the bottom ends of the springs. The spring group, or spring set **56**, is captured between the distal end **30** of bolster **24** and spring seat **52**, being placed under compression by the weight of the rail car body and lading that bears upon bolster **24** from above.

Bolster **24** has double, inboard and outboard, bolster pockets **60**, **62** on each face of the bolster at the outboard end (i.e., for a total of 8 bolster pockets per bolster, 4 at each end). Bolster pockets **60**, **62** accommodate fore and aft pairs of first and second, laterally

inboard and laterally outboard friction damper wedges **64**, **66** and **68**, **70**, respectively. Each bolster pocket **60**, **62** has an inclined face, or damper seat **72**, that mates with a similarly inclined hypotenuse face **74** of the damper wedge, **64**, **66**, **68** and **70**. Wedges **64**, **66** each sit over a first, inboard corner spring **76**, **78**, and wedges **68**, **70** each sit over
5 a second, outboard corner spring **80**, **82**. Angled faces **74** of wedges **64**, **66** and **68**, **70** ride against the angled faces of respective seats **72**.

A middle end spring **96** bears on the underside of a land **98** located intermediate bolster pockets **60** and **62**. The top ends of the central row of springs, **100**, seat under the
10 main central portion **102** of the end of bolster **24**. In this four corner arrangement, each damper is individually sprung by one or another of the springs in the spring group. The static compression of the springs under the weight of the car body and lading tends to act as a spring loading to bias the damper to act along the slope of the bolster pocket to force the friction surface against the sideframe. Friction damping is provided when the vertical
15 sliding faces **90** of the friction damper wedges **64**, **66** and **68**, **70** ride up and down on friction wear plates **92** mounted to the inwardly facing surfaces of sideframe columns **36**. In this way the kinetic energy of the motion is, in some measure, converted through friction to heat. This friction may tend to damp out the motion of the bolster relative to the sideframes. When a lateral perturbation is passed to wheels **50** by the rails, rigid axles
20 **48** may tend to cause both sideframes **26** to deflect in the same direction. The reaction of sideframes **26** is to swing, like pendula, on the upper rockers. The weight of the pendulum and the reactive force arising from the twisting of the springs may then tend to urge the sideframes back to their initial position. The tendency to oscillate harmonically due to track perturbations may tend to be damped out by the friction of the dampers on
25 the wear plates **92**.

As compared to a bolster with single dampers, such as may be mounted on the sideframe centerline as shown in Figure **1e**, for example, the use of doubled dampers such as spaced apart pairs of dampers **64**, **68** may tend to give a larger moment arm, as
30 indicated by dimension “**2M**” in Figure **1d**, for resisting parallelogram deformation of truck **22** more generally. Use of doubled dampers may yield a greater restorative “squaring” force to return the truck to a square orientation than for a single damper alone with the restorative bias, namely the squaring force, increasing with increasing deflection. That is, in parallelogram deformation, or lozenging, the differential compression of one
35 diagonal pair of springs (e.g., inboard spring **76** and outboard spring **82** may be more

pronouncedly compressed) relative to the other diagonal pair of springs (e.g., inboard spring **78** and outboard spring **80** may be less pronouncedly compressed than springs **76** and **82**) tends to yield a restorative moment couple acting on the sideframe wear plates. This moment couple tends to rotate the sideframe in a direction to square the truck, (that is, in a position in which the bolster is perpendicular, or “square”, to the sideframes). As such, the truck is able to flex, and when it flexes the dampers co-operate in acting as biased members working between the bolster and the side frames to resist parallelogram, or lozenging, deformation of the side frame relative to the truck bolster and to urge the truck back to the non-deflected position.

The bearing plate, namely wear plate **92** (Figure **1a**) is significantly wider than the through thickness of the sideframes more generally, as measured, for example, at the pedestals, and may tend to be wider than has been conventionally common. This additional width corresponds to the additional overall damper span width measured fully across the damper pairs, plus lateral travel as noted above, typically allowing $1\frac{1}{2}$ (+/-) inches of lateral travel of the bolster relative to the sideframe to either side of the undeflected central position. That is, rather than having the width of one coil, plus allowance for travel, plate **92** may have the width of three coils, plus allowance to accommodate $1\frac{1}{2}$ (+/-) inches of travel to either side for a total, double amplitude travel of 3” (+/-). Bolster **24** has inboard and outboard gibs **106**, **108** respectively, that bound the lateral motion of bolster **24** relative to sideframe columns **36**. This motion allowance may be in the range of +/- $1\frac{1}{8}$ to $1\frac{3}{4}$ in., and may be in the range of $1\frac{3}{16}$ to $1\frac{9}{16}$ in., and can be set, for example, at $1\frac{1}{2}$ in. or $1\frac{1}{4}$ in. of lateral travel to either side of a neutral, or centered, position when the sideframe is undeflected.

The lower ends of the springs of the entire spring group, identified generally as **58**, seat in lower spring seat **52**. Lower spring seat **52** may be laid out as a tray with an upturned rectangular peripheral lip. Although truck **22** employs a spring group in a 3 x 3 arrangement, this is intended to be generic, and to represent a range of variations. They may represent 3 x 5, 2 x 4, 3:2:3 or 2:3:2 arrangement, or some other, and may include a hydraulic snubber, or such other arrangement of springs may be appropriate for the given service for the railcar for which the truck is intended.

Rocker Description

The rocking interface surface of the bearing adapter may have a crown, or a concave curvature, by which a rolling contact on the rocker permits lateral swinging of the side frame. The present inventors have also noted, as shown and described herein, that the bearing adapter to pedestal seat interface might also have a fore-and-aft curvature, whether a crown or a depression, and that, if used as described by the inventors hereinbelow, this crown or depression might tend to present a more or less linear resistance to deflection in the longitudinal direction, much as a spring or elastomeric pad might do. It may be advantageous for the rockers to be self centering.

For surfaces in rolling contact on a compound curved surface (i.e., having curvatures in two directions) as shown and described by the present inventors hereinbelow, the vertical stiffness may be approximated as infinite (i.e. very large as compared to other stiffnesses); the longitudinal stiffness in translation at the point of contact can also be taken as infinite, the assumption being that the surfaces do not slip; the lateral stiffness in translation at the point of contact can be taken as infinite, again, provided the surfaces do not slip. The rotational stiffness about the vertical axis may be taken as zero or approximately zero. By contrast, the angular stiffnesses about the longitudinal and transverse axes are non-trivial. The lateral angular stiffnesses may tend to determine the equivalent pendulum stiffnesses for the sideframe more generally.

The stiffness of a pendulum is directly proportional to the weight on the pendulum. Similarly, the drag on a rail car wheel, and the wear to the underlying track structure, is a function of the weight borne by the wheel. For this reason, the desirability of self steering may be greatest for a fully laden car, and a pendulum may tend to maintain a general proportionality between the weight borne by the wheel and the stiffness of the self-steering mechanism as the lading increases.

Truck performance may vary with the friction characteristics of the bearing surfaces of the dampers used in the truck suspension. Conventional dampers have tended to employ dampers in which the dynamic and static coefficients of friction may have been significantly different, yielding a stick-slip phenomenon that may not have been entirely advantageous. In the view of the present inventors it may be advantageous to combine the feature of a self-steering capability with dampers that have a reduced tendency to stick-slip operation.

Furthermore, while bearing adapters may be formed of relatively low cost materials, such as cast iron, in some embodiments an insert of a different material may be used for the rocker. Further it may be advantageous to employ a member that may tend to center the rocker on installation, and that may tend to perform an auxiliary centering function to tend to urge the rocker to operate from a desired minimum energy position.

An embodiment of bearing adapter and pedestal seat assembly is illustrated in Figures 2a – 2g. Bearing adapter 44 has a lower portion 112 that is formed to accommodate, and to seat upon, bearing 46, that is itself mounted on the end of a shaft, namely an end of axle 48. Bearing adapter 44 has an upper portion 114 that has a centrally located, upwardly protruding fitting in the nature of a male bearing adapter interface portion 116. A mating fitting, in the nature of a female rocker seat interface portion 118 is rigidly mounted within the roof 120 of the sideframe pedestal. To that end, laterally extending lugs 122 are mounted centrally with respect to pedestal roof 120. The upper fitting 40, whichever type it may be, has a body that may be in the form of a plate 126 having, along its longitudinally extending, lateral margins a set of upwardly extending lugs or ears, or tangs 124 separated by a notch, that bracket, and tightly engage lugs 122, thereby locating upper fitting 40 in position, with the back of the plate 126 of fitting 40 abutting the flat, load transfer face of roof 120. Upper fitting 40 may be a pedestal seat fitting with a hollowed out female bearing surface, namely portion 118.

As shown in Figure 2g, when the sideframes are lowered over the wheel sets, the end reliefs, or channels 128 lying between the bearing adapter corner abutments 132 seat between the respective side frame pedestal jaws 130. With the sideframes in place, bearing adapter 44 is thus captured in position with the male and female portions (116 and 118) of the adapter interface in mating engagement.

Male portion 116 (Figure 2d) has been formed to have a generally upwardly facing surface 142 that has both a first curvature r_1 to permit rocking in the longitudinal direction, and a second curvature r_2 (Figure 2c) to permit rocking (i.e., swing motion of the sideframe) in the transverse direction. Similarly, in the general case, female portion 118 has a surface having a first radius of curvature R_1 in the longitudinal direction, and a second radius of curvature R_2 in the transverse direction. The engagement of r_1 with R_1 may tend to permit a rocking motion in the longitudinal direction, with resistance to rocking displacement being proportional to the weight on the wheel. That is to say, the resistance to angular deflection is proportional to weight rather than being a fixed spring constant. This may tend to yield

passive self-steering in both the light car and fully laden conditions. This relationship is shown in Figures **2d** and **2e**. Figure **2d** shows the centered, or at rest, non-deflected position of the longitudinal rocking elements. Figure **2e** shows the rocking elements at their condition of maximum longitudinal deflection. Figure **2d** represents a local, minimum potential energy condition for the system. Figure **2e** represents a system in which the potential energy has been increased by virtue of the work done by force **F** acting longitudinally in the horizontal plane through the center of the axle and bearing, **C_B**, which will tend to yield an incremental increase in the height of the pedestal. Put differently, as the axle is urged to deflect by the force, the rocking motion may tend to raise the car, and thereby to increase its potential energy.

The limit of travel in the longitudinal direction is reached when the end face **134** of bearing adapter **44** extending between corner abutments **132**, contacts one or another of travel limiting abutment faces **136** of the thrust blocks of jaws **130**. In general, the deflection may be measured either by the angular displacement of the axle centreline, θ_1 , or by the angular displacement of the rocker contact point on radius r_1 , shown as θ_2 . End face **134** of bearing adapter **44** is planar, and is relieved, or inclined, at an angle η from the vertical. As shown in Figure **2g**, abutment face **136** may have a round, cylindrical arc, with the major axis of the cylinder extending vertically. A typical maximum radius **R₃** for this surface is 34 inches. When bearing adapter **44** is fully deflected through angle η , end face **134** is intended to meet abutment face **136** in line contact. When this occurs, further longitudinal rocking motion of the male surface (of portion **116**) against the female surface (of portion **118**) is inhibited. Thus jaws **130** constrain the arcuate deflection of bearing adapter **44** to a limited range. A typical range for η might be about 3 degrees of arc. A typical maximum value of δ_{long} may be about $\pm 3/16$ " to either side of the vertical, at rest, center line.

Similarly, as shown in Figures **2b** and **2c**, in the transverse direction, the engagement of r_2 with **R₂** may tend to permit lateral rocking motion, as may be in the manner of a swing motion truck. Figure **2b** shows a centered, at rest, minimum potential energy position of the lateral rocking system. Figure **2c** shows the same system in a laterally deflected condition. In this instance δ_2 is roughly $(L_{\text{pendulum}} - r_2)\sin\phi$, where, for small angles $\sin\phi$ is approximately equal to ϕ . L_{pendulum} may be taken as the at rest difference in height between the center of the bottom spring seat, **52**, and the contact interface between the male and female portions **116** and **118**.

When a lateral force is applied at the centerplate of the truck bolster, a reaction force is, ultimately, provided at the meeting of the wheels with the rail. The lateral force is transmitted from the bolster into the main spring groups, and then into a lateral force in the spring seats to deflect the bottom of the pendulum. The reaction is carried to the bearing adapter, and hence into the top of the pendulum. The pendulum will then deflect until the weight on the pendulum, multiplied by the moment arm of the deflected pendulum is sufficient to balance the moment of the lateral moment couple acting on the pendulum.

This bearing adapter to pedestal seat interface assembly is biased by gravity acting on the pendulum toward a central, or "at rest" position, where there is a local minimum of the potential energy in the system. The fully deflected position shown in Figure 2c may correspond to a deflection from vertical of the order of less than 10 degrees (and preferably less than 5 degrees) to either side of center, the actual maximum being determined by the spacing of gibbs 106 and 108 relative to plate 104. Although in general R_1 and R_2 may differ, so the female surface is an outside section of a torus, it may be desirable, for R_1 and R_2 to be the same, i.e., so that the bearing surface of the female fitting is formed as a portion of a spherical surface, having neither a major nor a minor axis, but merely being formed on a spherical radius. R_1 and R_2 give a self-centering tendency. That tendency may be quite gentle. Further, and again in the general condition, the smallest of R_1 and R_2 may be equal to or larger than the largest of r_1 and r_2 . If so, then the contact point may have little, if any, ability to transmit torsion acting about an axis normal to the rocking surfaces at the point of contact, so the lateral and longitudinal rocking motions may tend to be torsionally decoupled, and hence it may be said that relative to this degree of freedom (rotation about the vertical, or substantially vertical axis normal to the rocking contact interface surfaces) the interface is torsionally compliant (that is, the resistance to torsional deflection about the axis through the surfaces at the point of contact may tend to be much smaller than, for example, resistance to lateral angular deflection). For small angular deflections, the torsional stiffness about the normal axis at the contact point, this condition may sometimes be satisfied even where the smaller of the female radii is less than the largest male radius. Although it is possible for r_1 and r_2 to be the same, such that the crowned surface of the bearing adapter (or the pedestal seat, if the relationship is inverted) is a portion of a spherical surface, in the general case r_1 and r_2 may be different, with r_1 perhaps tending to be larger, possibly significantly larger, than r_2 . In general, whether or not r_1 and r_2 are equal, R_1 and R_2 may be the same or different. Where r_1 and r_2 are different, the male fitting engagement surface may be a section of the surface of a torus. It may also be noted that, provided the

system may tend to return to a local minimum energy state (i.e., that is self-restorative in normal operation) in the limit either or both of $\mathbf{R}_1$ and $\mathbf{R}_2$ may be infinitely large such that either a cylindrical section is formed or, when both are infinitely large, a planar surface may be formed. In the further alternative, it may be that $\mathbf{r}_1 = \mathbf{r}_2$, and $\mathbf{R}_1 = \mathbf{R}_2$. In one
5 embodiment $\mathbf{r}_1$ may be the same as $\mathbf{r}_2$, and may be about 40 inches (+/- 5") and $\mathbf{R}_1$ may be the same as $\mathbf{R}_2$, and both may be infinite such that the female surface is planar.

The rocker surfaces herein may tend to be formed of a relatively hard material, which may be a metal or metal alloy material, such as a steel. Such materials may have
10 elastic deformation at the location of rocking contact in a manner analogous to that of journal or ball bearings. Nonetheless, the rockers may be taken as approximating the ideal rolling point or line contact (as may be) of infinitely stiff members. This is to be distinguished from materials in which deflection of an elastomeric element be it a pad, or block, of whatever shape, may be intended to determine a characteristic of the dynamic or
15 static response of the element.

In one embodiment the lateral rocking constant for a light car may be in the range of about 48,000 to 130,000 in-lbs per radian of angular deflection of the side frame pendulum, or, 260,000 to 700,000 in-lbs per radian for a fully laded car, or more generically, about 0.95
20 to 2.6 in-lbs per radian per pound of weight borne by the pendulum. Alternatively, for a light (i.e., empty) car the stiffness of the pendulum may be in the range 3,200 to 15,000 lbs per inch, and 22,000 to 61,000 lbs per inch for a fully laden 110 ton truck, or, more generically, in the range of 0.06 to 0.160 lbs per inch of lateral deflection per pound weight borne by the pendulum, as measured at the bottom spring seat.

The male and female surfaces may be inverted, such that the female engagement surface is formed on the bearing adapter, and the male engagement surface is formed on the pedestal seat. It is a matter of terminology which part is actually the "seat", and which is the
30 "rocker". Sometimes the seat may be assumed to be the part that has the larger radius, and which is usually thought of as being the stationary reference, while the rocker is taken to be the part with the smaller radius, that "rocks" on the stationary seat. However, this is not always so. At root, the relationship is of mating parts, whether male or female, and there is relative motion between the parts, or fittings, whether the fittings are called a "seat" or a "rocker". The fittings mate at a force transfer interface. The force transfer interface moves
35 as the parts that co-operate to define the rocking interface rock on each other, whichever part may be, nominally, the male part or the female part. One of the mating parts or surfaces is

part of the bearing adapter, and another is part of the pedestal. There may be only two mating surfaces, or there may be more than two mating surfaces in the overall assembly defining the dynamic interface between the bearing adapter and the pedestal fitting, or pedestal seat, however it may be called.

5

Both female radii $\mathbf{R}_1$ and $\mathbf{R}_2$ may not be on the same fitting, and both male radii $\mathbf{r}_1$ and $\mathbf{r}_2$ may not be on the same fitting. That is, they may be combined to form saddle shaped fittings in which the bearing adapter has an upper surface that has a male fitting in the nature of a longitudinally extending crown with a laterally extending axis of rotation, having the radius of curvature is $\mathbf{r}_1$, and a female fitting in the nature of a longitudinally extending trough having a lateral radius of curvature $\mathbf{R}_2$. Similarly, the pedestal seat fitting may have a downwardly facing surface that has a transversely extending trough having a longitudinally oriented radius of curvature $\mathbf{R}_1$, for engagement with $\mathbf{r}_1$ of the crown of the bearing adapter, and a longitudinally running, downwardly protruding crown having a transverse radius of curvature $\mathbf{r}_2$ for engagement with $\mathbf{R}_2$ of the trough of the bearing adapter.

15

In a sense, a saddle shaped surface is both a seat and a rocker, being a seat in one direction, and a rocker in the other. As noted above, the essence is that there are two small radii, and two large (or possibly even infinite) radii, and the surfaces form a mating pair that engage in rolling contact in both the lateral and longitudinal directions, with a central local minimum potential energy position to which the assembly is biased to return. It may also be noted that the saddle surfaces can be inverted such that the bearing adapter has $\mathbf{r}_2$ and $\mathbf{R}_1$, and the pedestal seat fitting has $\mathbf{r}_1$ and $\mathbf{R}_2$. In either case, the smallest of $\mathbf{R}_1$ and $\mathbf{R}_2$ may be larger than, or equal to, the largest of $\mathbf{r}_1$ and $\mathbf{r}_2$, and the mating saddle surfaces may tend to be torsionally uncoupled as noted above.

25

Figures 3a

Figure 3a shows an alternate embodiment of wheelset to sideframe interface assembly, indicated most generally as 150. In this example it may be understood that the pedestal region of sideframe 151, as shown in Figure 3a, is substantially similar to those shown in the previous examples, and may be taken as being the same except insofar as may be noted. Similarly, bearing 152 may be taken as representing the location of the end of a wheelset more generally, with the wheelset to sideframe interface assembly including those items, members or elements that are mounted between bearing 152 and sideframe 151. Bearing adapter 154 may be generally similar to bearing adapter 44 in terms of its lower

30

35

structure for seating on bearing **152**. As with the bodies of the other bearing adapters described herein, the body of bearing adapter **154** may be a casting or a forging, or a machined part, and may be made of a material that may be a relatively low cost material, such as cast iron or steel, and may be made in generally the same manner as bearing adapters have been made heretofore. Bearing adapter **154** may have a bi-directional rocker **153** employing a compound curvature of first and second radii of curvature according to one or another of the possible combinations of male and female radii of curvature discussed herein. Bearing adapter **154** may differ from those described above in that the central body portion **155** of the adapter has been trimmed to be shorter longitudinally, and the inside spacing between the corner abutment portions has been widened somewhat, to accommodate the installation of an auxiliary centering device, or centering member, or centrally biased restoring member in the nature of, for example, elastomeric bumper pads, such as those identified as resilient pads, or members **156**. Members **156** may be considered a form of restorative centering element, and may also be termed “snubbers” or “bumper” pads. A pedestal seat fitting having a mating rocking surface for permitting lateral and longitudinal rocking, is identified as **158**. As with the other pedestal seat fittings shown and described herein, fitting **158** may be made of a hard metal material, which may be a grade of steel. The engagement of the rocking surfaces may, again, tend to have low resistance to torsion about predominantly vertical axis through the point of contact.

Figure 3b

In Figure **3b**, a bearing adapter **160** is substantially similar to bearing adapter **154**, but differs in having a central recess, socket, cavity or accommodation, indicated generally as **161** for receiving an insert identified as a first, or lower, rocker member **162**. As with bearing adapter **154**, the main, or central portion of the body **159** of bearing adapter **160** may be of shorter longitudinal extent than might otherwise be the case, being truncated, or relieved, to accommodate resilient members **156**.

Accommodation **161** may have a plan view form whose periphery may include one or more keying, or indexing, features or fittings, of which cusps **163** may be representative. Cusps **163** may receive mating keying, or indexing, features or fittings of rocker member **162**, of which lobes **164** may be taken as representative examples. Cusps **163** and lobes **164** may fix the angular orientation of the lower, or first, rocker member **162** such that the appropriate radii of curvature may be presented in each of the lateral and longitudinal directions. For example, cusps **163** may be spaced unequally about the periphery of

accommodation **161** (with lobes **164** being correspondingly spaced about the periphery of the insert member **162**) in a specific spacing arrangement to prevent installation in an incorrect orientation, (such as 90 degrees out of phase). For example, one cusp may be spaced 80 degrees of arc about the periphery from one neighbouring cusp, and 100 degrees of arc from another neighbouring cusp, and so on to form a rectangular pattern. Many variations are possible.

While body **159** of bearing adapter **160** may be made of cast iron or steel, the insert, namely first rocker member **162**, may be made of a different material. That different material may present a hardened metal rocker surface such as may have been manufactured by a different process. For example, the insert, member **162**, may be made of a tool steel, or of a steel such as may be used in the manufacture of ball bearings. Furthermore, upper surface **165** of insert member **162**, which includes that portion that is in rocking engagement with the mating pedestal seat **168**, may be machined or otherwise formed to a high degree of smoothness, akin to a ball bearing surface, and may be heat treated, to give a finished bearing part.

Similarly, pedestal seat **168** may be made of a hardened material, such as a tool steel or a steel from which bearings are made, formed to a high level of smoothness, and heat treated as may be appropriate, having a surface formed to mate with surface **165** of rocker member **162**. Alternatively, pedestal seat **168** may have an accommodation indicated as **167**, and an insert member, identified as upper or second rocker member **166**, analogous to accommodation **161** and insert member **162**, with keying or indexing such as may tend to cause the parts to seat in the correct orientation. Member **166** may be formed of a hard material in a manner similar to member **162**, and may have a downward facing rocking surface **157**, which may be machined or otherwise formed to a high degree of smoothness, akin to a ball or roller bearing surface, and may be heat treated, to give a finished bearing part surface for mating, rocking engagement with surface **165**. Where rocker member **162** has both male radii, and the female radii of curvature are both infinite such that the female surface is planar, a wear member having a planar surface such as a spring clip may be mounted in a sprung interference fit in the pedestal roof in lieu of pedestal seat **168**. In one embodiment, the spring clip may be a clip on “Dyna-Clip” (t.m.) pedestal roof wear plate such as supplied by TransDyne Inc. Such a clip is shown in an isometric view in Figure **8a** as item **354**.

Figure 3e

Figure 3e shows an alternate embodiment of wheelset to sideframe interface assembly, indicated generally as 170. Assembly 170 may include a bearing adapter 171, a pair of resilient members 156, a rocking assembly that may include a boot, resilient ring or retainer, 172, a first rocker member 173, and a second rocker member 174. A pedestal seat may be provided to mount in the roof of the pedestal as described above, or second rocker member 174 may mount directly in the pedestal roof.

Bearing adapter 171 is generally similar to bearing adapter 44, or 154, in terms of its lower structure for seating on bearing 152. The body of bearing adapter 171 may be a casting or a forging, or a machined part, and may be made of a material that may be a relatively low cost material, such as cast iron or steel. Bearing adapter 171 may be provided with a central recess, socket, cavity or accommodation, indicated generally as 176, for receiving rocker member 173 and rocker member 174, and retainer 172. The ends of the main portion of the body of bearing adapter 171 may be of relatively short extent to accommodate resilient members 156. Accommodation 176 may have the form of a circular opening, that may have a radially inwardly extending flange 177, whose upwardly facing surface 178 defines a circumferential land upon which to seat first rocker member 173. Flange 177 may also include drain holes 178, such as may be 4 holes formed on 90 degree centers, for example. Rocker member 173 has a spherical engagement surface. First rocker member 173 may include a thickened central portion, and a thinner radially distant peripheral portion, having a lower radial edge, or margin, or land, for seating upon, and for transferring vertical loads into, flange 177. In an alternate embodiment, a non-galling, relatively soft annular gasket, or shim, whether made of a suitable brass, bronze, copper, or other material may be employed on flange 177 under the land. First rocker member 173 may be made of a different material from the material from which the body of bearing adapter 156 is made more generally. That is to say, rocker member 173 may be made of a hard, or hardened material, such as a tool steel or a steel such as might be used in a bearing, that may be finished to a generally higher level of precision, and to a finer degree of surface roughness than the body of bearing adapter 156 more generally. Such a material may be suitable for rolling contact operation under high contact pressures.

Second rocker member 174 may be a disc of circular shape (when viewed in plan view) or other suitable shape having an upper surface for seating in pedestal seat 168, or, in the event that a pedestal seat member is not used, then formed directly to mate with the pedestal roof having an integrally formed seat. First rocker member 173 may have an upper,

or rocker surface **175**, having a profile such as may give bi-directional lateral and longitudinal rocking motion when used in conjunction with the mating second, or upper rocker member, **174**. Second rocker member **174** may be made of a different material from the material from which the body of bearing adapter **171**, or the pedestal seat, is made more generally. Second rocker member **174** may be made of a hard, or hardened material, such as a tool steel or a steel such as might be used in a bearing, that may be finished to a generally higher level of precision, and to a finer degree of surface roughness than the body of sideframe **151** more generally. Such a material may be suitable for rolling contact operation under high contact pressures, particularly as when operated in conjunction with first rocker member **173**. Where an insert of dissimilar material is used, that material may tend to be rather more costly than the cast iron or relatively mild steel from which bearing adapters may otherwise tend to be made. Further still, an insert of this nature may possibly be removed and replaced when worn, either on the basis of a scheduled rotation, or as the need may arise.

Resilient member **172** may be made of a composite or polymeric material, such as a polyurethane. Resilient member **172** may also have apertures, or reliefs **179** such as may be placed in a position for co-operation with corresponding drain holes **178**. The wall height of resilient member **172** may be sufficiently tall to engage the periphery of first rocker member **173**. Further, a portion of the radially outwardly facing peripheral edge of the second, upper, rocking member **174**, may also lie within, or may be partially overlapped by, and may possibly slightly stretchingly engage, the upper margin of resilient member **172** in a close, or interference, fit manner, such that a seal may tend to be formed to exclude dirt or moisture. In this way the assembly may tend to form a closed unit. In that regard, such space as may be formed between the first and second rockers **173**, **174** inside the dirt exclusion member may be packed with a lubricant, such as a lithium or other suitable grease.

Figures 4a – 4e

As shown in Figures **4a – 4e**, resilient members **156** may have the general shape of a channel, having a central, or back, or transverse, or web portion **181**, and a pair of left and right hand, flanking wing portions **182**, **183**. Wing portions **182** and **183** may tend to have downwardly and outwardly tending extremities that may tend to have an arcuate lower edge such as may seat over the bearing casing. The inside width of wing portions **182** and **183**

may be such as to seat snugly about the sides of thrust blocks **180**. A transversely extending lobate portion **185**, running along the upper margin of web portion **181**, may seat in a radiused rebate **184** between the upper margin of thrust blocks **180** and the end of pedestal seat **168**. The inner lateral edge **186** of lobate portion **185** may tend to be chamfered, or relieved, to accommodate, and to seat next to, the end of pedestal seat **168**.

It may be desirable for the rocking assembly at the wheelset to sideframe interface to tend to maintain itself in a centered condition. As noted, the torsionally de-coupled bi-directional rocker arrangements disclosed herein may tend to have rocking stiffnesses that are proportional to the weight placed upon the rocker. Where a longitudinal rocking surface is used to permit self-steering, and the truck is experiencing reduced wheel load, (such as may approach wheel lift), or where the car is operating in the light car condition, it may be helpful to employ an auxiliary restorative centering element that may include a biasing element tending to urge the bearing adapter to a longitudinally centered position relative to the pedestal roof, and whose restorative tendency may be independent of the gravitational force experienced at the wheel. That is, when the bearing adapter is under less than full load, or is unloaded, it may be desirable to maintain a bias to a central position. Resilient members **156** described above may operate to urge such centering.

Figures **3c** and **3d** illustrate the spatial relationship of the sandwich formed by (a) the bearing adapter, for example, bearing adapter **154**; (b) the centering member, such as, for example, resilient members **156**; and (c) the pedestal jaw thrust blocks, **180**. Ancillary details such as, for example, drain holes or phantom lines to show hidden features have been omitted from Figures **3c** and **3d** for clarity. When resilient member **156** is in place, bearing adapter **154** (or **171**, as may be); may tend to be centered relative to jaws **180**. As installed, the snubber (member **156**) may seat closely about the pedestal jaw thrust lug, and may seat next to the bearing adapter end wall and between the bearing adapter corner abutments in a slight interference fit. The snubber may be sandwiched between, and may establish the spaced relative position of, the thrust lug and the bearing adapter and may provide an initial central positioning of the mating rocker elements as well as providing a restorative bias. Although bearing adapter **154** may still rock relative to the sideframe, such rocking may tend to deform (typically, locally to compress) a portion of member **156**, and, being elastic, member **156** may tend to urge bearing adapter **154** toward a central position, whether there is much weight on the rocking elements or not. Resilient member **156** may have a restorative force-deflection characteristic in the longitudinal direction that is

substantially less stiff than the force deflection characteristic of the fully loaded longitudinal rocker (perhaps one to two orders of magnitude less), such that, in a fully loaded car condition, member **156** may tend not significantly to alter the rocking behaviour. In one embodiment member **156** may be made of a polyurethane having a Young's modulus of some 6,500 p.s.i. In another embodiment the Young's modulus may be about 13,000 p.s.i. The Young's modulus of the elastomeric material may be in the range of 4 to 20 k.p.s.i. The placement of resilient members **156** may tend to center the rocking elements during installation. In one embodiment, the force to deflect one of the snubbers may be less than 20 % of the force to deflect the rocker a corresponding amount under the light car (i.e., unloaded) condition, and may, for small deflections, have an equivalent force/deflection curve slope that may be less than 10 % of the force deflection characteristic of the longitudinal rocker.

Figure 5

Thus far only primary wedge angles have been discussed. Figure 5 shows an isometric view of an end portion of a truck bolster **210**. As with all of the truck bolsters shown and discussed herein, bolster **210** is symmetrical about the central longitudinal vertical plane of the bolster (i.e., cross-wise relative to the truck generally) and symmetrical about the vertical mid-span section of the bolster (i.e., the longitudinal plane of symmetry of the truck generally, coinciding with the railcar longitudinal center line). Bolster **210** has a pair of spaced apart bolster pockets **212**, **214** for receiving damper wedges **216**, **218**. Pocket **212** is laterally inboard of pocket **214** relative to the side frame of the truck more generally. Wear plate inserts **220**, **222** are mounted in pockets **212**, **214** along the angled wedge face.

As can be seen, wedges **216**, **218** have a primary angle, α as measured between vertical and the angled trailing vertex **228** of outboard face **230**. For the embodiments discussed herein, primary angle α may tend to lie in the range of 35 – 55 degrees, possibly about 40 - 50 degrees. This same angle α is matched by the facing surface of the bolster pocket, be it **212** or **214**. A secondary angle β gives the inboard, (or outboard), rake of the sloped surface **224**, (or **226**) of wedge **216** (or **218**). The true rake angle can be seen by sighting along plane of the sloped face and measuring the angle between the sloped face and the planar outboard face **230**. The rake angle is the complement of the angle so measured. The rake angle may tend to be greater than 5 degrees, may lie in the range of 5 to 20 degrees, and is preferably about 10 to 15 degrees. A modest rake angle

may be desirable.

When the truck suspension works in response to track perturbations, the damper wedges may tend to work in their pockets. The rake angles yield a component of force tending to bias the outboard face **230** of outboard wedge **218** outboard against the opposing outboard face of bolster pocket **214**. Similarly, the inboard face of wedge **216** may tend to be biased toward the inboard planar face of inboard bolster pocket **212**. These inboard and outboard faces of the bolster pockets may be lined with a low friction surface pad, indicated generally as **232**. The left hand and right hand biases of the wedges may tend to keep them apart to yield the full moment arm distance intended, and, by keeping them against the planar facing walls, may tend to discourage twisting of the dampers in the respective pockets.

Bolster **210** includes a middle land **234** between pockets **212**, **214**, against which another spring **236** may work. Middle land **234** is such as might be found in a spring group that is three (or more) coils wide. However, whether two, three, or more coils wide, and whether employing a central land or no central land, bolster pockets can have both primary and secondary angles as illustrated in the example embodiment of Figure **5a**, with or without wear inserts.

Where a central land, e.g., land **234**, separates two damper pockets, the opposing side frame column wear plates need not be monolithic. That is, two wear plate regions could be provided, one opposite each of the inboard and outboard dampers, presenting planar surfaces against which the dampers can bear. The normal vectors of those regions may be parallel, the surfaces may be co-planar and perpendicular to the long axis of the side frame, and may present a clear, un-interrupted surface to the friction faces of the dampers.

Figure 1e

Figure **1e** shows an example of a three piece railroad car truck, shown generally as **250**. Truck **250** has a truck bolster **252**, and a pair of sideframes **254**. The spring groups of truck **250** are indicated as **256**. Spring groups **256** are spring groups having three springs **258** (inboard corner), **260** (center) and **262** (outboard corner) most closely adjacent to the sideframe columns **254**. A motion calming, kinematic energy dissipating element, in the nature of a friction damper **264**, **266** is mounted over each of central springs **260**.

Friction damper **264, 266** has a substantially planar friction face **268** mounted in facing, planar opposition to, and for engagement with, a side frame wear member in the nature of a wear plate **270** mounted to sideframe column **254**. The base of damper **264, 266** defines a spring seat, or socket **272** into which the upper end of central spring **260** seats.

5 Damper **264, 266** has a third face, being an inclined slope or hypotenuse face **274** for mating engagement with a sloped face **276** inside sloped bolster pocket **278**. Compression of spring **260** under an end of the truck bolster may tend to load damper **264** or **266**, as may be, such that friction face **268** is biased against the opposing bearing face of the sideframe column, **280**. Truck **250** also has wheelsets whose bearings are mounted in the pedestal **284** at either

10 ends of the side frames **254**. Each of these pedestals may accommodate one or another of the sideframe to bearing adapter interface assemblies described above and may thereby have a measure of self steering.

In this embodiment, vertical face **268** of friction damper **264, 266** may have a bearing surface having a co-efficient of static friction, μ_s , and a co-efficient of dynamic or kinetic friction, μ_k , that may tend to exhibit little or no “stick-slip” behaviour when operating against the wear surface of wear plate **270**. In one embodiment, the coefficients of friction are within 10 % of each other. In another embodiment the coefficients of friction are substantially equal and may be substantially free of stick-slip behaviour. In one

15 embodiment, when dry, the coefficients of friction may be in the range of 0.10 to 0.45, may be in the narrower range of 0.15 to 0.35, and may be about 0.30. Friction damper **264, 266** may have a friction face coating, or bonded pad **286** having these friction properties, and corresponding to those inserts or pads described in the context of Figures **6a- 6c**, and Figures **7a – 7h**. Bonded pad **286** may be a polymeric pad or coating. A low friction, or controlled

20 friction pad or coating **288** may also be employed on the sloped surface of the damper. In one embodiment that coating or pad **288** may have coefficients of static and dynamic friction that are within 20 %, or, more narrowly, 10 % of each other. In another embodiment, the coefficients of static and dynamic friction are substantially equal. The co-efficient of dynamic friction may be in the range of 0.10 to 0.30, and may be about 0.20.

Figures 6a to 6c

The bodies of the damper wedges themselves may be made from a relatively common material, such as a mild steel or cast iron. The wedges may then be given wear

35 face members in the nature of shoes, wear inserts or other wear members, which may be intended to be consumable items. In Figure **6a**, a damper wedge is shown generically as

300. The replaceable, friction modification consumable wear members are indicated as 302, 304. The wedges and wear members may have mating male and female mechanical interlink features, such as the cross-shaped relief 303 formed in the primary angled and vertical faces of wedge 300 for mating with the corresponding raised cross shaped features 305 of wear members 302, 304. Sliding wear member 302 may be made of a material having specified friction properties, and may be obtained from a supplier of such materials as, for example, brake and clutch linings and the like, such as Railway Friction Products. The materials may include materials that are referred to as being non-metallic, low friction materials, and may include UHMW polymers. Although Figures 6a and 6c show consumable inserts in the nature of wear plates, namely wear members 302, 304 the entire bolster pocket may be made as a replaceable part. It may be a high precision casting, or may include a sintered powder metal assembly having suitable physical properties. The part so formed may then be welded into place in the end of the bolster.

The underside of the wedges described herein, wedge 300 being typical in this regard, may have a seat, or socket 307, for engaging the top end of the spring coil, whichever spring it may be, spring 262 being shown as typically representative. Socket 307 serves to discourage the top end of the spring from wandering away from the intended generally central position under the wedge. A bottom seat, or boss, for discouraging lateral wandering of the bottom end of the spring is shown in Figure 1e as item 308. It may be noted that wedge 300 has a primary angle, but does not have a secondary rake angle. In that regard, wedge 300 may be used as damper 264, 266 of truck 250 of Figure 1e, for example, and may provide friction damping with little or no “stick-slip” behaviour, but rather friction damping for which the coefficients of static and dynamic friction are equal, or only differ by a small (less than about 20%, perhaps less than 10%) difference. Wedge 300 may be used in truck 250 in conjunction with a bi-directional bearing adapter of any of the embodiments described herein. Wedge 300 may also be used in a four cornered damper arrangement, as in truck 22, for example, where wedges may be employed that may lack secondary angles.

Figures 7a – 7h

Referring to Figures 7a – 7e, a damper 310 is shown such as may be used in truck 22, or any of the other double damper trucks described herein, such as may have appropriately formed, mating bolster pockets. Damper 310 is similar to damper 300, but may include both primary and secondary angles. Damper 310 may, arbitrarily, be termed

a right handed damper wedge. Figures 7a – 7e are intended to be generic such that it may be understood also to represent the left handed, mirror image of a mating damper with which damper 310 would form a matched pair.

5 Wedge 310 has a body 312 that may be made by casting or by another suitable process. Body 312 may be made of steel or cast iron, and may be substantially hollow. Body 312 has a first, substantially planar platen portion 314 having a first face for placement in a generally vertical orientation in opposition to a sideframe bearing surface, for example, a wear plate mounted on a sideframe column. Platen portion 314 may have
10 a rebate, or relief, or depression formed therein to receive a bearing surface wear member, indicated as member 316. Member 316 may be a material having specific friction properties when used in conjunction with the sideframe column wear plate material. For example, member 316 may be formed of a brake lining material, and the column wear plate may be formed from a high hardness steel.

15 Body 312 may include a base portion 318 that may extend rearwardly from and generally perpendicularly to, platen portion 314. Base portion 318 may have a relief 320 formed therein in a manner to form, roughly, the negative impression of an end of a spring coil, such as may receive a top end of a coil of a spring of a spring group, such as
20 spring 262. Base portion 318 may join platen portion 314 at an intermediate height, such that a lower portion 321 of platen portion 314 may depend downwardly therebeyond in the manner of a skirt. That skirt portion may include a corner, or wrap around portion 322 formed to seat around a portion of the spring.

25 Body 312 may also include a diagonal member in the nature of a sloped member 324. Sloped member 324 may have a first, or lower end extending from the distal end of base 318 and running upwardly and forwardly toward a junction with platen portion 314. An upper region 326 of platen portion 314 may extend upwardly beyond that point of junction, such that damper wedge 310 may have a footprint having a vertical extent
30 somewhat greater than the vertical extent of sloped member 324. Sloped member 324 may also have a socket or seat in the nature of a relief or rebate 328 formed therein for receiving a sliding face member 330 for engagement with the bolster pocket wear plate of the bolster pocket into which wedge 310 may seat. As may be seen, sloped member 324 (and face member 330) are inclined at a primary angle α , and a secondary angle β .
35 Sliding face member 330 may be an element of chosen, possibly relatively low, friction properties (when engaged with the bolster pocket wear plate), such as may include

desired values of coefficients of static and dynamic friction. In one embodiment the coefficients of static and dynamic friction may be substantially equal, may be about 0.2 (+/- 20 %, or, more narrowly +/- 10%), and may be substantially free of stick-slip behaviour.

In the alternative embodiment of Figure 7g, a damper wedge 332 is similar to damper wedge 310, but, in addition to pads or inserts for providing modified or controlled friction properties on the friction face for engaging the sideframe column and on the face for engaging the slope of the bolster pocket, damper wedge 332 may have pads or inserts such as pad 334 on the side faces of the wedge for engaging the side faces of the bolster pockets. In this regard, it may be desirable for pad 334 to have low coefficients of friction, and to tend to be free of stick slip behaviour. The friction materials may be cast or bonded in place, and may include mechanical interlocking features, such as shown in Figure 6a, or bosses, grooves, splines, or the like such as may be used for the same purpose. Similarly, in the alternative embodiment of Figure 7h, a damper wedge 336 is provided in which the slope face insert or pad, and the side wall insert or pad form a continuous, or monolithic, element, indicated as 338. The material of the pad or insert may, again, be cast in place, and may include mechanical interlock features.

Figures 8a – 8f

Figures 8a – 8f show an alternate bearing adapter assembly to that of Figure 3a. The assembly, indicated generally as 350, may differ from that of Figure 3a insofar as bearing adapter 344 may have an upper surface 346 that may be a load bearing interface surface of significant extent, that may be substantially planar and horizontal, such that it may act as a base upon which to seat a rocker element, 348. Rocker element 348 may have an upper, or rocker, surface 352 having a suitable profile, such as a compound curvatures having lateral and longitudinal radii of curvature, for mating with a corresponding rocker engagement surface of a pedestal seat liner 354. As noted above, in the general case each of the two rocking engagement surface may have both lateral and longitudinal radii of curvature, such that there are mating lateral male and female radii, and mating longitudinal male and female radii. In one embodiment, both the female radii may be infinite, such that the pedestal seat may have a planar engagement surface, and the pedestal seat liner may be a wear liner, or similar device.

Rocker element **348** may also have a lower surface **356** for seating on, mating with, and for transferring loads into, upper surface **346** over a relatively large surface area, and may have a suitable through thickness for diffusing vertical loading from the zone of rolling contact to the larger area of the land (i.e., surface **346**, or a portion thereof) upon which rocker element **348** sits. Lower surface **356** may also include a keying, or indexing feature **358** of suitable shape, and may include a centering feature **360**, both to aid in installation, and to aid in re-centering rocker element **348** in the event that it should be tempted to migrate away from the central position during operation. Indexing feature **358** may also include an orienting element for discouraging misorientation of rocker element **348**. Indexing feature **358** may be a cavity **362** of suitable shape to mate with an opposed button **364** formed on the upper surface **346** of bearing adapter **344**. If this shape is non-circular, it may tend to admit of only one permissible orientation. The orienting element may be defined in the plan form shape of cavity **362** and button **364**. Where the various radii of curvature of rocker element **348** differ in the lateral and longitudinal directions, it may be that two positions 180 degrees out of phase may be acceptable, whereas another orientation may not. While an ellipse of differing major and minor axes may serve this purpose, the shape of cavity **362** and button **364** may be chosen from a large number of possibilities, and may have a cruciform or triangular shape, or may include more than one raised feature in an asymmetrical pattern, for example. The centering feature may be defined in the tapered, or sloped, flanks **368** and **370** of cavity **362** and **364** respectively, in that, once positioned such that flanks **368** and **370** begin to work against each other, a normal force acting downward on the interface may tend to cause the parts to center themselves.

Rocker element **348** has an external periphery **372**, defining a footprint. Resilient members **374** may be taken as being the same as resilient members **156**, noted above, except insofar as resilient members **374** may have a depending end portion for nesting about the thrust block of a jaw of the pedestal, and also a predominantly horizontally extending portion **376** for overlying a substantial portion of the generally flat or horizontal upper region of bearing adapter **344**. That is, the outlying regions of surface **346** of bearing adapter **344** may tend to be generally flat, and may tend, due to the general thickness of rocker element **348**, to be compelled to stand in a spaced apart relationship from the opposed, downwardly facing surface of the pedestal seat, such as may be, for example, the exposed surface of a wear liner such as item **354**, or a seat such as item **168**, or such other mating part as may be suitable. Portion **376** is of a thickness suitable for

lying in the gaps so defined, and may tend to be thinner than the mean gap height so as not to interfere with operation of the rocker elements. Horizontally extending portion 376 may have the form of a skirt such as may include a pair of left and right hand arms or wings 378 and 380 having a profile, when seen in plan view, for embracing a portion of periphery 372. Resilient member 374 has a relief 382 defined in the inwardly facing edge. Where rocker member 348 has outwardly extending blisters, or cusps, akin to item 164, relief 382 may function as an indexing or orientation feature. A relatively coarse engagement of rocker element 348 may tend to result in wings 378 and 380 urging rocker element 348 to a generally centered position relative to bearing adapter 344. This coarse centering may tend to cause cavity 362 to pick up on button 364, such that rocker member 348 is then urged to the desired centered position by a fine centering feature, namely the chamfered flanks 368, 370. The root of portion 376 may be relieved by a radius 384 adjacent the juncture of surface 346 with the end wall 386 of bearing adapter 348 to discourage chaffing of resilient member 372, 374 at that location. Without the addition of a multiplicity of drawings, it may be noted that rocker element 348 could, alternatively, be inverted so as to, seat in an accommodation formed in the pedestal roof, with a land facing toward the roof, and a rocking surface facing toward a mating bearing adapter, be it adapter 44 or some other.

Figures 9a and 9b

Figure 9a shows an alternative arrangement to that of Figure 3a or Figure 8a. In the wheelset to sideframe interface assembly of Figure 9a, indicated generally as 400, bearing adapter 404 may be substantially similar to bearing adapter 344, and may have an upper surface 406 and a rocker element 408 that interact in the same manner as rocker element 348 interacts with surface 346. (Or, in the inverted case, the rocker element may be seated in the pedestal roof, and the bearing adapter may have a mating upwardly facing rocker surface). The rocker element may interact with a pedestal seat fitting 410 such as may be a wear liner seated in the pedestal roof. Rocker element 408 and the body of bearing adapter 404 may have mating indexing features as described in the context of Figures 8a to 8e.

Rather than two resilient members, such as items 374, however, assembly 400 employs a single resilient member 412, such as may be a monolithic cast material, be it polyurethane or a suitable rubber or rubberlike material such as may be used, for

example, in making an LC pad or a Pennsy pad. An LC pad is an elastomeric bearing adapter pad available from Lord Corporation of Erie Pennsylvania. An example of an LC pad may be identified as Standard Car Truck Part Number SCT 5578. In this instance, resilient member **412** has first and second end portions **414**, **416** for interposition between the thrust lugs of the jaws of the pedestal and the ends **418** and **420** of the bearing adapter. End portions **414**, **416** may tend to be a bit undersize so that, once the roof liner is in place, they may slide vertically into place on the thrust lugs, possibly in a modest interference fit. The bearing adapter may slide into place thereafter, and again, may do so in a slight interference fit, carrying the rocker element **408** with it into place.

Resilient member **412** may also have a central or medial portion **422** extending between end portions **414**, **416**. Medial portion **422** may extend generally horizontally inward to overlie substantial portions of the upper surface bearing adapter **404**. Resilient member **412** may have an accommodation **424** formed therein, be it in the nature of an aperture, or through hole, having a periphery of suitable extent to admit rocker element **408**, and so to permit rocker element **408** to extend at least partially through member **412** to engage the mating rocking element of the pedestal seat. It may be that the periphery of accommodation **422** is matched to the shape of the footprint of rocker element **408** in the manner described in the context of Figures **8a** to **8e** to facilitate installation and to facilitate location of rocker element **408** on bearing adapter **404**. In one embodiment resilient member **412** may be formed in the manner of a Pennsy Pad with a suitable central aperture formed therein.

Figure **9b** shows a Pennsy pad installation. In this installation, a bearing adapter is indicated as **430**, and an elastomeric member, such as may be a Pennsy pad, is indicated as **432**. On installation, member **432** seats between the pedestal roof and the bearing adapter. The term “Pennsy pad”, or “Pennsy Adapter Plus”, refers to a kind of elastomeric pad developed by Pennsy Corporation of Westchester Pa. One example of such a pad is illustrated in US Patent 5,562,045 of Rudibaugh et al., issued October 6, 1996. Figure **9b** may include a pad **432** and bearing adapter of **430** the same, or similar, nature to those shown and described in the 5,562,045 patent. The Pennsy pad may tend to permit a measure of passive steering. The Pennsy pad installation of Figure **9b** can be installed in the sideframe of Figure **1a**, in combination with a four cornered damper arrangement, as indicated in Figures **1a** – **1d**. In this embodiment the truck may be a Barber S2HD truck, modified to carry a damper arrangement, such as a four-cornered

damper arrangement, such as may have an enhanced restorative tendency in the face of non-square deformation of the truck, having dampers that may include friction surfaces as described herein.

5 Figures 10a – 10e

Figure 10a shows a further alternate embodiment of wheelset to sideframe interface assembly to that of Figure 3a or Figure 8a. In this instance, bearing adapter 444 may have an upper rocker surface of any of the configurations discussed above, or may
10 have a rocker element in the manner of bearing adapter 344.

The underside of bearing adapter 444 may have not only a circumferentially extending medial groove, channel or rebate 446, having an apex lying on the transverse plane of symmetry of bearing adapter 444, but also a laterally extending underside rebate
15 448 such as may tend to lie parallel to the underlying longitudinal axis of the wheelset shaft and bearing centreline (i.e., the axial direction) such that the underside of bearing adapter 444 has four corner lands or pads 450 arranged in an array for seating on the casing of the bearing. In this instance, each of the pads, or lands, may be formed on a curved surface having a radius conforming to a body of revolution such as the outer shell
20 of the bearing. Rebate 448 may tend to lie along the apex of the arch of the underside of bearing adapter 444, with the intersection of rebates 446 and 448. Rebate 448 may be relatively shallow, and may be gently radiused into the surrounding bearing adapter body. The body of bearing adapter 444 is more or less symmetrical about both its longitudinal central vertical plane (i.e., on installation, that plane lying vertical and parallel to, if not
25 coincident with, the longitudinal vertical central plane of the sideframe), and also about its transverse central plane (i.e., on installation, that plane extending vertically radially from the center line of the axis of rotation of the bearing and of the wheelset shaft). It may be noted that axial rebate 448 may tend to lie at the section of minimum cross-sectional area of bearing adapter 444. In the view of the present inventors, rebates 446
30 and 448 may tend to divide, and spread, the vertical load carried through the rocker element over a larger area of the casing of the bearing, and hence to more evenly distribute the load into the elements of the bearing than might otherwise be the case. It is thought that this may tend to encourage longer bearing life.

35 In the general case, bearing adapter 444 may have an upper surface having a crown to permit self-steering, or may be formed to accommodate a self-steering apparatus

such as an elastomeric pad, such as a Pennsy Pad or other pad. In the event that a rocker surface is employed, whether by way of a separable insert, or a disc, or is integrally formed in the body of the bearing adapter, the location of the contact of the rocker in the resting position may tend to lie directly above the center of the bearing adapter, and hence
5 above the intersection of the axial and circumferential rebates in the underside of bearing adapter **444**.

Figures 11a – 11f

10 Figures **11a – 11f** show views of a bearing adapter **452**, a pedestal seat insert **454** and elastomeric bumper pad members **456**, as an assembly for insertion between bearing **46** and sideframe **26**. Bearing adapter **452** and pad members **456** are generally similar to bearing adapter **171** and members **156**, respectively. They differ, however, insofar as bearing adapter **452** has thrust block standoff elements **460**, **462** located at either end
15 thereof, and the lower corners of bumpers **456** have been truncated accordingly. It may be that for a certain range of deflection, an elastomeric response is desired, and may be sufficient to accommodate a high percentage of in-service performance. However, excursion beyond that range of deflection might tend to cause damage, or reduction in life, to pad members **456**. Standoff elements **460**, **462** may act as limiting stops to bound
20 that range of motion. Standoff elements **460**, **462** may have the form of shelves, or abutments, or stops **466**, **468** mounted to, and standing proud of, the laterally inwardly facing faces of the corner abutment portions **470**, **472** of bearing adapter **452** more generally. As installed, stops **466**, **468** underlie toes **474**, **476** of members **456**. As may be noted, toes **474**, **476** have a truncated appearance as compared to the toes of member
25 **356** in order to stand clear of stops **466**, **468** on installation. In the at rest, centered condition, stops **466**, **468** may tend to stand clear of the pedestal jaw thrust blocks by some gap distance. When the lateral deflection of the elastomer in member **456** reaches the gap distance, the thrust lug may tend to bottom against stop **466** or **468**, as the case may be. The sheltering width of stops **466**, **468** (i.e., the distance by which they stand
30 proud of the inner face of corner abutment portions **470**, **472**) may tend to provide a reserve compression zone for wings **475**, **477** and may thereby tend to prevent them from being unduly squeezed or pinched. Pedestal seat insert **454** may be generally similar to liner **354**, but may include radiused bulges **480**, **482**, and a thicker central portion **484**. Bearing adapter **452** may include a central bi-directional rocker portion **486** for mating
35 rocking engagement with the downwardly facing rocking surface of central portion **484**.

The mating surfaces may conform to any of the combinations of bi-directional rocking radii discussed herein. Rocker portion **486** may be trimmed laterally as at longitudinally running side shoulders **488, 490** to accommodate bulges **480, 482**.

5 Bearing adapter **452** may also have different underside grooving, **492** in the nature of a pair of laterally extending tapered lobate depressions, cavities, or reliefs **494, 496** separated by a central bridge region **498** having a deeper section and flanks that taper into reliefs **494, 496**. Reliefs **494, 496** may have a major axis that runs laterally with respect to the bearing adapter itself, but, as installed, runs axially with respect to the axis of
10 rotation of the underlying bearing. The absence of material at reliefs **494, 496** may tend to leave a generally H-shaped footprint on the circumferential surface **500** that seats upon the outside of bearing **46**, in which the two side regions, or legs, of the H form lands or pads **502, 504** joined by a relatively narrow waist, namely bridge region **498**. To the extent that the undersurface of the lower portion of bearing adapter **452** conforms to an
15 arcuate profile, such as may accommodate the bearing casing, reliefs **494, 496** may tend to run, or extend, predominantly along the apex of the profile, between the pads, or lands, that lie to either side. This configuration may tend to spread the rocker rolling contact point load into pads **502, 504** and thence into bearing **46**. Bearing life may be a function of peak load in the rollers. By leaving a space between the underside of the bearing
20 adapter and the top center of the bearing casing over the bearing races, reliefs **494, 496** may tend to prevent the vertical load being passed in a concentrated manner predominantly into the top rollers in the bearing. Instead, it may be advantageous to spread the load between several rollers in each race. This may tend to be encouraged by employing spaced apart pads or lands, such as pads **502, 504**, that seat upon the bearing
25 casing. Central bridge region **498** may seat above a section of the bearing casing under which there is no race, rather than directly over one of the races. Bridge region **498** may act as a central circumferential ligature, or tension member, intermediate bearing adapter end arches **506, 508** such as may tend to discourage splaying or separation of pads **502, 504** away from each other as vertical load is applied.

30 Figures 12a – 12d

Figures **12a** to **12d** show an alternate assembly to that of Figure **11a**, indicated generally as **510** for seating in a sideframe **512**. Bearing **46** and bearing adapter **452** may
35 be as before. Assembly **510** may include an upper rocker fitting identified as pedestal seat member **514**, and resilient members **516**. Sideframe **512** may be such that the upper

rocker fitting, namely pedestal seat member **514** may have a greater through thickness, t_s , than otherwise. This thickness, t_s may be greater than 10 % of the magnitude of the width W_s of the pedestal seat member, and may be about 20 (+/-5) % of the width. In one embodiment the thickness may be roughly the same as the thickness of and 'LC pad' such as may be obtained from Lord Corporation. Such thickness may be greater than 7/16", and such thickness may be 1 inch (+/- 1/8"). Pedestal seat member **514** may tend to have a greater thickness for enhancing the spreading of the rocker contact load into sideframe **512**. It may also be used as part of a retro-fit installation in sideframes such as may formerly have been made to accommodate LC pads.

Pedestal seat member **514** may have a generally planar body **518** having upturned lateral margins **520** for bracketing, and seating about, the lower edges of the sideframe pedestal roof member **522**. The major portion of the upper surface of body **518** may tend to mate in planar contact with the downwardly facing surface of roof member **522**. Seat member **514** may have protruding end portions **524** that extend longitudinally from the main, planar portion of body **518**. End portions **524** may include a deeper nose section **526**, that may stand downwardly proud of two wings **528**, **530**. The depth of nose section **526** may correspond to the general through thickness depth of member **514**. The lower, downwardly facing surface **532** of member **518** (as installed) may be formed to mate with the upper surface of the bearing adapter, such that a bi-directional rocking interface is achieved, with a combination of male and female rocking radii as described herein. In one embodiment the female rocking surface may be planar.

Resilient members **516** may be formed to engage protruding portions **524**. That is, resilient member **516** may have the generally channel shaped for of resilient member **156**, having a lateral web **534** standing between a pair of wings **536**, **538**. However, in this embodiment, web **534** may extend, when installed, to a level below the level of stops **466**, **468**, and the respective base faces **540**, **542** of wings **536**, **538** are positioned to sit above stops **466**, **468**. A superior lateral wall, or bulge, **544** surmounts the upper margin of web **534**, and extends longitudinally, such as may permit it to overhang the top of the sideframe jaw thrust lug **546**. The upper surface of bulge **544** may be trimmed, or flattened to accommodate nose section **526**. The upper extremities of wings **536**, **538** terminate in knobs, or prongs, or horns **548**, **550** that stand upwardly proud of the flattened surface **552** of bulge **544**. As installed, the upper ends of horns **548**, **550** underlie the downwardly facing surfaces of wings **536**, **538**.

In the event that an installer might attempt to install bearing adapter **452** in sideframe **512** without first placing pedestal seat member **512** in position, the height of horns **548, 550** is sufficient to prevent the rocker surface of bearing adapter **452** from engaging sideframe roof member **522**. That is, the height of the highest portion of the crown of the rocker surface **552** of the bearing adapter is less than the height of the ends of horns **548, 550** when horns **548, 550** are in contact with stops **466, 468**. However, when pedestal seat member **512** is correctly in place, nose section **526** is located between wings **536, 538**, and wings **536, 538** are captured above horns **548, 550**. In this way, resilient members **514**, and in particular horns **548, 550**, act as installation error detection elements, or damage prevention elements.

The steps of installation may include the step of removing an existing bearing adapter, removing an existing elastomeric pad, such as an LC pad, installing pedestal seat fitting **514** in engagement with roof **522**; seating of resilient members **514** above each of thrust lugs **546**; and sliding bearing adapter **452** between resilient pad members **514**. Resilient pad members **514** then serve to locate other elements on assembly, to retain those elements in service, and to provide a centering bias to the mating rocker elements, as discussed above.

Compound Pendulum Geometry

The various rockers shown and described herein may employ rocking elements that define compound pendulums – that is, pendulums for which the male rocker radius is non-zero, and there is an assumption of rolling (as opposed to sliding) engagement with the female rocker. The embodiment of Figure **2a** (and others) for example, shows a bi-directional compound pendulum. The performance of these pendulums may affect both lateral stiffness and self-steering on the longitudinal rocker.

The lateral stiffness of the suspension may tend to reflect the stiffness of (a) the sideframe between (i) the bearing adapter and (ii) the bottom spring seat (that is, the sideframes swing laterally); (b) the lateral deflection of the springs between (i) the lower spring seat and (ii) the upper spring seat mounting against the truck bolster, and (c) the moment between (i) the spring seat in the sideframe and (ii) the upper spring mounting against the truck bolster. The lateral stiffness of the spring groups may be approximately $\frac{1}{2}$ of the vertical spring stiffness. For a 100 or 110 Ton truck designed for 263,000 or

286,000 lbs GWR, vertical spring group stiffness might be 25 – 30,000 Lbs./in., assuming two groups per truck, and two trucks per car, giving a lateral spring stiffness of 13 – 16,000 Lbs./in. The second component of stiffness relates to the lateral rocking deflection of the sideframe. The height between the bottom spring seat and the crown of the bearing adapter might be about 15 inches (+/-). The pedestal seat may have a flat surface in line contact on a 60 inch radius bearing adapter crown. For a loaded 286,000 lbs. car, the apparent stiffness of the sideframe due to this second component may be 18,000 – 25,000 Lbs./in, measured at the bottom spring seat. Stiffness due to the third component, unequal compression of the springs, is additive to sideframe stiffness. It may be of the order of 3000 - 3500 Lbs./in per spring group, depending on the stiffness of the springs and the layout of the group. The total lateral stiffness for one sideframe for an S2HD 110 Ton truck may be about 9200 Lbs./inch per side frame.

An alternate truck is the “Swing Motion” truck, such as shown at page 716 in the 1980 *Car and Locomotive Cyclopedia* (1980, Simmons-Boardman, Omaha). In a swing motion truck, the sideframe may act more like a pendulum. The bearing adapter has a female rocker, of perhaps 10 in. radius. A mating male rocker mounted in the pedestal roof may have a radius of perhaps 5 in. Depending on the geometry, this may yield a sideframe resistance to lateral deflection in the order of ¼ (or less) to about ½ of what might otherwise be typical. If combined with the spring group stiffness, the relative softness of the pendulum may be dominant. Lateral stiffness may then be less governed by vertical spring stiffness. Use of a rocking lower spring seat may reduce, or eliminate, lateral stiffness due to unequal spring compression. Swing motion trucks have used transoms to link the side frames, and to lock them against non-square deformation. Other substantially rigid truck stiffening devices such as lateral unsprung rods or a “frame brace” of diagonal unsprung bracing have been used. Lateral unsprung bracing may increase resistance to rotation of the sideframes about the long axis of the truck bolster.

A formula may be used for estimation of truck lateral stiffness:

$$k_{\text{truck}} = 2 \times [(k_{\text{sideframe}})^{-1} + (k_{\text{spring shear}})^{-1}]^{-1}$$

where

$k_{\text{sideframe}}$ = $[k_{\text{pendulum}} + k_{\text{spring moment}}]$

$k_{\text{spring shear}}$ = The lateral spring constant for the spring group in shear.

k_{pendulum} = The force required to deflect the pendulum per unit of deflection, as measured at the center of the bottom spring seat.

- 42 -

$k_{\text{spring moment}}$ = The force required to deflect the bottom spring seat per unit of sideways deflection against the twisting moment caused by the unequal compression of the inboard and outboard springs.

5 In a pendulum, the relationship of weight and deflection is roughly linear for small angles, analogous to $F = kx$, in a spring. A lateral constant can be defined as $k_{\text{pendulum}} = W / L$, where W is weight, and L is pendulum length. An approximate equivalent pendulum length can be defined as $L_{\text{eq}} = W / k_{\text{pendulum}}$. W is the sprung weight on the sideframe. For a truck having $L = 15$ and a 60" crown radius, L_{eq} might be about 3
10 in. For a swing motion truck, L_{eq} may be more than double this.

A formula for a longitudinal (i.e., self-steering) rocker as in Figure 2a, may also be defined:

15
$$F / \delta_{\text{long}} = k_{\text{long}} = (W / L) [[(1 / L) / (1 / r_1 - 1 / R_1)] - 1]$$

Where:

k_{long} is the longitudinal constant of proportionality between longitudinal force and longitudinal deflection for the rocker.

F is a unit of longitudinal force, applied at the centerline of the axle

20 δ_{long} is a unit of longitudinal deflection of the centreline of the axle

L is the distance from the centreline of the axle to the apex of male portion 116.

R_1 is the longitudinal radius of curvature of the female hollow in the pedestal seat 38.

25 r_1 is the longitudinal radius of curvature of the crown of the male portion 116 on the bearing adapter

30 In this relationship, R_1 is greater than r_1 , and $(1 / L)$ is greater than $[(1 / r_1) - (1 / R_1)]$, and, as shown in the illustrations, L is smaller than either r_1 or R_1 . In some embodiments herein, the length L from the center of the axle to apex of the surface of the bearing adapter, at the central rest position may typically be about 5 – ¾ to 6 inches (+/-), and may be in the range of 5 – 7 inches. Bearing adapters, pedestals, side frames, and bolsters are typically made from steel. The present inventor is of the view that the rolling contact surface may preferably be made of a tool steel, or a similar material.

35 In the lateral direction, an approximation for small angular deflections is:

$$k_{\text{pendulum}} = (F_2/\delta_2) = (W/L_{\text{pend.}})[(1/L_{\text{pend.}})/((1/R_{\text{Rocker}}) - (1/R_{\text{Seat}}))] + 1]$$

where:

k_{pendulum} = the lateral stiffness of the pendulum

5 F_2 = the force per unit of lateral deflection applied at the bottom spring seat

δ_2 = a unit of lateral deflection

W = the weight borne by the pendulum

$L_{\text{pend.}}$ = the length of the pendulum, as undeflected, between the contact surface of the bearing adapter to the bottom of the pendulum at the spring seat

10 $R_{\text{Rocker}} = r_2$ = the lateral radius of curvature of the rocker surface

$R_{\text{Seat}} = R_2$ = the lateral radius of curvature of the rocker seat

Where R_{Seat} and R_{Rocker} are of similar magnitude, and are not unduly small relative to L , the pendulum may tend to have a relatively large lateral deflection constant.

15 Where R_{Seat} is large compared to L or R_{Rocker} , or both, and can be approximated as infinite (i.e., a flat surface), this formula simplifies to:

$$k_{\text{pendulum}} = (F_{\text{lateral}}/\delta_{\text{lateral}}) = (W/L_{\text{pend.}})[(R_{\text{Rocker}}/L_{\text{pendulum}}) + 1]$$

20 Using this number in the denominator, and the design weight in the numerator yields an equivalent pendulum length, $L_{\text{eq.}} = W/k_{\text{pendulum}}$

The sideframe pendulum may have a vertical length measured (when undeflected) from the rolling contact interface at the upper rocker seat to the bottom spring seat of
 25 between 12 and 20 inches, perhaps between 14 and 18 inches. The equivalent length $L_{\text{eq.}}$ may be in the range of greater than 4 inches and less than 15 inches, and, more narrowly, 5 inches and 12 inches, depending on truck size and rocker geometry. Although truck 20 or 22 may be a 70 ton special, a 70 ton, 100 ton, 110 ton, or 125 ton truck, truck 20 or 22 may be a truck size having 33 inch diameter, or 36 or 38 inch diameter wheels. In some
 30 embodiments herein, the ratio of male rocker radius R_{Rocker} to pendulum length, $L_{\text{pend.}}$, may be 3 or less, in some instances 2 or less. In laterally quite soft trucks this value may be less than 1. The factor $[(1/L_{\text{pend.}})/((1/R_{\text{Rocker}}) - (1/R_{\text{Seat}}))]$, may be less than 3, and, in some instances may be less than 2 ½. In laterally quite soft trucks, this factor may be less than 2. In those various embodiments, the lateral stiffness of the lateral rocker
 35 pendulum, calculated at the maximum truck capacity, or the GWR limit for the railcar

more generally, may be less than the lateral shear stiffness of the associated spring group. Further, in those various embodiments the truck may be free of lateral unsprung bracing, whether in terms of a transom, laterally extending parallel rods, or diagonally criss-crossing frame bracing or other unsprung stiffeners. In those embodiments the trucks
5 may have four cornered damper groups driven by each spring group.

In the trucks described herein, for their fully laden design condition which may be determined either according to the AAR limit for 70, 100, 110 or 125 ton trucks, or, where a lower intended lading is chosen, then in proportion to the vertical sprung load
10 yielding 2 inches of vertical spring deflection in the spring groups, the equivalent lateral stiffness of the sideframe, being the ratio of force to lateral deflection, measured at the bottom spring seat, may be less than the horizontal shear stiffness of the springs. In some embodiments, particularly for relatively low density fragile, high valued lading such as automobiles, consumer goods, and so on. The equivalent lateral stiffness of the
15 sideframe $k_{\text{sideframe}}$ may be less than 6000 lbs./in. and may be between about 3500 and 5500 lbs./in., and perhaps in the range of 3700 – 4100 lbs./in. For example, in one embodiment a 2 x 4 spring group has 8 inch diameter springs having a total vertical stiffness of 9600 lbs./ in. per spring group and a corresponding lateral shear stiffness
20 $k_{\text{spring shear}}$ of 8200 lbs./in. The sideframe has a rigidly mounted lower spring seat. It may be used in a truck with 36 inch wheels. In another embodiment, a 3 x 5 group of 5 ½ inch diameter springs is used, also having a vertical stiffness of about 9600 lbs./in., in a truck with 36 inch wheels. It may be that the vertical spring stiffness per spring group lies in the range of less than 30,000 lbs./in., that it may be in the range of less than 20,000 lbs./in and that it may perhaps be in the range of 4,000 to 12000 lbs./in, and may be about 6000
25 to 10,000 lbs./in. The twisting of the springs may have a stiffness in the range of 750 to 1200 lbs./in. and a vertical shear stiffness in the range of 3500 to 5500 lbs./in. with an overall sideframe stiffness in the range of 2000 to 3500 lbs./in.

In the embodiments of trucks having a fixed bottom spring seat, the truck may
30 have a portion of stiffness, attributable to unequal compression of the springs equivalent to 600 to 1200 lbs./in. of lateral deflection, when the lateral deflection is measured at the bottom of the spring seat on the sideframe. This value may be less than 1000 lbs./in., and may be less than 900 lbs./in. The portion of restoring force attributable to unequal compression of the springs may tend to be greater for a light car as opposed to a fully
35 laden car.

Some embodiments, including those that may be termed swing motion trucks, may have one or more features, namely that, in the lateral swinging direction $r/R. < 0.7$; $3 < r < 30$, or more narrowly, $4 < r < 20$; and $5 < R < 45$, or more narrowly, $8 < R < 30$, and in lateral stiffness, $2,000 \text{ lbs/in} < k_{\text{pendulum}} < 10,000 \text{ lbs/in}$, or expressed differently, the lateral pendulum stiffness in pounds per inch of lateral deflection at the bottom spring seat where vertical loads are passed into the sideframe, per pound of weight carried by the pendulum, may be in the range of 0.08 and 0.2, or, more narrowly, 0.10 to 0.16.

Friction Surfaces

Dynamic response may be quite subtle. It is advantageous to reduce resistance to curving, and self steering may help in this regard. It is advantageous to reduce the tendency for wheel lift to occur. A reduction in stick-slip behaviour in the dampers may improve performance in this regard. Employment of dampers having roughly equal upward and downward friction forces may discourage wheel lift. Wheel lift may be sensitive to a reduction in torsional linkage between the sideframes, as when a transom or frame brace is removed. While it may be desirable torsionally to decouple the sideframes it may also be desirable to supplant a physically locked relationship with a relationship that allows the truck to flex in a non-square manner, subject to a bias tending to return the truck to its squared position such as may be obtained by employing the larger resistive moment couple of doubled dampers as compared to single dampers. While use of laterally softy rockers, dampers with reduced stick slip behaviour, four-cornered damper arrangements, and self steering may all be helpful in their own right, it appears that they may also be inter-related in a subtle and unexpected manner. Self steering may function better where there is a reduced tendency to stick slip behaviour in the dampers. Lateral rocking in the swing motion manner may also function better where the dampers have a reduced tendency to stick slip behaviour. Lateral rocking in the swing motion manner may tend to work better where the dampers are mounted in a four cornered arrangement. Counter-intuitively, truck hunting may not worsen significantly when the rigidly locked relationship of a transom or frame brace is replaced by four cornered dampers (apparently making the truck softer, rather than stiffer), and where the dampers are less prone to stick slip behaviour. The combined effect of these features may be surprisingly interlinked.

In the various truck embodiments described herein, there is a friction damping

interface between the bolster and the sideframes. Either the sideframe columns or the damper (or both) may have a low or controlled friction bearing surface, that may include a hardened wear plate, that may be replaceable if worn or broken, or that may include a consumable coating or shoe, or pad. That bearing face of the motion calming, friction damping element may be obtained by treating the surface to yield desired co-efficients of static and dynamic friction whether by application of a surface coating, and insert, a pad, a brake shoe or brake lining, or other treatment. Shoes and linings may be obtained from clutch and brake lining suppliers, of which one is Railway Friction Products. Such a shoe or lining may have a polymer based or composite matrix, loaded with a mixture of metal or other particles of materials to yield a specified friction performance.

That friction surface may, when employed in combination with the opposed bearing surface, have a co-efficient of static friction, μ_s , and a co-efficient of dynamic or kinetic friction, μ_k . The coefficients may vary with environmental conditions. For the purposes of this description, the friction coefficients will be taken as being considered on a dry day condition at 70 F. In one embodiment, when dry, the coefficients of friction may be in the range of 0.15 to 0.45, may be in the narrower range of 0.20 to 0.35, and, in one embodiment, may be about 0.30. In one embodiment that coating, or pad, may, when employed in combination with the opposed bearing surface of the sideframe column, result in coefficients of static and dynamic friction at the friction interface that are within 20%, or, more narrowly, within 10 % of each other. In another embodiment, the coefficients of static and dynamic friction are substantially equal.

Sloped Wedge Surface

Where damper wedges are employed, a generally low friction, or controlled friction pad or coating may also be employed on the sloped surface of the damper that engages the wear plate (if such is employed) of the bolster pocket where there may be a partially sliding, partially rocking dynamic interaction. The present inventors consider the use of a controlled friction interface between the slope face of the wedge and the inclined face of the bolster pocket, in which the combination of wear plate and friction member may tend to yield coefficients of friction of known properties, to be advantageous. In some embodiments those coefficients may be the same, or nearly the same, and may have little or no tendency to exhibit stick-slip behaviour, or may have a reduced stick-slip tendency as compared to cast iron on steel. Further, the use of brake linings, or inserts of cast materials having known friction properties may tend to permit the properties to be

controlled within a narrower, more predictable and more repeatable range such as may yield a reasonable level of consistency in operation. The coating, or pad, or lining, may be a polymeric element, or an element having a polymeric or composite matrix loaded with suitable friction materials. It may be obtained from a brake or clutch lining manufacturer, or the like. One such firm that may be able to provide such friction materials is Railway Friction Products of 13601 Laurinburg Maxton Ai, Maxton NC; another may be Quadrant EPP USA, Inc., of 2120 Fairmont Ave., Reading PA. In one embodiment, the material may be the same as that employed by the Standard Car Truck Company in the "Barber Twin Guard" (t.m.) damper wedge with polymer covers. In one embodiment the material may be such that a coating, or pad, may, when employed with the opposed bearing surface of the sideframe column, result in coefficients of static and dynamic friction at the friction interface that are within 20%, or more narrowly, within 10 % of each other. In another embodiment, the coefficients of static and dynamic friction are substantially equal. The co-efficient of dynamic friction may be in the range of 0.15 to 0.30, and in one embodiment may be about 0.20.

A damper may be provided with a friction specific treatment, whether by coating, pad or lining, on both the vertical friction face and the slope face. The coefficients of friction on the slope face need not be the same as on the friction face, although they may be. In one embodiment it may be that the coefficients of static and dynamic friction on the friction face may be about 0.3, and may be about equal to each other, while the coefficients of static and dynamic friction on the slope face may be about 0.2, and may be about equal to each other. In either case, whether on the vertical bearing face against the sideframe column, or on the sloped face in the bolster pocket, the present inventors consider it to be advantageous to avoid surface pairings that may tend to lead to galling, and stick-slip behaviour.

Spring Groups

The main spring groups may have a variety of spring layouts. Among various double damper embodiments of spring layout are the following:

D ₁ X ₁ D ₃ X ₂ X ₃ X ₄ D ₂ X ₅ D ₄	D ₁ X ₁ D ₃ X ₂ X ₃ X ₄ D ₂ X ₄ D ₄	D ₁ X ₁ D ₃ X ₂ X ₃ X ₄ D ₂ X ₃ D ₄	D ₁ X ₁ X ₂ X ₃ D ₃ X ₄ X ₅ X ₆ X ₇ X ₈ D ₂ X ₉ X ₁₀ X ₁₁ D ₄	D ₁ X ₁ X ₂ D ₃ D ₂ X ₃ X ₄ D ₄
3 x 3	3:2:3	2:3:2	3 x 5	2 x 4

In these groups, D_i represents a damper spring, and X_i represents a non-damper spring.

In the context of 100 Ton or 110 Ton trucks, the inventors propose spring and damper combinations lying within 20 % (and preferably within 10 %) of the following parameter envelopes:

(a) For a four wedge arrangement with all steel or iron damper surfaces, an envelope having an upper boundary according to $k_{\text{damper}} = 2.41(\theta_{\text{wedge}})^{1.76}$, and a lower boundary according to $k_{\text{damper}} = 1.21(\theta_{\text{wedge}})^{1.76}$.

(b) For a four wedge arrangement with all steel or iron damper surfaces, a mid range zone of

$$k_{\text{damper}} = 1.81(\theta_{\text{wedge}})^{1.76} (+/- 20 \%).$$

(c) For a four wedge arrangement with non-metallic damper surfaces, such as may be similar to brake linings, an envelope having an upper boundary according to $k_{\text{damper}} = 4.84(\theta_{\text{wedge}})^{1.64}$, and a lower a lower boundary according to $k_{\text{damper}} = 2.42(\theta_{\text{wedge}})^{1.64}$ where the wedge angle may lie in the range of 30 to 60 degrees.

(d) For a four wedge arrangement with non-metallic damper surfaces, a mid range zone of

$$k_{\text{damper}} = 3.63(\theta_{\text{wedge}})^{1.64} (+/- 20 \%).$$

Where k_{damper} is the side spring stiffness under each damper in lbs/in/damper

θ_{wedge} is the associated primary wedge angle, in degrees

θ_{wedge} may tend to lie in the range of 30 to 60 degrees. In other embodiments θ_{wedge} may lie in the range of 35 – 55 degrees, and in still other embodiments may tend to

lie in the narrower range of 40 to 50 degrees.

It may be advantageous to have upward and downward damping forces that are not overly dissimilar, and that may in some cases tend to be roughly equal. Frictional forces at the dampers may differ depending on whether the damper is being loaded or unloaded. The angle of the wedge, the coefficients of friction, and the springing under the wedges can be varied. A damper is being “loaded” when the bolster is moving downward in the sideframe window, since the spring force is increasing, and hence the force on the damper is increasing. Similarly, a damper is being “unloaded” when the bolster is moving upward toward the top of the sideframe window, since the force in the springs is decreasing. The equations can be written as:

$$\text{While loading: } F_d = \mu_c F_s \frac{(\cot(\phi) - \mu_s)}{(1 + (\mu_s - \mu_c) \cot(\phi) + \mu_s \mu_c)}$$

$$\text{While unloading: } F_d = \mu_c F_s \frac{(\cot(\phi) + \mu_s)}{(1 + (\mu_c - \mu_s) \cot(\phi) + \mu_s \mu_c)}$$

Where: F_d = friction force on the sideframe column
 F_s = force in the spring
 μ_s = coefficient of friction on the angled slope face on the bolster
 μ_c = the coefficient of friction against the sideframe column
 ϕ = the included angle between the angled face on the bolster and the friction face bearing against the column

For a given angle, a friction load factor, C_f can be determined as $C_f = F_d / F_s$. This load factor C_f will tend to be different depending on whether the bolster is moving up or down.

It may be advantageous to have different vertical spring rates in the empty and fully loaded conditions. To that end springs of different heights may be employed, for example, to yield two or more vertical spring rates for the entire spring group. In this way, the dynamic response in the light car condition may be different from the dynamic response in a fully loaded car, where two spring rates are used. Alternatively, if three (or more) spring rates are used, there may be an intermediate dynamic response in a semi-loaded condition. In one embodiment, each spring group may have a first combination of

springs that have a free length of at least a first height, and a second group of springs of which each spring has a free length that is less than a second height, the second height being less than the first height by a distance δ_1 , such that the first group of springs will have a range of compression between the first and second heights in which the spring rate of the group has a first value, namely the sum of the spring rates of the first group of springs, and a second range in which the spring rate of the group is greater, namely that of the first group plus the spring rate of at least one of the springs whose free height is less than the second height. The different spring rate regimes may yield corresponding different damping regimes.

For example, in one embodiment a car having a dead sprung weight (i.e., the weight of the car body with no lading excluding the unsprung weight below the main spring such as the sideframes and wheelsets), of about 35,000 to about 55,000 lbs (+/- 5000 lbs) may have spring groups of which a first portion of the springs have a free height in excess of a first height. The first height may, for example be in the range of about $9 - \frac{3}{4}$ to $10 - \frac{1}{4}$ inches. When the car sits, unladen, on its trucks, the springs compress to that first height. When the car is operated in the light car condition, that first portion of springs may tend to determine the dynamic response of the car in the vertical bounce, pitch-and-bounce, and side-to-side rocking, and may influence truck hunting behaviour. The spring rate in that first regime may be of the order of 12,000 to 22,000 lbs/ in., and may be in the range of 15,000 to 20,000 lbs/in.

When the car is more heavily laden, as for example when the combination of dead and live sprung weight exceeds a threshold amount, which may correspond to a per car amount in the range of perhaps 60,000 to 100,000 lbs, (that is, 15,000 to 25,000 lbs per spring group for symmetrical loading, at rest) the springs may compress to, or past, a second height. That second height may be in the range of perhaps $8 - \frac{1}{2}$ to $9 - \frac{3}{4}$ inches, for example. At this point, the sprung weight is sufficient to begin to deflect another portion of the springs in the overall spring group, which may be some or all of the remaining springs, and the spring rate constant of the combined group of the now compressed springs in this second regime may tend to be different, and larger than, the spring rate in the first regime. For example, this larger spring rate may be in the range of about 20,000 – 30,000 lbs/in., and may be intended to provide a dynamic response when the sum of the dead and live loads exceed the regime change threshold amount. This second regime may range from the threshold amount to some greater amount, perhaps

tending toward an upper limit, in the case of a 110 Ton truck, of as great as about 130,000 or 135,000 lbs per truck. For a 100 Ton truck this amount may be 115,000 or 120,000 lbs per truck.

- 5 Table 1 gives a tabulation of a number of spring groups that may be employed in a 100 or 110 Ton truck, in symmetrical 3 x 3 spring layouts and that have dampers in four-cornered groups. The last entry in Table 1 is a symmetrical 2:3:2 layout of springs. The term “side spring” refers to the spring, or combination of springs, under each of the individually sprung dampers, and the term “main spring” referring to the spring, or
10 combination of springs, of each of the main coil groups:

Group	D7-G1	D7-G2	D7-G3	D7-G4	D7-G5	D5-G1
Main Springs	5 * D7-O	5 * D7-O	5 * D7-O	5 * D7-O	5 * D7-O	5 * D5-O
	5 * D6-I	5 * D6-I	5 * D8-I	5 * D8-I	5 * D7-I	5 * D6-I
	5 * D6A	5 * D6A	5 * D8A	5 * D8A	5 * D8A	---
Side Springs	4 * B353	4 * B353	4 * NSC-1	4 * B353	4 * B353	4 * B432
	---	4 * B354	4 * B354	4 * NSC-2	4 * NSC-2	4 * B433

Group	D5-G2	D5-G3	D5-G4	D5-G5	D5-G6	D5-G7
Main Springs	5 * D5-O	5 * D5-O	5 * D5-O	5 * D5-O	5 * D5-O	5 * D5-O
	5 * D6-I	5 * D6-I	5 * D8-I	5 * D8-I	5 * D6-I	5 * D6-I
	5 * D6A	---	5 * D8A	5 * D6A	5 * D6A	---
Side Springs	4 * B432	4 * B353	4 * B353	4 * B353	4 * B353	4 * B353
	4 * B433	4 * B354	4 * B354	4 * B354	4 * B354	4 * B354

Group	D5-G8	D5-G9	D5-G10	D5-G11	D5-G12	NSC 232-1
Main Springs	5 * D5-O	5 * D5-O	5 * D5-O	5 * D5-O	5 * D5-O	3 * D51-O
	5 * D6-I	5 * D6-I	5 * D8-I	5 * D8-I	5 * D5-I	3 * D61-I
	5 * D6B	5 * D6A	5 * D8A	5 * D8A	5 * D6B	3 * D61A
Side Springs	4 * NSC-1	4 * NSC-1	4 * NSC-1	4 * NSC-1	4 * B353	4 * B353-O
	4 * NSC-2	4 * B354	4 * B354	4 * NSC-2	4 * NSC-2	4 * B354-I

Table 1 – Spring Group Combinations

In this tabulation, the terms NSC-1, NSC-2, D8, D8A and D6B refer to springs of non-standard size proposed by the present inventors. The properties of these springs are

given in Table 2a (main springs) and 2b (side springs), along with the properties of the other springs of Table 1.

Main Springs	Free Height	Rate	Solid Height	Free to Solid	Solid Capacity	Diameter	d – Wire Diameter
	(in)	(lbs/in)	(in)	(in)	(lbs)	(in)	(in)
D5 Outer	10.2500	2241.6	6.5625	3.6875	8266	5.500	0.9531
D51 Outer	10.2500	2980.6	6.5625	3.6875	10991	5.500	1.0000
D5 Inner	10.3125	1121.6	6.5625	3.7500	4206	3.3750	0.6250
D6 Inner	9.9375	1395.2	6.5625	3.3750	4709	3.4375	0.6563
D61 Inner	10.1875	1835.9	6.5625	3.6250	6655	3.4375	0.6875
D6A Inner Inner	9.0000	463.7	6.5625	3.3125	1536	2.0000	0.3750
D61A Inner Inner	10.0000	823.6	5.6875	3.4375	2831	2.0000	0.3750
D7 Outer	10.8125	2033.6	6.5625	4.2500	8643	5.5000	0.9375
D7 Inner	10.7500	980.8	6.5625	4.1875	4107	3.5000	0.6250
D6B Inner Inner	9.7500	575.0	6.5625	3.1875	1833	2.0000	0.3940
D8 Inner	9.5500	1395.0	6.5625	2.9875	4168	3.4375	0.6563
D8 Inner Inner	9.2000	575.0	6.5625	2.6375	1517	2.0000	0.3940

5

Table 2a Main Spring Parameters

Side Springs	Free Height	Rate	Solid Height	Free to Solid	Solid Capacity	Coil Diameter	d - Wire Diameter
	(in)	(lbs/in)	(in)	(in)	(lbs)	(in)	(in)
B353 Outer	11.1875	1358.4	6.5625	4.6250	6283	4.8750	0.8125
B354 Inner	11.5000	577.6	6.5625	4.9375	2852	3.1250	0.5313
B355 Outer	10.7500	1358.8	6.5625	4.1875	5690	4.8750	0.8125
B356 Inner	10.2500	913.4	6.5625	3.6875	3368	3.1250	0.5625
B432 Outer	11.0625	1030.4	6.5625	4.5000	4637	3.8750	0.6719
B433 Inner	11.3750	459.2	6.5625	4.8125	2210	2.4063	0.4375
49427-1 Outer	11.3125	1359.0	6.5625	4.7500	6455		
49427-2 Inner	10.8125	805.0	6.5625	4.2500	3421		
B358 Outer	10.7500	1546.0	6.5625	4.1875	6474	5.0000	0.8438
B359 Inner	11.3750	537.5	6.5625	4.8125	2587	3.1875	0.5313

52310-1 Outer	11.3125	855.0	6.5625	4.7500	4061		
52310-2 Inner	8.7500	2444.0	6.5625	2.1875	5346		
11-1-0562 Outer	12.5625	997.0	6.5625	6.0000	5982		
11-1-0563 Outer	12.6875	480.0	6.5625	6.1250	2940		
NSC-1 Outer	11.1875	952.0	6.5625	4.6250	4403	4.8750	0.7650
NSC-2 Inner	11.5000	300.0	6.5625	4.9375	1481	3.0350	0.4580

Table 2b – Side Spring Parameters

Table 3 provides a listing of truck parameters for a number of known trucks, and for trucks proposed by the present inventors. In the first instance, the truck embodiment identified as No. 1 may be taken to employ damper wedges in a four-cornered arrangement in which the primary wedge angle is 45 degrees and the damper wedges have steel bearing surfaces. In the second instance, the truck embodiment identified as No. 2, may be taken to employ damper wedges in a four-cornered arrangement in which the primary wedge angle is 40 degrees, and the damper wedges have non-metallic bearing surfaces.

	NACO Swing Motion	Barber S-2-E	Barber S-2-HD	ASF Super Service RideMaster	ASF Motion Control	No. 1	No. 2	No. 3 2:3:2
Main Springs	6 * D7-O	7*D5-O	6*D5-O	7 * D5-O	7 * D5-O	5 * D5-O	5 * D5-O	3*D51-O
	7 * D7-I	7 * D5-I	7* D6-I	7 * D5-I	5 * D5-I	5 * D8-I	5 * D6-I	3*D61-I
	4 * D6A		4* D6A	2 * D6A		5 * D8A	5 * D6A	3*D61-A
Side Springs	2*49427-1	2 * B353	2*B353	2 * 5062	2 * 5062	2*NSC-1	4 * B353	4* B353
	2*49427-2	2 * B354	2*B354	2 * 5063	2 * 5063	2 * B354	4 * B354	4* B354
k _{empty}	22414	27414	27088	26496	24253	17326	18952	22194
k _{loaded}	25197	27414	28943	27423	24253	27177	28247	24664
Solid	103,034	105,572	105,347	107,408	96,735	98,773	107,063	97,970
H _{Empty}	10.3504	9.9898	9.8558	10.0925	10.0721	9.9523	10.0583	10.0707
H _{Loaded}	7.9886	7.9562	7.8748	8.0226	7.7734	7.7181	7.9679	7.8033
k _w	4328	3872	3872	2954	2954	6118	7744	7744
k _w /k _{loaded}	17.18	14.12	13.38	10.77	12.18	22.51	27.42	31.40
Wedge α	45	32	32	37.5	37.5	45	40	45
F _D (down)	1549	3291	3291	1711	1711	2392	2455	2522
F _D (up)	1515	1742	1742	1202	1202	2080	2741	2079
Total F _D	3064	5033	5033	2913	2913	4472	5196	4601

Table 3 – Truck Parameters

In Table 3, the Main Spring entry has the format of the quantity of springs, followed by the type of spring. For example, the ASF Super Service Ride Master, in one embodiment, has 7 springs of the D5 Outer type, 7 springs of the D5 Inner type, nested inside the D5 Outers, and 2 springs of the D6A Inner-Inner type, nested within the D5
 5 Inners of the middle row (i.e, the row along the bolster centerline). It also has 2 side springs of the 5052 Outer type, and 2 springs of the 5063 Inner type nested inside the 5062 Outers. The side springs would be the middle elements of the side rows underneath
 10 centrally mounted damper wedges.

k_{empty} refers to the overall spring rate of the group in lbs/in for a light (i.e., empty) car.

k_{loaded} refers to the spring rate of the group in lbs/in., in the fully laded condition.

15 “Solid” refers to the limit, in lbs, when the springs are compressed to the solid condition

H_{Empty} refers to the height of the springs in the light car condition

H_{Loaded} refers to the height of the springs in the at rest fully loaded condition

k_W refers to the overall spring rate of the springs under the dampers.

20 k_W/k_{loaded} gives the ratio of the spring rate of the springs under the dampers to the total spring rate of the group, in the loaded condition, as a percentage.

The wedge angle is the primary angle of the wedge, expressed in degrees.

F_D is the friction force on the sideframe column. It is given in the upward and downward directions, with the last row giving the total when the upward
 25 and downward amounts are added together.

In various embodiments of trucks, such as truck **22**, the resilient interface between each sideframe and the end of the truck bolster associated therewith may include a four cornered damper arrangement and a 3 x 3 spring group having one of the spring
 30 groupings set forth in Table 1. Those groupings may have wedges having primary angles lying in the range of 30 to 60 degrees, or more narrowly in the range of 35 to 55 degrees, more narrowly still in the range 40 to 50 degrees, or may be chosen from the set of angles of 32, 36, 40 or 45 degrees. The wedges may have steel surfaces, or may have friction modified surfaces, such as non-metallic surfaces.

The combination of wedges and side springs may be such as to give a spring rate under the side springs that is 20 % or more of the total spring rate of the spring groups. It may be in the range of 20 to 30 % of the total spring rate. In some embodiments the combination of wedges and side springs may be such as to give a total friction force for the dampers in the group, for a fully laden car, when the bolster is moving downward, that is less than 3000 lbs. In other embodiments the arithmetic sum of the upward and downward friction forces of the dampers in the group is less than 5500 lbs.

In some embodiments in which steel faced dampers are used, the sum of the magnitudes of the upward and downward friction forces may be in the range of 4000 to 5000 lbs. In some embodiments, the magnitude of the friction force when the bolster is moving upward may be in the range of $2/3$ to $3/2$ of the magnitude of the friction force when the bolster is moving downward. In some embodiments, the ratio of $F_d(\text{Up})/F_d(\text{Down})$ may lie in the range of $3/4$ to $5/4$. In some embodiments the ratio of $F_d(\text{Up})/F_d(\text{Down})$ may lie in the range of $4/5$ to $6/5$, and in some embodiments the magnitudes may be substantially equal.

In some embodiments in which non-metallic friction surfaces are used, the sum of the magnitudes of the upward and downward friction force may be in the range of 4000 to 5500 lbs. In some embodiments, the magnitude of the friction force when the bolster is moving up, $F_d(\text{Up})$, to the magnitude of the friction force when the bolster is moving down, $F_d(\text{Down})$ may be in the range of $3/4$ to $5/4$, may be in the range of 0.85 to 1.15. Further, those wedges may employ a secondary angle, and the secondary angle may be in the range of about 5 to 15 degrees.

Nos.1 and 2

The inventors consider the combinations of parameters listed in Table 3 under the columns No. 1 and No. 2, to be advantageous. No. 1 may employ with steel on steel damper wedges and sideframe columns. No. 2 may employ non-metallic friction surfaces, that may tend not to exhibit stick-slip behaviour, for which the resultant static and dynamic friction coefficients are substantially equal. The friction coefficients of the friction face on the sideframe column may be about 0.3. The slope surfaces of the wedges may also work on a non-metallic bearing surface and may also tend not to exhibit stick slip behaviour. The coefficients of static and dynamic friction on the slope face may also be substantially equal, and may be about 0.2. Those wedges may have a secondary angle, and that secondary angle may be about 10 degrees.

No. 3

In some embodiments there may be a 2:3:2 spring group layout. In this layout the damper springs may be located in a four cornered arrangement in which each pair of damper springs is not separated by an intermediate main spring coil, and may sit side-by-side, whether the dampers are cheek-to-cheek or separated by a partition or intervening block. There may be three main spring coils, arranged on the longitudinal centreline of the bolster. The springs may be non-standard springs, and may include outer, inner, and inner-inner springs identified respectively as D51-O, D61-I, and D61-A in Tables 1, 2 and 3 above. The No. 3 layout may include wedges that have a steel-on-steel friction interface in which the kinematic friction co-efficient on the vertical face may be in the range of 0.30 to 0.40, and may be about 0.38, and the kinematic friction co-efficient on the slope face may be in the range of 0.12 to 0.20, and may be about 0.15. The wedge angle may be in the range of 45 to 60 degrees, and may be about 50 to 55 degrees. In the event that 50 (+/-) degree wedges are chosen, the upward and downward friction forces may be about equal (i.e., within about 10 % of the mean), and may have a sum in the range of about 4600 to about 4800 lbs, which sum may be about 4700 lbs (+/- 50). In the event that 55 degree (+/-) wedges are chosen, the upward and downward friction forces may again be substantially equal (within 10 % of the mean), and may have a sum on the range of 3700 to 4100 Lbs, which sum may be about 3850 – 3900 lbs.

Alternatively, in other embodiments employing a 2:3:2 spring layout, non-metallic wedges may be employed. Those wedges may have a vertical face to sideframe column co-efficient of kinematic friction in the range of 0.25 to 0.35, and which may be about 0.30. The slope face co-efficient of kinematic friction may be in the range of 0.08 to 0.15, and may be about 0.10. A wedge angle of between about 35 and about 50 degrees may be employed. It may be that the wedge angles lie in the range of about 40 to about 45 degrees. In one embodiment in which the wedge angle is about 40 degrees, the upward and downward kinematic friction forces may have magnitudes that are each within about 20 % of their average value, and whose sum may lie in the range of about 5400 to about 5800 lbs, and which may be about 5600 lbs (+/- 100). In another embodiment in which the wedge angle is about 45 degrees, the magnitudes of each of the upward and downward forces of kinematic friction may be within 20 % of their averaged value, and whose sum may lie in the range of about 440 to about 4800 lbs, and may be about 4600 lbs (+/- 100).

Combinations and Permutations

The present description recites many examples of dampers and bearing adapter arrangements. Not all of the features need be present at one time, and various optional combinations can be made. As such, the features of the embodiments of several of the various figures may be mixed and matched, without departing from the spirit or scope of the invention. For the purpose of avoiding redundant description, it will be understood that the various damper configurations can be used with spring groups of a 2 X 4, 3 X 3, 3:2:3, 2:3:2, 3 X 5 or other arrangement. Similarly, several variations of bearing to pedestal seat adapter interface arrangements have been described and illustrated. There are a large number of possible combinations and permutations of damper arrangements and bearing adapter arrangements. In that light, it may be understood that the various features can be combined, without further multiplication of drawings and description.

The various embodiments described herein may employ self-steering apparatus in combination with dampers that may tend to exhibit little or no stick-slip. They may employ a "Pennsy" pad, or other elastomeric pad arrangement, for providing self-steering. Alternatively, they may employ a bi-directional rocking apparatus, which may include a rocker having a bearing surface formed on a compound curve of which several examples have been illustrated and described herein. Further still, the various embodiments described herein may employ a four cornered damper wedge arrangement, which may include bearing surfaces of a non-stick-slip nature, in combination with a self steering apparatus, and in particular a bi-directional rocking self-steering apparatus, such as a compound curved rocker.

In the various embodiments of trucks herein, the gibs may be shown mounted to the bolster inboard and outboard of the wear plates on the side frame columns. In the embodiments shown herein, the clearance between the gibs and the side plates is desirably sufficient to permit a motion allowance of at least $\frac{3}{4}$ " of lateral travel of the truck bolster relative to the wheels to either side of neutral, advantageously permits greater than 1 inch of travel to either side of neutral, and may permit travel in the range of about 1 or $1 - \frac{1}{8}$ " to about $1 - \frac{5}{8}$ or $1 - \frac{9}{16}$ " inches to either side of neutral.

The inventors presently favour embodiments having a combination of a bi-directional compound curvature rocker surface, a four cornered damper arrangement in which the dampers are provided with friction linings that may tend to exhibit little or no

stick-slip behaviour, and may have a slope face with a relatively low friction bearing surface. However, there are many possible combinations and permutations of the features of the examples shown herein. In general it is thought that a self draining geometry may be preferable over one in which a hollow is formed and for which a drain hole may be required.

5

In each of the trucks shown and described herein, the overall ride quality may depend on the inter-relation of the spring group layout and physical properties, or the damper layout and properties, or both, in combination with the dynamic properties of the bearing adapter to pedestal seat interface assembly. It may be advantageous for the lateral stiffness of the sideframe acting as a pendulum to be less than the lateral stiffness of the spring group in shear. In rail road cars having 110 ton trucks, one embodiment may employ trucks having vertical spring group stiffnesses in the range of 16,000 lbs/inch to 36,000 lbs/inch in combination with an embodiment of bi-directional bearing adapter to pedestal seat interface assemblies as shown and described herein. In another embodiment, the vertical stiffness of the spring group may be less than 12,000 lbs./in per spring group, with a horizontal shear stiffness of less than 6000 lbs./in.

10

15

20

25

The double damper arrangements shown above can also be varied to include any of the four types of damper installation indicated at page 715 in the *1997 Car and Locomotive Cyclopedica*, with appropriate structural changes for doubled dampers, with each damper being sprung on an individual spring. That is, while inclined surface bolster pockets and inclined wedges seated on the main springs have been shown and described, the friction blocks could be in a horizontal, spring biased installation in a pocket in the bolster itself, and seated on independent springs rather than the main springs. Alternatively, it is possible to mount friction wedges in the sideframes, in either an upward orientation or a downward orientation.

30

The embodiments of trucks shown and described herein may vary in their suitability for different types of service. Truck performance can vary significantly based on the loading expected, the wheelbase, spring stiffnesses, spring layout, pendulum geometry, damper layout and damper geometry.

35

Various embodiments of the invention have been described in detail. Since changes in and or additions to the above-described best mode may be made without departing from the nature, spirit or scope of the invention, the invention is not to be limited to those details but only by the appended claims.

Claims

We claim:

1. At least one member of a railroad freight car truck that member having a first self-steering apparatus fitting, said at least one member comprising at least one of:

- 5 a bearing adapter for mounting to a casing of a bearing on a rail road car truck wheelset, said bearing adapter being for use in combination with at least one other member having a second fitting of the self-steering apparatus, said at least one other fitting including at least a pedestal seat; said bearing adapter having a pair of axially spaced apart arches formed to seat on a cylindrical casing of a rail road
- 10 freight car roller bearing having an axis of rotation, and first and second pairs of corner abutments, each pair of corner abutments be spaced to straddle respective ones of a pair of first and second opposed thrust lugs of a rail road freight car sideframe pedestal; said bearing adapter having a metal rolling contact engagement surface for orientation facing away from the wheelset when installed;
- 15 and said bearing adapter rolling contact engagement surface has a fore-and-aft arcuate profile permitting rolling contact rocking of the wheelset bearing lengthwise relative to the sideframe; and
- a sideframe of a railroad freight car truck, said sideframe having a compression member, a tension member, a first sideframe column and a second sideframe
- 20 column; said tension member, compression member, first sideframe column and second sideframe column defining bottom, top and sides of a sideframe window formed to receive an end of a freight car truck bolster; said sideframe columns having friction members operable to develop friction when the bolster moves relative to said columns; said tension member extending upwardly to meet said
- 25 compression member at first and second ends of said sideframe, said sideframe having first and second sideframe pedestals at said first and second ends thereof respectively, each of said sideframe pedestals having a pedestal jaw, each said pedestal jaw including first and second opposed thrust lugs about which corner abutment pairs of a bearing adapter may seat; said pedestals each including a
- 30 pedestal seat, one said pedestal seat being a first pedestal seat, said first pedestal seat being for use in combination with at least one other member having a second fitting of the self-steering apparatus, said at least one other member including at least a bearing adapter having a pair of axially spaced apart arches formed to seat on a cylindrical casing of a rail road freight car roller bearing, and first and second

pairs of corner abutments, each pair of corner abutments being spaced to straddle respective ones of said opposed thrust lugs; said first pedestal seat having a metal rolling contact engagement surface for orientation toward the wheelset; and said metal rolling contact engagement surface of said first pedestal seat has a fore-and-aft arcuate profile permitting rolling contact rocking of the wheelset bearing lengthwise relative to the sideframe.

2. The subject matter of claim 1 wherein said at least one member having said first self-steering apparatus fitting is the bearing adapter of part (a) of claim 1.

3. The subject matter of claim 2 wherein said bearing adapter rolling contact engagement surface is one of (a) a spherical surface; and (b) a surface having a curvature formed on a body of revolution having an axis parallel to the axis of the bearing.

4. The subject matter of claim 1 wherein said at least one member having said first self-steering apparatus fitting is the sideframe of part (b) of claim 1.

5. The subject matter of claim 4 wherein said sideframe has a long dimension defining a longitudinal axis, and said metal rolling contact engagement surface of said first pedestal seat is one of (a) a spherical surface; and (b) a surface having a curvature formed on a body of revolution having an axis cross-wise to the longitudinal axis of the sideframe.

6. The subject matter of claim 1 wherein said rolling contact engagement surface having said fore-and-aft arcuate profile also has a cross-wise arcuate profile.

7. A combination of a first member according to claim 1, and a mating second member, said second member having a mating second self-steering apparatus fitting having another metal rolling contact engagement surface orientable on installation to mate with said metal rolling contact engagement surface having said fore-and-aft arcuate profile, and, when installed in a railroad car truck and co-operatively engaged, said first fitting and said mating second fitting being operable to provide self-steering.

8. The combination of claim 7 further including a third member, said third member being a resilient member mountable in co-operation with at least one of (a) said first

member, and (b) said second member; and said third member being operable to urge said rolling contact surfaces of said first and second members to a centered position relative to each other.

5 9. A combination of the bearing adapter of part (a), and the sideframe of part (b) of claim 71, said bearing adapter and said first pedestal seat being matingly engageable on installation to permit fore-and-aft rolling contact rocking therebetween.

10 10. The combination of claim 9 wherein said first pedestal seat and said bearing adapter are also engageable to rock laterally in rolling contact with respect to one another.

15 11. The combination of claim 10 wherein the metal rolling contact engagement surface of at least one of (i) said bearing adapter and (ii) said first pedestal seat is formed on a compound surface.

12. The combination of claim 10 wherein any said rolling contact engagement surface includes a spherical portion.

20 13. The combination of claim 9 including at least a third member, said third member being a resilient member mountable to urge said bearing adapter and said first pedestal seat to a centered position relative to each other.

25 14. The combination of claim 13 wherein the bearing adapter has an end wall, and said third member is formed to seat between that end wall and a thrust lug of said first sideframe pedestal.

30 15. The combination of claim 13 wherein the bearing adapter has at least one end wall, and said third member has a first portion for seating adjacent said end wall, and a second portion at least partially overlying said bearing adapter, said second portion having a relief formed therein to accommodate rocking engagement of said bearing adapter with said first pedestal seat.

35 16. The member of claim 71 wherein said member is one of:
 (i) the bearing adapter of part (a), and said metal rolling contact engagement surface is a rocker having both lengthwise and cross-wise radii of curvature; and.

(ii) the sideframe of part (b), and said metal rolling contact engagement surface is a rocker having both lengthwise and cross-wise radii of curvature.

17. The member of claim 71 wherein said member is the bearing adapter of part (a), for seating on a roller bearing that has first and second axially spaced apart roller bearing races enclosed within a casing, and said first and second arches are engageable with first and second end regions of the bearing casing, the bearing races being straddled between the arches; and a land for engaging the casing, said land extending between the arches and being relieved at locations above top dead center of the bearing races.

18. In combination, (i) the at least one member of claim 71 wherein said member is the bearing adapter of part (a); and (ii) a roller bearing, the bearing adapter being for seating on the roller bearing; wherein said bearing has first and second axially spaced apart roller bearing races enclosed within a casing, said bearing races being straddled between the arches of said bearing adapter; said bearing adapter has a land for engaging the casing, said land extending between the arches, said land having at least one relief, and said bearing adapter being mounted on said bearing with said at least one relief being positioned axially to sit abreast of, and to overlie, top dead center of at least one of said bearing races.

19. A combination of a bearing adapter, a sideframe having at least a first pedestal seat, and a resilient pad for use with the bearing adapter; at least one of (a) said bearing adapter and (b) said sideframe being the member according to claim 71, wherein the bearing adapter and the first pedestal seat have respective mutually engageable rolling contact surfaces, said resilient pad has a first portion for engaging a first end of the bearing adapter, a second portion for engaging a second end of the bearing adapter, and a medial portion between said first and second end portions, said medial portion being formed to accommodate mating engagement of the mutually engageable rolling contact surfaces.

20. The combination of a bearing adapter and an auxiliary centering member for a railroad freight car truck, wherein:

the bearing adapter has an underside for seating upon a round cylindrical casing of a railroad car truck wheelset bearing;

said bearing adapter is shaped to nest between a pair of opposed sideframe pedestal jaws of a sideframe pedestal of a railroad car sideframe;

said bearing adapter has an upwardly facing surface for engagement with a sideframe pedestal member of the railroad car sideframe;

said upwardly facing surface has a rolling contact surface for rolling contact engagement with the sideframe pedestal member;

5 said auxiliary centering member is shaped to seat between said bearing adapter and said sideframe pedestal member;

said auxiliary centering member is resilient;

said auxiliary centering member is operable, when installed, to act on said bearing adapter to urge said bearing adapter upwardly facing surface to a centered position relative to the sideframe pedestal member; and

10

as installed, rolling contact engagement of said upwardly facing surface of said bearing adapter with the sideframe pedestal member is unimpeded by said auxiliary centering member.

15

21. The combination of claim 20 wherein said bearing adapter has a body having first and second parts, said first part including said upwardly facing surface; said first and second parts being made of metal, said first part having a greater hardness than said second part.

20

22. The combination of claim 20 wherein said bearing adapter includes a metal body made of one of (a) iron; and (b) steel.

25

23. The combination of claim 20 wherein said upwardly facing surface of said bearing adapter has the form of a rolling contact rocker having a radius of curvature, and, when said bearing adapter is installed in a mating sideframe pedestal, said radius of curvature permitting longitudinal rolling contact rocking of said bearing adapter lengthwise relative to the sideframe.

30

24. The combination of claim 23 wherein said upwardly facing surface of said bearing adapter also has a curvature permitting cross-wise swinging of the sideframe relative to the bearing adapter.

35

25. The combination of claim 20 wherein said upwardly facing surface of said bearing adapter has the form of a rolling contact rocker having a radius of curvature, and, when said bearing adapter is installed in a mating sideframe pedestal, said radius of

curvature permits cross-wise rolling contact swinging of the sideframe relative to the bearing adapter.

26. The combination of claim 20 wherein said auxiliary centering member is made of an elastomer.

27. The combination of claim 26 wherein said auxiliary centering member has a first part and a second part; said first part overlies a portion of said upwardly facing surface of said bearing adapter, and said first part has an accommodation formed therein to permit unobstructed rolling contact of said rolling contact surface of said bearing adapter with a mating sideframe pedestal member.

28. The combination of claim 26 wherein:
said bearing adapter has first and second end walls that, on installation, face toward each of first and second pedestal thrust lugs of the pedestal jaws of the sideframe;
said auxiliary centering member has a first part and a second part;
said first part overlies at least a portion of said upwardly facing surface of said bearing adapter; and
said second part is shaped to depend from said first part over one of said end walls of said bearing adapter.

29. The combination of claim 28 wherein said auxiliary centering member has a third part that depends from said first part over said second end wall of said bearing adapter.

30. The combination of claim 20 wherein said auxiliary centering member is a first auxiliary centering member, and said combination also includes a second auxiliary centering member.

31. The combination of claim 30 wherein:
said bearing adapter has first and second end faces that, on installation, face toward each of the first and second pedestal thrust lugs of the pedestal jaws of the sideframe pedestal;
said first auxiliary centering member has a first part and a second part;

said first part of said first auxiliary centering member overlies at least a first portion of said upwardly facing surface of said bearing adapter, and said second part of said first auxiliary centering member overhangs said first end wall of said bearing adapter;

5 said second auxiliary centering member has a first part and a second part;
 said first part of said second auxiliary centering member overlies at least a second portion of said upwardly facing surface of said bearing adapter; and
 and said second part of said second auxiliary centering member overhangs said second end wall of said bearing adapter.

10

32. The combination of claim 31 wherein:

 said bearing adapter has first and second end walls, each of said first and second end walls being bracketed by a pair of first and second corner abutments associated with that respective end wall;

15

 each said end wall and its associated corner abutments defining a channel for nesting about a corresponding pedestal seat thrust lug of said sideframe pedestal;

 said second part of said first auxiliary centering member seats in front of said first end wall between said first and second corner abutments associated therewith; and

20

 said second part of said second auxiliary centering member seats in front of said second end wall of said bearing adapter between said first and second corner abutments associated therewith.

25 33. The combination of a bearing adapter and an auxiliary centering member for a railroad freight car truck, wherein:

 the bearing adapter has a body having an underside for seating upon a round cylindrical casing of a railroad car truck wheel set bearing;

30

 said bearing adapter body has first and second end walls bracketed by associated first and second corner abutments, each said end wall and corner abutments associated therewith being shaped to seat nestingly about a sideframe pedestal jaws thrust block, such that when installed said bearing adapter is captured above the bearing and between a pair of opposed sideframe pedestal jaws of a sideframe pedestal of a railroad car sideframe;

- 66 -

said body having an upwardly facing surface for engagement with a sideframe pedestal member of the railroad car sideframe;

said upwardly facing surface having a rolling contact surface for rolling contact engagement with the sideframe pedestal member;

5 said auxiliary centering member being shaped to seat between said bearing adapter and said sideframe pedestal member;

said auxiliary centering member being resilient; and

10 said auxiliary centering member being operable, when installed, to urge said bearing adapter upwardly facing surface to a centered position relative to the sideframe pedestal member; and

when installed, rolling contact engagement of said upwardly facing surface of said bearing adapter with the sideframe pedestal member being unimpeded by said auxiliary centering member.

15 34. A wheelset-to-sideframe interface assembly for a railroad car truck, said interface assembly comprising:

a bearing adapter, a mating pedestal seat and a resilient member;

20 said bearing adapter having first and second ends formed for interlocking insertion between a pair of pedestal jaws of a sideframe pedestal of a railroad car sideframe;

said bearing adapter having a first rocking member;

said pedestal seat having a second rocking member;

25 said first and second rocking members being matingly engageable to permit rolling contact rocking therebetween in a longitudinal direction relative to the sideframe;

said resilient member being mounted between said bearing adapter and said pedestal seat;

said resilient member having a first end portion formed to engage said first end of said bearing adapter; and

30 said resilient member having a second portion, said second portion having an accommodation formed therein to permit mating engagement of said first and second rocking members.

35. The wheelset-to-sideframe interface assembly of claim 34 wherein said resilient member has first and second ends formed to seat between said bearing adapter and pedestal jaws of the sideframe.

5 36. The wheelset-to-sideframe interface assembly of claim 34 wherein:
each of said first and second ends has an end wall bracketed by a pair of corner
abutments, said end wall and corner abutments co-operating to define a
channel permitting insertion of said bearing adapter between a pair of
thrust lugs of said pedestal jaws of said sideframe pedestal;
10 said resilient member has a second end portion engageable with said second end
of said bearing adapter for interposition between said second end of said
bearing adapter and a second pedestal jaw thrust lug;
said second portion of said resilient member is a medial portion lying between
said first and second end portions; and
15 said medial portion has said accommodation formed therein to permit mating
rocking engagement of said first and second rocking members.

37. The wheelset-to-sideframe interface assembly of claim 34 wherein said bearing
adapter has a body for seating upon a bearing of a rail road truck wheelset, and said first
20 rocking member is mounted to said body, said first rocking member having a rocking
surface, said rocking surface facing away from said body when said first rocking member is
mounted to said body, and said first rocking member being made of a different material
from said body.

25 38. The wheelset-to-sideframe interface assembly of claim 37 wherein said first
rocking member is an insert removably seated on said body of said bearing adapter.

39. The wheelset-to-sideframe interface assembly of claim 38 wherein said rocking
surface of said first rocking member is a portion of a sphere.

30

40. The wheelset-to-sideframe interface assembly of claim 34 wherein:
said resilient member is a first resilient member, and said assembly includes a
second resilient member;
said second resilient member being mounted between said bearing adapter and
35 said pedestal seat;

said second resilient member having a first portion formed to engage said second end of said bearing adapter; and

said second resilient member having a second portion, said second portion having an accommodation formed therein to permit mating engagement of said first and second rocking members.

41. The wheelset-to-sideframe interface assembly of claim 40 wherein said bearing adapter has a body for seating upon a bearing of a rail road car truck wheelset, said first rocking member is an insert mounted to said body, said insert is a disc having a spherically arcuate upper surface, and said insert nests between said second portions of said first and second resilient members.

42. A railroad freight car truck having wheelsets mounted in a pair of sideframes, said sideframes having pedestals for receiving said wheelsets, said pedestals having pedestal jaws, said jaws including sideframe pedestal jaw thrust blocks, said truck having wheelset-to-sideframe interface assemblies according to claim 34 mounted in said sideframe pedestals, said bearing adapters being mounted between said jaws, said sideframe pedestals having respective ones of said sideframe pedestal members rockingly co-operable with said bearing adapters, and said truck having ones of said resilient members mounted intermediate said jaws and said bearing adapters for urging said bearing adapters to a centered position relative to the respective pedestal seats.

43. The wheelset-to-sideframe interface assembly of claim 34 wherein said resilient member is a resilient pad having a second end portion for engaging a second end of the bearing adapter, and said second portion is a medial portion of said pad located between said first and second end portions, said medial portion being formed to accommodate mating engagement of the rocking members.

44. The wheelset-to-sideframe interface assembly of claim 34 wherein said assembly is a wheelset-to-sideframe interface assembly kit.

45. The wheelset-to-sideframe interface assembly of claim 44 wherein said mating pedestal seat has a depth of section of greater than ½ inches.

46. The wheelset-to-sideframe interface assembly of claim 34 wherein said bearing adapter has a body for seating upon a bearing of a rail road truck wheelset, and said first rocking member is mountable to said body, said first rocking member has a rocking surface, said rocking surface facing away from said body when said first rocking member is mounted to said body, and said first rocking member being made of a different material from said body.

47. The bearing adapter of claim 46 wherein said first rocking surface has both a lateral curvature and a longitudinal curvature.

48. The bearing adapter of claim 34 wherein said first rocking surface has both a lateral curvature and a longitudinal curvature.

49. The bearing adapter of claim 34 wherein said first rocking surface is formed on a spherical arc.

50. A self-steering railroad car truck having a truck bolster mounted transversely between sideframes, said sideframes having sideframe pedestals mounted upon wheelsets, there being a self-steering apparatus between said sideframes and said wheelsets, said truck bolster having ends, each of said ends of said truck bolster being resiliently mounted to a respective one of said sideframes, said truck having a set of dampers mounted between each said bolster end and its respective sideframe, each set of dampers including at least a first damper and a second damper, the first damper being mounted transversely inboard of the second damper, each damper having a bearing surface mounted to work slidingly against a mating surface at a friction interface in a sliding, substantially stick-slip free relationship when said bolster moves relative to said sideframes, said first damper and said second damper being urged against the mating surface by a first biasing device and a second biasing device respectively, the first biasing device being offset sideways from the second biasing device, said bearing face-surface of each said damper having a dynamic co-efficient of friction and a static co-efficient of friction when working against said mating surface and said static and dynamic co-efficients of friction of said first damper lie in the range of 0.1 to 0.4.

51. The truck of claim 50 wherein said dynamic and static co-efficients of friction of said first damper have respective magnitudes within 10% of each other.

52. The truck of claim 50 wherein said static and dynamic co-efficients of friction of said first damper are substantially equal.

5 53. The truck of claim 50 wherein said first damper has an oblique face for seating in a damper pocket of said truck bolster of said truck, when said first damper is installed in said damper pocket said bearing surface is a substantially vertical face, and said respective mating surface is a surface of a mating sideframe column.

10 54. The truck of claim 50 wherein said static and dynamic co-efficients of friction of said first damper lie in the range 0.2 to 0.35.

55. The truck of claim 50 wherein said static and dynamic co-efficients of friction of said first damper are about 0.27 to 0.33.

15

56. The truck of claim 50 wherein each of said first and second sets of dampers includes four friction dampers, two thereof being inboard dampers, two thereof being outboard dampers, and all four thereof being independently biased.

20 57. The truck of claim 54 wherein said static and dynamic co-efficients of friction of said first damper are substantially equal.

58. The truck of claim 50 wherein said dampers each include a friction element mounted thereto, and said bearing surface is a surface of said friction element.

25

59. The truck of claim 58 wherein said friction element is a composite surface element that includes a polymeric material.

60. The truck of claim 50 wherein said self-steering apparatus includes a rocker.

30

61. The truck of claim 50 wherein said self-steering apparatus has a force-deflection characteristic varying as a function of vertical load.

62. The truck of claim 50 wherein, in operation, bearing surfaces of said first and second dampers face toward a sideframe column of one of said sideframes and said

respective bearing surfaces of said first and second dampers have normal vectors that are substantially parallel.

63. The truck of claim 50 wherein said sideframes have a long axis, said sideframes have a long axis, said sideframes have sideframe columns, said mating surface is mounted to one of said sideframe columns, and said mating surface is substantially perpendicular to said long axis of said sideframes.

64. The truck of claim 50 wherein said bolster is permitted a range of lateral travel of at least $\frac{3}{4}$ " to either side of neutral relative to said sideframes.

65. The truck of claim 50 wherein said sideframes have a long axis, in operation said bearing surfaces of said first and second dampers both face toward one sideframe column of one of said sideframes, said respective bearing surfaces of said first and second dampers have normal vectors that are substantially parallel to each other and to said long axis, and said bolster is permitted at least $\frac{3}{4}$ " of lateral travel to either side of neutral relative to said sideframes.

66. A self-steering railroad car truck having:

a truck bolster mounted transversely between sideframes, said sideframes having sideframe pedestals mounted upon wheelsets, there being a self-steering apparatus between said sideframes and said wheelsets;

said truck bolster having ends, each of said ends of said truck bolster being resiliently mounted to a respective one of said sideframes;

said truck having a set of dampers mounted between each said bolster end and its respective sideframe, each set of dampers including at least a first damper and a second damper, the first damper being mounted transversely inboard of the second damper;

each damper having a bearing surface mounted to work slidingly against a mating surface at a friction interface in a sliding, substantially stick-slip free relationship when said bolster moves relative to said sideframes, said first damper and said second damper being urged against the mating surface by a first biasing device and a second biasing device respectively, the first biasing device being offset sideways from the second biasing device, said bearing face--surface of each said damper having a dynamic co-

efficient of friction and a static co-efficient of friction when working against said mating surface; and

said truck has a bearing adapter to sideframe pedestal interface that includes said self-steering apparatus, and said self-steering apparatus includes a rocker that rocks both lengthwise and sideways, said rocker being operable to permit lateral rocking of said sideframes and to permit self-steering of said truck.

67. The truck of claim 50 wherein said bearing surface is fabricated from a material having a polymeric component.

68. The truck of claim 50 wherein said bolster includes a damper pocket defining a seat for accommodating said first damper; said first damper has an oblique face for seating in said damper pocket of said truck bolster, one of said sideframes has a sideframe column, said sideframe column including said mating wear surface; and said bearing surface is a substantially vertical face for bearing against said mating sideframe column mating wear surface.

69. The truck of claim 68 wherein said oblique face has a surface treatment for encouraging sliding of said oblique face relative to said damper pocket.

70. The truck of claim 68 wherein said oblique face has a static coefficient of friction and a dynamic co-efficient of friction, and said co-efficients of static and dynamic friction of said oblique face are substantially equal.

71. The truck of claim 68 wherein said oblique face and said bearing surface both have sliding surface elements, and both of said sliding surface elements are made from materials having a polymeric component.

72. The truck of claim 68 wherein said oblique face has a primary angle relative to said bearing surface, and a cross-wise secondary angle.

73. The truck of claim 66 wherein said dynamic and static co-efficients of friction of said first damper have respective magnitudes within 10% of each other.

- 73 -

74. The truck of claim 66 wherein said static and dynamic co-efficients of friction of said first damper are substantially equal.

5 75. The truck of claim 66 wherein said static and dynamic co-efficients of friction of said first damper lie in the range 0.2 to 0.35.

76. The truck of claim 66 wherein said bearing surface is fabricated from a material having a polymeric component.

10 77. The truck of claim 66 wherein said self-steering apparatus having a force-deflection characteristic varying as a function of vertical load.

15 78. The truck of claim 66 wherein said bolster includes a damper pocket defining a seat for accommodating said first damper, said first damper has an oblique face for seating in said damper pocket of said truck bolster, said sideframes have sideframe columns, said mating surface is a surface of one of said sideframe columns; and said bearing surface is a substantially vertical face for bearing against said sideframe column mating surface.

20 79. The truck of claim 78 wherein said oblique face has a surface treatment for encouraging sliding of said oblique face relative to said damper pocket.

25 80. The truck of claim 78 wherein said oblique face has a static coefficient of friction and a dynamic co-efficient of friction and said static and dynamic co-efficient of friction of said oblique face are substantially equal.

81. The truck of claim 78 wherein said oblique face and said bearing surface both have sliding surface elements, and both of said sliding surface elements are made from materials having a polymeric component.

30 82. The truck of claim 78 wherein said oblique face has a primary angle relative to said bearing surface , and a cross-wise secondary angle.

35 83. The truck of claim 78 wherein each of said sets of dampers includes four friction dampers, two thereof being inboard dampers, two thereof being outboard dampers, and all four thereof being independently biased.

84. The truck of claim 66 wherein, in operation, bearing surfaces of said first and second dampers face toward a sideframe column of one of said sideframes and said respective bearing surfaces of said first and second dampers have normal vectors that are substantially parallel.

5

85. The truck of claim 66 wherein said sideframes each have a long axis, said sideframes have sideframe columns, said mating surface is mounted one of said sideframe columns, and said mating surface is substantially perpendicular to said long axis of said sideframes.

10

86. The truck of claim 66 wherein said bolster is permitted a range of lateral travel of at least $\frac{3}{4}$ " to either side of neutral relative to said sideframes.

15

87. The truck of claim 66 wherein said sideframes have a long axis, in operation said bearing surfaces of said first and second dampers face toward a sideframe column of one of said sideframes, said respective bearing surfaces of said first and second dampers have normal vectors that are substantially parallel to each other and to said long axis of said truck, and said bolster is permitted at least $\frac{3}{4}$ " of lateral travel to either side of neutral relative to said sideframes.

20

88. A self-steering railroad car truck having:

a truck bolster mounted transversely between a pair of first and second sideframes,

each of said sideframes having a sideframe window bounded by respective first and second sideframe columns;

25

said truck bolster having first and second ends, each of said first and second ends of said truck bolster being resiliently mounted in the sideframe window of a respective one of said sideframes, said first and second sideframes are able to yaw relative to said bolster;

30

said first and second sideframes each having first and second sideframe pedestals; said first and second sideframe pedestals being mounted upon respective first and second wheelsets,

a self-steering apparatus mounted between said sideframe pedestals and said wheelsets;

35

a first set of friction dampers mounted between said first end of said bolster

- 75 -

and said sideframe columns of said first sideframe;
a second set of friction dampers being mounted between said second end of said
bolster and said sideframe columns of said second sideframe;
said first set of friction dampers including at least a first friction damper and a
5 second friction damper;
said first and second friction dampers each having a bearing surface mounted
to work slidingly against a mating surface when said bolster moves
relative to said sideframe columns of said first sideframe;
said first friction damper and said second friction damper being independently
10 urged against the respective mating surface by a first biasing device and a
second biasing device respectively, said first biasing device being offset
sideways from the second biasing device;
said first friction damper being mounted transversely inboard of said second
friction damper whereby yawing motion of said first sideframe relative
15 to said bolster generates a restorative moment couple between said first
friction damper and said second friction damper, that moment couple
acting to restore said bolster to a squared position relative to said first
sideframe;
said bearing surface having a dynamic co-efficient of friction when working
20 against said mating surface;
said bearing surface having a static co-efficient of friction when working
against said mating surface;
said bearing surface and said mating surface defining a substantially stick-slip
free friction interface therebetween; and
25 said dynamic and static co-efficients of friction of said first friction damper
both lie in the range of 0.2 to 0.35.

89. The self-steering railroad car truck of claim 88 wherein said dynamic co-efficient
of friction of said bearing surface of said first friction damper against said respective
30 mating surface is substantially the same as said static co-efficient of friction of said
bearing surface of said first friction damper against said respective mating surface.

90. The self-steering railroad car truck of claim 88 wherein said dynamic co-efficient
of friction of said bearing surface of said first friction damper against said respective
35 mating surface and said static co-efficient of friction of said bearing surface of said

- 76 -

first friction damper against said respective mating surface have respective magnitudes within 10 % of each other.

5 91. The self-steering railroad car truck of claim 88 wherein said first and second friction dampers each include a friction element mounted thereto, said bearing surface is a surface of said friction element, and said friction element is a composite surface element that includes a polymeric material.

10 92. The self-steering railroad car truck of claim 88 wherein said truck bolster has a damper pocket defining a seat in which to accommodate said first friction damper; said first friction damper has an oblique face for seating in said damper pocket said truck, when said first friction damper is installed in said damper pocket said bearing surface is a substantially vertical face, and said respective mating surface is a surface of a mating one of said sideframe columns.

15 93. The self-steering railroad car truck of claim 88 wherein said self-steering apparatus includes a rocker.

20 94. The self-steering railroad car truck of claim 88 wherein said self-steering apparatus has a force-deflection characteristic varying as a function of vertical load.

25 95. The self-steering railroad car truck of claim 88 wherein each of said first and second sets of friction dampers includes four friction dampers, two thereof being inboard dampers, two thereof being outboard dampers, and all four thereof being independently biased.

30 96. The truck of claim 88 wherein, in operation, bearing surfaces of said first and second dampers face toward a sideframe column of one of said sideframes and said respective bearing surfaces of said first and second dampers have normal vectors that are substantially parallel.

35 97. The truck of claim 88 wherein said sideframes have a long axis, said sideframes have sideframe columns, said mating surface is mounted to one of said sideframe columns, and said mating surface is substantially perpendicular to said long axis of said sideframes.

98. The truck of claim 88 wherein said bolster is permitted a range of lateral travel of at least%" to either side of neutral relative to said sideframes.

5 99. The truck of claim 88 wherein said sideframes each have a long axis, in operation said bearing surfaces of said first and second friction dampers both face toward one sideframe column of one of said sideframes, said respective bearing surfaces of said first and second friction dampers have normal vectors that are substantially parallel to each other and to said long axis, and said bolster is permitted at least%" of lateral travel to
10 either side of neutral relative to said sideframes.

100. A railroad car truck having a truck bolster mounted transversely between sideframes, said truck bolster having ends, each of said ends of said truck bolster being resiliently mounted to a respective one of said sideframes, said truck having a set of
15 dampers mounted between each said bolster end and its respective sideframe, each set of dampers including at least a first damper and a second damper, the first damper being mounted transversely inboard of the second damper, each damper having a bearing surface mounted to work slidingly against a mating surface at a friction interface in a sliding, substantially stick-slip free relationship when said bolster moves relative to said
20 sideframes, said first damper and said second damper being urged against the mating surface by a first biasing device and a second biasing device respectively, the first biasing device being offset sideways from the second biasing device, said bearing surface of each said damper having a dynamic co-efficient of friction and a static co-efficient of friction when working against said mating surface; said truck includes a bearing adapter
25 to sideframe pedestal interface that includes a self-steering apparatus; and said self-steering apparatus includes a rocker.

101. The truck of claim 100 wherein said dynamic and static co-efficients of friction of said first damper have respective magnitudes within 10% of each other.
30

102. The truck of claim 100 wherein said static and dynamic co-efficients of friction of said first damper are substantially equal.

103. The truck of claim 100 wherein said static and dynamic co-efficients of friction of said first damper lie in the range 0.2 to 0.35.
35

104. The truck of claim 100 wherein said bearing surface is fabricated from a material having a polymeric component.

5 105. The truck of claim 100 wherein said truck includes a self-steering apparatus having a force-deflection characteristic varying as a function of vertical load.

10 106. The truck of claim 100 wherein said bolster includes a damper pocket defining a seat for accommodating said first damper; said first damper has an oblique face for seating in said damper pocket of said truck bolster, said sideframes have sideframe columns, said mating surface is a surface of one of said sideframe columns; and said bearing surface is a substantially vertical face for bearing against said mating sideframe column mating surface.

15 107. The truck of claim 106 wherein said oblique face has a surface treatment for encouraging sliding of said oblique face relative to said damper pocket.

20 108. The truck of claim 106 wherein said oblique face has a static coefficient of friction and a dynamic co-efficient of friction, and said static and dynamic co-efficients of friction of said oblique face are substantially equal.

25 109. The truck of claim 106 wherein said oblique face and said bearing surface both have sliding surface elements, and both of said sliding surface elements are made from materials having a polymeric component.

110. The truck of claim 106 wherein said oblique face has a primary angle relative to said bearing surface, and a cross-wise secondary angle.

30 111. The truck of claim 100 wherein each of said sets of friction dampers includes four friction dampers, two thereof being inboard dampers, two thereof being outboard dampers, and all four thereof being independently biased.

112. The truck of claim 100 wherein, in operation, bearing surfaces of said first and second dampers face toward a sideframe column of one of said sideframes and said

respective bearing surfaces of said first and second dampers have normal vectors that are substantially parallel.

113. The truck of claim 100 wherein said sideframes each have a long axis, said sideframes have sideframe columns, said mating bearing surface is mounted one of said sideframe columns, and said mating surface is substantially perpendicular to said long axis of said sideframes.

114. The truck of claim 100 wherein said bolster is permitted a range of lateral travel of at least $\frac{3}{4}$ " to either side of neutral relative to said sideframes.

115. The truck of claim 100 wherein said sideframes each have a long axis, in operation said bearing surfaces of said first and second dampers both face toward one sideframe column of one of said sideframes, said respective bearing surfaces of said first and second dampers have normal vectors that are substantially parallel to each other and to said long axis, and said bolster is permitted at least 1" of lateral travel to either side of neutral relative to said sideframes.

116. A three piece railroad car truck for rolling in a lengthwise direction on cross-wise spaced rails of a railroad track, said truck comprising:

a truck bolster, a first sideframe, a second sideframe, a first wheelset, a second wheelset, a first main spring group, a second main spring group, a first set of dampers and a second set of dampers;

said truck bolster having a first end and a second end;

said truck bolster extending cross-wise between said first and second sideframes, and said sideframes being mounted to yaw relative to said truck bolster;

each of said first and second sideframes having a sideframe window defined between an upper member, a lower member, and a pair of first and second sideframe columns, said lower member having a main spring seat;

said first main spring group being carried on said main spring seat of said first sideframe, and said first end of said truck bolster being supported upon said first main spring group;

said second main spring group being carried on said main spring seat of said

- 80 -

second sideframe, and said second end of said truck bolster being supported upon said second main spring group;

said first and second sideframes having sideframe pedestals into which said wheelsets are mounted;

5 said wheelsets having respective wheelset bearings mounted in associated ones of said sideframe pedestals of said first and second sideframes;

said truck having self-steering apparatus, said self-steering apparatus being mounted between said wheelset bearings and said sideframe pedestals;

10 each of said first and second main spring groups having respective first, second, third, and fourth comer springs, said first and second comer springs being offset cross-wise inboard of said third and fourth comer springs respectively, and said first and third comer springs being offset lengthwise from said second and fourth comer springs respectively;

15 said first set of dampers being mounted to work between said first end of said bolster and said first sideframe;

said second set of dampers being mounted to work between said second end of said bolster and said second side-frame;

20 each of said first and second sets of dampers including first, second, third and fourth dampers, said first and second dampers being offset cross-wise inboard of said third and fourth dampers respectively, and said first and third dampers being offset lengthwise from said second and fourth dampers being independently biased to work in sliding friction relationship against associated bearing plates of said truck when said bolster moves relative to said sideframes, said bearing plates being oriented square to said lengthwise direction;

25 said bolster being displaceable cross-wise relative to said first sideframe when said truck is subjected to lateral perturbations, total lateral deflection of said bolster including a first component of deflection and a second component of deflection, said components of deflection being additive;

30 said first component of deflection being cross-wise deflection measured between said main spring seat of said first sideframe and said first end of said bolster;

35 said second component of deflection being cross-wise deflection between said first wheelset and said main spring seat of said first sideframe;

each of said first and second components of deflection having a magnitude;
and
said total lateral deflection having a magnitude greater than either of said
first and second components of deflection.

5

117. The three piece railroad car truck of claim 116 wherein said truck has a rated load, said truck has a first lateral stiffness, k_1 , associated with said first component of deflection, and a second lateral stiffness, k_2 associated with said second component of deflection, and, at said rated load k_2 is less than k_1 .

10

118. The three piece railroad car truck of claim 116 wherein said truck has members confining said bolster to a bounded range of lateral translation relative to said first sideframe, and said bounded range of lateral translation permits at least 10 inches of lateral travel of said bolster relative to said first sideframe to either side of a neutral position.

15

119. The three piece railroad car truck of claim 118 wherein said range of lateral translation is bounded by gibs, and said gibs permit a maximum excursion of between 1 1/8" and 1 3/4" of lateral travel to either side of said neutral position.

20

120. The three piece railroad car truck of claim 118 wherein said first and second sets of dampers are mounted in pockets in said first and second bolster ends respectively; said bearing plates are bearing plates of said sideframe columns; said first and second main spring groups have a width in the cross-wise direction, and said bearing plates are wider than said main spring groups in the cross-wise direction.

25

121. The three piece railroad car truck of claim 116 wherein said dampers include damper wedges, and said wedges of said first, second, third and fourth dampers are driven by said first, second, third and fourth corner springs of said main spring groups respectively.

30

122. The three piece railroad car truck of claim 121 wherein said first, second, third, and fourth corner springs each have another spring nested therewithin.

35

123. The three piece railroad car truck of claim 116 wherein each of said main spring groups has an overall vertical spring rate, k_r ; each said main spring group has springs mounted to bias said dampers, including said first, second, third and fourth

comer springs; said springs mounted to bias said dampers have a total vertical spring rate, k_D ; and k_D is at least 20% of k_r .

5 124. The three piece railroad car truck of claim 116 wherein said dampers include damper wedges having a primary wedge angle of at least 35 degrees, and k_D lies in the range of 25 to 50% of k_r .

10 125. The three piece railroad car truck of claim 116 wherein said self-steering apparatus includes a member permitting fourth dampers respectively, and each of said first, sec longitudinal deflection of said wheelsets in said sideframe pedestals, and, for small deflections, said self-steering apparatus has a linear force deflection characteristic.

15 126. The three piece railroad car truck of claim 116 wherein said self-steering apparatus has a force deflection characteristic that varies as a function of vertical load passed between said the associated wheelset and sideframe pedestal.

20 127. The three piece railroad car truck of claim 116 wherein said self-steering apparatus includes a rolling contact rocker having a lengthwise curvature.

128. The three piece railroad car truck of claim 127 wherein said self-steering apparatus rocker includes both a lengthwise curvature to permit self-steering and a cross-wise curvature to permit sideways swinging of said first sideframe.

25 129. The three piece railroad car truck of claim 116 wherein said second component of deflection being cross-wise said self-steering apparatus includes an elastomeric pad.

30 1. The three piece railroad car truck of claim 116 wherein each said bearing has a bearing adapter mounted thereon, each said pedestal has a pedestal seat, and an elastomeric shear pad is mounted between said bearing adapter and the pedestal seat associated therewith, and self-steering apparatus includes said shear pad.

131. The three piece railroad car truck of claim 116 wherein said bolster has four damper pockets formed at each end thereof, said bearing plates are mounted to said

sideframe columns, and said dampers are driven by auxiliary springs captured in said pockets in said bolster.

132. The three piece railroad car truck of claim 116 wherein said bolster has first, second, third, and fourth four damper pockets formed at each end thereof, said first, second, third and fourth dampers are driven by said first, second, third and fourth corner springs respectively.

133. The three piece railroad car truck of claim 132 wherein said bolster has an intermediate land between each of (a) said first and third damper pockets and (b) said second and fourth bolster pockets.

134. The three piece railroad car truck of claim 116 wherein said dampers have non-metallic friction surfaces mounted to work against said bearing plates.

135. The three piece railroad car truck of claim 116 wherein said dampers have coefficients of static friction and dynamic friction against said bearing plates, and said coefficients are within 20% of one another.

136. The three piece railroad car truck of claim 116 wherein said truck has a rated load capacity at least as great as an AAR 70 Ton truck.

137. The three piece railroad car truck of claim 116 wherein:

each said bearing has a bearing adapter mounted thereto, each said pedestal has a pedestal seat, and an elastomeric shear pad is mounted between said bearing adapter and the pedestal seat associated therewith, and said self-steering apparatus includes said shear pads;

said truck has members confining said bolster to a bounded range of lateral translation relative to said first side-frame, and said bounded range of lateral translation permits at least $\frac{3}{4}$ inches of lateral travel of said bolster relative to said first sideframe to either side of a neutral position;

said first and second sets of dampers are mounted in pockets in said first and second bolster ends respectively;

said bearing plates are bearing plates of said sideframe columns; and

said dampers include damper wedges, said damper wedges having a primary

wedge angle of greater than 35 degrees, said damper wedges being driven by said first, second, third and fourth comer springs of said main 35 spring groups respectively.

- 5 138. A three piece railroad car truck for rolling in a length- wise direction on cross-
wise spaced rails of a railroad track, said truck comprising:
- a truck bolster, a first sideframe, a second sideframe, a first wheelset, a second
wheelset, a first main spring group, a second main spring group, a first
set of dampers and a second set of dampers;
- 10 said truck bolster having a first end and a second end;
said truck bolster extending cross-wise between said first 45 and second
sideframes, and said sideframes being mounted to yaw relative to said
truck bolster;
- 15 each of said first and second sideframes having a sideframe window defined
between an upper member, a lower member, and a pair of first and
second sideframe columns, said lower member having a main spring
seat;
- 20 said first main spring group being carried on said main spring seat of said first
sideframe, and said first end of said truck bolster being supported upon
said first main spring group;
- 25 said second main spring group being carried on said main spring seat of second
sideframe, and said second end of said truck bolster supported upon said
second main spring group;
- 30 said first and second sideframes having sideframe pedestals into which said
wheelsets are mounted;
- said wheelsets having respective wheelset bearings mounted in associated
ones of said sideframe pedestals of said first and second sideframes;
- said truck having self-steering apparatus, said self-steering apparatus being
mounted between said wheelset bearing and said sideframe
pedestals;
- 35 each of said first and second main spring groups having respective first,
second, third, and fourth comer springs, said comer springs being coil
springs, said first and second corner springs being offset cross-wise
inboard of said third and fourth corner springs respectively, and said
first and third comer springs being offset lengthwise from said second

and fourth comer springs respectively;

said first and second bolster ends having accommodations formed therein to accommodate said first and second sets of dampers, said first set of dampers being mounted to work between said first end of said bolster and said first sideframe, said second set of dampers being mounted to work between said second end of said bolster and said second sideframe;

said sideframe columns of said first and second sideframes having respective bearing surfaces against which said dampers of said sets of dampers work when said bolster moves relative to said sideframes, said bearing surfaces being mounted square to the lengthwise direction;

each of said first and second sets of dampers including dampers mounted above said first, second, third, and fourth comer springs respectively;

said bolster being displaceable cross-wise relative to said first sideframe when said truck is subjected to lateral perturbations, total lateral deflection of said bolster including a first component of deflection and a second component of deflection, said components of deflection being additive;

said first component of deflection being cross-wise deflection measured between said main spring seat of said first sideframe and said first end of said bolster;

said second component of deflection being cross-wise deflection between said first wheelset and said main spring seat of said first sideframe;

each of said first and second components of deflection having a magnitude; and

said total lateral deflection having a magnitude greater than either of said first and second components of deflection.

139. The three piece railroad car truck of claim 138 wherein said truck has a rated load, said truck has a first lateral stiffness, k_1 associated with said first component of deflection, and a second lateral stiffness, k_2 associated with said second component of deflection, and, at said rated load k_2 is less than k_1 .

140. The three piece railroad car truck of claim 138 wherein said truck has members confining said bolster to a bounded range of lateral translation relative to said first sideframe, and said bounded range of lateral translation permits at least $\frac{3}{4}$ inches of

lateral travel of said bolster relative to said first sideframe to either side of a neutral position.

141. The three piece railroad car truck of claim 140 wherein said range of lateral translation is bounded by gibs, and said gibs permit maximum excursion of between $1\frac{1}{8}$ " and $1\frac{3}{4}$ " of lateral travel to either side of said neutral position.

142. The three piece railroad car truck of claim 138 wherein said first, second, third, and fourth corner springs each have another spring nested therewithin.

143. The three piece railroad car truck of claim 138 wherein each of said main spring groups has an overall vertical spring rate, k_D ; each said main spring group has springs mounted to bias said dampers, including said first, second, third and fourth corner springs; said springs mounted to bias said dampers have a total vertical spring rate, k_D ; and k_D is at least 20% of k_r .

144. The three piece railroad car truck of claim 138 wherein said dampers include damper wedges having a primary wedge angle of at least 35 degrees, and k_D lies in the range of 25 to 50% of k_r .

145. The three piece railroad car truck of claim 138 wherein said self-steering apparatus includes a member permitting longitudinal deflection of said wheelsets in said sideframe pedestals, and, for small deflections, said self-steering apparatus has a linear force deflection characteristic.

146. The three piece railroad car truck of claim 138 wherein said self-steering apparatus has a force deflection characteristic that varies as a function of vertical load passed between said the associated wheelset and sideframe pedestal.

147. The three piece railroad car truck of claim 138 wherein said self-steering apparatus includes a rolling contact rocker having a lengthwise curvature.

148. The three piece railroad car truck of claim 147 wherein said self-steering apparatus rocker includes both a lengthwise curvature to permit self-steering and a cross-wise curvature to permit sideways swinging of said first sideframe.

149. The three piece railroad car truck of claim 138 wherein said self-steering apparatus includes an elastomeric pad.

5 150. The three piece railroad car truck of claim 138 wherein each said bearing has a bearing adapter mounted thereon, each said pedestal has a pedestal seat, and an elastomeric shear pad is mounted between said bearing adapter and the pedestal seat associated therewith, and said self-steering apparatus includes said shear pad.

10 151. The three piece railroad car truck of claim 138 wherein said dampers have non-metallic friction surfaces mounted to work against said bearing plates.

15 152. The three piece railroad car truck of claim 138 wherein said dampers have coefficients of static friction and dynamic friction against said bearing plates, and said coefficients are within 20% of one another.

153. The three piece railroad car truck of claim 138 wherein said truck has a rated load capacity at least as great as an AAR 70 Ton truck.

20

154. A three piece railroad car truck having

25

a bolster sprung cross-wise between first and second sideframes, said sideframes being mounted on first and second lengthwise spaced apart wheelsets, said wheelsets being mounted to said sideframes at sideframe to wheelset interface assemblies that include self-steering apparatus permitting angular deflection of said wheelsets relative to said sideframes as viewed from above;

30

said bolster having a center plate and first and second ends distant from said center plate, said first and second sideframes being mounted to yaw relative to said bolster; and

35

said truck including a first set of yaw resisting members mounted to work between said bolster and said first sideframe, and a second set of yaw resisting members mounted to work between said bolster and said second sideframe, each of said sets of yaw resisting members including a first yaw resisting member and a second yaw resisting member, said

first and second yaw resisting members being independently biased to oppose yaw deflection, said first yaw resisting member being mounted closer to said center plate of said bolster than said second yaw resisting member, said first and second yaw resisting members being co-operable to yield a moment couple opposing yaw deflection of the respective sideframe relative to said bolster, said moment couple having a magnitude increasing as a function of increasing yaw deflection.

155. The three piece railroad car truck of claim 154 wherein said interface assemblies each include a bearing adapter mounted on a wheelset, a pedestal seat located in an associated sideframe pedestal of one of said sideframes, and said self-steering apparatus includes an elastomeric shear pad mounted between the pedestal seat and the bearing adapter.

156. The three piece railroad car truck of claim 154 wherein said interface assemblies each include a bearing adapter mounted on a wheelset, a pedestal seat located in an associated sideframe pedestal of one of said sideframes, and said self-steering apparatus includes co-operating rolling contact rocker elements of the bearing adapter and the pedestal seat.

157. A three piece railroad car truck having a laterally extending truck bolster, said truck bolster having first and second ends; first and second longitudinally extending sideframes; said first and second ends of said bolster being resiliently mounted on respective first and second spring groups to said first and second sideframes respectively; said sideframes being mounted on wheelsets at sideframe to wheelset mounting interface assemblies; a four cornered damper group being mounted between each end of said truck bolster and the respective sideframe to which that end is mounted, those four cornered damper groups being first and second damper groups; and said sideframe to wheelset mounting interface assemblies accommodating rotational deflection of the wheelsets relative to the sideframes about a predominantly vertical axis.

158. The three piece railroad car truck of claim 157 wherein said truck is free of unsprung lateral cross-members between said sideframes.

159. The three piece railroad car truck of claim 157 wherein said sideframes are mounted to swing laterally.

5 160. The three piece railroad car truck of claim 159 wherein said sideframe to wheelset mounting interface assemblies include self-steering apparatus.

10 161. The three piece railroad car truck of claim 157 wherein said sideframes include sideframe pedestals in which said wheelset mounting interface assemblies are seated, said wheelset mounting interface assemblies include self-steering apparatus, said self-steering apparatus includes a member permitting longitudinal deflection of said wheelsets in said sideframe pedestals, and, for small deflections, said self-steering apparatus has a linear force deflection characteristic.

15 162. The three piece railroad car truck of claim 161 wherein said self-steering apparatus has a force deflection characteristic that varies as a function of vertical load passed between said the associated wheelset and sideframe pedestal.

20 163. The three piece railroad car truck of claim 161 wherein said self-steering apparatus includes a rolling contact rocker having a lengthwise curvature.

164. The three piece railroad car truck of claim 163 wherein said self-steering apparatus rocker includes both said lengthwise curvature to permit self-steering and a cross-wise curvature to permit sideways swinging of said first sideframe.

25 165. The three piece railroad car truck of claim 157 wherein said sideframes include sideframe pedestals in which said wheelset mounting interface assemblies include self-steering apparatus, said self-steering apparatus includes a member permitting longitudinal deflection of said wheelsets in said sideframe pedestals, and, said self-steering apparatus includes an elastomeric pad.

30 166. The three piece railroad car truck of claim 157 wherein said truck has members confining said bolster to a bounded range of lateral translation relative to said first sideframe, and said bounded range of lateral translation permits at least $\frac{3}{4}$ inches of lateral travel of said bolster relative to said first sideframe to either side of a neutral position.

35

167. The three piece railroad car truck of claim 166 wherein said range of lateral translation is bounded by gibs, and said gibs permit a maximum excursion of between $1\frac{1}{8}$ " and $1\frac{3}{4}$ " of lateral travel to either side of said neutral position.

5

168. The three piece railroad car truck of claim 161 wherein:

said first end of said bolster is mounted to said first sideframe on a first spring group;

10

said second end of said bolster is mounted to said second sideframe on a second spring group;

said truck has a rated load, said truck has a first lateral stiffness, k_1 , associated with lateral deflection of said spring groups; and a second lateral stiffness, k_2 associated with said lateral swinging of said sideframes, and, at said rated load, k_2 is less than k_1 .

15

169. The three piece railroad car truck of claim 157 wherein dampers of said first and second damper groups are mounted in pockets in said first and second bolster ends respectively; said sideframes have sideframe columns, and bearing plates mounted to said sideframe columns against which dampers of said groups of dampers work; said first and second spring groups each have a width in the cross-wise direction, and said bearing plates are each wider than said width.

20

170. The three piece railroad car truck of claim 170 wherein each of said first and second damper groups includes first, second, third and fourth damper wedges driven by corresponding first, second, third and fourth comer springs of each of said first and second spring groups respectively.

25

171. The three piece railroad car truck of claim 170 wherein said first, second, third, and fourth springs each have another spring nested therewithin.

30

172. The three piece railroad car truck of claim 157 wherein:

each of said first and second spring groups has an overall vertical spring rate, k_T ;

each said first and second spring group has springs mounted to bias said dampers, including first, second, third and fourth comer springs;

35

- 91 -

said springs mounted to bias said dampers have a total vertical spring rate,
 k_D ; and
 k_D is at least 20 %
of k_T .

5

173. The three piece railroad car truck of claim 157 wherein said damper groups include damper wedges having a primary wedge angle of at least 35 degrees, and k_D lies in the range of 25 to 50% of k_T .

10

174. The three piece railroad car truck of claim 157 wherein said damper groups include dampers having non-metallic friction surfaces mounted to work against bearing plates.

15

175. The three piece railroad car truck of claim 157 wherein said damper groups include dampers that work against bearing plates, and said dampers have co-efficients of static friction and dynamic friction against said bearing plates, and said co-efficients are within 20% of one another.

20

176. The three piece railroad car truck of claim 157 wherein said truck has a rated load capacity at least as great as AAR 70 Ton truck.

177. A wheelset-to-sideframe interface assembly for a railroad car truck, said interface assembly comprising:

25

a bearing adapter and a mating pedestal seat;

said bearing adapter having first and second ends formed for interlocking insertion between a pair of pedestal jaws of a railroad car truck sideframe;

said bearing adapter having a first rocking member;

said pedestal seat having a second rocking member;

said first and second rocking members being matingly engageable to permit rocking therebetween;

30

a resilient member mounted between said bearing adapter and said pedestal seat;

said resilient member having a portion formed to engage said first end of said bearing adapter;

35

said resilient member having an accommodation formed therein to permit mating engagement of said first and second rocking members;

and, when assembled, said bearing adapter receives vertical loads from said pedestal seat through said first rocking member uninterrupted by said resilient member.

5 178. The wheelset-to-sideframe interface assembly of claim 177 wherein said resilient member has first and second ends formed for interposition between said bearing adapter and pedestal jaws of the sideframe.

10 179. The wheelset-to-sideframe interface assembly of claim 177 wherein said resilient member has a relief formed therein to define said accommodation.

180. The wheelset-to-sideframe interface assembly of claim 177 wherein said resilient member is an elastomeric member.

15 181. The wheelset-to-sideframe interface assembly of claim 180 wherein said elastomeric member is made of a rubber material.

182. The wheelset-to-sideframe interface assembly of claim 180 wherein said elastomeric member is made of a polyurethane material.

20 183. The wheelset-to-sideframe interface assembly of claim 180 wherein said accommodation is formed through said elastomeric material and said assembly is chosen from the set of assemblies consisting of assemblies in which (a) said first rocking member protrudes at least part way through said accommodation to meet said second
25 rocking member, and (b) said second rocking member protrudes at least part way through said accommodation to meet said first rocking member.

30 184. The wheelset-to-sideframe interface assembly of claim 177 wherein said bearing adapter is a bearing adapter assembly, said bearing adapter assembly including a bearing adapter body surmounted by said first rocking member.

185. The wheelset-to-sideframe interface assembly of claim 184 wherein said first rocking member is formed of a different material from said bearing adapter body.

186. The wheelset-to-sideframe interface assembly of claim 184 wherein said first rocking member is an insert.

187. The wheelset-to-sideframe interface assembly of claim 184 wherein said first
5 rocking member has a footprint having a profile conforming to said accommodation.

188. The wheelset-to-sideframe interface assembly of claim 187 wherein said profile and said accommodation are mutually indexed to discourage mis-orientation of said first rocking member relative to said bearing adapter.

10 189. The wheelset-to-sideframe interface assembly of claim 184 wherein said body and said first rocking member are keyed to discourage mis-orientation therebetween.

15 190. The wheelset-to-sideframe interface assembly of claim 177 wherein said accommodation is formed through said resilient member and said assembly is chosen from the set of assemblies consisting of assemblies in which (a) said first rocking member protrudes at least part way through said accommodation to meet said second rocking member, and (b) said second rocking member protrudes at least part way through said accommodation to meet said first rocking member.

20 191. The wheelset-to-sideframe interface assembly of claim 177 wherein said pedestal seat includes an insert having said second rocking member formed therein.

25 192. The wheelset-to-sideframe interface assembly of claim 191 wherein said second rocking member has a footprint having a profile conforming to said accommodation.

30 193. The wheelset-to-sideframe interface assembly of claim 177 wherein said portion of said resilient member formed to engage said first end of said bearing adapter, when installed, includes elements interposed between said first end of said bearing adapter and a pedestal jaw to inhibit lateral and longitudinal movement of said bearing adapter relative to the jaw.

35 194. The wheelset-to-sideframe interface assembly of claim 177 wherein: each of said ends of said bearing adapter includes an end wall bracketed by a pair of corner abutments, said end wall and corner abutments defining a channel to permit sliding

insertion of said bearing adapter between the pedestal jaws of the sideframe; said portion of said resilient member formed to engage said first end of said bearing adapter being a first end portion; said resilient member having a second end portion formed to engage said second end of said bearing adapter; said resilient member having a middle portion extending between said first and second end portions; and said accommodation being formed in said middle portion of said resilient member.

195. The wheelset-to-sideframe interface assembly of claim 194 wherein said resilient member has a central opening formed therein to define said accommodation.

196. A wheelset-to-sideframe interface assembly for a rail road car truck, said interface assembly comprising:

a bearing adapter, a pedestal seat, and a resilient member;

said bearing adapter having a first end and a second end, each of said first and second ends having an end wall bracketed by a pair of corner abutments, said end wall and corner abutments co-operating to define a channel permitting insertion of said bearing adapter between a pair of thrust lugs of a sideframe pedestal;

said bearing adapter having a first rocking member;

said pedestal seat having a second rocking member for mating engagement with said first rocking member;

said first and second rocking members, when engaged, being operable to rock longitudinally relative to a sideframe to permit the rail road car truck to steer;

said resilient member having a first end portion engageable with said first end of said bearing adapter for interposition between said first end of said bearing adapter and a first pedestal jaw thrust lug;

said resilient member having a second end portion engageable with said second end of said bearing adapter for interposition between said second end of said bearing adapter and a second pedestal jaw thrust lug;

said resilient member having a medial portion lying between said first and second end portions; and

said medial portion being formed to accommodate mating rocking engagement of said first and second rocking members.

197. A wheelset-to-sideframe interface assembly kit, said kit comprising:
a pedestal seat for mounting in the roof of a rail road car truck sideframe pedestal;
a bearing adapter for mounting to a bearing of a wheelset of a rail road car truck
and a resilient member for mounting to said bearing adapter;
5 said bearing adapter having a first rocker element for engaging said seat in
rocking relationship, and when so engaged, said first rocker element
receives vertical loads from said seat and carry said loads into said bearing
adapter uninterrupted by said resilient member;
said bearing adapter having a first end and a second end, each of said ends having
10 an end wall and a pair of abutments bracketing said end wall to define a
channel, permitting sliding insertion of said bearing adapter between a pair
of sideframe pedestal jaw thrust lugs;
said resilient member having a first portion conforming to said first end of said
bearing adapter for inter-positioning between said bearing adapter and a
15 thrust lug;
said resilient member having a second portion connected to said first portion; and,
when installed,
said second portion at least partially overlying said bearing adapter.
- 20 198. The kit of claim 197 wherein said second portion of said resilient member has a
margin having a profile facing toward said first rocker element, and said first racker
element is shaped to nest adjacent said profile.
199. The kit of claim 197 wherein said bearing adapter includes a body, and said first
25 rocker element is separable from said body.
200. The kit of claim 199 wherein said second portion of said resilient member has a
margin having a profile facing toward said first rocker element, and said first rocker
element is shaped to nest adjacent said profile.
30
201. The kit of claim 200 wherein said profile and said first rocker element are shaped
to discourage mis-orientation of said first rocker element on installation.
202. The kit of claim 199 wherein said first rocker element and said body are mutually
35 keyed to facilitate location of said first rocker element on said body on installation.

203. The kit of claim 199 wherein said first rocker element and said body are mutually keyed to discourage mis-orientation of said rocker element on installation.

5 204. The kit of claim 200 wherein said first rocker element and said body have mutual engagement features, said features being mutually keyed to discourage mis-orientation of said rocker element on installation.

10 205. The kit of claim 204 wherein, on assembly of said kit, said profile provides a coarse locating bias to urge said first rocker member to within a first tolerance of location, and, within said first tolerance of location said mutual engagement features mate to urge said first rocker to within a second tolerance of location.

15 206. The kit of claim 199 wherein said kit includes a second resilient member, said second resilient member conforming to said second end of said bearing adapter.

20 207. The kit of claim 199 wherein said resilient member includes a pedestal seat engagement fitting for locating said resilient member relative to said pedestal seat on assembly.

208. The kit of claim 199 wherein said resilient member includes a second end portion conforming to said second end of said bearing adapter.

25 209. A wheelset-to-sideframe interface assembly for a railroad car truck, said interface assembly comprising:

a bearing adapter and a mating pedestal seat;

said bearing adapter having first and second ends formed for interlocking insertion between a pair of pedestal jaws of a railroad car truck sideframe;

said bearing adapter having a first rocking member;

30 said pedestal seat having a second rocking member;

said first and second rocking members being matingly engageable to permit rocking therebetween;

a resilient member mounted between said bearing adapter and said pedestal seat;

35 said resilient member having a portion formed to engage said first end of said bearing adapter;

said resilient member having an accommodation formed therein to permit mating engagement of said first and second rocking members;
said accommodation is formed through said resilient member; and
said assembly is chosen from the set of assemblies consisting of assemblies in
5 which (a) said first rocking member protrudes at least part way through said accommodation to meet said second rocking member; and (b) said second rocking member protrudes at least part way through said accommodation to meet said first rocking member.

10 210. The wheelset-to-sideframe interface assembly of claim 209 wherein said resilient member has first and second ends formed for interposition between said bearing adapter and pedestal jaws of the sideframe.

15 211. The wheelset-to-sideframe interface assembly of claim 209 wherein said resilient member is an elastomeric member.

20 212. The wheelset-to-sideframe interface assembly of claim 209 wherein said bearing adapter is a bearing adapter assembly, said bearing adapter assembly including a bearing adapter body surmounted by said first rocking member.

213. The wheelset-to-sideframe interface assembly of claim 212 wherein said first rocking member is formed of a different material from said bearing adapter body.

25 214. The wheelset-to-sideframe interface assembly of claim 212 wherein said first rocking member is an insert.

215. The wheelset-to-sideframe interface assembly of claim 212 wherein said first rocking member has a footprint having a profile conforming to said accommodation.

30 216. The wheelset-to-sideframe interface assembly of claim 215 wherein said profile and said accommodation are mutually indexed to discourage mis-orientation of said first rocking member relative to said bearings adapter.

35 217. The wheelset-to-sideframe interface assembly of claim 212 wherein said body and said first rocking member are keyed to discourage mis-orientation therebetween.

218. The wheelset-to-sideframe interface assembly of claim 209 wherein said pedestal seat includes an insert having said second rocking member formed therein.

5 219. The wheelset-to-sideframe interface assembly of claim 209 wherein said portion of said resilient member formed to engage said first end of said bearing adapter, when installed, includes elements interposed between said first end of said bearing adapter and a pedestal jaw to inhibit lateral and longitudinal movement of said bearing adapter relative to the jaw.

10 220. The wheelset-to-sideframe interface assembly at claim 209 wherein: each of said ends of said bearing adapter includes an end wall bracketed by a pair of corner abutments, said end wall and corner abutments defining a channel to permit sliding insertion of said bearing adapter between the pedestal jaws of the sideframe; said portion
15 of said resilient member formed to engage said first end of said bearing adapter being a first end portion; said resilient member having a second end portion formed to engage said second end of said bearing adapter; said resilient member having a middle portion extending between said first and second end portions; and said accommodation being formed in said middle portion of said resilient member.

20 221. The assembly of claim 209 wherein said resilient member includes a second portion, said second portion at least partially overlying said bearing adapter, said accommodation being formed in said second portion; said second portion of said resilient member has a margin having a profile facing toward said first rocker element; and said
25 first rocker element is shaped to nest adjacent said profile.

222. The assembly of claim 221 wherein said profile and said first rocker element are shaped to discourage mis-orientation of said first rocker element on installation.

30 223. The assembly of claim 209 wherein said bearing adapter includes a body, and said first rocking member is separable from said body.

224. The assembly of claim 223 wherein said first rocking member and said body are mutually keyed to discourage mis-orientation of said rocker element on installation.

225. The assembly of claim 223 wherein said kit includes a second resilient member, said second resilient member conforming to said second end of said beating adapter.

226. The assembly of claim 223 wherein said resilient member includes a pedestal seat engagement fitting for locating said resilient member relative to said pedestal seat on assembly.

227. A bearing adapter for installation between a bearing of a railroad car truck wheelset and a pedestal mounting of a railroad car truck sideframe, the wheelset bearing having an axis of rotation defining an axial direction, and first and second axially spaced apart bearing races contained within a round cylindrical bearing casing of the bearing, the bearing races extending about the axis in a circumferential direction, the pedestal mounting having a roof that, in operation, lies over the bearing, wherein said bearing adapter comprises:

a metal body having a pair of axially spaced apart end arches for engaging the bearing, and a first seat extending between the arches, said first seat being formed to engage the round cylindrical bearing casing of the wheel bearing, and a second seat for orientation facing toward the pedestal mounting roof;

said first seat including first and second side portions having surfaces conforming to, and for mating with, the round cylindrical bearing casing at circumferentially spaced apart locations on the round cylindrical bearing casing abreast of one of the bearing races;

said first seat including a central portion located circumferentially between said side portions, at least part of said central portion including a relief formed in said metal body; and,

said bearing adapter being mountable on the bearing in a position in which said relief of

said part of said central portion is located abreast of and above one of the bearing races and said first and second portions are located circumferentially to either side of top dead center of the bearing respectively, and, when so mounted, said first and second portions defining dominant load transfer interfaces from said bearing adapter into said bearing for vertical loads from the sideframe passed into said bearing adapter at said second seat circumferentially to either side of said relief.

228. The bearing adapter of claim 227 wherein said bearing adapter has a first arch and a second arch, said first and second arches being axially spaced apart, with said first, second and central portions of said first seat lying therebetween.

5

229. The bearing adapter of claim 227 wherein said relief formed in said bearing adapter extends predominantly axially.

10

230. The bearing adapter of claim 227 wherein said first seat is relieved at top dead center locations corresponding to both of the two bearing races.

231. The bearing adapter of claim 227 wherein said relief includes an axially extending groove.

15

232. The bearing adapter of claim 227 further including a circumferentially extending groove locatable on the bearing casing axially intermediate the bearing races.

20

233. The bearing adapter of claim 227 further including a circumferentially extending groove locatable on the bearing casing axially intermediate the bearing races and said relief includes an axially extending groove intersecting said circumferentially extending groove.

25

234. The bearing adapter of claim 227 wherein said first and second side portions are formed on radiused arcs of a first radius of curvature, said radius of curvature having a center of curvature, and, at the location of said relieved part, said central portion has a surface facing toward said center of curvature, said surface of said relief lying a distance greater than said first radius of curvature from said center of curvature.

30

235. The bearing adapter of claim 227 wherein said first seat has an array of pads formed on an arcuate profile each of said first and second portions including respective first and second ones of said pads, said first and second pads being circumferentially separated by said relief of said part of said central portion of said first seat.

35

236. The bearing adapter of claim 235 wherein:

there is a first pad, and a second pad, a third pad and a fourth pad;
said first pad and said second pad are axially spaced from said third and fourth
pads;
said first pad is circumferentially spaced from said second pad;
5 said third pad is circumferentially spaced from said fourth pad; and
said relieved part of said central portion is located circumferentially between
said first pad and said second pad, and between said third pad and said
fourth pad.

10 237. The bearing adapter of claim 227 wherein said first seat defines an underside
of said bearing adapter, said underside having a predominantly arched shape, the
arched shape having an apex, and said relief lies at the apex of said arched shape
and, when installed, extends over one of the bearing races.

15 238. The bearing adapter of claim 227 wherein said first seat defines an underside
of said bearing adapter, said underside having a predominantly arched shape, said
arched shape having an axially extending apex, and said relief of said part of said
central portion runs axially along the apex of the predominantly arched shape.

20 239. The bearing adapter of claim 238 wherein the underside has a
circumferentially formed groove, and said groove intersects said relief of said central
portion.

25 240. A combination of the bearing adapter of claim 227, and a resilient pad, said
resilient pad being engageable in said second seat.

241. The combination of claim 240 wherein said resilient pad extends over said
central portion of said bearing adapter.

30 242. The combination of claim 240 wherein said bearing adapter includes end walls
and corner portions co-operable to seat about pedestal jaw thrust lugs, and said
resilient pad includes an end portion engageable to one of said end walls of said
bearing adapter between said corner portions, and, on installation, said end portion
seats between the thrust lug and the end portion.

243. The combination of the bearing adapter of claim 227 and a wheel bearing, the bearing adapter being seated thereon.

244. A railroad car truck having a pair of sideframes and a truck bolster mounted cross-wise therebetween, said sideframes having pedestal mounts, and said sideframes being mounted to wheelsets, the wheelsets having bearings, and bearing adapters according to claim 227 being mounted in said pedestal mounts on said bearings.

245. The railroad car truck of claim 244 wherein resilient pads are mounted to said bearing adapters between said second seats thereof and said pedestal mounts.

246. A bearing adapter for seating upon a rail road car truck wheelset bearing within a pedestal of a railroad car truck sideframe, said bearing adapter being made of metal; said bearing adapter having a pair of axially spaced apart arches and a first surface generally conforming to an upwardly facing portion of a cylindrical bearing casing, said first surface extending axially between said end arches, and a second surface for orientation facing a pedestal seat of the pedestal, said first surface having at least one relief formed in said metal of said bearing adapter at top dead center of said first surface, and, as seated on the bearing casing in use, said relief extending to at least one location axially abreast of a bearing race of the bearing, said first surface including first and second portions lying axially abreast of and circumferentially to either side of said relief by which to pass loads between said bearing adapter and the bearing casing abreast of that bearing race, whereby loads passed between said bearing adapter and the bearing are forced to split into dominant load paths to either side of said relief formed in said metal of said bearing adapter.

247. The bearing adapter of claim 246 wherein, as positioned in use, said first surface is relieved at top dead center axially abreast of two bearing races of the bearing.

248. The bearing adapter of claim 246 wherein, as positioned in use, said relief extends axially along top dead center of said first surface.

249. The bearing adapter of claim 246 wherein, the bearing having an axis of rotation, said second surface has an arcuate crown formed thereon, and, as positioned in use, said crown permitting rocking of the bearing in the pedestal seat in a direction

cross-wise to the axis of rotation of the bearing.

250. The bearing adapter of claim 246 wherein said bearing adapter has a body made of a metal that is one of one of (a) iron; and (b) steel, and said relief is formed in said metal of said body.

251. The bearing adapter of claim 246 wherein said bearing adapter has two said reliefs formed therein, said reliefs being axially spaced from each other, and said reliefs having the form of cusps formed in said first surface.

252. A bearing adapter for seating upon a rail road car truck wheelset bearing within a railroad car truck sideframe pedestal, said bearing adapter having a body that is a casting made of one of (a) iron and (b) steel, wherein said body has a pair of axially spaced apart arches for location at either end of the bearing, and two pair of corner abutments forming respective channels for seating about sideframe pedestal thrust blocks; said body having a first surface generally conforming to an upwardly facing portion of a round cylindrical bearing casing, said first surface extending axially between said end arches, and a second surface for orientation facing the pedestal seat, said first surface being formed on a curve having an apex, said surface having at least one relief formed in said casting at said apex thereof, and, as seated on the bearing casing in use, said relief extending to at least one location axially abreast of a bearing race of the bearing, said first surface including first and second portions lying axially abreast of and circumferentially to either side of said relief by which to pass loads between said bearing adapter and the bearing casing abreast of that bearing race, whereby loads passed between said bearing adapter and the bearing are forced to split into dominant load paths to either side of said relief.

253. A combination of the bearing adapter of claim 246 and a resilient pad, said resilient pad extending over at least a portion of said second surface, and said resilient pad being shaped to permit contact of said second surface with a mating surface of a sideframe pedestal seat.

254. The combination of claim 253 wherein said second surface of said bearing adapter includes an arcuate surface having a curvature formed in the lengthwise direction of the sideframe.

255. The combination of claim 253 wherein said second surface of said bearing adapter includes an arcuate surface having a curvature formed in a cross-wise direction relative to the sideframe to permit sideways swinging of the sideframe.

5

256. The railroad car truck of claim 253 wherein said second surface of each said bearing adapter includes an arcuate surface having a curvature formed in the lengthwise direction of the sideframe.

10

257. The railroad car truck of claim 253 wherein said truck is a self-steering truck.

258. The combination bearing adapter of claim 253 wherein said second surface of said bearing adapter includes an arcuate surface having a curvature formed in the lengthwise direction of the sideframe.

15

259. The combination bearing adapter of claim 253 wherein said second surface of said bearing adapter includes an arcuate surface having a curvature formed in a cross-wise direction relative to the sideframe to permit sideways swinging of the sideframe.

20

260. A rail road car truck comprising:

a truck bolster mounted transversely between a pair of first and second sideframes, said truck bolster having first and second ends, each of said first and second sideframes having a sideframe window into which a respective one of said first and second ends of said bolster is received;

25

a first spring group, said first spring group being mounted in said window of said first sideframe, said first spring group including a first array of side-by-side coil springs upon which said first end of said truck bolster is carried;

30

a second spring group, said second spring group being mounted in said window of said second sideframe, said second spring group including a second array of side-by-side coil springs upon which said second end of said truck bolster is carried;

35

said first sideframe having a first end and a first pedestal fitting defined thereat, said first pedestal fitting including a pair of first and second opposed pedestal jaw thrust lugs and a pedestal roof;

said second sideframe having a first end and a first pedestal fitting defined thereat, said second pedestal fitting including a pair of first and second opposed pedestal jaw thrust lugs and a pedestal roof;

said sideframes being mounted on wheelsets, said wheelsets including a first wheelset, said first wheelset having an axle; said axle having a first end and a second end;

said wheelset having first and second bearings mounted on said first and second ends thereof, said bearings having substantially cylindrical bearing casings;

said first bearing being mounted in said first sideframe pedestal fitting of said first sideframe and said second bearing being mounted in said first sideframe pedestal fitting of said second sideframe;

a first bearing adapter and a second bearing adapter, said first bearing adapter being mounted upon the casings of said first and second bearings respectively;

each of said bearing adapters having a pair of axially spaced arches, longitudinally spaced end walls and pairs of corner abutments, said pairs of corner abutments being axially spaced to bracket respective ones of said thrust lugs, and each of said end walls of each said bearing adapter extending axially between a respective one of said pairs of said corner abutments;

said first sideframe being mounted to yaw appreciably relative to said truck bolster, and said second sideframe being mounted to yaw appreciably relative to said truck bolster;

a first elastomeric pad member mounted to overlie at least a portion of said first bearing adapter between said first bearing adapter and said first sideframe pedestal roof of said first sideframe;

an second elastomeric pad member mounted to overlie at least a portion of said second bearing adapter between said second bearing adapter and said first sideframe pedestal roof of said second sideframe; and

a first set of friction dampers mounted to work between said first end of said truck bolster and said first sideframe;

a second set of friction dampers mounted to work between said second end of said truck bolster and said second sideframe;

said first set of dampers including a first damper and a second damper;

said first damper and said second damper being driven independently of each other; and said first damper being mounted transversely inboard of said second damper.

5 261. The rail road car truck of claim 260 herein said first elastomeric pad member is a passive self-steering pad.

10 262. The railroad car truck of claim 260 wherein said first elastomeric pad member includes at least one end portion formed to seat between one said end wall of said first bearing adapter and said first sideframe pedestal jaw.

15 263. The rail road car truck of claim 260 wherein said first elastomeric pad member is one of (a) a Lord Corporation elastomeric passive steering pad; and (b) a Pennsy Corporation elastomeric passive steering pad.

264. The rail road car truck of claim 260 wherein said first elastomeric pad member is made from one of (a) a polyurethane; (b) rubber; and (c) rubber-like material.

20 265. The rail road car truck of claim 260 wherein said truck is free of unsprung lateral cross-bracing between said first and second sideframes.

266. The rail road car truck of claim 260 wherein said truck bolster has four damper pockets at each end thereof and respective dampers seated therein.

25 267. The rail road car truck of claim 266 wherein said damper pockets, and those respective dampers have both primary and secondary wedge angles.

30 268. The rail road car truck of claim 260 and said dampers include damper wedges having at least one non-metallic friction face.

269. The rail road car truck of claim 260 wherein said dampers include a set of damper wedges, said damper wedges including at least one non-stick slip damper wedge.

35 270. The rail road car truck of claim 260 and a set of damper wedges for a rail

road car truck, said damper wedges having primary damper wedge angles of greater than 35 degrees.

271. The rail road car truck of claim 260 wherein said first set of friction dampers includes a set of friction damper wedges, said wedges having a primary damper angle, and, in up-and-down motion, said dampers having respective up and down forces, said up force being in the range of $2/3$ to $3/2$ of said down force.

272. The rail road car truck of claim 271 wherein the down force when the bolster is moving downward is less than 3000 lbs.

273. The rail road car truck of claim 260 and a set of damper wedges, said damper wedges having a friction face for mating frictional sliding engagement with a bearing face of said truck, said friction face having a coefficient of static friction and a coefficient of dynamic friction, said coefficients of friction being within 20 % of each other.

274. A rail road car truck comprising:

a truck bolster mounted transversely between a pair of first and second sideframes, said truck bolster having first and second ends, each of said first and second sideframes having a sideframe window into which a respective one of said first and second ends of said bolster is received;

a first spring group, said first spring group being mounted in said window of said first sideframe, said first spring group including a first array of side-by-side coil springs upon which said first end of said truck bolster is carried;

a second spring group, said second spring group being mounted in said window of said second sideframe, said second spring group including a second array of side-by-side coil springs upon which said second end of said truck bolster is carried;

said first sideframe having a first end and a first pedestal fitting defined thereat, said first pedestal fitting including a pair of first and second opposed pedestal jaw thrust lugs and a pedestal roof;

said second sideframe having a first end and a first pedestal fitting defined thereat, said second pedestal fitting including a pair of first and

second opposed pedestal jaw thrust lugs and a pedestal roof;
said sideframes being mounted on wheelsets, said wheelsets including a first
wheelset, said first wheelset having an axle; said axle having a first
end and a second end;
5 said wheelset having first and second bearings mounted on said first and
second ends thereof, said bearings having substantially cylindrical
bearing casings;
said first bearing being mounted in said first sideframe pedestal fitting of said
first sideframe and said second bearing being mounted in said first
10 sideframe pedestal fitting of said second sideframe;
a first bearing adapter and a second bearing adapter, said first bearing adapter
being mounted upon the casings of said first and second bearings
respectively;
each of said bearing adapters having a pair of axially spaced arches,
15 longitudinally spaced end walls and pairs of corner abutments, said
pairs of corner abutments being axially spaced to bracket respective
ones of said thrust lugs, and each of said end walls of each said
bearing adapter extending axially between a respective one of said pairs
of said corner abutments;
20 said first sideframe being mounted to yaw appreciably relative to said truck
bolster, and said second sideframe being mounted to yaw appreciably
relative to said truck bolster;
a first elastomeric pad member mounted to overlie at least a portion of said
first bearing adapter between said first bearing adapter and said first
25 sideframe pedestal roof of said first sideframe;
an second elastomeric pad member mounted to overlie at least a portion of
said second bearing adapter between said second bearing adapter and
said first sideframe pedestal roof of said second sideframe; and
a first set of friction dampers mounted to work between said first end of said
30 truck bolster and said first sideframe;
a second set of friction dampers mounted to work between said second end
of said truck bolster and said second sideframe;
said first set of dampers including a first damper and a second damper;
said first damper and said second damper being driven independently of
35 each other; and said first damper being mounted transversely inboard of

said second damper; and

The rail road car truck of claim 1 wherein said truck bolster has a range of lateral travel relative to said sideframes, said range of lateral travel being governed by bolster gibs, and said bolster gibs are spaced to permit at least 1 1/8 inches of lateral travel of said bolster relative to said sideframes to either side of a neutral position.

275. The rail road car truck of claim 260 wherein:

said truck has a rolling direction, and, when the truck is at equilibrium on tangent track, said first and second sideframes have respective longitudinal axes parallel to the rolling direction;

said sideframe windows of said first and second sideframes are bounded longitudinally by respective first and second sideframe columns;

said sideframe columns have respective sideframe column wear plates against which said friction dampers work;

said first sideframe column of said first sideframe has a first sideframe column wear plate region against which said first friction damper works, and a second sideframe column wear plate region against which said second friction damper works;

said first and second wear plate regions having respective first and second normals, said first and second normal being parallel to each other and to the longitudinal axis of their respective sideframe.

276. The rail road car truck of claim 275 wherein said first sideframe column wear plate of said first sideframe is substantially planar and includes both of said first and second wear plate regions.

277. The rail road car truck of claim 275 wherein: said first sideframe column of said first sideframe column wear plate includes said first sideframe column wear plate region; said first spring group includes rows of springs, said first spring group has a width in the transverse direction, and said first sideframe column wear plate is wider than said width of said first spring group.

278. The rail road car truck of claim 260 wherein said first spring group includes four cornermost coil springs, and a friction damper is mounted over each of said

cornermost coil springs.

279. The rail road car truck of claim 277 wherein said cornermost coil springs each include an outer spring and an innerspring nested therewithin.

5

280. A rail road car truck comprising:

- 10 a truck bolster mounted transversely between a pair of first and second sideframes, said truck bolster having first and second ends, each of said first and second sideframes having a sideframe window into which a respective one of said first and second ends of said bolster is received;
- a first spring group, said first spring group being mounted in said window of said first sideframe, said first spring group including a first array of side-by-side coil springs upon which said first end of said truck bolster is carried;
- 15 a second spring group, said second spring group being mounted in said window of said second sideframe, said second spring group including a second array of side-by-side coil springs upon which said second end of said truck bolster is carried;
- said first sideframe having a first end and a first pedestal fitting defined thereat, said first pedestal fitting including a pair of first and second opposed pedestal jaw thrust lugs and a pedestal roof;
- 20 said second sideframe having a first end and a first pedestal fitting defined thereat, said second pedestal fitting including a pair of first and second opposed pedestal jaw thrust lugs and a pedestal roof;
- 25 said sideframes being mounted on wheelsets, said wheelsets including a first wheelset, said first wheelset having an axle; said axle having a first end and a second end;
- said wheelset having first and second bearings mounted on said first and second ends thereof, said bearings having substantially cylindrical bearing casings;
- 30 said first bearing being mounted in said first sideframe pedestal fitting of said first sideframe and said second bearing being mounted in said first sideframe pedestal fitting of said second sideframe;
- a first bearing adapter and a second bearing adapter, said first bearing adapter
35 being mounted upon the casings of said first and second bearings

- 111 -

respectively;

each of said bearing adapters having a pair of axially spaced arches, longitudinally spaced end walls and pairs of corner abutments, said pairs of corner abutments being axially spaced to bracket respective ones of said thrust lugs, and each of said end walls of each said bearing adapter extending axially between a respective one of said pairs of said corner abutments;

said first sideframe being mounted to yaw appreciably relative to said truck bolster, and said second sideframe being mounted to yaw appreciably relative to said truck bolster;

a first elastomeric pad member mounted to overlie at least a portion of said first bearing adapter between said first bearing adapter and said first sideframe pedestal roof of said first sideframe;

an second elastomeric pad member mounted to overlie at least a portion of said second bearing adapter between said second bearing adapter and said first sideframe pedestal roof of said second sideframe; and

a first set of friction dampers mounted to work between said first end of said truck bolster and said first sideframe;

a second set of friction dampers mounted to work between said second end of said truck bolster and said second sideframe;

said first set of dampers including a first damper and a second damper; said first damper and said second damper being driven independently of each other; and said first damper being mounted transversely inboard of said second damper; and

said truck includes metal rocker members working on a rolling contact rocking interface located between one of said pedestal fittings and a corresponding one of said bearing adapters, and said first elastomeric pad member has a relief formed therein to accommodate co-operating rolling contact engagement of those metal rocker members.

281. The rail road car truck of claim 280, wherein said metal rolling contact rocker members include at least one of:

(a) a rocker insert, said rocker insert having a size corresponding to said relief and an arcuate rocking surface;

(b) a pedestal seat roof fitting having an arcuate rocking surface; and

(c) a bearing adapter having an arcuate rocking surface.

282. The rail road car truck of claim 281 wherein said truck is free of unsprung lateral cross-bracing between said first and second sideframes and said arcuate rocking surface includes one of:

- (i) a fore-and-aft curvature;
- (ii) a transverse curvature; and
- (iii) both a fore-and-aft curvature and a transverse curvature.

283. The rail road car truck of claim 260 wherein said sideframes are mounted to swing on lateral rocking elements as a pendulum, and said sideframes have a sideways swinging pendulum stiffness in the range of 0.95 to 2.6 inch-pounds per radian per pound of weight borne by the pendulum.

284. The rail road car truck of claim 260 wherein said truck bolster has a first upper spring seat engaged to an upper end of said first spring group and the first sideframe has a lower spring seat engaged to a lower end of said first spring group, and said first sideframe has a sideways swinging pendulum stiffness in the range of 0.08 to 0.2 pounds per inch of lateral deflection at the lower spring seat per pound of vertical load carried by said first sideframe.

285. The rail road car truck of claim 260 wherein:

said first spring group has a lateral shear stiffness, $k_{\text{spring shear}}$;

each of said sideframes has a sideways swinging stiffness, $k_{\text{sideframe}}$; and

$k_{\text{spring shear}}$ is greater than $k_{\text{sideframe}}$ when the truck is loaded to its rated gross weight on rail.

286. The rail road car truck of claim 260 and a set of damper wedges for a rail road car truck, said damper wedges having primary damper wedge angles of greater than 35 degrees and said damper wedges having at least one non-metallic friction face.

287. The rail road car truck of claim 260 and a set of damper wedges for a rail road car truck, said damper wedges having primary damper wedge angles of greater than 35 degrees and said damper wedges include at least one non-stick-slip damper wedge.

288. A sideframe pedestal to axle bearing interface assembly for installation between a wheelset and a sideframe of a rail road freight car truck, said interface assembly including self-steering apparatus having a force-deflection characteristic, said force-deflection characteristic varying as a function of vertical load.

289. The sideframe pedestal to axle bearing interface assembly of claim 1 wherein, for a given vertical load, said force-deflection characteristic is a linear force-deflection characteristic.

290. The sideframe pedestal to axle bearing interface assembly of any or of claim 288 and claim 289 wherein said force-deflection characteristic varies linearly with vertical loading of said truck.

291. The sideframe pedestal to axle bearing interface assembly of any one of claims 288, 289 and 290 wherein said self-steering apparatus includes rocker fittings.

292. The sideframe pedestal to axle bearing interface assembly of claim 288, wherein said self-steering apparatus includes rocker fittings operable to rock lengthwise relative to the sideframe.

293. The sideframe pedestal to axle bearing interface assembly according to one of claims 288 to 292, wherein said assembly includes rolling contact fittings operable to rock both cross-wise and lengthwise relative to the sideframe.

294. The sideframe pedestal to axle bearing interface assembly of claim 293 wherein said rolling contact fittings include a first surface of compound curvature, and a second surface, said first surface being operable to rock in rolling contact against said second surface in both cross-wise and lengthwise directions.

295. The sideframe pedestal to axle bearing interface assembly of claim 299 wherein said assembly is chosen from the set of said assemblies consisting of assemblies in which:

- (a) at least a portion of said first surface is spherical;
- (b) at least a portion of said second surface is spherical;
- (c) at least a portion of said second surface is flat;
- (d) said second surface is also a surface of compound curvature; and
- 5 (e) said first and second surfaces are rockingly matable saddle shaped surfaces.

10 296. The sideframe pedestal to axle bearing interface assembly of any one of claims 288 to 295 wherein the axle bearing has a casing, and said first surface is chosen from the set of first surfaces consisting of (a) a first surface portion of the bearing casing; and (b) a first surface rigidly mounted to the bearing casing.

15 297. The sideframe pedestal to axle bearing interface assembly of any one of claims 288 to 293 wherein said assembly includes an auxiliary centering member.

298. The sideframe pedestal to axle bearing interface assembly of any one of claims 288 to 293 wherein said assembly includes at least one elastomeric member.

20 299. A rail road car truck having the sideframe pedestal to axle bearing interface assembly of any one of claims 288 to 298.

25 300. The rail road car truck of claim 299, wherein said truck has a pair of side frames and a bolster mounted cross-wise therebetween; friction dampers mounted to work between said bolster and each of said sideframes; wherein said friction dampers are chosen from the set of said friction dampers consisting of friction dampers which:

- (a) in operation, are substantially stick-slip free; and
- (b) include dampers having co-efficients of static friction and dynamic friction, and said co-efficients are substantially the same.

30 301. The rail road car truck of claim 299, wherein said truck has a pair of first and second sideframes and a bolster extending laterally therebetween, said bolster has a first end mounted to said first sideframe, and a second end mounted to said second sideframe, said truck has first and second groups of dampers mounted to work between said bolster

and said first and second sideframes, respectively; said first group including a first damper and a second damper, and said second damper being mounted more laterally outboard than said first damper.

5 302. The railroad car truck of claim 299 having a bolster having ends sprung from sideframes, and wheelsets mounted to said sideframes at said sideframe pedestal to axle bearing interface fittings, said truck having a four cornered arrangement of dampers mounted at each end of said bolster, said dampers being mounted to work between said bolster ends and said sideframes respectively.

10

303. The sideframe pedestal to bearing adapter interface assembly of any one of claims 288 to 293 wherein said assembly includes a bearing adapter having a body for seating on a bearing, and a second member mounted to said body, said second member including one of said rocker fittings, and said second member being made of a different material
15 from said body of said bearing adapter.

304. The sideframe pedestal to bearing adapter interface assembly of any one of claims 288 to 293 wherein said assembly includes a bearing adapter having a body formed to seat over the casing of a roller bearing of the type of roller bearings having first and
20 second axially spaced apart bearing races, and wherein said bearing adapter has an underside that, on installation, faces the casing of the bearing, and said underside of said bearing adapter is relieved in a region corresponding to top dead center relative to the location of the bearing races.

25 305. The sideframe pedestal to axle bearing interface assembly of claim 288 wherein said self-steering apparatus thereof includes at least one self-steering apparatus fitting, and wherein said at least one self-steering apparatus fitting comprises at least one of:

- 30 (a) a bearing adapter mountable to bearings on a wheelset, said bearing adapter being for use in combination with other fittings of said self steering apparatus, said other fittings including at least a pedestal seat;
 said bearing adapter having a rolling contact engagement surface for orientation facing away from the wheelset when installed; and
 (b) a pedestal seat mountable in a pedestal of a sideframe of the railroad car

truck, said pedestal seat being for use in combination with other fittings of said self-steering apparatus, said other fittings including at least a bearing adapter; and

5 said pedestal seat having a rolling contact engagement surface for orientation toward the wheelset; and

 at least one of (a) the bearing adapter rolling contact engagement surface; and (b) the pedestal seat rolling contact engagement surface, has a fore-and-aft arcuate profile permitting rocking of the wheelset bearing lengthwise relative to the sideframe.

10

306. The sideframe pedestal to axle bearing interface assembly of claim 305 wherein said rolling contact engagement surface having said fore-and-aft arcuate profile also has a cross-wise arcuate profile.

15

307. A sideframe pedestal to axle bearing interface assembly of any one of claims 305 and claim 306 wherein said sideframe pedestal to axle bearing interface assembly includes a combination of a first fitting according to either of claim 18 or claim 19, and a mating second fitting having another rolling contact engagement surface orientable on installation to mate with said rolling contact engagement surface having said fore-and-aft arcuate profile, and, when installed in a rail road car truck and co-operatively engaged, said first fitting and said mating second fitting being operable to provide self-steering.

20

25

308. The sideframe pedestal to axle bearing interface assembly of claim 307 further including a third fitting, said third fitting being a resilient member mountable in co-operation with at least one of (a) said first fitting, and (b) said second fitting; and said third fitting being operable to urge said first and second fittings to a centered position relative to each other.

30

309. The sideframe pedestal to axle bearing interface assembly of claim 305 wherein said sideframe pedestal to axle bearing interface assembly includes a combination of a bearing adapter and a pedestal seat according to claim 305, said bearing adapter and said pedestal seat being matingly engageable on installation to permit fore-and-aft rolling contact rocking therebetween.

310. The sideframe pedestal to axle bearing interface assembly of claim 309 wherein the assembly is chosen from the set of assemblies consisting of assemblies in which:

(a) said pedestal seat and said bearing adapter are also engageable to permit lateral rocking therebetween; and

(b) the rolling contact engagement surface of at least one of (i) said bearing adapter and (ii) said pedestal seat is formed on a compound surface.

311. The sideframe pedestal to axle bearing interface assembly of claim 309, wherein the assembly is chosen from the set of assemblies consisting of assemblies including at least a third fitting in which:

(a) said third fitting is a resilient member mountable to urge said bearing adapter and said pedestal seat to a centered position relative to each other;

(b) the bearing adapter has an end wall, and said third fitting is formed to seat between that end wall and a thrust lug of a sideframe pedestal; and

(c) the bearing adapter has at least one end wall, and said third fitting has a first portion for seating adjacent said end wall, and a second portion at least partially overlying said bearing adapter, said second portion having a relief formed therein to accommodate rocking engagement of said bearing adapter with said pedestal seat.

312. The sideframe pedestal to axle bearing assembly of claim 288 wherein said interface assembly comprises:

a bearing adapter, a pedestal seat, and a resilient member;

said bearing adapter having a first end and a second end, each of said first and second ends having an end wall bracketted by a pair of corner abutments, said end wall and corner abutments co-operating to define a channel permitting insertion of said bearing adapter between a pair of thrust lugs of a sideframe pedestal;

said bearing adapter having a first rocking member;

said pedestal seat having a second rocking member for making engagement with said first rocking member;

- 118 -

said first and second rocking members, when engaged, being operable to rock longitudinally relative to a sideframe to permit the rail road car truck to steer;

said resilient member having a first end portion engageable with said first end of said bearing adapter for interposition between said first end of said bearing adapter and a first pedestal jaw thrust lug;

said resilient member having a second end portion engageable with said second end of said bearing adapter for interposition between said second end of said bearing adapter and a second pedestal jaw thrust lug;

said resilient member having a medial portion lying between said first and second end portions; and

said medial portion being formed to accommodate mating rocking engagement of said first and second rocking members.

313. At least one member of a railroad freight car truck that member having a first self-steering apparatus fitting, said at least one member comprising at least one of:

(a) a bearing adapter for mounting to a casing of a bearing on a rail road car truck wheelset, said bearing adapter being for use in combination with at least one other member having a second fitting of the self-steering apparatus, said at least one other fitting including at least a pedestal seat; said bearing adapter having a pair of axially spaced apart arches formed to seat on a cylindrical casing of a rail road freight car roller bearing having an axis of rotation, and first and second pairs of corner abutments, each pair of corner abutments be spaced to straddle respective ones of a pair of first and second opposed thrust lugs of a rail road freight car sideframe pedestal; said bearing adapter having a metal rolling contact engagement surface for orientation facing away from the wheelset when installed; and said bearing adapter rolling contact engagement surface has a fore-and-aft arcuate profile permitting rolling contact rocking of the wheelset bearing lengthwise relative to the sideframe; and

(b) a sideframe of a railroad freight car truck, said sideframe having a compression member, a tension member, a first sideframe column and a second sideframe column; said tension member, compression member, first sideframe column and second sideframe column defining bottom, top

and sides of a sideframe window formed to receive an end of a freight car truck bolster; said sideframe columns having friction members operable to develop friction when the bolster moves relative to said columns; said tension member extending upwardly to meet said compression member at first and second ends of said sideframe, said sideframe having first and second sideframe pedestals at said first and second ends thereof respectively, each of said sideframe pedestals having a pedestal jaw, each said pedestal jaw including first and second opposed thrust lugs about which corner abutment pairs of a bearing adapter may seat; said pedestals each including a pedestal seat, one said pedestal seat being a first pedestal seat, said first pedestal seat being for use in combination with at least one other member having a second fitting of the self-steering apparatus, said at least one other member including at least a bearing adapter having a pair of axially spaced apart arches formed to seat on a cylindrical casing of a rail road freight car roller bearing, and first and second pairs of corner abutments, each pair of corner abutments being spaced to straddle respective ones of said opposed thrust lugs; said first pedestal seat having a metal rolling contact engagement surface for orientation toward the wheelset; and said metal rolling contact engagement surface of said first pedestal seat has a fore-and-aft arcuate profile permitting rolling contact rocking of the wheelset bearing lengthwise relative to the sideframe.

314. The subject matter of claim 313 wherein said at least one member having said first self-steering apparatus fitting is the bearing adapter of part (a) of claim 313.

315. The subject matter of claim 314 wherein said bearing adapter rolling contact engagement surface is one of (a) a spherical surface; and (b) a surface having a curvature formed on a body of revolution having an axis parallel to the axis of the bearing.

316. The subject matter of claim 313 wherein said at least one member having said first self-steering apparatus fitting is the sideframe of part (b) of claim 313.

317. The subject matter of claim 316 wherein said sideframe has a long dimension defining a longitudinal axis, and said metal rolling contact engagement surface of said first pedestal seat is one of (a) a spherical surface; and (b) a surface having a curvature formed on a body of revolution having an axis cross-wise to the longitudinal axis of the sideframe.

318. The subject matter of claim 313 wherein said rolling contact engagement surface having said fore-and-aft arcuate profile also has a cross-wise arcuate profile.

319. A combination of a first member according to claim 313, and a mating second member, said second member having a mating second self-steering apparatus fitting having another metal rolling contact engagement surface orientable on installation to mate with said metal rolling contact engagement surface having said fore-and-aft arcuate profile, and, when installed in a railroad car truck and co-operatively engaged, said first fitting and said mating second fitting being operable to provide self-steering.

320. The combination of claim 319 further including a third member, said third member being a resilient member mountable in co-operation with at least one of (a) said first member, and (b) said second member; and said third member being operable to urge said rolling contact surfaces of said first and second members to a centered position relative to each other.

321. A combination of the bearing adapter of part (a) of claim 321, and the sideframe of part (b) of claim 26, said bearing adapter and said first pedestal seat being matingly engageable on installation to permit fore-and-aft rolling contact rocking therebetween.

322. The combination of claim 321 wherein said combination is chosen from the set of combinations consisting of combinations in which:

(a) said first pedestal seat and said bearing adapter are also engageable to rock laterally in rolling contact with respect to one another;

(b) the metal rolling contact engagement surface of at least one of (i) said bearing adapter and (ii) said first pedestal seat is formed on a compound surface; and

(c) any said rolling contact engagement surface includes a spherical portion.

323. The combination of claim 321 wherein the combination is chosen from the set of

combinations consisting of combinations including at least a third member in which:

(a) said third member is a resilient member mountable to urge said bearing adapter and said first pedestal seat to a centered position relative to each other;

5 (b) the bearing adapter has an end wall, and said third member is formed to seat between that end wall and a thrust lug of said first sideframe pedestal; and

(c) the bearing adapter has at least one end wall, and said third member has a first portion for seating adjacent said end wall, and a second portion at least partially overlying said bearing adapter, said second portion having a relief formed therein to accommodate rocking engagement of said bearing adapter with said first pedestal seat.

10

324. The member of claim 313 wherein said member is one of:

(i) the bearing adapter of part (a) of claim 313, and said metal rolling contact engagement surface is a rocker having both lengthwise and cross-wise radii of curvature; and.

15

(ii) the sideframe of part (b) of claim 313, and said metal rolling contact engagement surface is a rocker having both lengthwise and cross-wise radii of curvature.

20

325. The member of claim 313 wherein said member is the bearing adapter of part (a) of claim 26, for seating on a roller bearing that has first and second axially spaced apart roller bearing races enclosed within a casing, and said first and second arches are engageable with first and second end regions of the bearing casing, the bearing races being straddled between the arches; and a land for engaging the casing, said land extending between the arches and being relieved at locations above top dead center of the bearing races.

25

30

326. In combination, (i) the at least one member of claim 313 wherein said member is the bearing adapter of part (a) of claim 313; and (ii) a roller bearing, the bearing adapter being for seating on the roller bearing; wherein said bearing has first and second axially spaced apart roller bearing races enclosed within a casing, said bearing races being straddled between the arches of said bearing adapter; said bearing adapter has a land for engaging the casing, said land extending between the arches, said land having at least one relief, and said bearing adapter being mounted on said bearing with said at least one relief being positioned axially to sit abreast of, and to overlie, top dead center of at least one of said bearing races.

35

327. A combination of a bearing adapter, a sideframe having at least a first pedestal seat, and a resilient pad for use with the bearing adapter; at least one of (a) said bearing adapter and (b) said sideframe being the member according to claim 313, wherein the bearing adapter and the first pedestal seat have respective mutually engageable rolling contact surfaces, said resilient pad has a first portion for engaging a first end of the bearing adapter, a second portion for engaging a second end of the bearing adapter, and a medial portion between said first and second end portions, said medial portion being formed to accommodate mating engagement of the mutually engageable rolling contact surfaces.

328. A self-steering rolling contact rocker fitting for installation as part of a wheelset to sideframe interface assembly mounted between a wheelset axle bearing and a sideframe pedestal of a rail road freight car truck, said rolling contact rocker fitting having a curved rolling contact rocking surface operable on installation to rock lengthwise relative to the sideframe, thereby to provide self-steering in the railroad car truck.

329. One of:

(a) a rail road car truck bearing adapter having an underside for seating on a round cylindrical casing of a railroad freight car truck wheelset, the bearing adapter including the self-steering rolling contact fitting of claim 328, said bearing adapter having said rolling contact rocking surface for rocking engagement with a mating surface of a pedestal seat of a sideframe pedestal of a railroad car truck, said rolling contact rocking surface having a compound curvature to permit both lengthwise and sideways rocking; and

(b) a rail road car truck pedestal seat of a sideframe pedestal, the pedestal seat including the self-steering rolling contact fitting of claim 328, said pedestal seat having said rolling contact rocker surface for rocking engagement with a mating surface of a bearing adapter of a railroad car truck, said rocking surface having a compound curvature to permit both lengthwise and sideways rocking.

330. A combination comprising one of:

(a) the bearing adapter of part (a) of claim 329 and a mating pedestal seat; and

(b) the pedestal seat of part (b) of claim 329 and a mating bearing adapter.

331. A combination comprising both a bearing adapter of part (a) of claim 329 and a pedestal seat of part (b) of claim 329, said bearing adapter and said pedestal seat being mutually engageable in rolling contact.

5

332. The subject matter of claim 328 and a mating member in rolling contact rocking engagement therewith, wherein said rolling contact rocking surface is a first surface, said mating member has a second surface, and said first and second surfaces are chosen from the set of rolling contact rocking surfaces consisting of those in which:

10

(a) at least a portion of said first surface is spherical;

(b) at least a portion of said second surface is spherical;

(c) at least a portion of said second surface is flat;

(d) said first and second surfaces are surfaces of compound curvature; and

15

(e) said first and second surfaces are rockingly matable saddle shaped surfaces;

(f) said first surface has a longitudinal radius of curvature and a lateral radius of curvature, and said radii are different from each other; and

(g) said second surface has a longitudinal radius of curvature and a lateral radius of curvature, and said radii are different from each other.

20

333. A wheelset to sideframe interface assembly for a three piece rail road car truck, said interface assembly having rolling contact rocker fittings operable to rock in rolling point contact both laterally and longitudinally, said fittings including the subject matter of any one of claims 328 to 332

25

334. A wheelset to sideframe interface assembly for a rail road car truck, said interface assembly comprising:

a bearing adapter, a pedestal seat, and a resilient member;

said bearing adapter having an underside for seating on a cylindrical casing of a railroad car truck wheelset bearing;

30

said bearing adapter having a first end and a second end, each of said first and second ends having an end wall bracketed by a pair of corner abutments, said end wall and corner abutments co-operating to define a channel

- 124 -

permitting insertion of said bearing adapter between a pair of thrust lugs of a sideframe pedestal;

said bearing adapter having a first rocking member;

said pedestal seat having a second rocking member for making engagement with said first rocking member;

one of said first and second rocking members being said self-steering rolling contact rocker fitting of claim 328; and

said first and second rocking members, when engaged, being operable to rock longitudinally relative to a sideframe to permit the rail road car truck to steer.

335. A wheelset to sideframe interface assembly incorporating the subject matter of claim 334 wherein said assembly includes an elastomeric member; said elastomeric member has a first portion for seating adjacent said end wall of said first end of said bearing adapter, and a second portion at least partially overlying said bearing adapter; and said second portion of said elastomeric member has a relief formed therein to accommodate rocking engagement of said bearing adapter with said pedestal seat.

336. A wheelset to sideframe interface assembly incorporating the subject matter of any one of claims 332-334 wherein said assembly includes an auxiliary centering member operable to urge said fittings to a centered condition.

337. A rail road car truck comprising:

a laterally extending truck bolster having first and second ends;

a pair of longitudinally extending first and second sideframes to which said first and second ends of the truck bolster are resiliently mounted, said sideframes having respective sideframe pedestals;

wheelsets to which the sideframes are mounted at said sideframe pedestals; and

wheelset to sideframe interface assemblies of any one of claims 5 to 8 mounted between said wheelsets and said sideframes pedestals.

338. The three piece rail road car truck of claim 337 wherein said truck is free of unsprung lateral cross-members between said first and second sideframes.

339. The railroad car truck of any one of claims 337 and 338, wherein said truck has first and second groups of dampers mounted to work between said bolster and said first and second sideframes, respectively; said first group including a first damper and a second damper, and said second damper being mounted more laterally outboard than said first damper.

340. The railroad car truck of claim 339 wherein each of said dampers has a friction face, said friction faces of said first and second dampers have co-efficients of static friction and dynamic friction, and any one of:

- (a) said co-efficients of static and dynamic friction are within 20 % of each other;
- (b) at least one of the dampers has co-efficients of static friction and dynamic friction, and both of those co-efficients lie in the range of 0.1 to 0.4;
- (c) said coefficients of static and dynamic friction are substantially the same;
- (d) said friction faces of said first and second friction dampers have a substantially stick-slip free friction interaction with said respective wear plates; and
- (e) one of said sliding friction faces of said dampers is non-metallic.

341. The railroad car truck of any one of claims 337 to 340 wherein:

said first end of said bolster is mounted to said first sideframe on a first main spring group;

said second end of said bolster is mounted to said second sideframe on a second main spring group;

a first group of four dampers is mounted to work between said first end of said bolster and said first sideframe, said dampers being first, second third and fourth dampers;

a second group of four dampers is mounted to work between said second end of said bolster and said second sideframe;

said first main spring group includes first, second, third and fourth corner springs; and

said first, second, third and fourth dampers are mounted over said first, second, third, and fourth corner springs, respectively, of said first main spring group.

342. The rail road car truck of claim 341 wherein said first main spring group has an overall vertical spring rate $k_{\text{spring group}}$, and the springs mounted under said first, second third and fourth dampers have a total vertical spring rate $k_{\text{damper springs}}$, and $k_{\text{damper springs}}$ is greater than 20 % of $k_{\text{spring group}}$, and wherein said first, second, third and fourth dampers include
 5 damper wedges, and said damper wedges have primary damper angles of greater than 35 degrees.

343. The railroad car truck of any of claims 337 to 342 wherein said truck has a rated load, said sideframes have a resistance to lateral perturbations having a first characteristic,
 10 $k_{\text{sideframe}}$ associated with lateral swinging of the sideframes, and a second characteristic, $k_{\text{spring shear}}$, associated with lateral shear of the main spring groups; and, at said rated load $k_{\text{sideframe}}$ is softer than $k_{\text{spring shear}}$.

344. The railroad car truck of any one of claims 337 to 343 wherein said bolster has a
 15 range of lateral translation relative to said sideframes and gibs limiting said range, said range being at least as $\frac{3}{4}$ inches to either side of a neutral position.

345. A rail road car truck incorporating the subject matter of any of claims 328 to 344 wherein:

20 said truck has a rolling direction, and, when the truck is at equilibrium on tangent track, said first and second sideframes have respective longitudinal axes parallel to the rolling direction;

said first yaw resisting member includes a first friction damper, and said second yaw resisting member includes a second friction damper;

25 said first and second sideframes have respective sideframe windows bounded longitudinally by respective first and second sideframe columns;

said sideframe columns have respective sideframe column wear plates against which said friction dampers work;

30 said first sideframe column of said first sideframe has a first sideframe column wear plate region against which said first friction damper works, and a second sideframe column wear plate region against which said second friction damper works; and

35 said first and second wear plate regions have respective first and second normals, said first and second normals being parallel to each other and to the longitudinal axis of their respective sideframe.

346. The railroad car truck of any one of claims 339 to 345 wherein said truck has dampers mounted to work between said bolster and said sideframes; said dampers exert a first friction force F_D when said bolster is moving in a downward direction relative to said sideframes, and a second friction force, F_U when said bolster is moving in an upward direction relative to said sideframes; and a ratio of F_D : F_U , by magnitude, lies in the range of 2:3 to 3:2.

347. At least one self-steering rolling contact rocker fitting according to claim 328 for use in a wheelset to sideframe interface of a rail road car truck, said self-steering apparatus fitting comprising at least one of:

(a) a bearing adapter mountable to bearings on a wheelset, said bearing adapter being for use in combination with other fittings of said self steering apparatus, said other fittings including at least a pedestal seat;

said bearing adapter having said curved rolling contact engagement surface, said surface being for orientation facing away from the wheelset when installed; and

(b) a pedestal seat mountable in a pedestal of a sideframe of the railroad car truck, said pedestal seat being for use in combination with other fittings of said self steering apparatus, said other fittings including at least a bearing adapter;

said pedestal seat having said curved rolling contact engagement surface, said surface being for orientation toward the wheelset; and

at least one of (a) the bearing adapter rolling contact engagement surface; and (b)

the pedestal seat rolling contact engagement surface, has a longitudinally arcuate profile permitting rocking of the wheelset bearing lengthwise relative to the sideframe.

348. At least one self-steering rolling contact rocker fitting according to claim 328, said fitting being one of:

(i) a bearing adapter for a railroad car truck, said bearing adapter having a pair of arches and an underside for seating on the round cylindrical casing of a railroad freight car wheelset bearing, said arches being spaced on an axis, and said rolling contact engagement surface; said surface being an

upwardly facing rolling contact surface for engagement with a mating rolling contact rocking element, said rolling contact surface having a curvature that is one of (a) spherical; and (b) formed about an axis of a body of revolution, said body of revolution having an axis of revolution parallel to said axis of said arches; and

- (ii) a pedestal seat mountable in a sideframe pedestal of a rail road car truck sideframe, the sideframe having a long dimension defining a longitudinal axis, said pedestal seat having said rolling contact engagement surface, said surface being a rolling contact surface for engagement with a mating rolling contact element, said rolling contact surface having a curvature that is one of (a) spherical; and (b) formed about an axis of a body of revolution, said body of revolution having an axis of revolution cross-wise to said longitudinal axis.

349. The subject matter of claim 348 including a bearing adapter according to part (i) of claim 21, wherein said bearing adapter has a body for seating on a bearing, and a second member mounted to said body, said second member including said rocker fitting, and said second member being made of a different material than said body of said bearing adapter.

350. A rail road car truck comprising:

a bolster, a first sideframe, a second sideframe, a first spring group, a second spring group, a first wheelset and a second wheelset;

said bolster extending cross-wise between said sideframes;

said bolster having a first end supported on said first spring group, said first spring group being seated on said first sideframe;

said bolster having a second end supported on said second spring group, said second spring group being seated on said second sideframe;

said first and second sideframes being seated on said wheelsets;

a first group of friction dampers being mounted to work between said first end of said bolster and said first sideframe;

a second group of dampers being mounted to work between said second end of said bolster and said second sideframe;

said first and second groups of friction dampers having sliding friction faces mounted to work against wear plates as said first end of said bolster moves relative to said first sideframe;

said first and second groups of dampers each including respective first and second dampers, said first and second dampers being independently driven;

said first friction damper being laterally inboard of said second damper spring; and

said dampers having a co-efficient of static friction, u_s , and a co-efficient of dynamic friction, u_k , those coefficients being within 20 % of one another.

10 351. The rail road car truck of claim 350 wherein any one of:

(a) said coefficients of static can dynamic friction are substantially the same;

(b) said first and second friction dampers have friction faces having substantially stick-slip free friction interaction with said respective wear plates;

(c) both u_k and u_s lie in the range of 0.20 to 0.35; and

15 (d) said first and second friction dampers have sliding friction faces for interaction with said respective wear plates and one of said sliding friction faces is non-metallic.

20 352. The rail road car truck of any one of claims 348 and 349 wherein said first friction damper includes a friction damper wedge, said friction damper wedge has a primary damper wedge angle, and said primary damper wedge angle lies in the range of 35 to 55 degrees.

25 353. The rail road car truck of any one of claims 350 to 352 wherein each of said spring groups includes a first corner spring, a second corner spring, a third corner spring and a fourth corner spring, said first corner spring being offset laterally inboard of said second corner spring, said third corner spring being laterally offset inboard of said fourth corner spring, said first and second corner springs being longitudinally offset from said third and fourth corner springs respectively; and said first friction damper is mounted over said first corner spring and said second friction damper is mounted over said second corner spring.

30

354. The rail road car truck of claim 353 wherein each of said corner springs has another spring nested therewithin.

35 355. The rail road car truck of any one of claims 350 to 354 wherein said first spring group has a total vertical spring rate k_v , and said dampers of said respective first group of

friction dampers are driven by springs having a total spring rate k_d , wherein the ratio k_d/k_v is greater than 20 %.

356. The rail road car truck of any one of claims 350 to 355 wherein:

5 said bolster has accommodations formed therein and said friction dampers each seat
 in a respective one of said accommodations;
 said sideframes each include an upper member, a lower member and a pair of
 sideframe columns, and a sideframe window is defined therebetween;
 said sideframe columns have said wear plates mounted thereto; and
 10 said wear plates are mounted square to said bolster and span said first and second
 dampers.

357. The rail road car truck of any one of claims 350 to 356 wherein said bolster is
 15 movable within a range of lateral motion relative to said sideframes, said range being
 bounded by hard stop abutments, and said range of lateral motion is at least 3/4" to either
 side of a neutral position.

358. A rail road car truck incorporating the subject matter of any of claims 350 to 357
 wherein:

20 said truck has a rolling direction, and, when the truck is at equilibrium on tangent
 track, said first and second sideframes have respective longitudinal axes
 parallel to the rolling direction;
 said first yaw resisting member includes a first friction damper, and said second
 yaw resisting member includes a second friction damper;
 25 said first and second sideframes have respective sideframe windows bounded
 longitudinally by respective first and second sideframe columns;
 said sideframe columns have respective sideframe column wear plates against
 which said friction dampers work;
 said first sideframe column of said first sideframe has a first sideframe column
 30 wear plate region against which said first friction damper works, and a
 second sideframe column wear plate region against which said second
 friction damper works;
 said first and second wear plate regions having respective first and second
 normals, said first and second normal being parallel to each other and to
 35 the longitudinal axis of their respective sideframe.

359. The rail road car truck of any one of claims 350 to 358, said truck having a rated load, wherein said first and second sideframes are swingingly mounted on said wheelsets, said truck having a first component of resistance to lateral deflection of said bolster relative to said sideframes associated with sideways swinging of each of said sideframes, k_p , and a second component of resistance to lateral deflection of said bolster relative to said sideframes associated with lateral shear in said spring groups, respectively, k_{ss} , and, at said rated load, k_p is softer than k_{ss} .

360. The rail road car truck of any one of claims 350 to 359 wherein said sideframes are self-steeringly mounted to said wheelsets.

361. The rail road car truck of any one of claims 350 to 360 wherein said sideframes have respective pedestal mounts, and said truck has rolling contact rockers mounted at said pedestal mounts to permit longitudinal rocking of said wheelsets relative to said pedestal mounts, said rolling contact rockers being operable to permit said truck to self-steer.

362. The rail road car truck of claim 361 wherein said rockers have a first curvature permitting fore-and-aft rocking, and a second curvature permitting sideways swinging of said sideframes.

363. The rail road car truck of any one of claims 350 to 362 wherein:

said spring groups each have four corner springs, each of said corner springs having another spring nested therewithin;

each friction damper includes a friction camper wedge having a primary damper angle in the range of 35 to 55 degrees;

each sideframe has sideframe columns and friction wear plates mounted to said sideframe columns, said friction wear plates spanning said first and second friction dampers; and

said bolster has gibs mounted thereto, said gibs being spaced to bracket said sideframes and to define end stops of a range of lateral motion of said bolster relative to said sideframes, said range being at least $\frac{3}{4}$ inches to either side of a neutral position.

364. A three piece railroad car truck having:

- 132 -

a laterally extending truck bolster, said truck bolster having first and second ends;
first and second longitudinally extending sideframes resiliently mounted at
said first and second ends of said bolster respectively;
said sideframes being mounted on wheelsets, said wheelsets being self-steeringly
5 mounted in said sideframes at wheelset to sideframe interface assemblies;
first and second sets of yaw resisting members mounted to work between one of
said ends of said truck bolster and the respective sideframe to which that
end is mounted;
each said set including a first yaw resisting member and a second yaw resisting
10 member;
said yaw resisting members being biased to oppose yaw deflection of the
respective sideframe;
said first yaw resisting member being laterally inboard of said second yaw
resisting member; and
15 said yaw resisting members increasing in yaw resistance as a function of
increased yaw displacement.

365. The three piece railroad car truck of claim 364 wherein:

said wheelsets are mounted to said sideframes at wheelset to sideframe interface
20 assemblies that include self-steering apparatus permitting angular
deflection of said wheelsets relative to said sideframes as viewed from
above;
said bolster has a center plate bowl, said first and second ends of said bolster
being distant from said center plate bowl;
25 said first and second sideframes being mounted to yaw relative to said bolster;
said first yaw resisting member and said second yaw resisting member each being
independently biased to oppose yaw deflection;
said first yaw resisting member being mounted closer to said center plate of said
bolster than is said second yaw resisting member, said first and second
30 yaw resisting members being co-operable to yield a moment couple
opposing yaw deflection of the respective sideframe relative to said
bolster, said moment couple having a magnitude increasing as a function
of increasing yaw deflection.

35 366. The three piece railroad car truck of any of claims 364 and 365 wherein each said

set of yaw resisting members includes first, second, third, and fourth yaw resisting members arranged in a four cornered arrangement.

367. The three piece railroad car truck of any one of claims 364 and 366 wherein each of said yaw resisting members is an independently sprung, spring-biased friction damper.

368. The three piece railroad car truck of any one of claims 364 and 367 wherein each of said yaw resisting members is an independently sprung, spring-biased friction damper, said friction dampers include damper wedges; said first and second ends of said bolster are seated on first and second main spring groups carried in said first and second sideframes, respectively, each of said first and second main spring groups has respective first, second, third and fourth corner springs; and said friction damper wedges of said first, second, third and fourth dampers are driven by said first, second, third and fourth corner springs respectively.

369. The three piece railroad car truck of claim 368 wherein said first, second, third, and fourth springs each have another spring nested therewithin.

370. The three piece railroad car truck of any one of claims 364 and 369 wherein said wheelset to sideframe interface assembly includes self-steering apparatus, and said self-steering apparatus includes rolling contact rockers.

371. The three piece railroad car truck of any one of claims 364 and 369 wherein said wheelset to sideframe interface assembly includes self-steering apparatus, and said self-steering apparatus includes an elastomeric shear pad.

372. The three piece railroad car truck of any one of claims 364 and 371 wherein said wheelset to sideframe interface assemblies each include a bearing adapter mounted on one of said wheelsets, a pedestal seat located in an associated sideframe pedestal of one of said sideframes, and said self-steering apparatus includes one of (a) an elastomeric shear pad mounted between the pedestal seat and the bearing adapter; and (b) co-operating rolling contact rocker elements of the bearing adapter and the pedestal seat.

373. The three piece railroad car truck of any one of claims 364 and 372 wherein said sideframes are mounted to swing cross-wise.

374. The three piece railroad car truck of any one of claims 364 and 363 wherein:
said first sideframe has a first main spring seat and a first main spring group
mounted therein, said first end of said bolster being seated on said first
main spring group;
said bolster is displaceable cross-wise relative to said first sideframe when said
truck is subjected to lateral perturbations;
total lateral deflection of said bolster includes a first component of deflection and
a second component of deflection, said first and second components of
deflection being additive;
said first component of deflection being cross-wise deflection measured between
said main spring seat of said first sideframe and said first end of said
bolster;
said second component of deflection being cross-wise deflection between said
first wheelset and said main spring seat of said first sideframe;
each of said first and second components of deflection having a magnitude; and
said total lateral deflection having a magnitude greater than either of said first and
second components of deflection.

375. The three piece railroad car truck of claim 374 wherein said truck has a rated load,
said truck has a first lateral stiffness, k_1 , associated with said first component of
deflection, and a second lateral stiffness, k_2 associated with said second component of
deflection, and, at said rated load k_2 is less than k_1 .

376. The three piece railroad car truck of any one of claims 364 to 375 wherein said
truck has members confining said bolster to a bounded range of lateral translation relative
to said first sideframe, and said bounded range of lateral translation permits at least $\frac{3}{4}$
inches of lateral travel of said bolster relative to said first sideframe to either side of a
neutral position.

377. The three piece railroad car truck of claim 376 wherein said range of lateral
translation is bounded by gibs, and said gibs permit a maximum excursion of between $1\frac{1}{8}$ " and $1 - \frac{3}{4}$ " of lateral travel to either side of said neutral position.

378. The three piece railroad car truck of any one of claims 364 and 377 wherein said first and second ends of said bolster being supported on first and second main spring groups respectively; said first and second sets of yaw resisting members include dampers mounted in pockets in said first and second bolster ends respectively; each of said sideframes has sideframe columns and bearing plates mounted thereto; said first and second main spring groups have a width in the cross-wise direction; and said bearing plates are wider than said main spring groups in the cross-wise direction.

379. The three piece railroad car truck of any one of claims 364 and 378 wherein said first and second ends of said bolster are supported on first and second main spring groups, each of said main spring groups has an overall vertical spring rate, k_T ; each said main spring group has springs mounted to bias said dampers, including said first, second, third and fourth corner springs; said springs mounted to bias said dampers have a total vertical spring rate, k_D ; and k_D is at least 20 % of k_T .

380. The three piece railroad car truck of claim 379 wherein said yaw resisting members include friction damper wedges having a primary wedge angle of at least 35 degrees, and k_D lies in the range of 25 to 50 % of k_T .

381. The three piece railroad car truck of any one of claims 364 and 380 wherein said yaw resisting members include friction dampers have any one of:

- (a) non-metallic friction surfaces mounted to work against bearing plates mounted to sideframe columns of said first and second sideframes;
- (b) at least one non-stick slip friction surface for working against a mating sideframe column wear plate; and
- (c) co-efficients of static friction and dynamic friction against sideframe column wear plates, said co-efficients of static friction and dynamic friction being within 20 % of one another.

382. The rail road car truck of any one of claims 364 and 381 wherein said yaw resisting members include and a set of friction damper wedges having primary damper wedge angles of greater than 35 degrees.

383. The rail road car truck of any one of claims 364 and 382 wherein said yaw resisting members include a set of friction dampers, and, in up-and-down motion, said

- 136 -

friction dampers having respective up and down forces, said up force being in the range of 2/3 to 3/2 of said down force.

384. The rail road car truck of claim 383 wherein the down force when the bolster is moving downward is less than 3000 lbs.

385. The rail road car truck of any one of claims 364 and 384 wherein said yaw resisting members include friction dampers, said truck bolster has four damper pockets at each end thereof and respective ones of said friction dampers seated therein.

386. The rail road car truck of any of claims 364 and 385 wherein:
said truck has a rolling direction, and, when the truck is at equilibrium on tangent track, said first and second sideframes have respective longitudinal axes parallel to the rolling direction;
said first yaw resisting member includes a first friction damper, and said second yaw resisting member includes a second friction damper;
said first and second sideframes have respective sideframe windows bounded longitudinally by respective first and second sideframe columns;
said sideframe columns have respective sideframe column wear plates against which said friction dampers work;
said first sideframe column of said first sideframe has a first sideframe column wear plate region against which said first friction damper works, and a second sideframe column wear plate region against which said second friction damper works;
said first and second wear plate regions having respective first and second normals, said first and second normal being parallel to each other and to the longitudinal axis of their respective sideframe.

387. A three piece railroad car truck for rolling in a lengthwise direction on cross-wise spaced rails of a railroad track, said truck comprising:
a truck bolster, a first sideframe, a second sideframe, a first wheelset, a second wheelset, a first main spring group, a second main spring group, a first set of dampers and a second set of dampers;
said truck bolster having a first end and a second end;

said truck bolster extending cross-wise between said first and second sideframes,
and said sideframes being mounted to yaw relative to said truck bolster;
each of said first and second sideframes having a sideframe window defined
between an upper member, a lower member, and a pair of first and second
5 sideframe columns, said lower member having a main spring seat;
said first main spring group being carried on said main spring seat of said first
sideframe, and said first end of said truck bolster being supported upon
said first main spring group;
said second main spring group being carried on said main spring seat of said
10 second sideframe, and said second end of said truck bolster being
supported upon said second main spring group;
said first and second sideframes having sideframe pedestals into which said
wheelsets are mounted;
said wheelsets having respective wheelset bearings mounted in associated ones of
15 said sideframe pedestals of said first and second sideframes;
said truck having self-steering apparatus, said self-steering apparatus being
mounted between said wheelset bearings and said sideframe pedestals;
each of said first and second main spring groups having respective first, second,
third, and fourth corner springs, said first and second corner springs being
20 offset cross-wise inboard of said third and fourth corner springs
respectively, and said first and third corner springs being offset lengthwise
from said second and fourth corner springs respectively;
said first set of dampers being mounted to work between said first end of said
bolster and said first sideframe;
25 said second set of dampers being mounted to work between said second end of
said bolster and said second sideframe;
each of said first and second sets of dampers including first, second, third and
fourth dampers, said first and second dampers being offset cross-wise
inboard of said third and fourth dampers respectively, and said first and
30 third dampers being offset lengthwise from said second and fourth
dampers respectively, and each of said first, second, third and fourth
dampers being independently biased to work in sliding friction
relationship against associated bearing plates of said truck when said
bolster moves relative to said sideframes, said bearing plates being
35 oriented square to said lengthwise direction.

388. The three piece railroad car truck of claim 24 wherein:

each said bearing has a bearing adapter mounted thereto, each said pedestal has a pedestal seat, and an elastomeric shear pad is mounted between said bearing adapter and the pedestal seat associated therewith, and said self-steering apparatus includes said shear pads;

said truck has members confining said bolster to a bounded range of lateral translation relative to said first sideframe, and said bounded range of lateral translation permits at least $\frac{3}{4}$ inches of lateral travel of said bolster relative to said first sideframe to either side of a neutral position;

said first and second sets of dampers are mounted in pockets in said first and second bolster ends respectively;

said bearing plates are bearing plates of said sideframe columns; and

said dampers include damper wedges, said damper wedges having a primary wedge angle of greater than 35 degrees, said damper wedges being driven by said first, second, third and fourth corner springs of said main spring groups respectively.

389. A bearing adapter for installation in a rail road car truck sideframe pedestal, said bearing adapter having an upper portion engageable with a pedestal seat, and a lower portion engageable with a bearing casing of a rail road car truck wheelset bearing, said lower portion having an apex, said lower portion defining a seat for engaging a bearing casing; said seat including a first land portion for engaging a first portion of the bearing casing, a second land portion for engaging a second portion of the bearing casing, said first land portion lying to one side of the apex, said second land portion lying to the other side of the apex, and at least one relief formed at said apex for seating over a bearing race of the bearing, said relief being located circumferentially between said first and second lands.

390. The bearing adapter of claim 389 wherein said bearing adapter has two reliefs at said apex, said reliefs being a first relief and a second relief, said two reliefs being spaced along said apex from each other, each relief being for seating over a bearing race of the bearing.

391. The bearing adapter of claim 389 wherein said relief is a groove that runs lengthwise along said apex.

392. The bearing adapter of claim 389 wherein said lower portion has a shape conforming to a body of revolution, said relief is a groove running along said apex, and said bearing adapter has a circumferentially extending underside groove that intersects said relief.

393. The bearing adapter of any one of claims 389 to 392 wherein said underside of said bearing adapter includes four land portions formed on a common radius conforming to a body of revolution.

394. The bearing adapter of any one of claims 389 to 392 wherein said at least one relief includes a first relief, said seat of said lower portion includes an array of pads formed on an arcuate profile; each of said first and second land portions includes one of said pads; and said pads are circumferentially separated by said first relief of said part of said apex of said seat.

395. The bearing adapter of claim 394 wherein:
said seat includes a first pad, and a second pad, a third pad and a fourth pad;
said first pad and said second pad are axially spaced from said third and fourth pads;
said first pad is circumferentially spaced from said second pad;
said third pad is circumferentially spaced from said fourth pad; and
said relieved part of said central portion is located circumferentially between said first pad and said second pad, and between said third pad and said fourth pad.

396. The bearing adapter of any one of claims 389 to 395 wherein said bearing adapter has a longitudinal plane of symmetry and a transverse plane of symmetry, said apex runs along said transverse plane of symmetry, and said lower portion of said bearing adapter is relieved along said apex to either side of said longitudinal plane of symmetry.

397. A combination of the bearing adapter of claim 390 and a bearing having a casing and axially spaced races contained within the casing, wherein said bearing adapter has a

first said relief mounted over one of said races, and a second said relief mounted over another of said races.

398. The subject matter of any one of claims 389 to 397 wherein said bearing adapter
5 has a pair of spaced apart arches, and said lower portion lies between said arches.

399. The subject matter of any one of claims 389 to 398 in combination with and a
pedestal seat, the upper portion of the bearing adapter having a first rolling contact
surface, the pedestal seat having a second rolling contact surface, said first and second
10 rolling contact surfaces being operable to provide self-steering.

400. The subject matter of any one of claims 389 to 399 wherein said upper portion of
said bearing adapter has a surface having both longitudinal and transverse curvature.

401. A railroad car truck that includes the subject matter of any one of claims 389 to
15 400.

402 The railroad car truck of claim 401 wherein said truck is a self-steering truck.

403. A bearing adapter for seating upon a cylindrical bearing casing of a wheelset
bearing of a railroad car truck, within a pedestal seat of a pedestal of a railroad car truck
sideframe, the wheelset bearing having an axis of rotation defining an axial direction and
first and second axially spaced apart bearing races contained within the round cylindrical
bearing casing, the bearing races extending about the axis of rotation in a circumferential
20 direction, wherein said bearing adapter comprises:

a metal body having having a pair of axially spaced apart end arches; a first seat
conforming to an upwardly facing portion of the cylindrical bearing
casing, said first seat extending axially between said end arches; and a
second seat for orientation facing the pedestal seat;

30 said first seat having at least a first relief formed in said metal of said bearing
adapter body; and, as seated on the bearing casing in use,

said first relief extending to a first location, said first location being axially
abreast of a first bearing race of the bearing;

said first seat including first and second portions lying axially abreast of said
35 relief;

when installed on the bearing casing, said first and second portions of said first seat lying circumferentially to either side of top dead center thereof; said first and second portions defining load path interfaces circumferentially to either side of said first relief, by which to pass loads between said bearing adapter and the bearing casing abreast of that first bearing race;

whereby loads passed between said bearing adapter and the bearing are forced to split into dominant load paths to either side of said first relief formed in said metal of said bearing adapter.

404. The bearing adapter of claim 403 wherein: said first seat first and second side portions having surfaces conforming to, and for mating with, the round cylindrical bearing casing at circumferentially spaced apart locations on the round cylindrical bearing casing abreast of the first bearing race; said first seat including a central portion located circumferentially between said side portions, at least part of said central portion including said first relief formed in said metal body.

405. The bearing adapter of any one of claims 403 and 404 wherein, as positioned in use, said first seat is defined in a first surface, and said first surface is relieved at top dead center axially abreast of two bearing races of the bearing.

406. The bearing adapter of any one of claims 403 to 405 wherein said bearing adapter has two said reliefs formed therein, said reliefs being axially spaced from each other, and said reliefs having the form of cusps formed in said first surface.

407. The bearing adapter of any one of claims 403 to 406 wherein, as positioned in use, said relief extends axially along top dead center of said first seat.

408. The bearing adapter of any one of claims 403 to 407 and further including a circumferentially extending groove locatable on the bearing casing axially intermediate the bearing races.

409. The bearing adapter of any one of claims 403 to 408 wherein said bearing adapter body is made of one of (a) iron; and (b) steel.

410. The bearing adapter of any one of claims 403 to 409 wherein said bearing adapter includes end walls and corner portions co-operable to seat about pedestal jaw thrust lugs of the sideframe.

5 411. The bearing adapter of any one of claims 403 to 410 wherein said first and second side portions are formed on radiused arcs of a first radius of curvature, said radius of curvature having a center of curvature, and, at the location of said relief, said central portion has a surface facing toward said center of curvature, said surface of said relief lying a distance greater than said first radius of curvature from said center of curvature.

10

412. The bearing adapter of any one of claims 403 to 411 wherein: said first seat of said bearing adapter includes an array of pads formed on an arcuate profile; each of said first and second portions includes respective first and second ones of said pads; and said first and second pads are circumferentially separated by said relief of said part of said
15 central portion of said first seat.

20

413. The bearing adapter of claim 412 wherein: said first seat of said bearing adapter includes a first pad, and a second pad, a third pad and a fourth pad; said first pad and said second pad are axially spaced from said third and fourth pads; said first pad is circumferentially spaced from said second pad; said third pad is circumferentially spaced from said fourth pad; and said relieved part of said central portion is located circumferentially between said first pad and said second pad, and between said third pad and said fourth pad.

25

414. The bearing adapter of any one of claims 403 to 413 wherein said second seat of said bearing adapter includes an arcuate surface having a curvature formed in the lengthwise direction of the sideframe to permit lengthwise rolling contact rocking of said bearing adapter in said sideframe.


30

415. The bearing adapter of any one of claims 403 to 414 wherein said second seat of said bearing adapter includes an arcuate surface having a curvature formed in a cross-wise direction relative to the sideframe to permit sideways rolling contact swinging of the sideframe thereon.



- 143 -

416. The bearing adapter of any one of claims 403 to 413 in combination with a resilient pad, said resilient pad being mounted in said second seat of said bearing adapter.

5 417. A railroad car truck having a pair of sideframes and a truck bolster mounted cross-wise therebetween, said sideframes having pedestal mounts, and said sideframes being mounted to wheelsets, the wheelsets having bearings, wherein said truck incorporates the subject matter of any of claims 403 to 416.

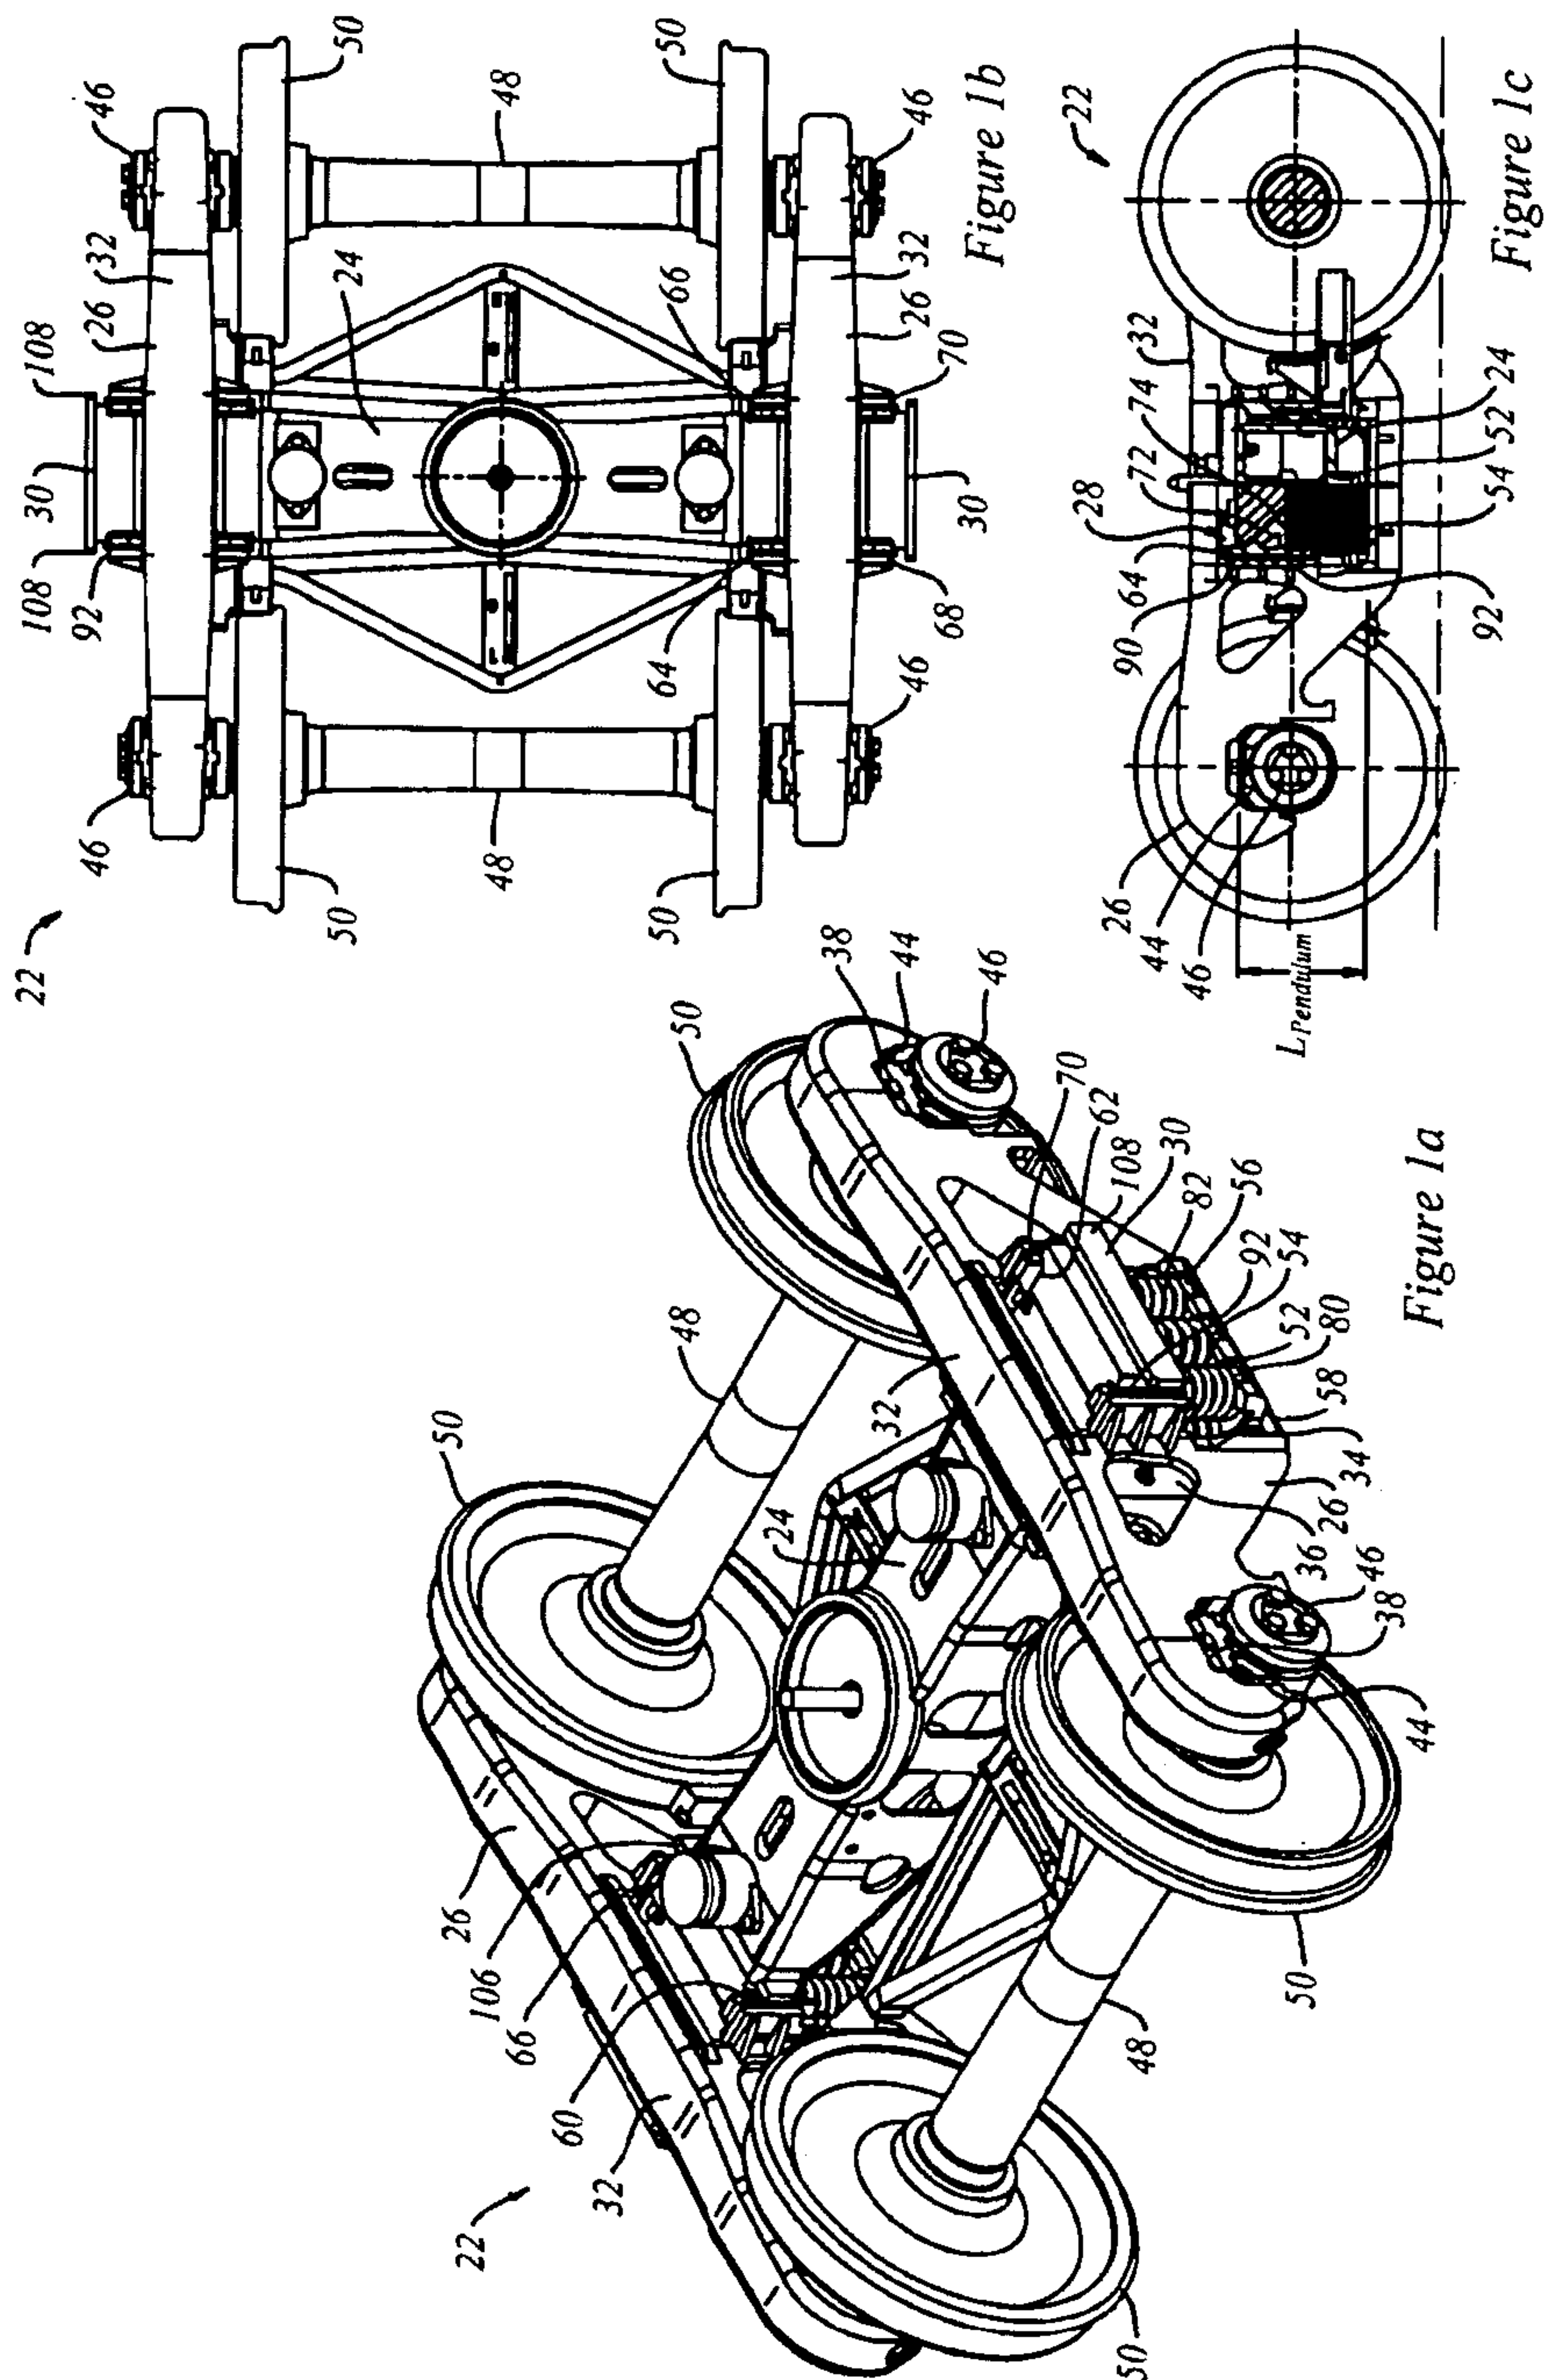

2 / 15

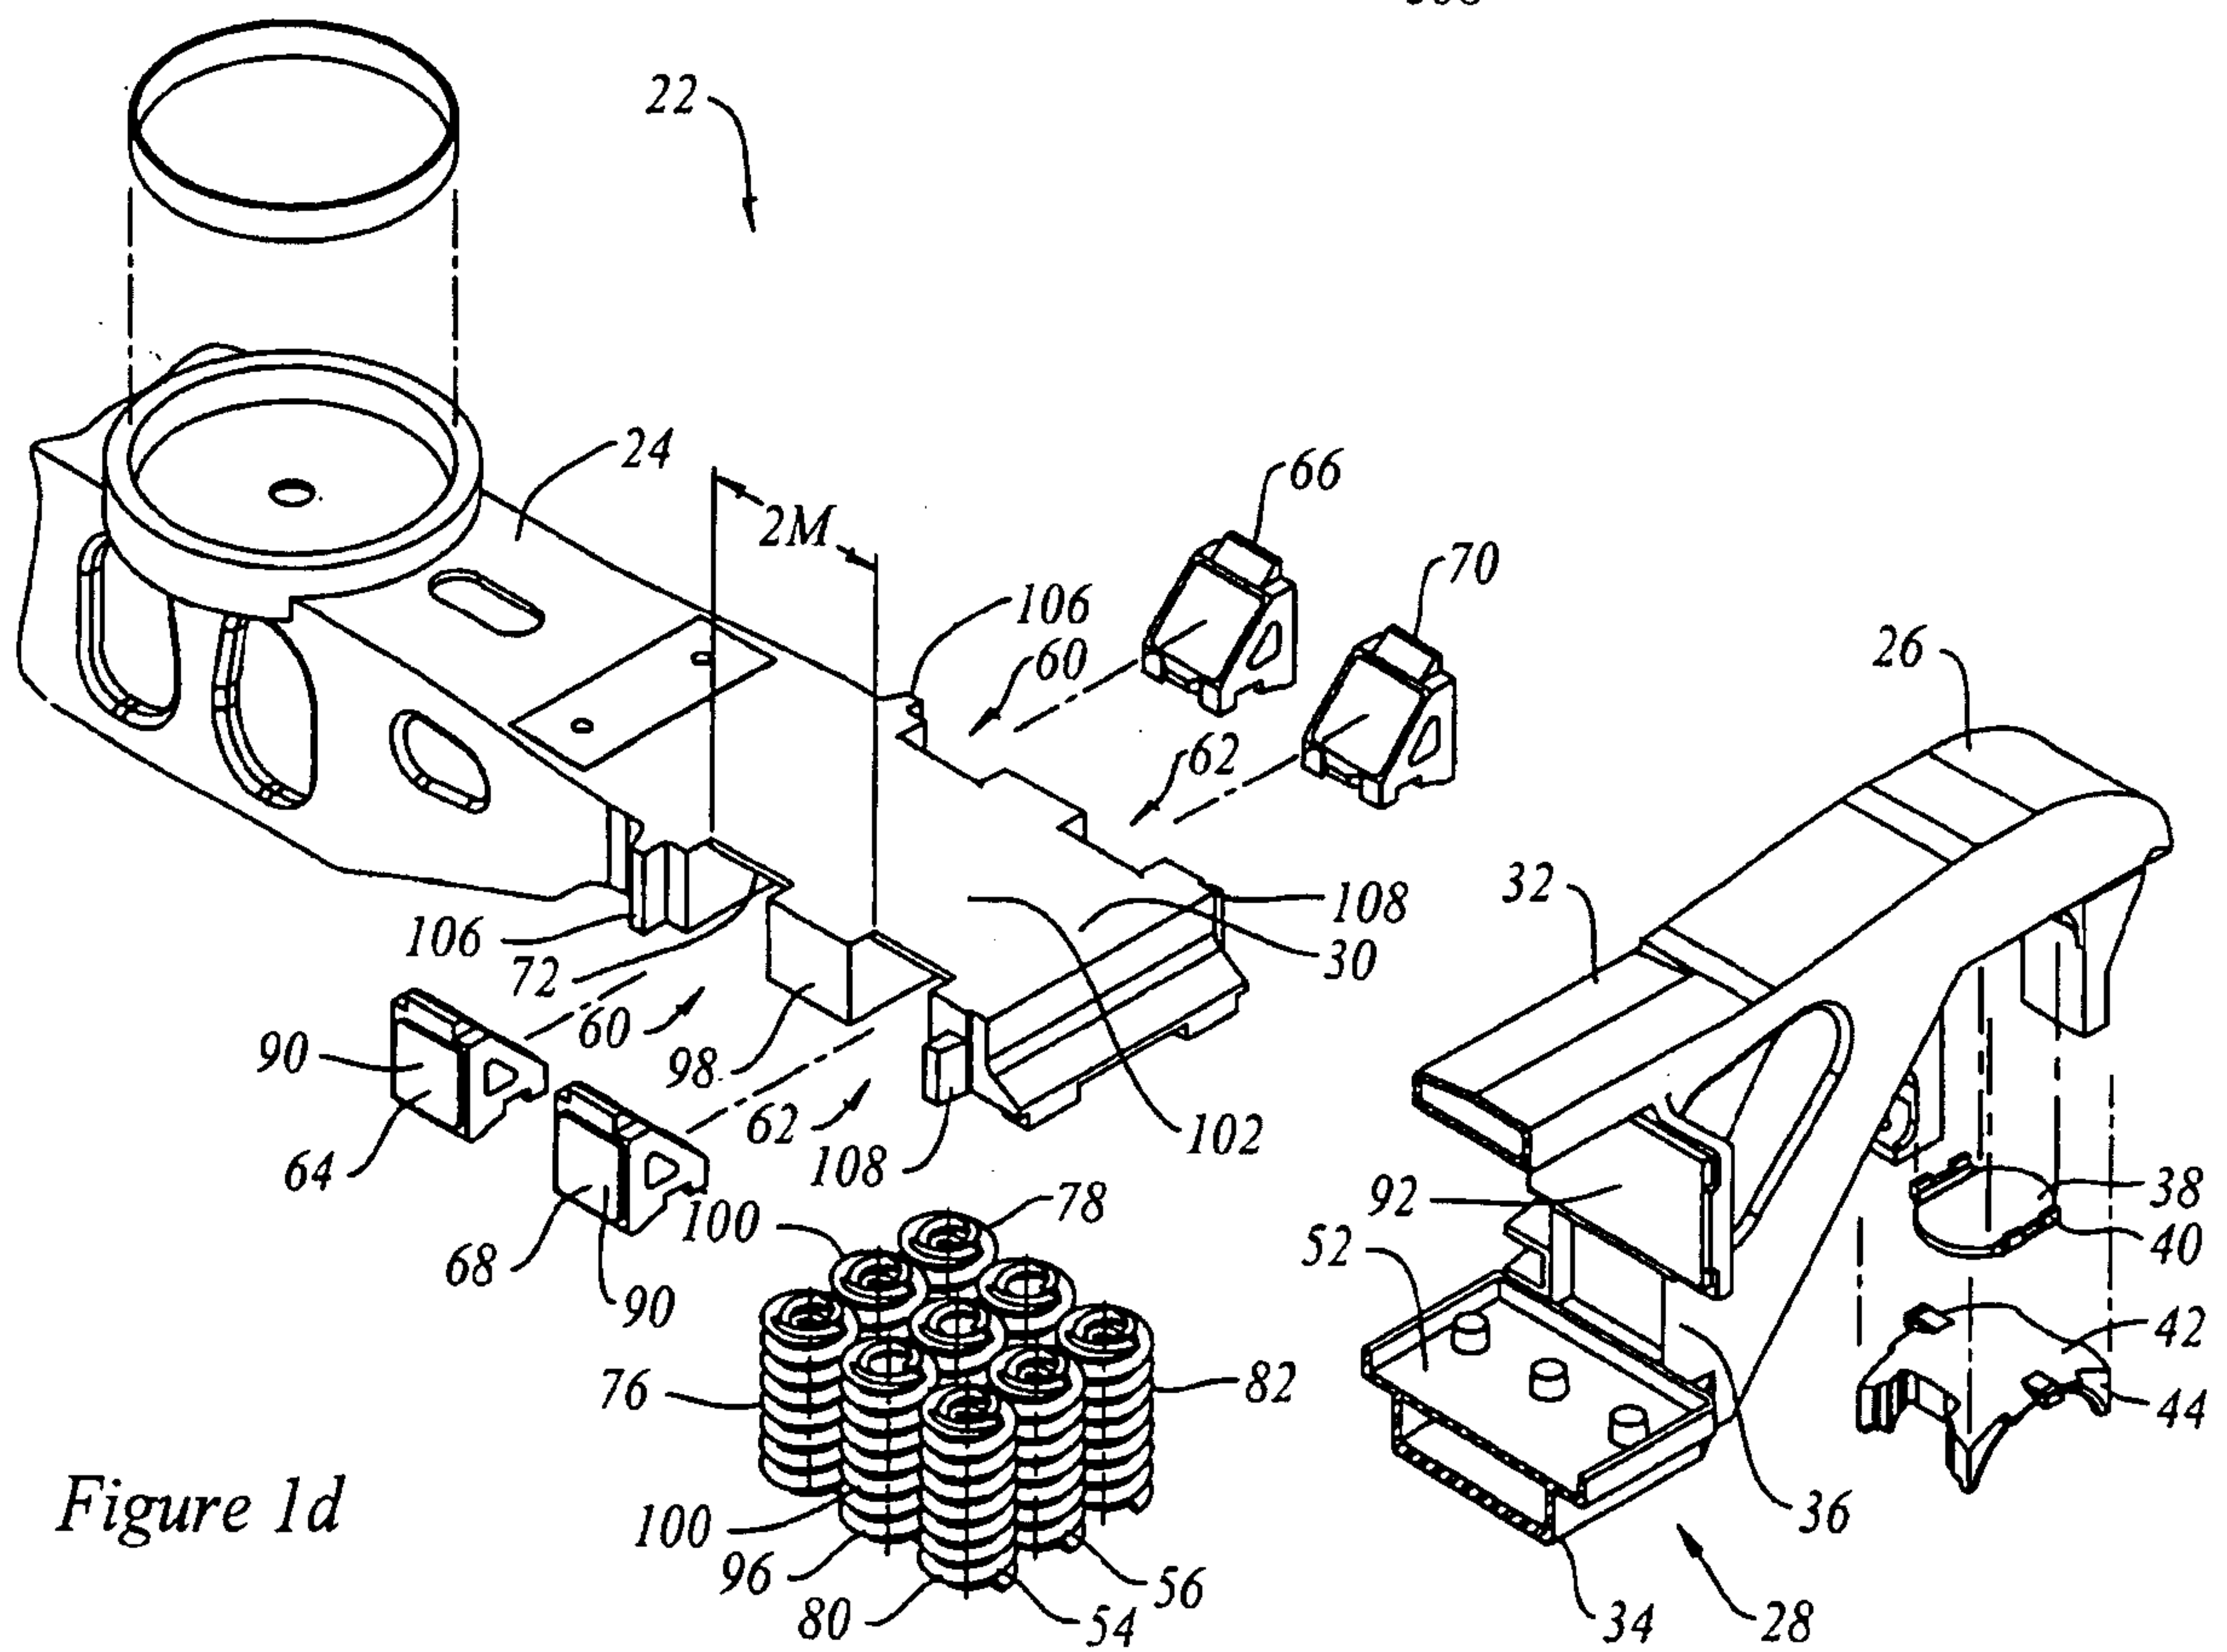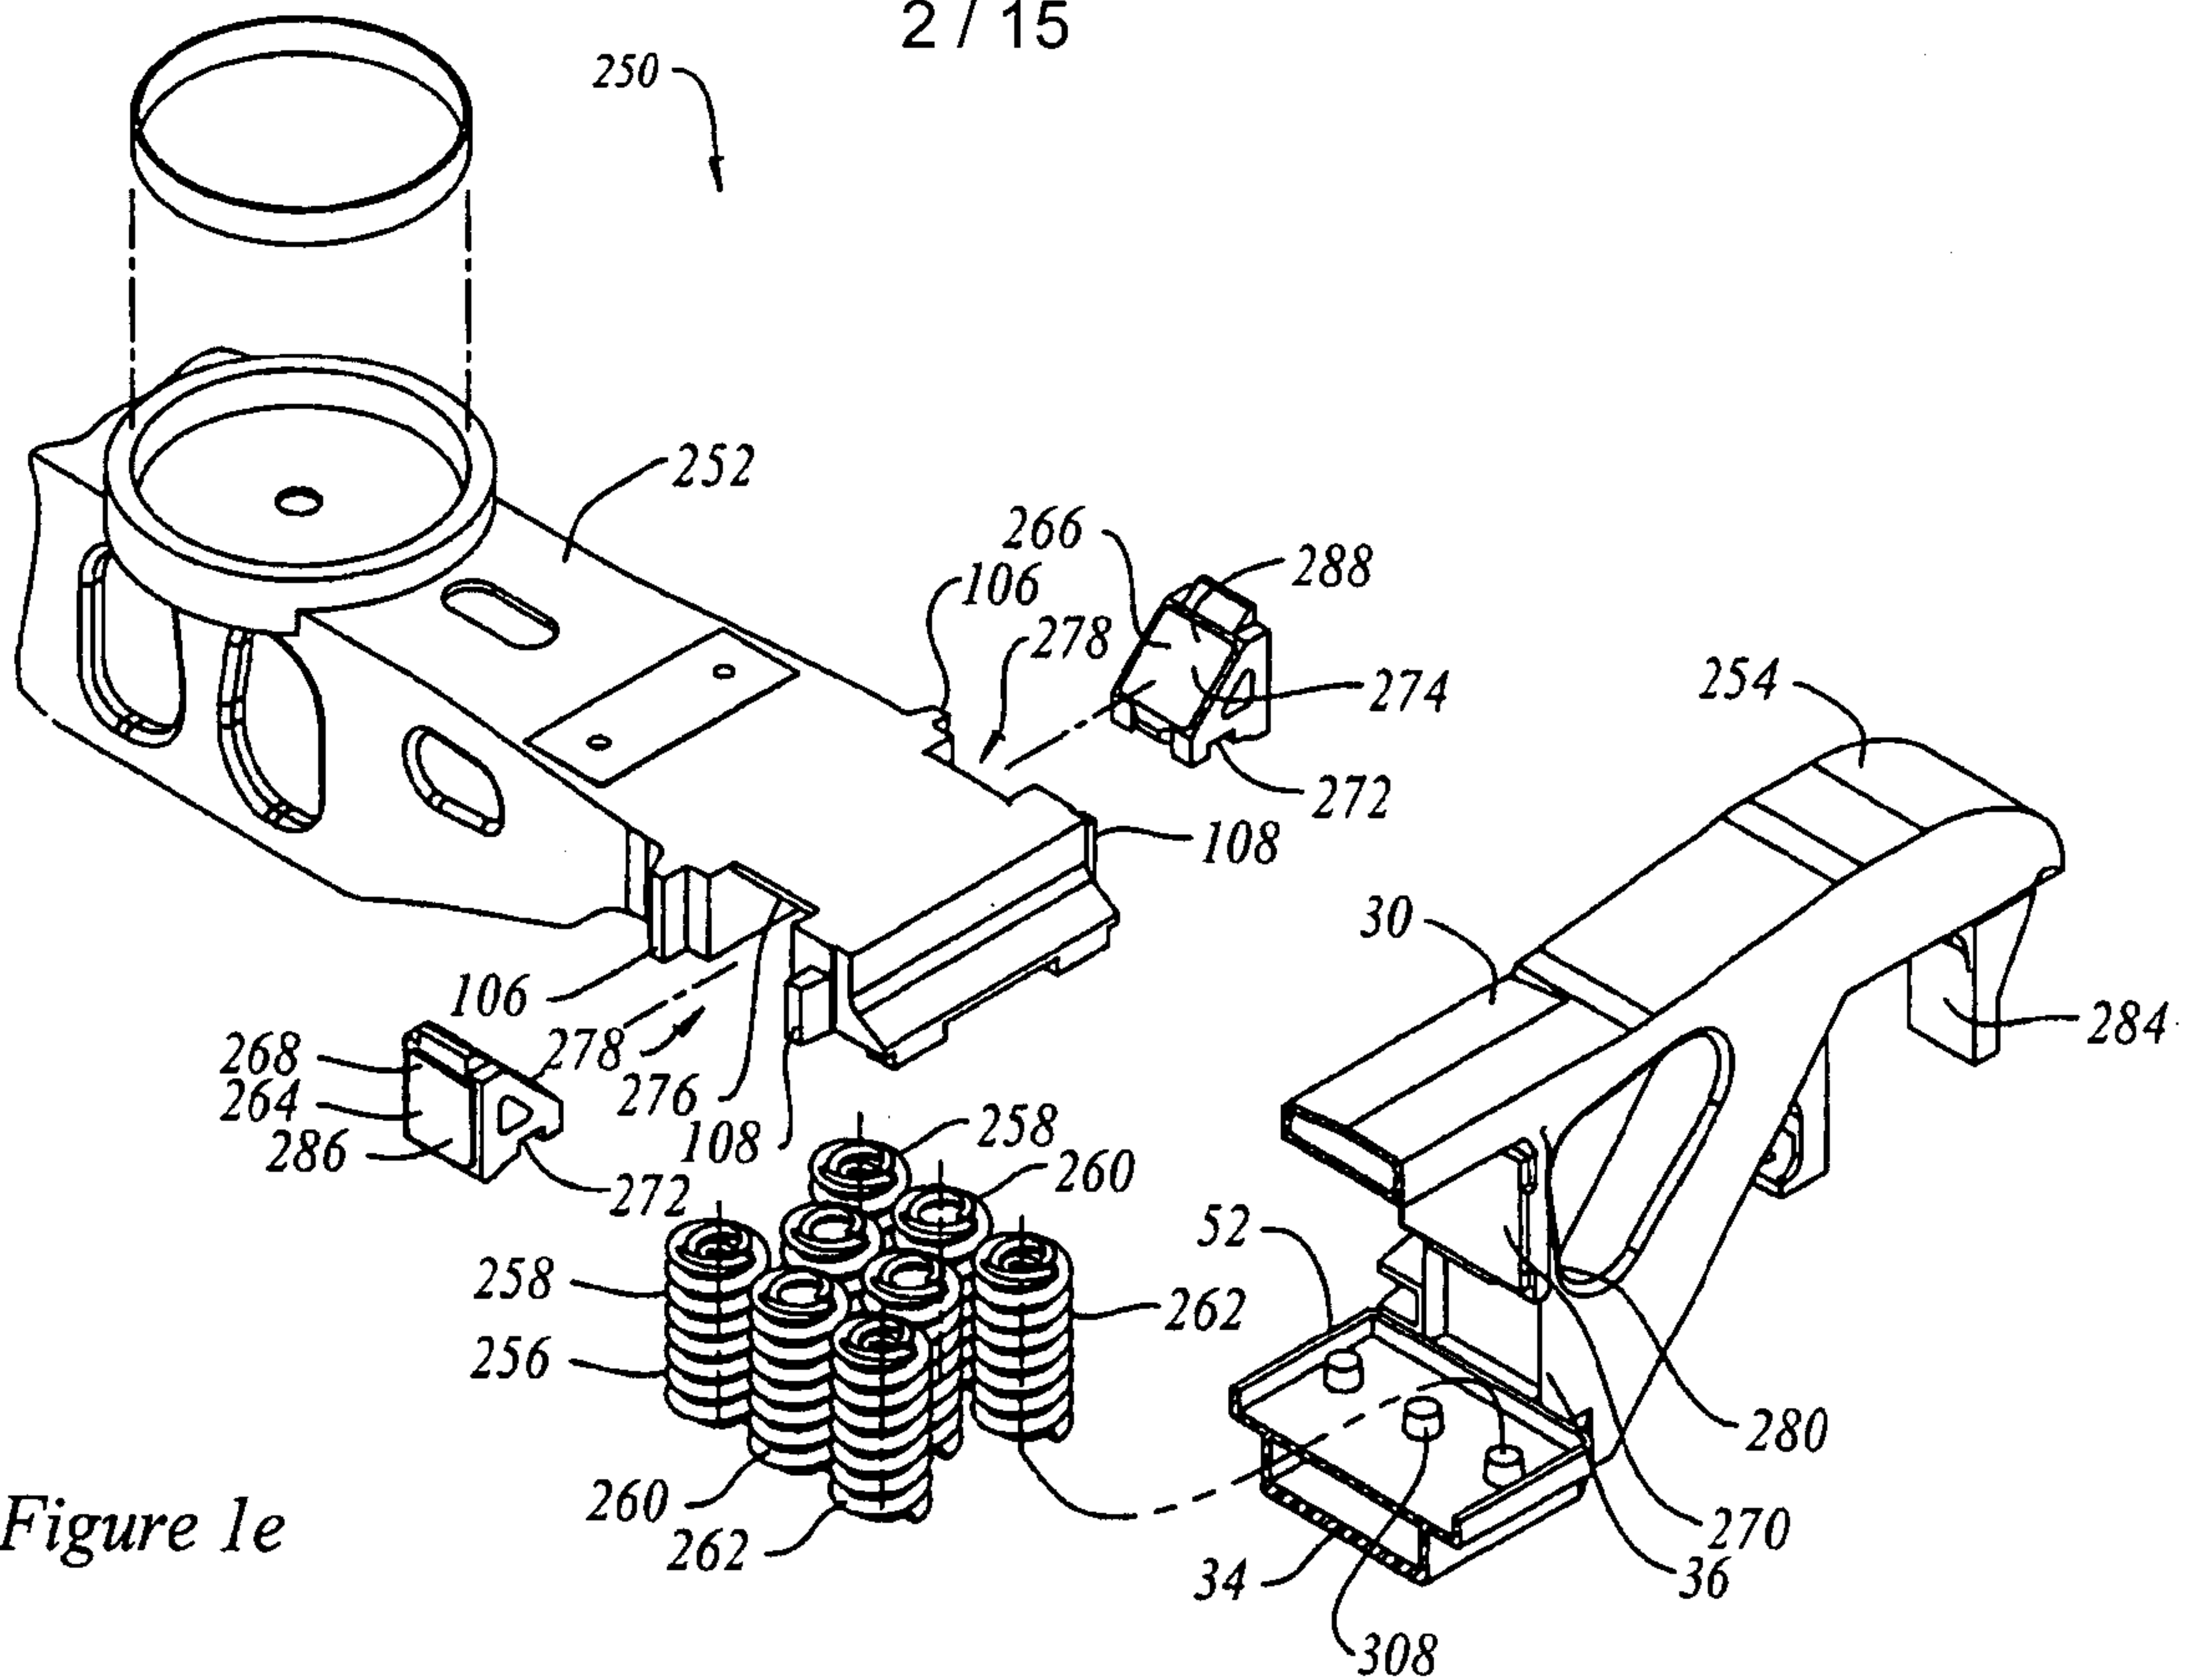

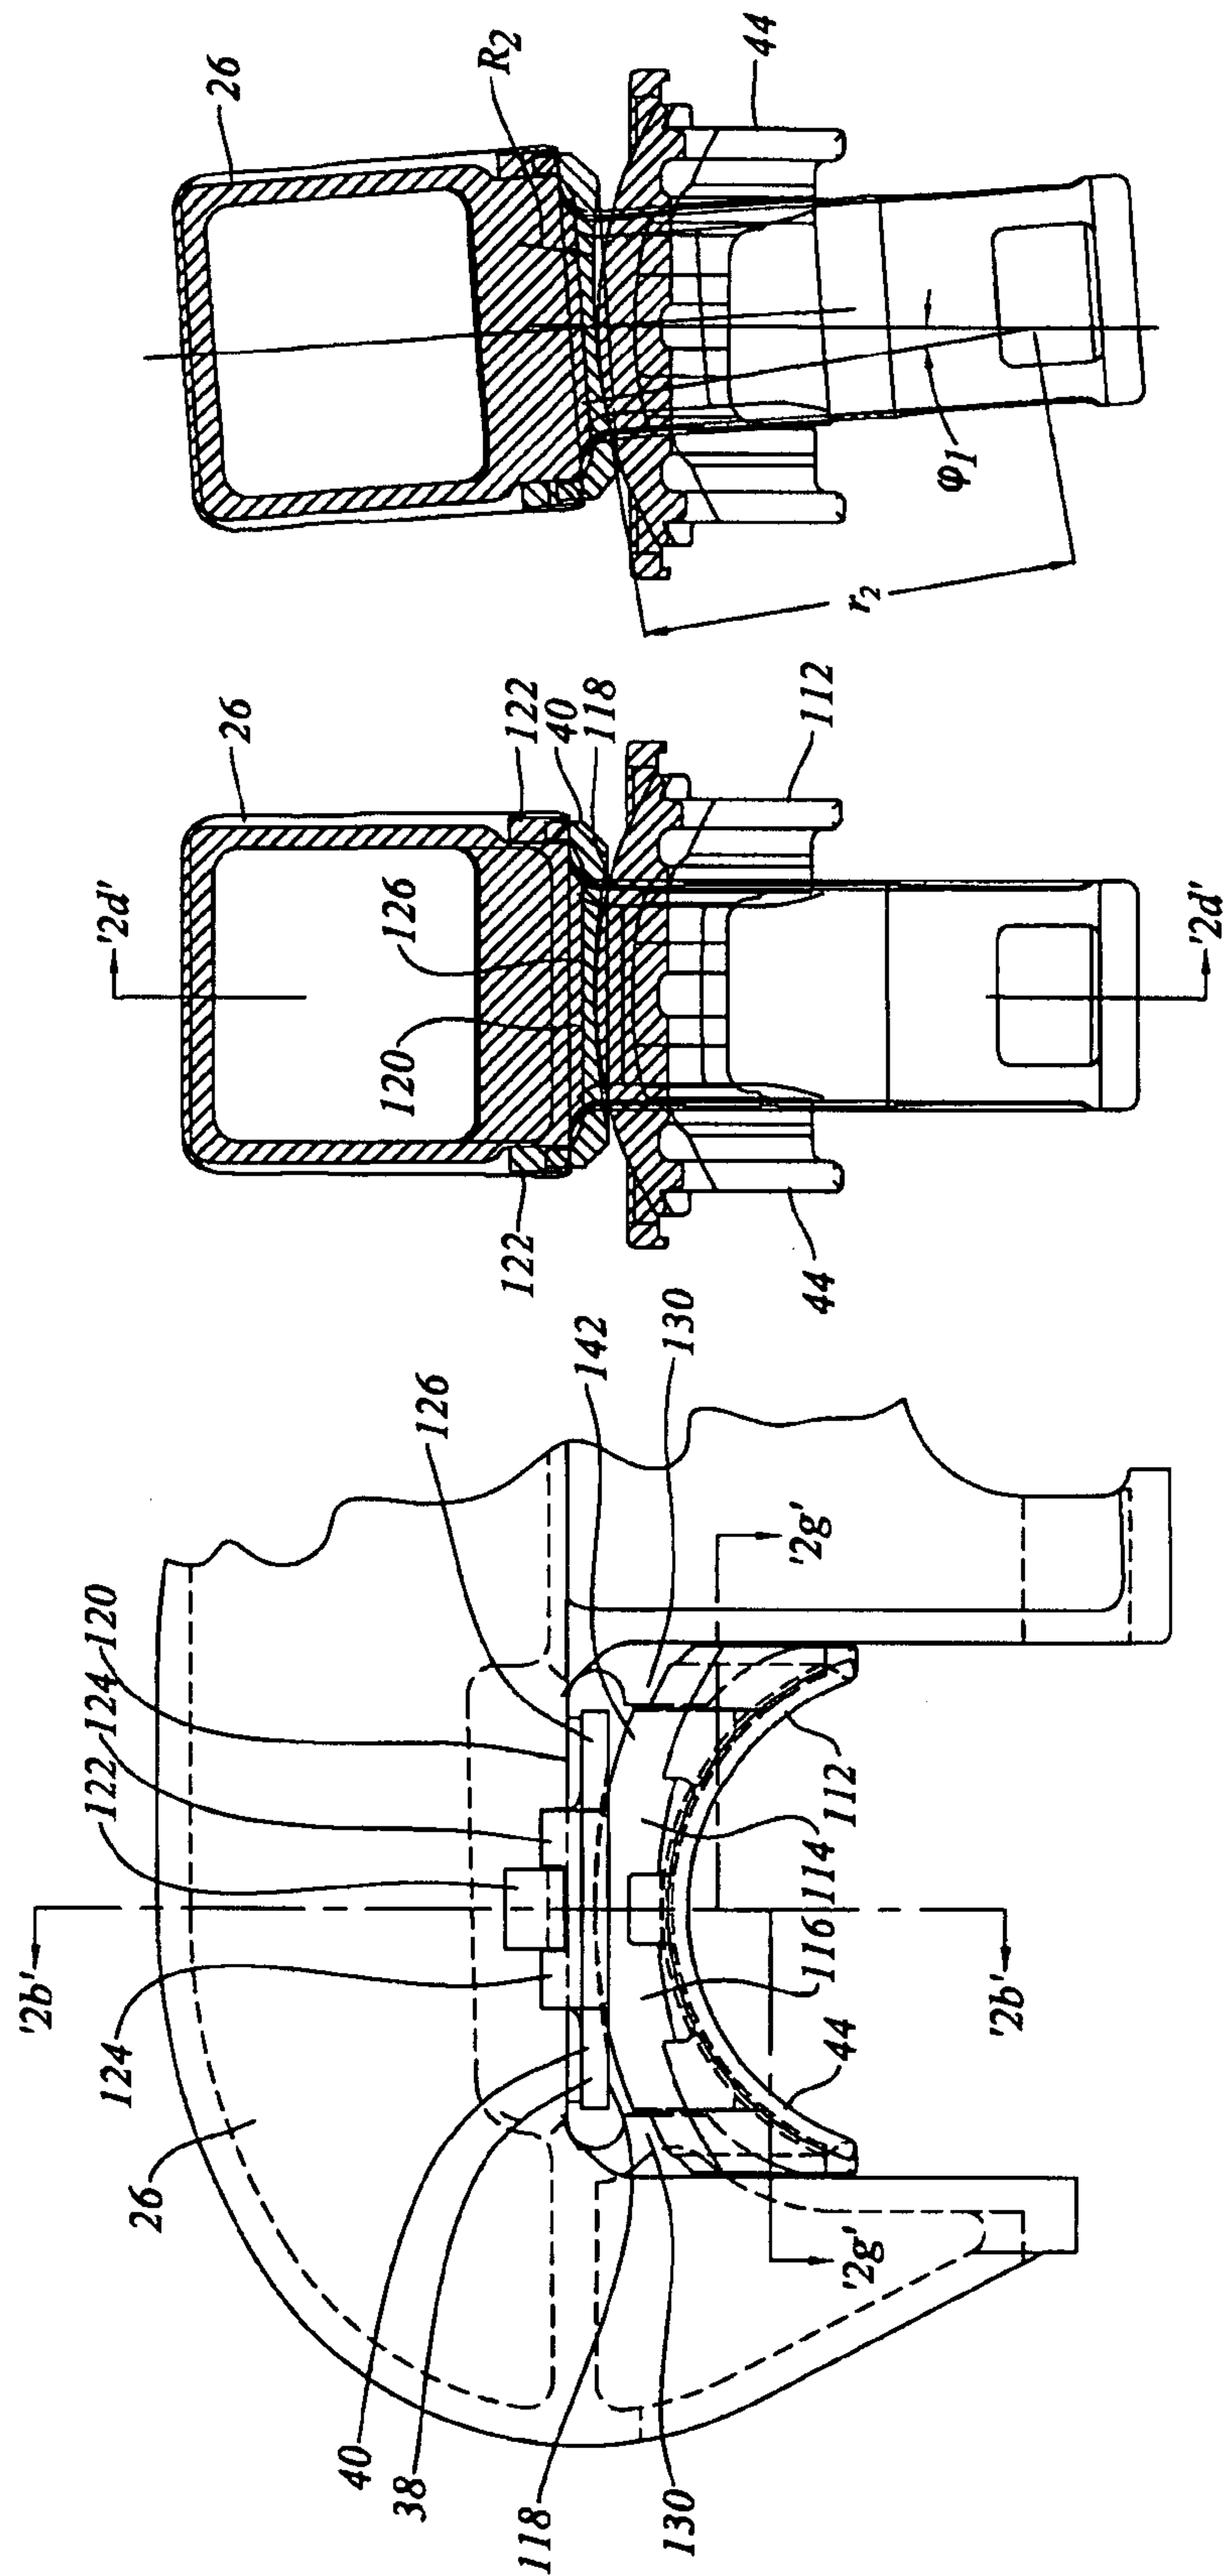


Figure 2a

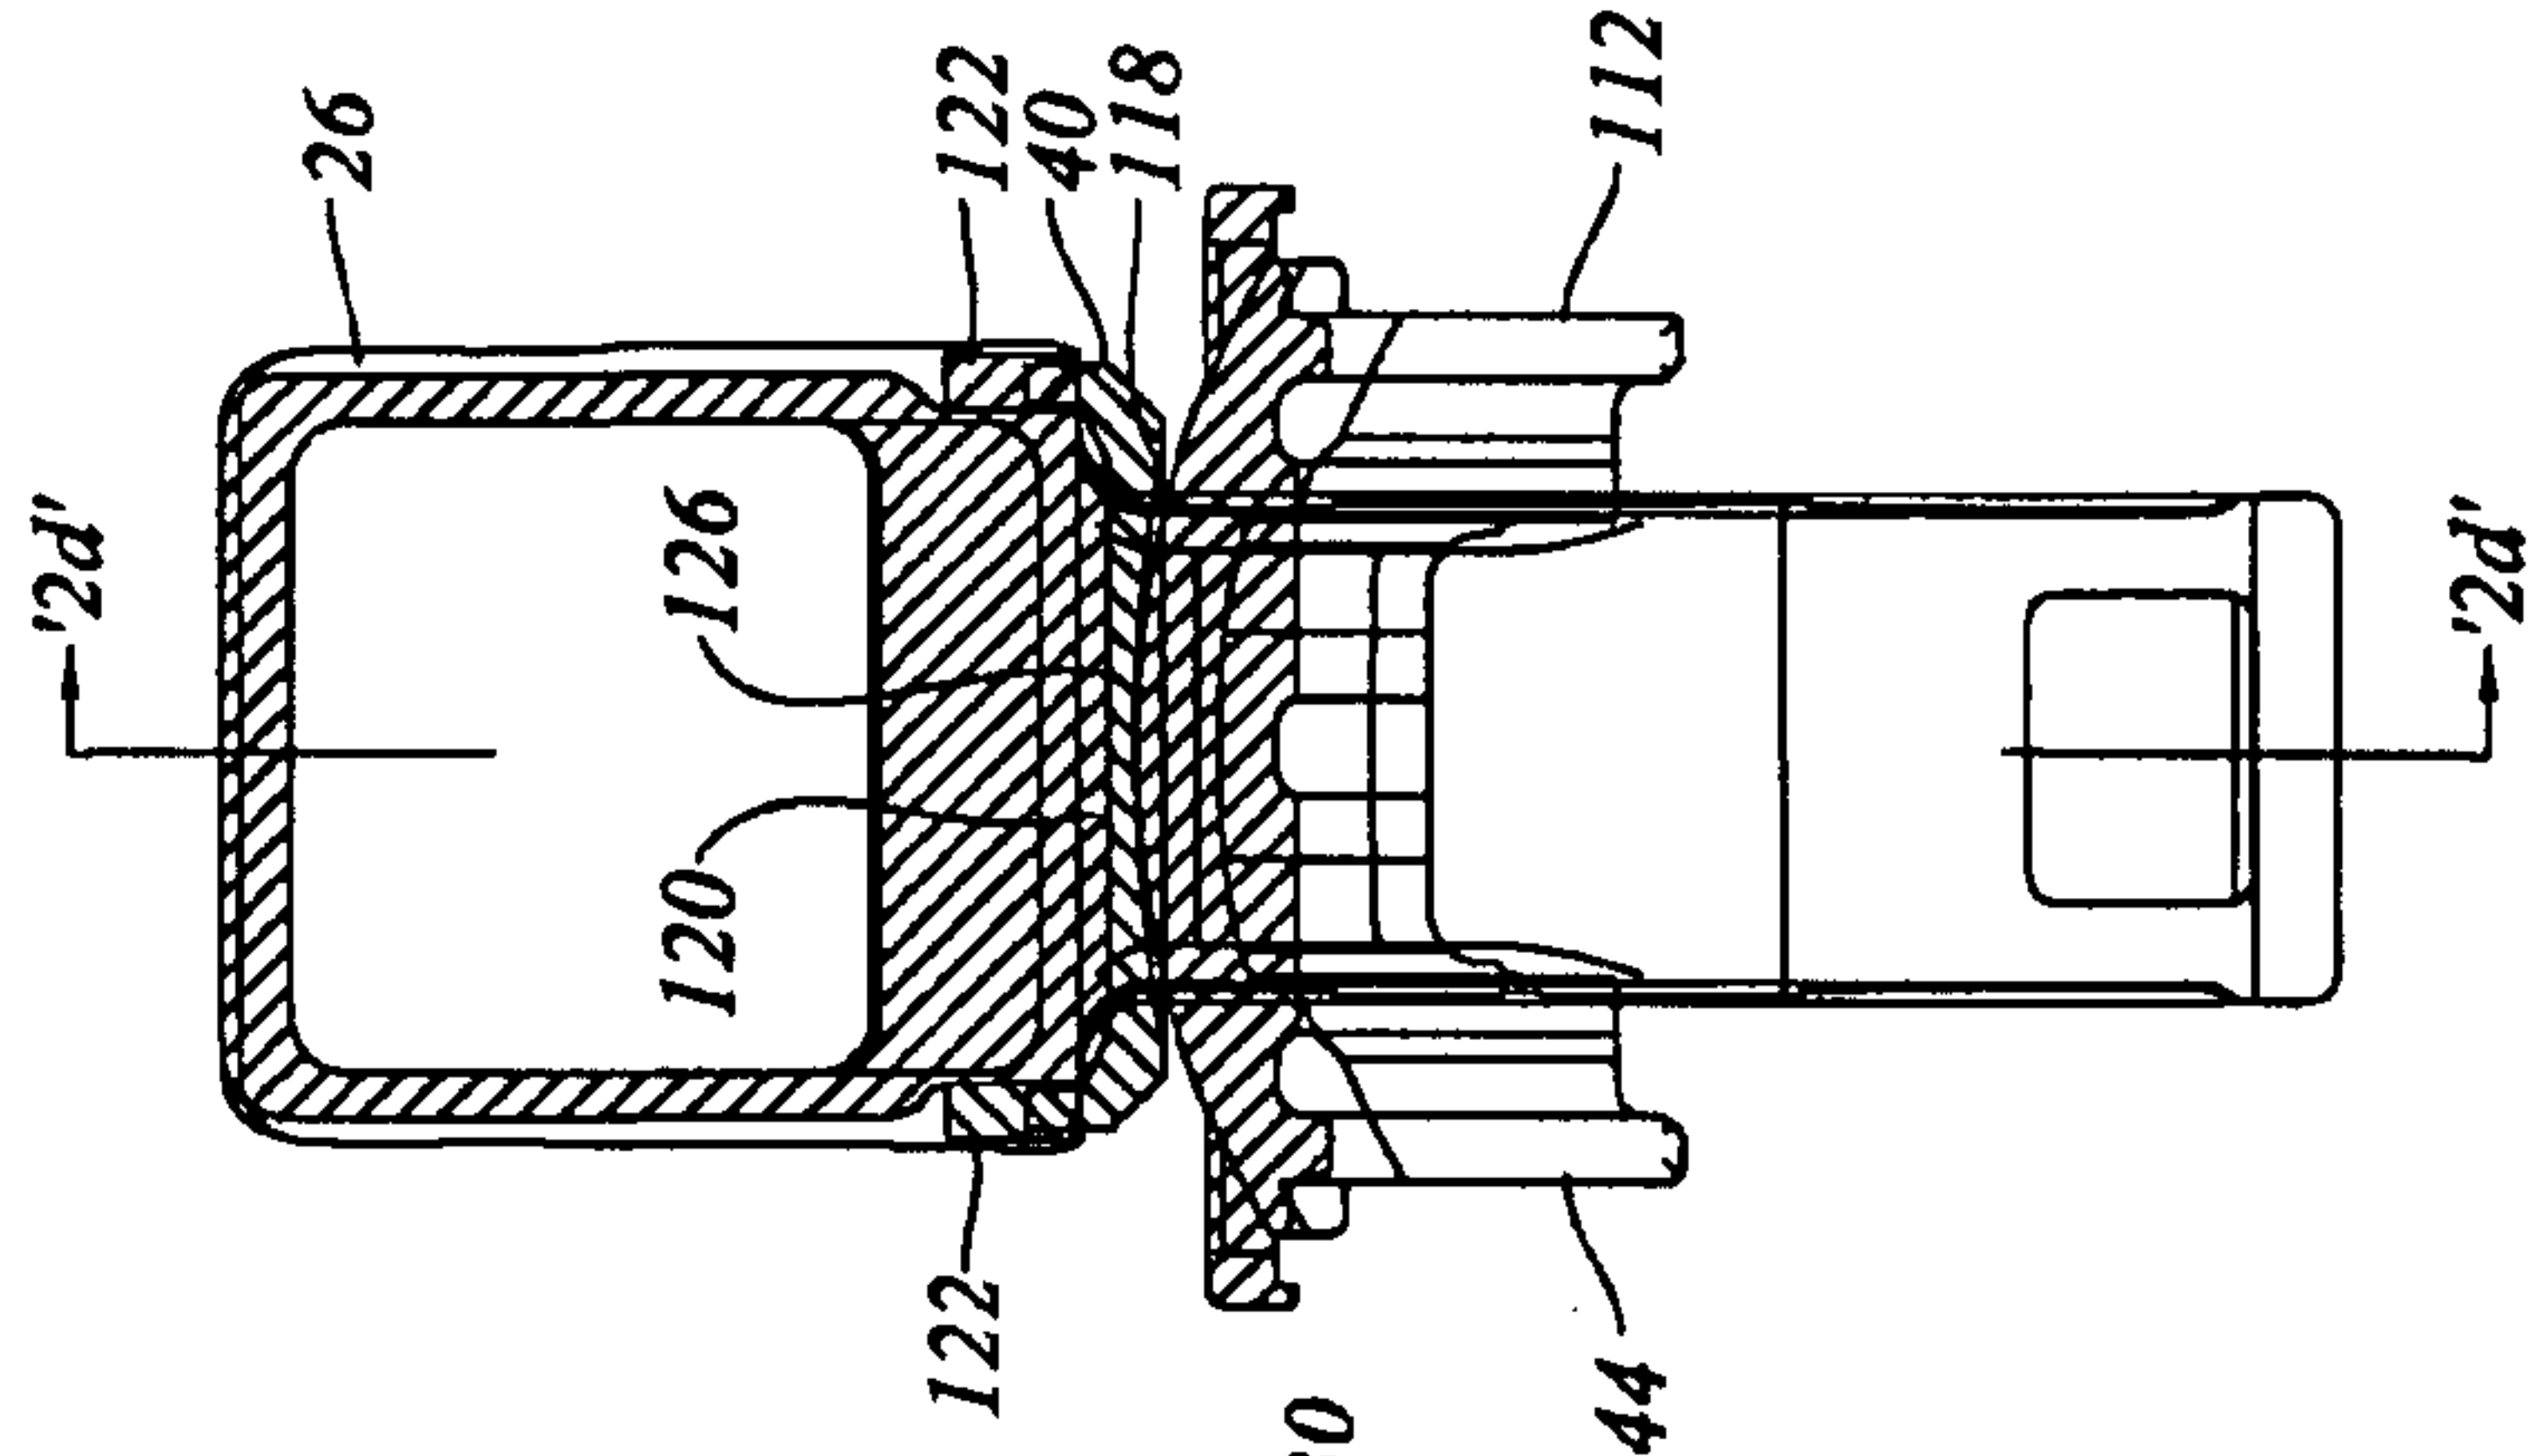


Figure 2b

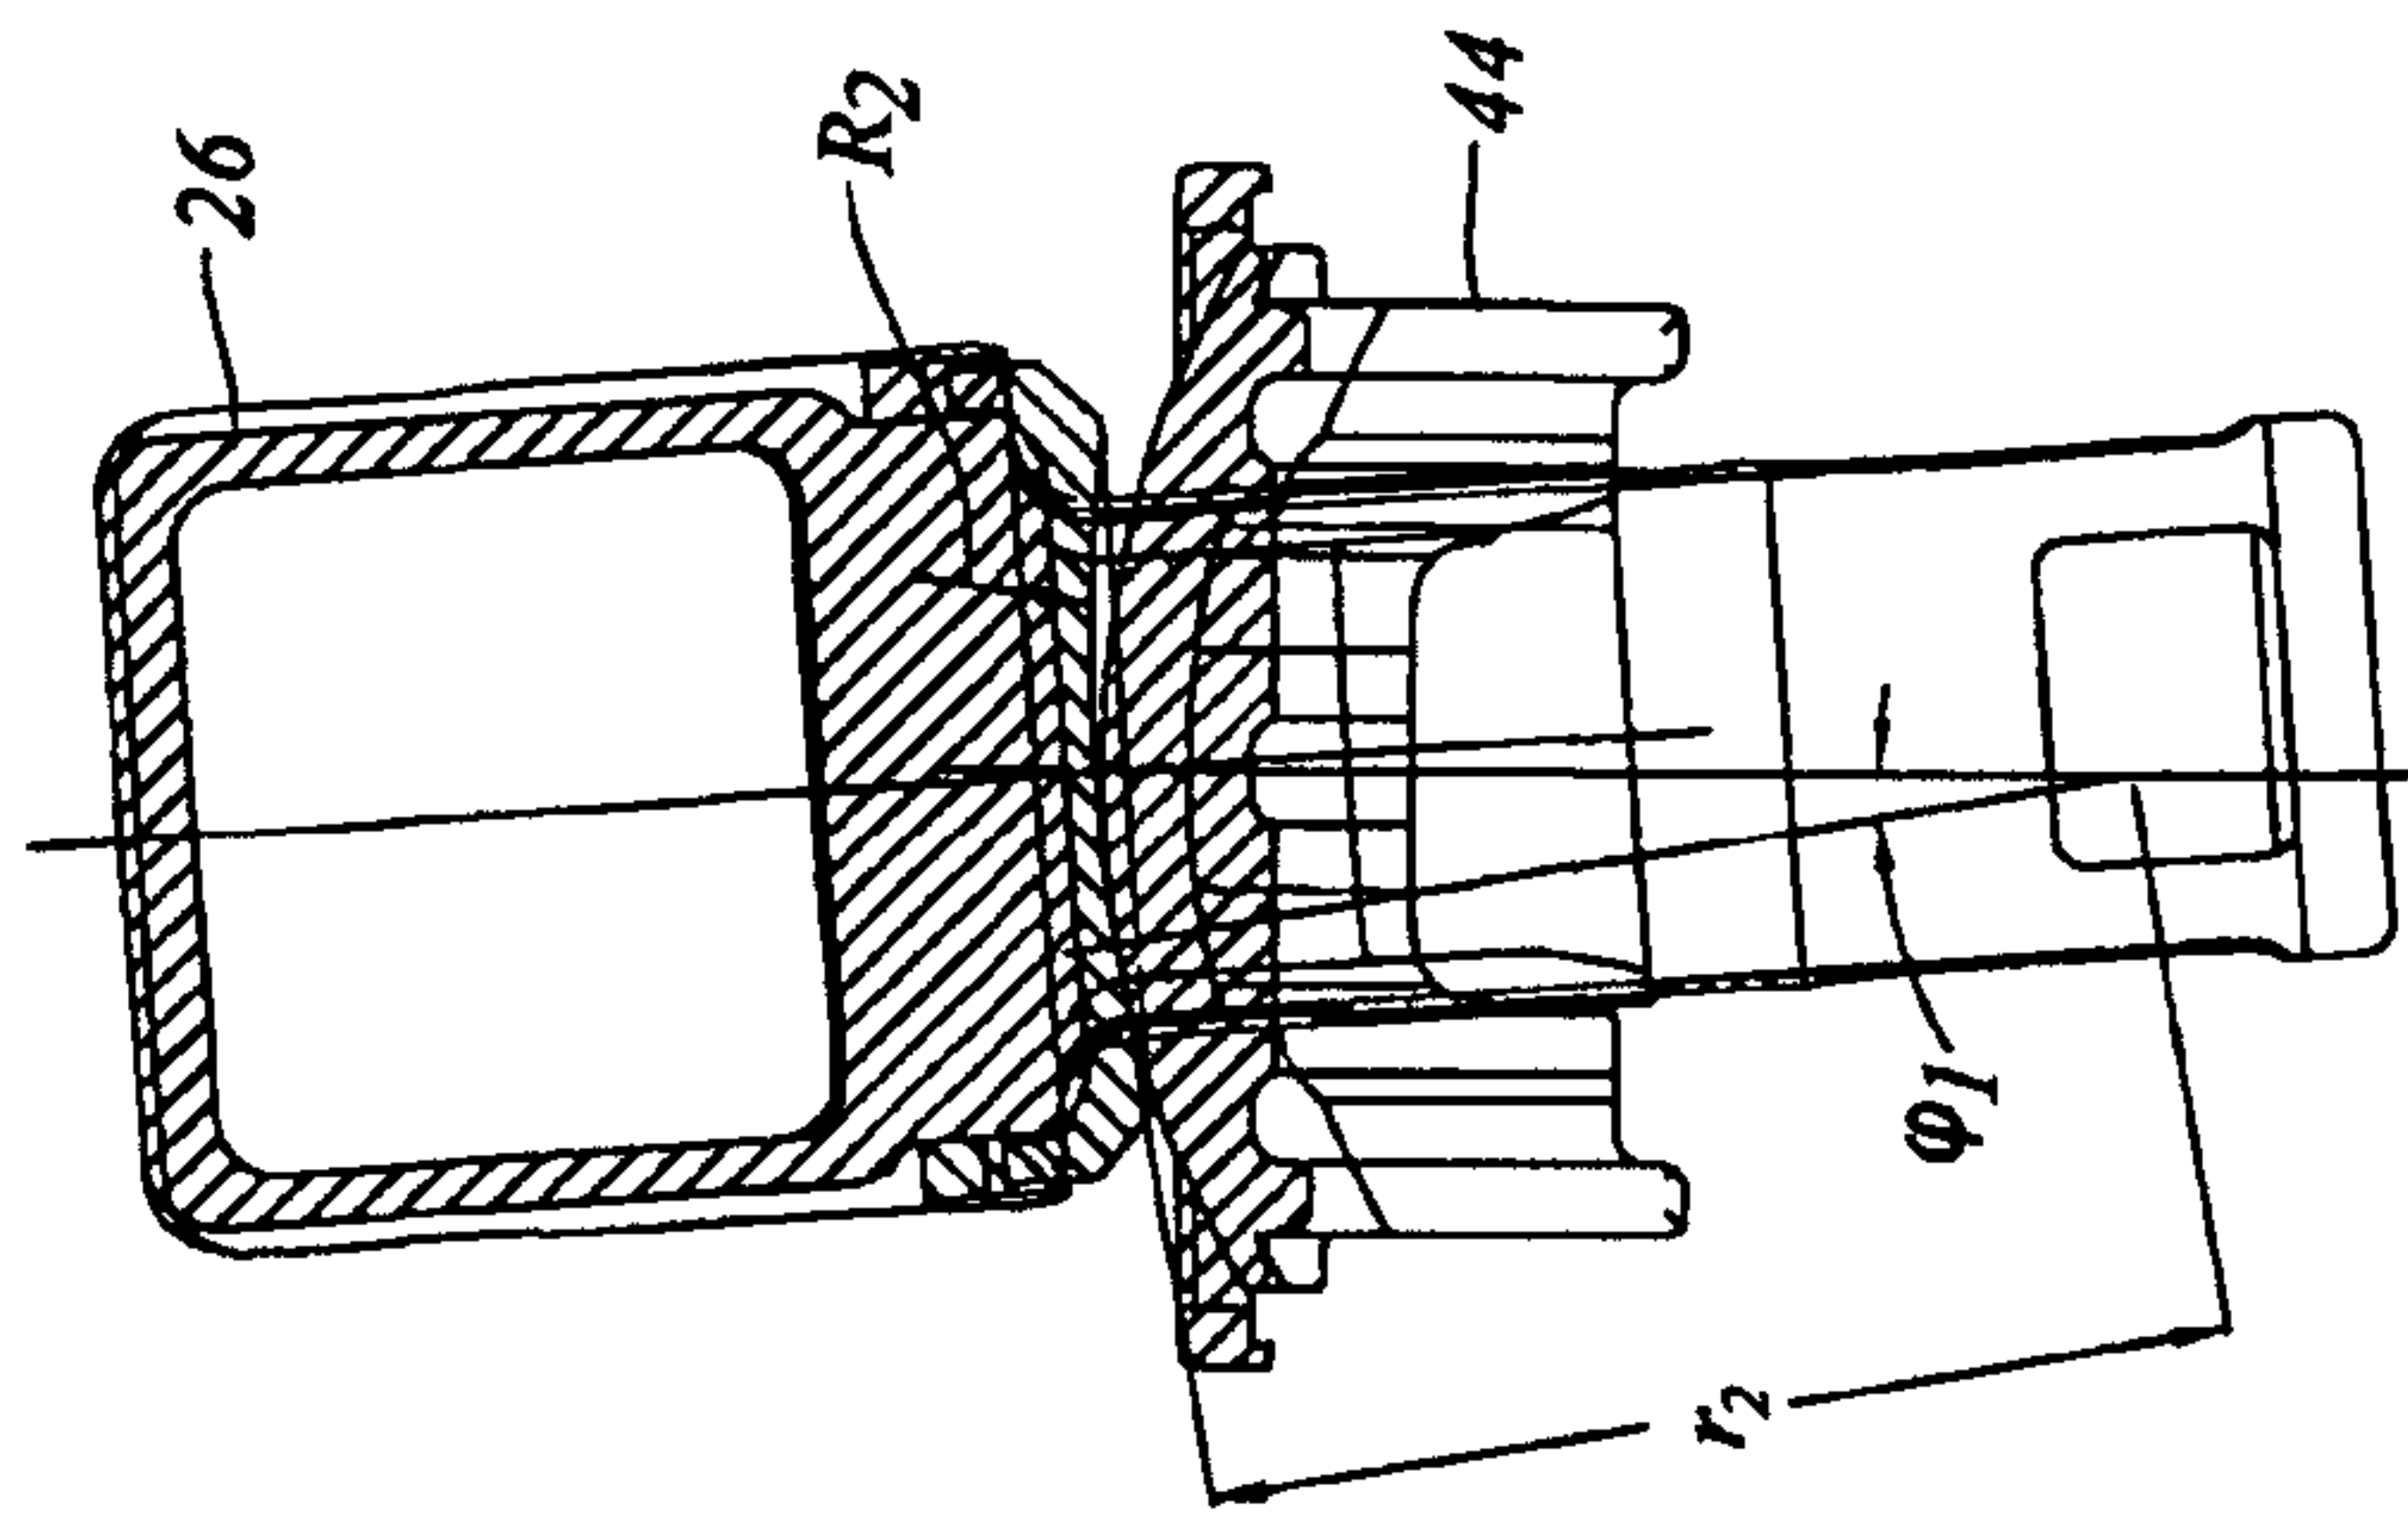


Figure 2c

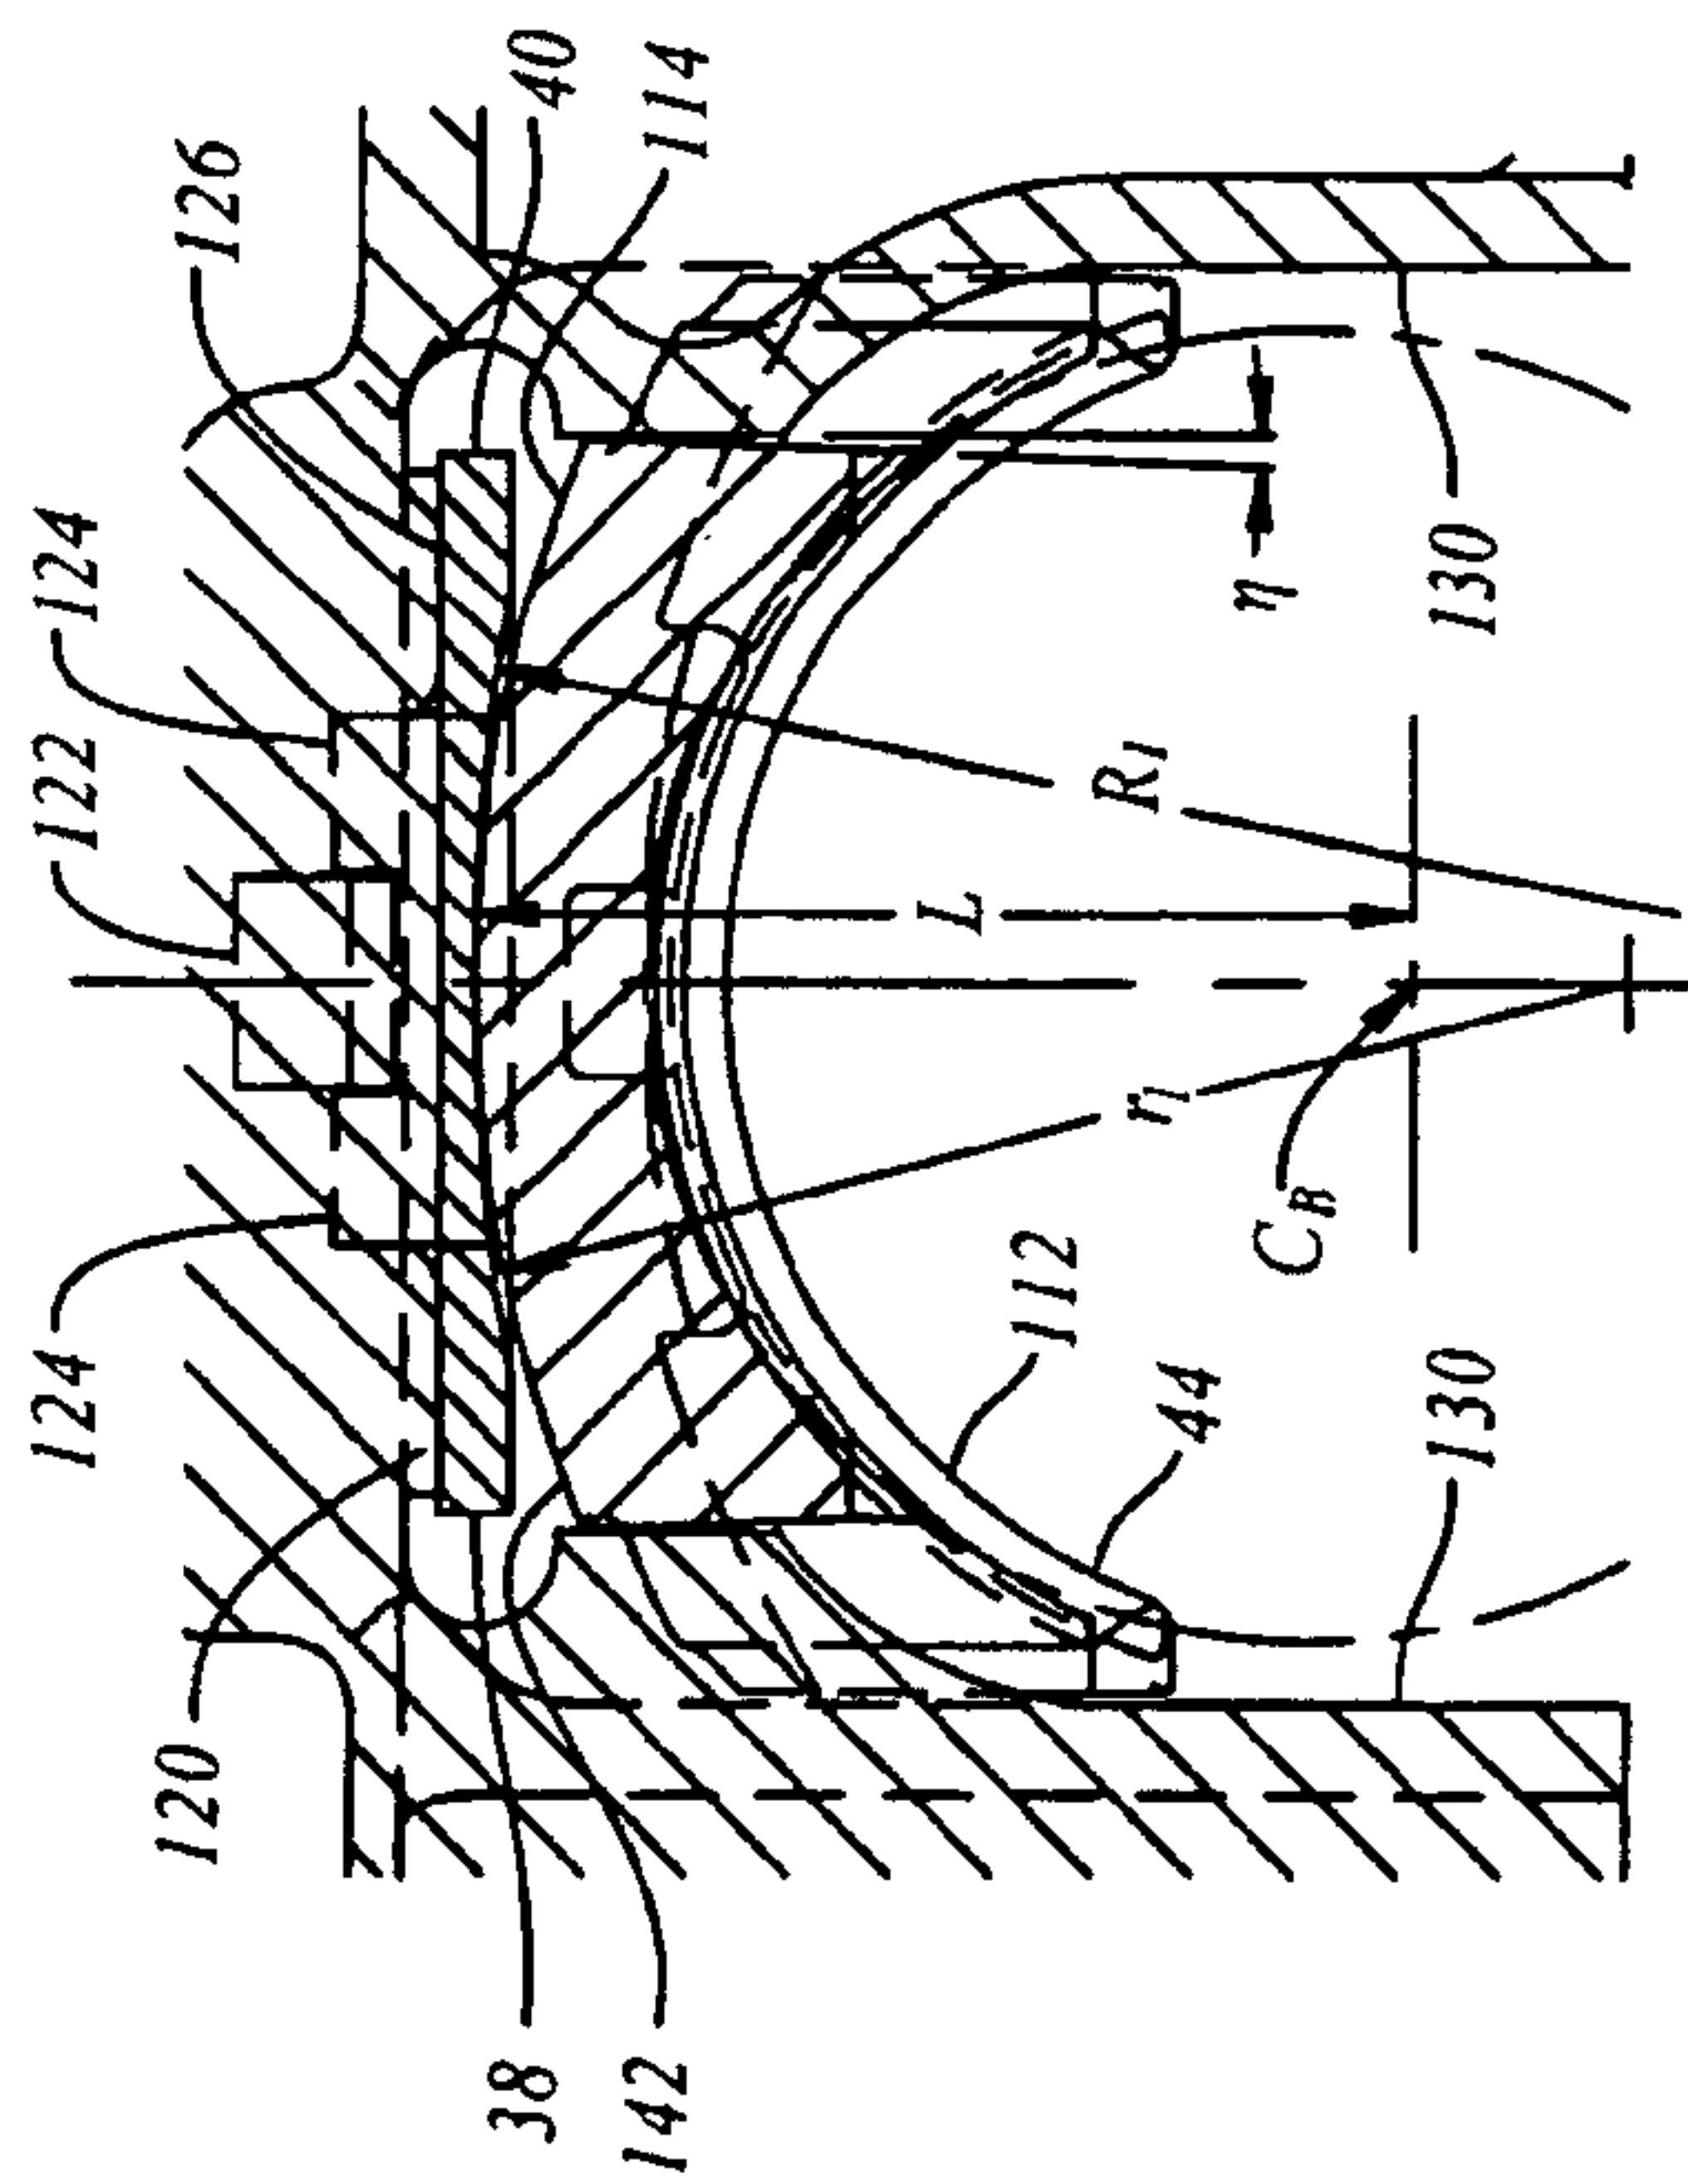


Figure 2d

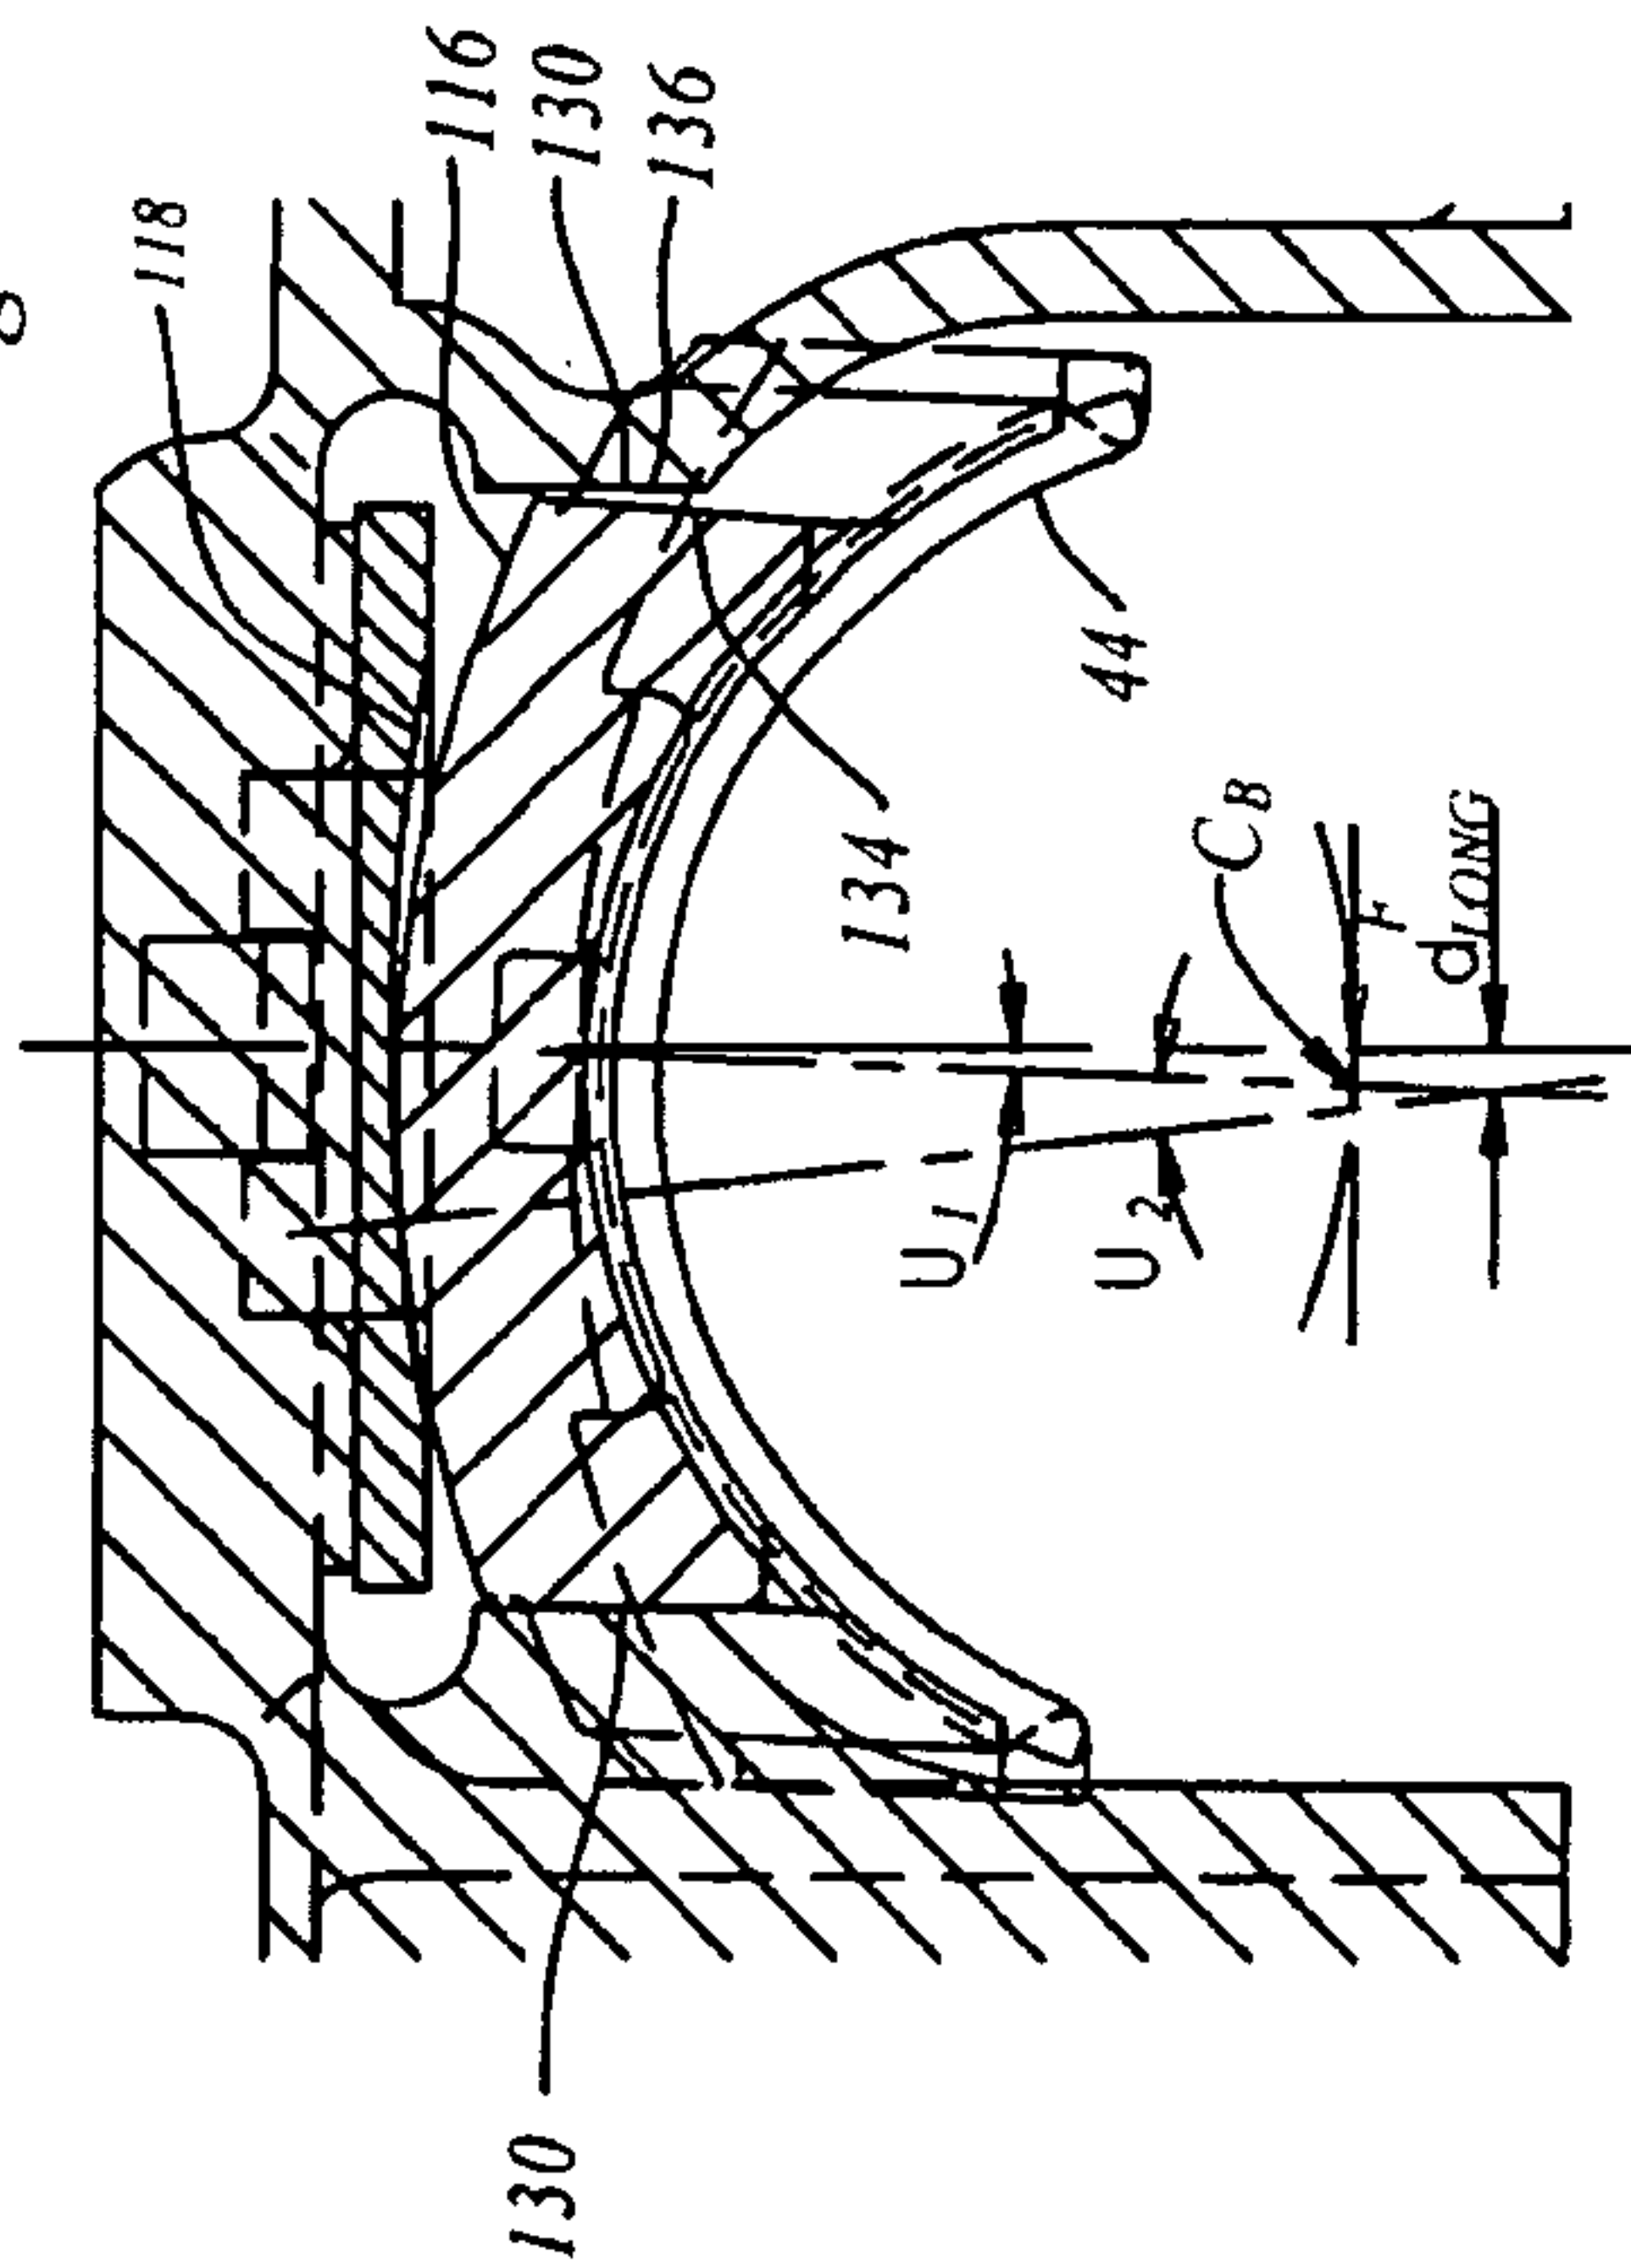


Figure 2e

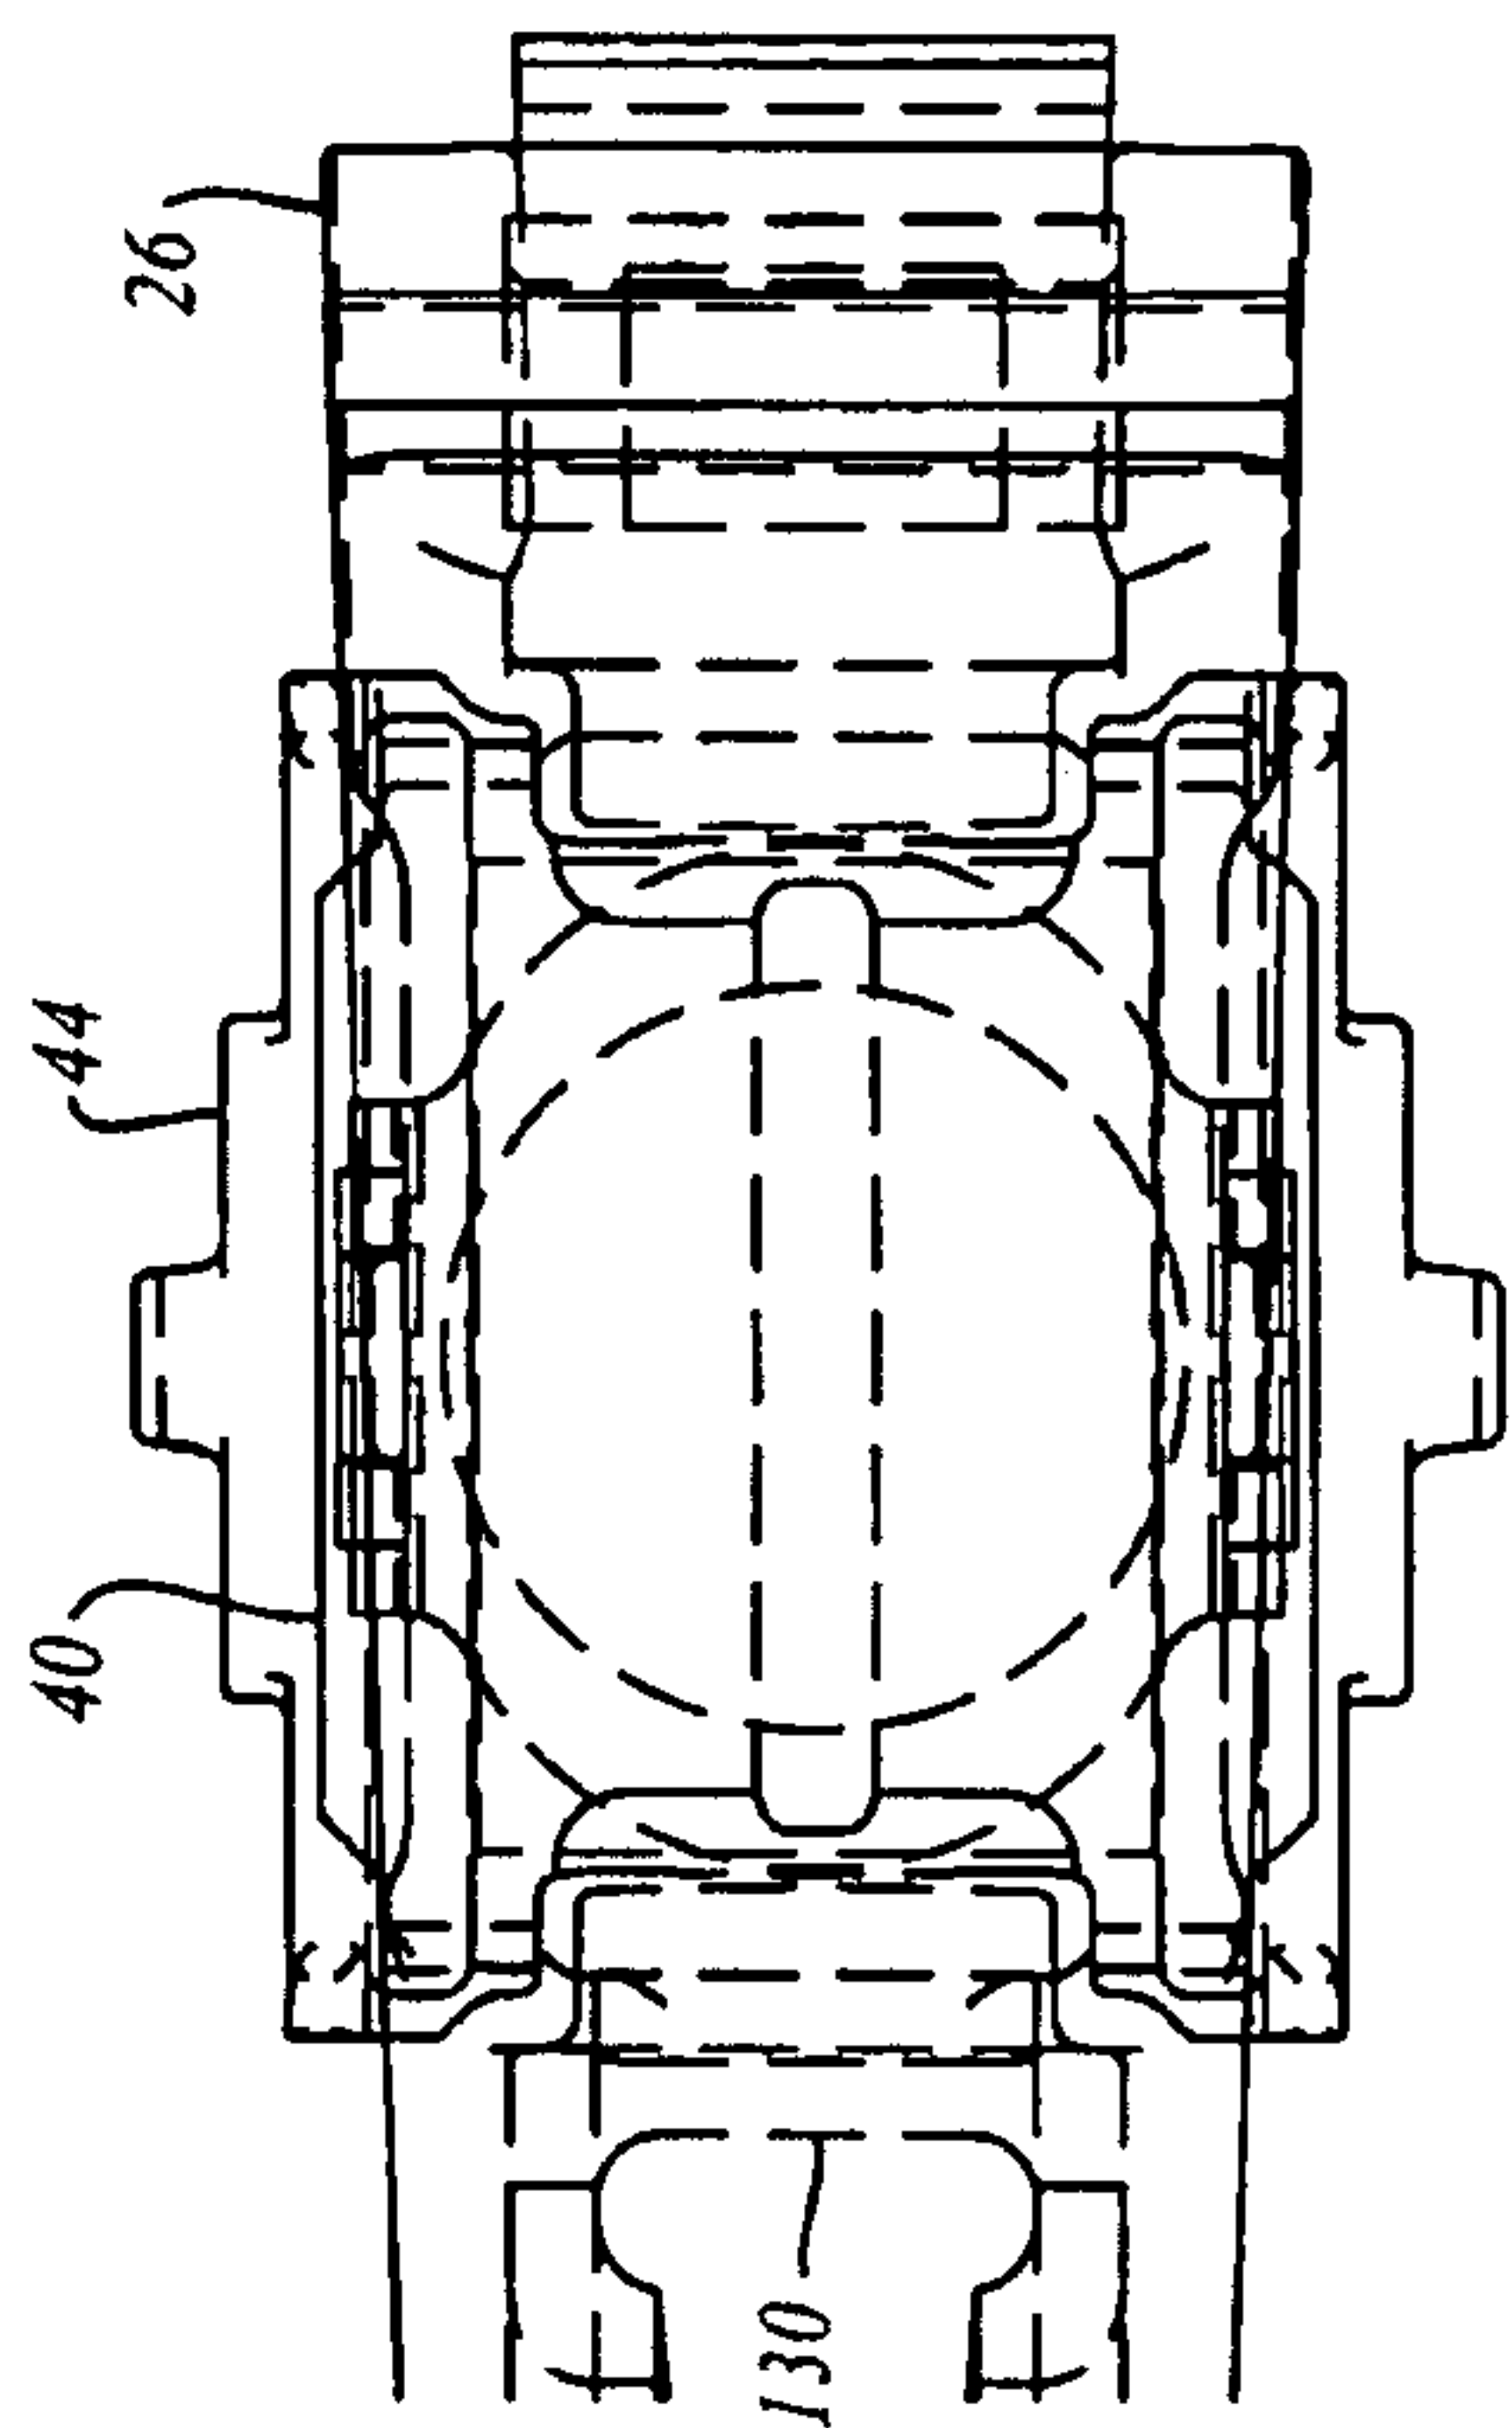


Figure 2f

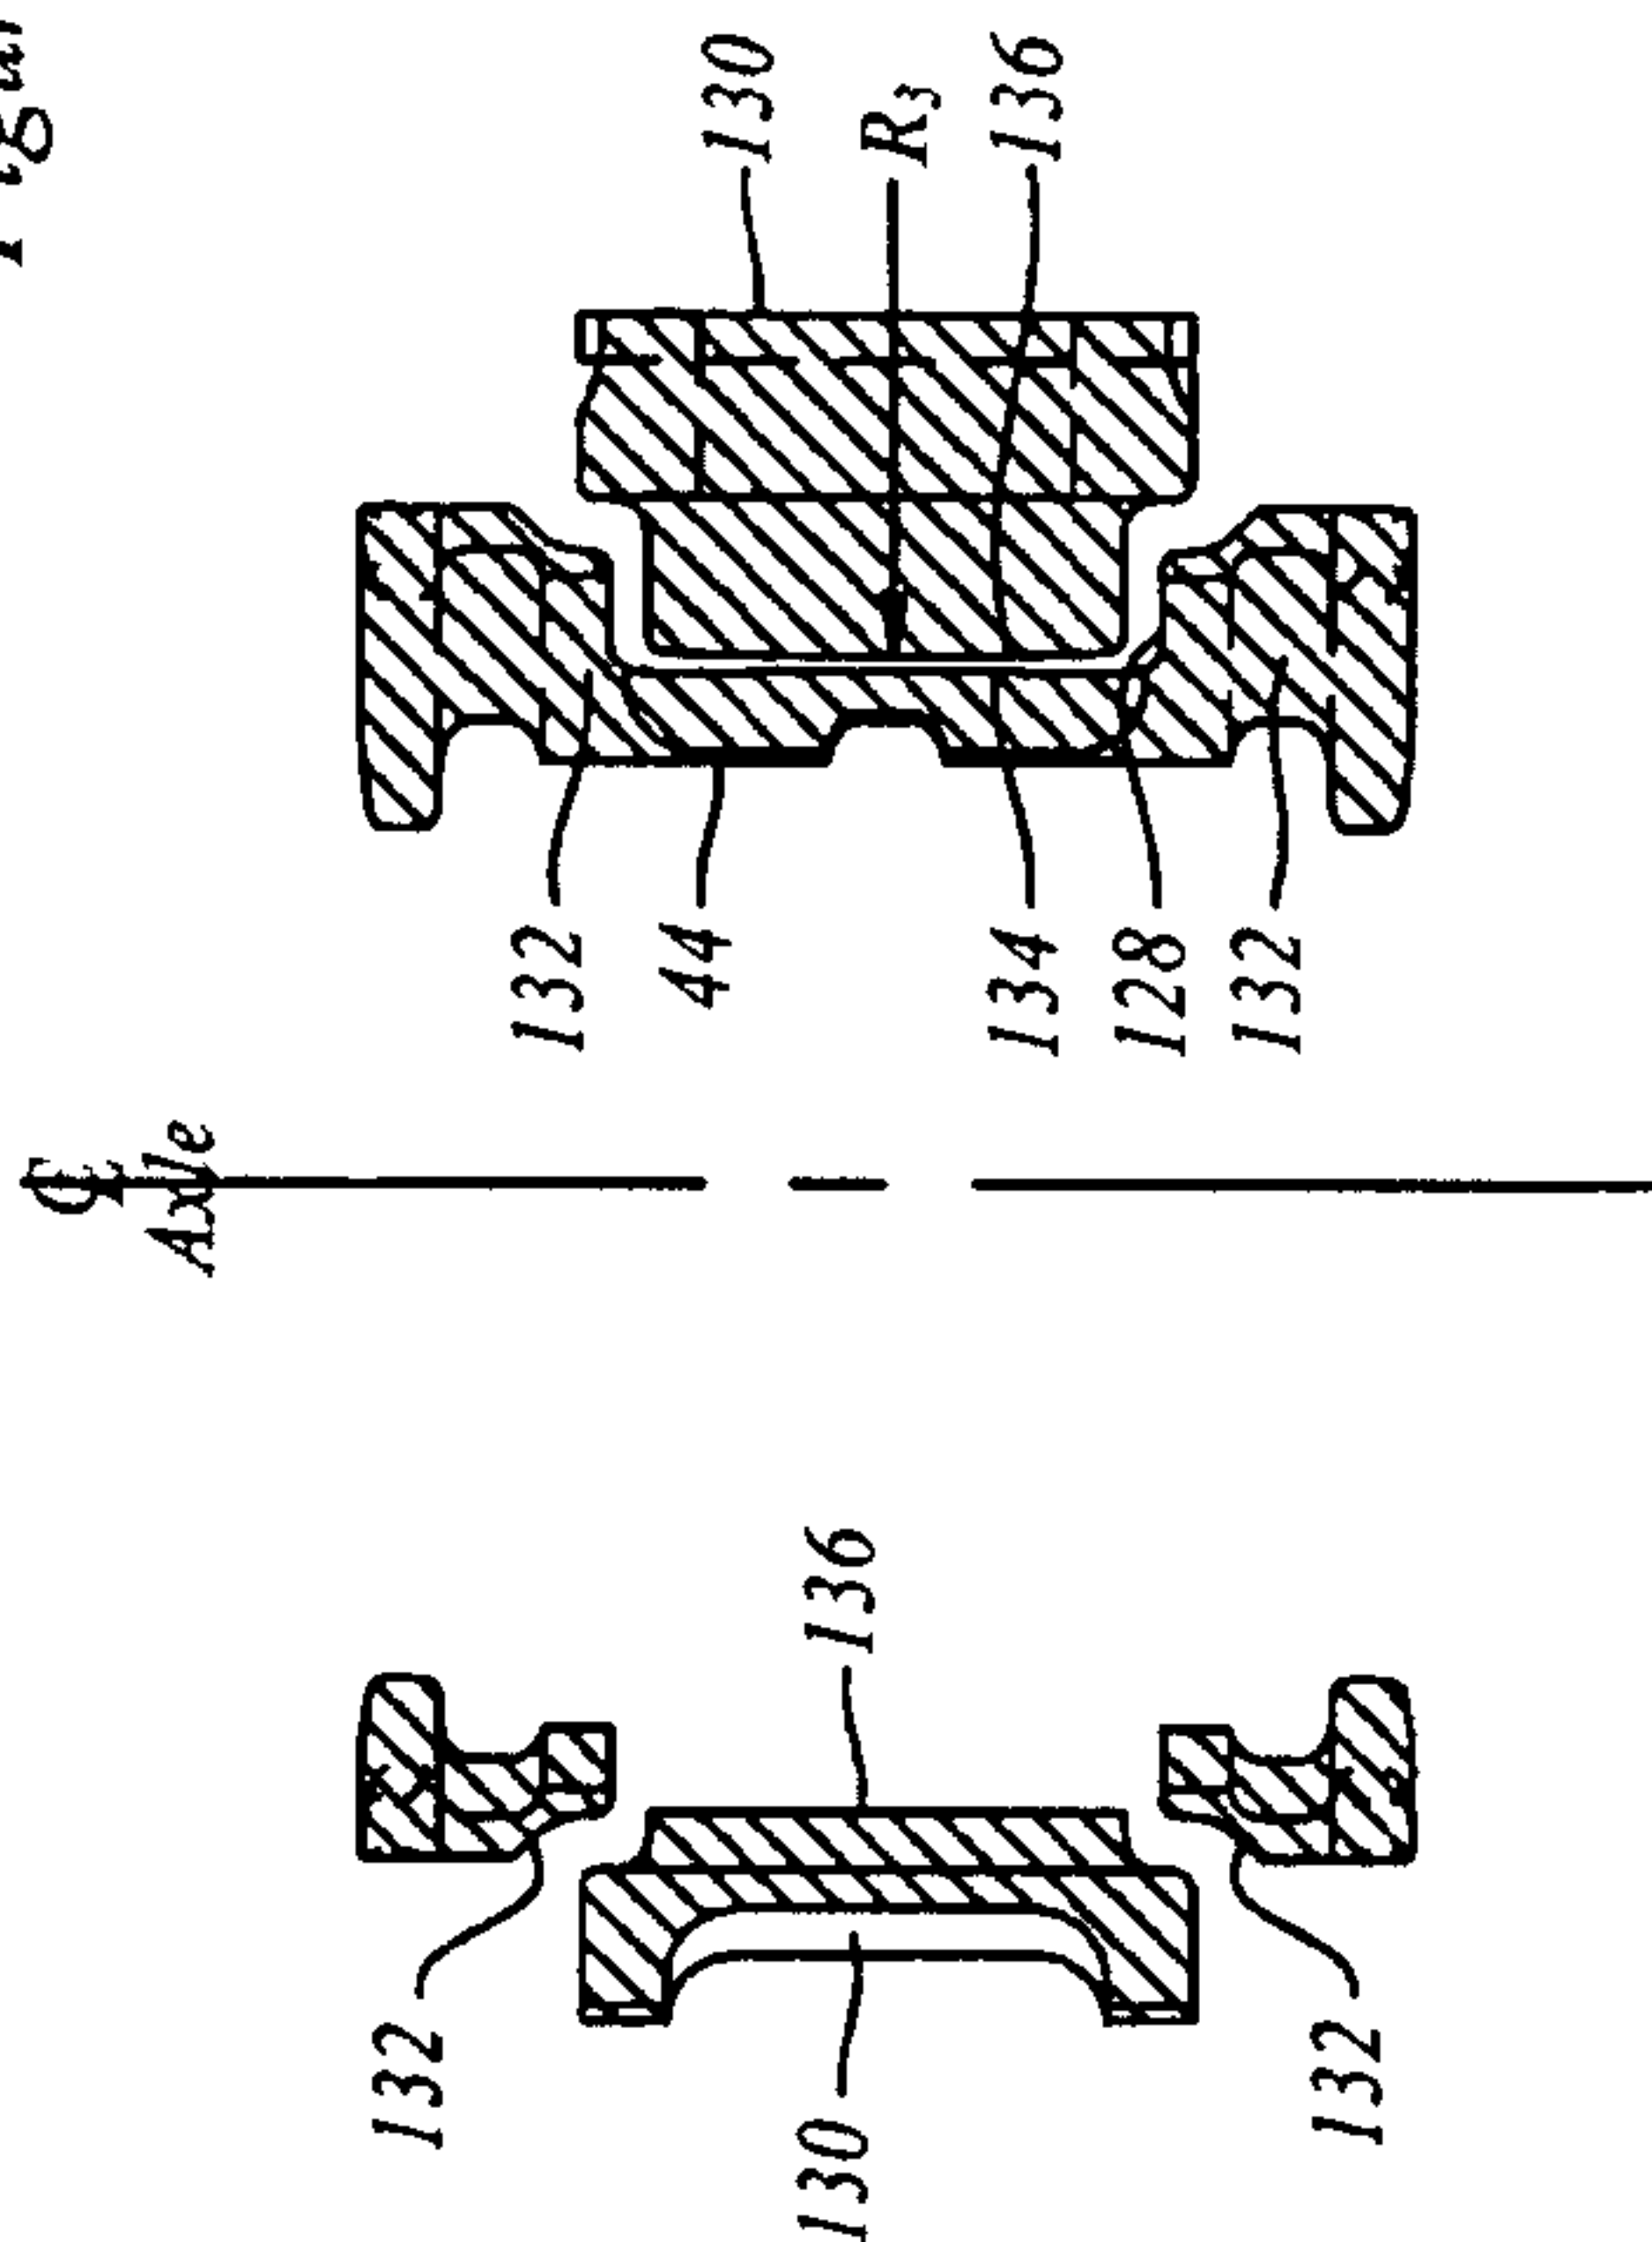


Figure 2g

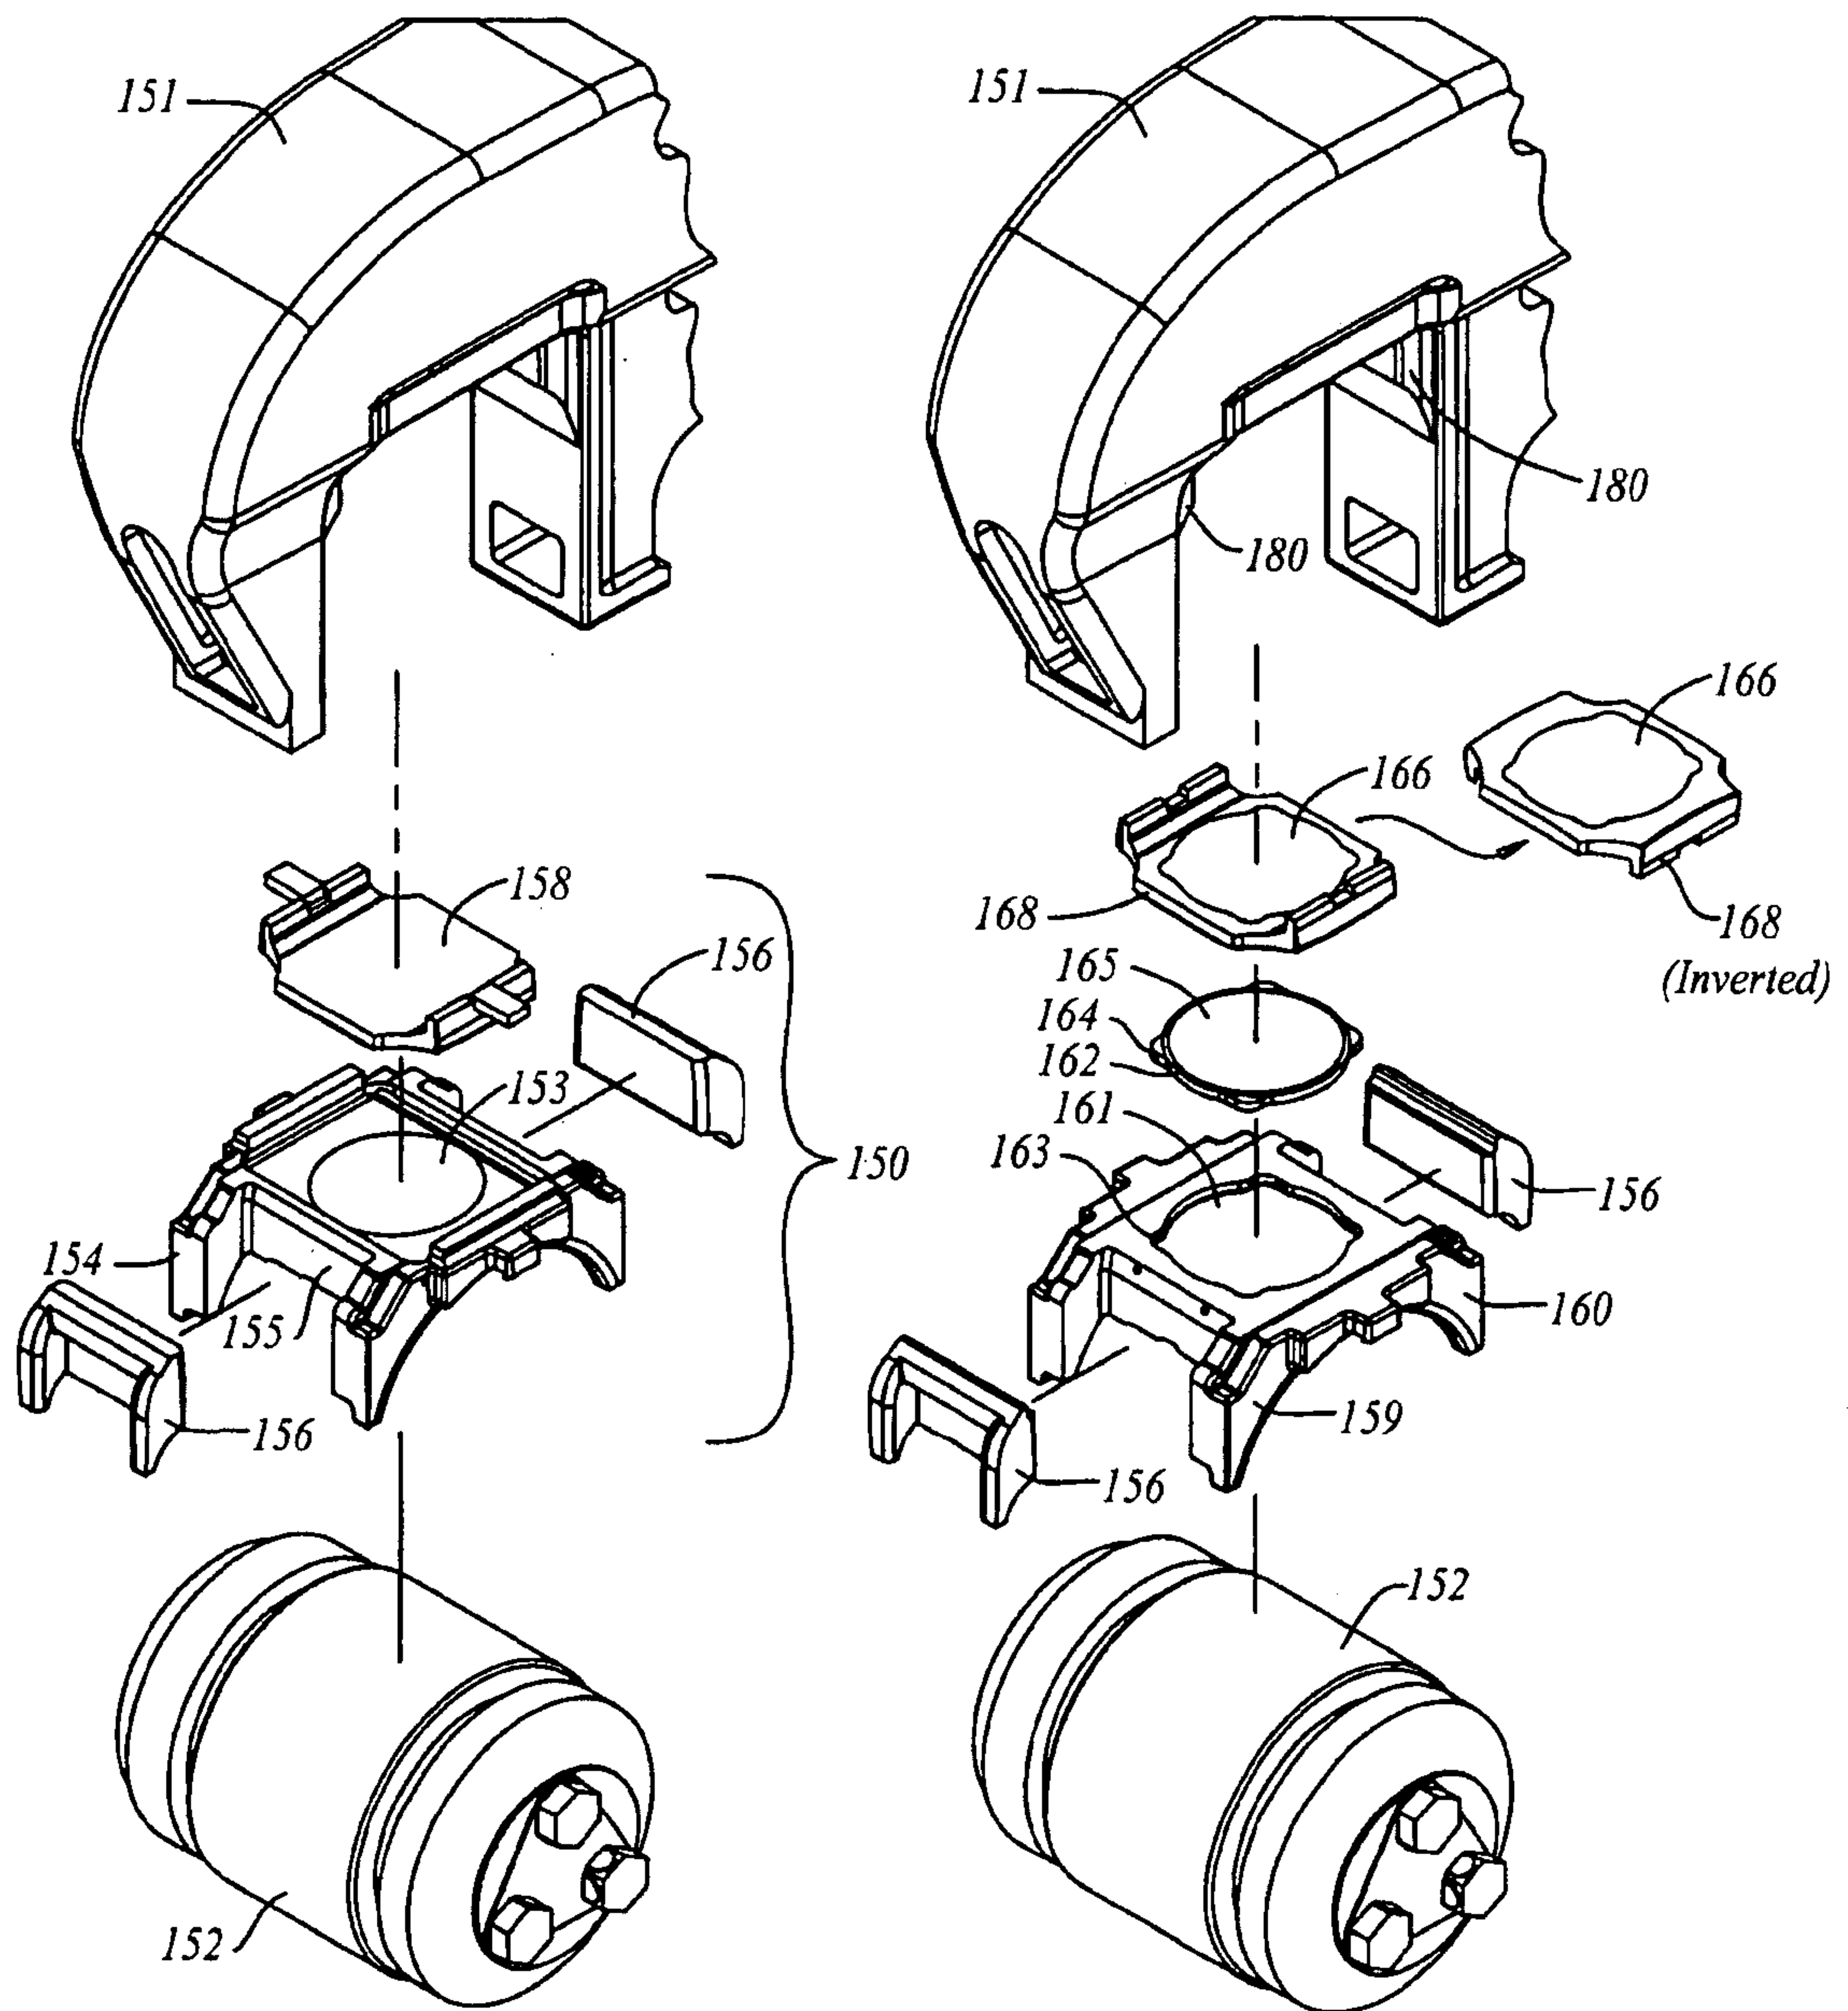


Figure 3a

Figure 3b

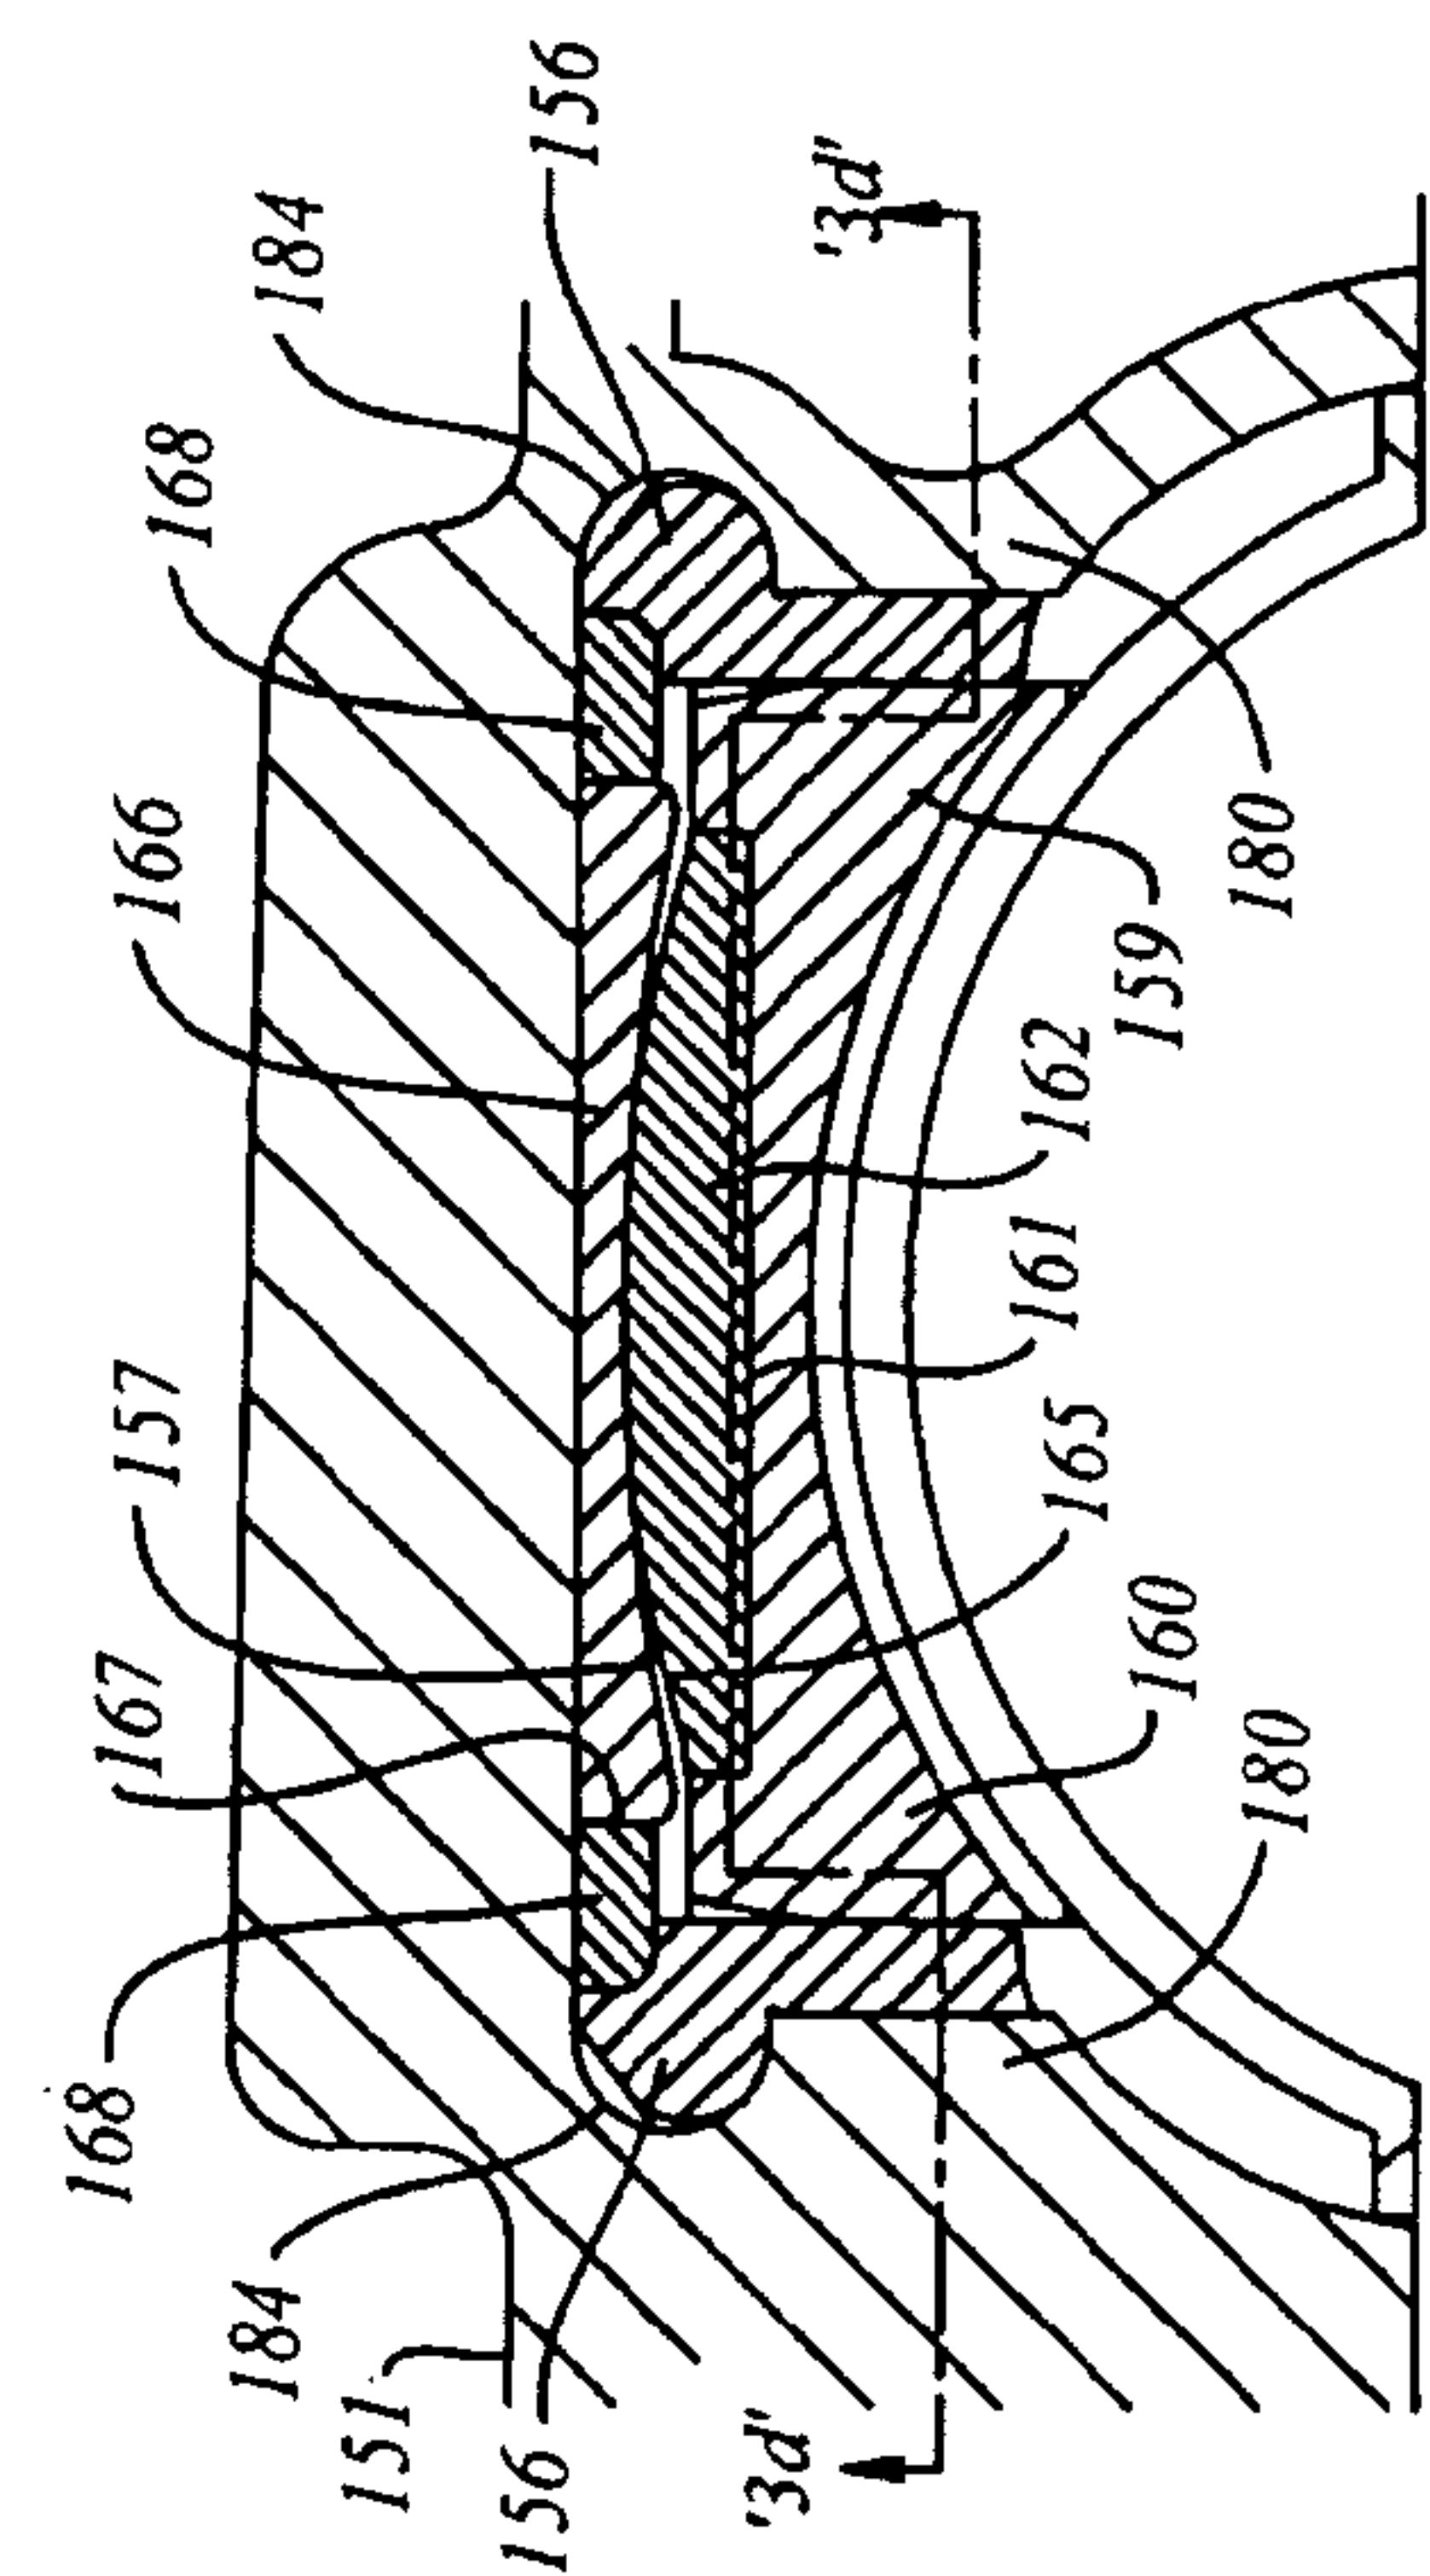


Figure 3c

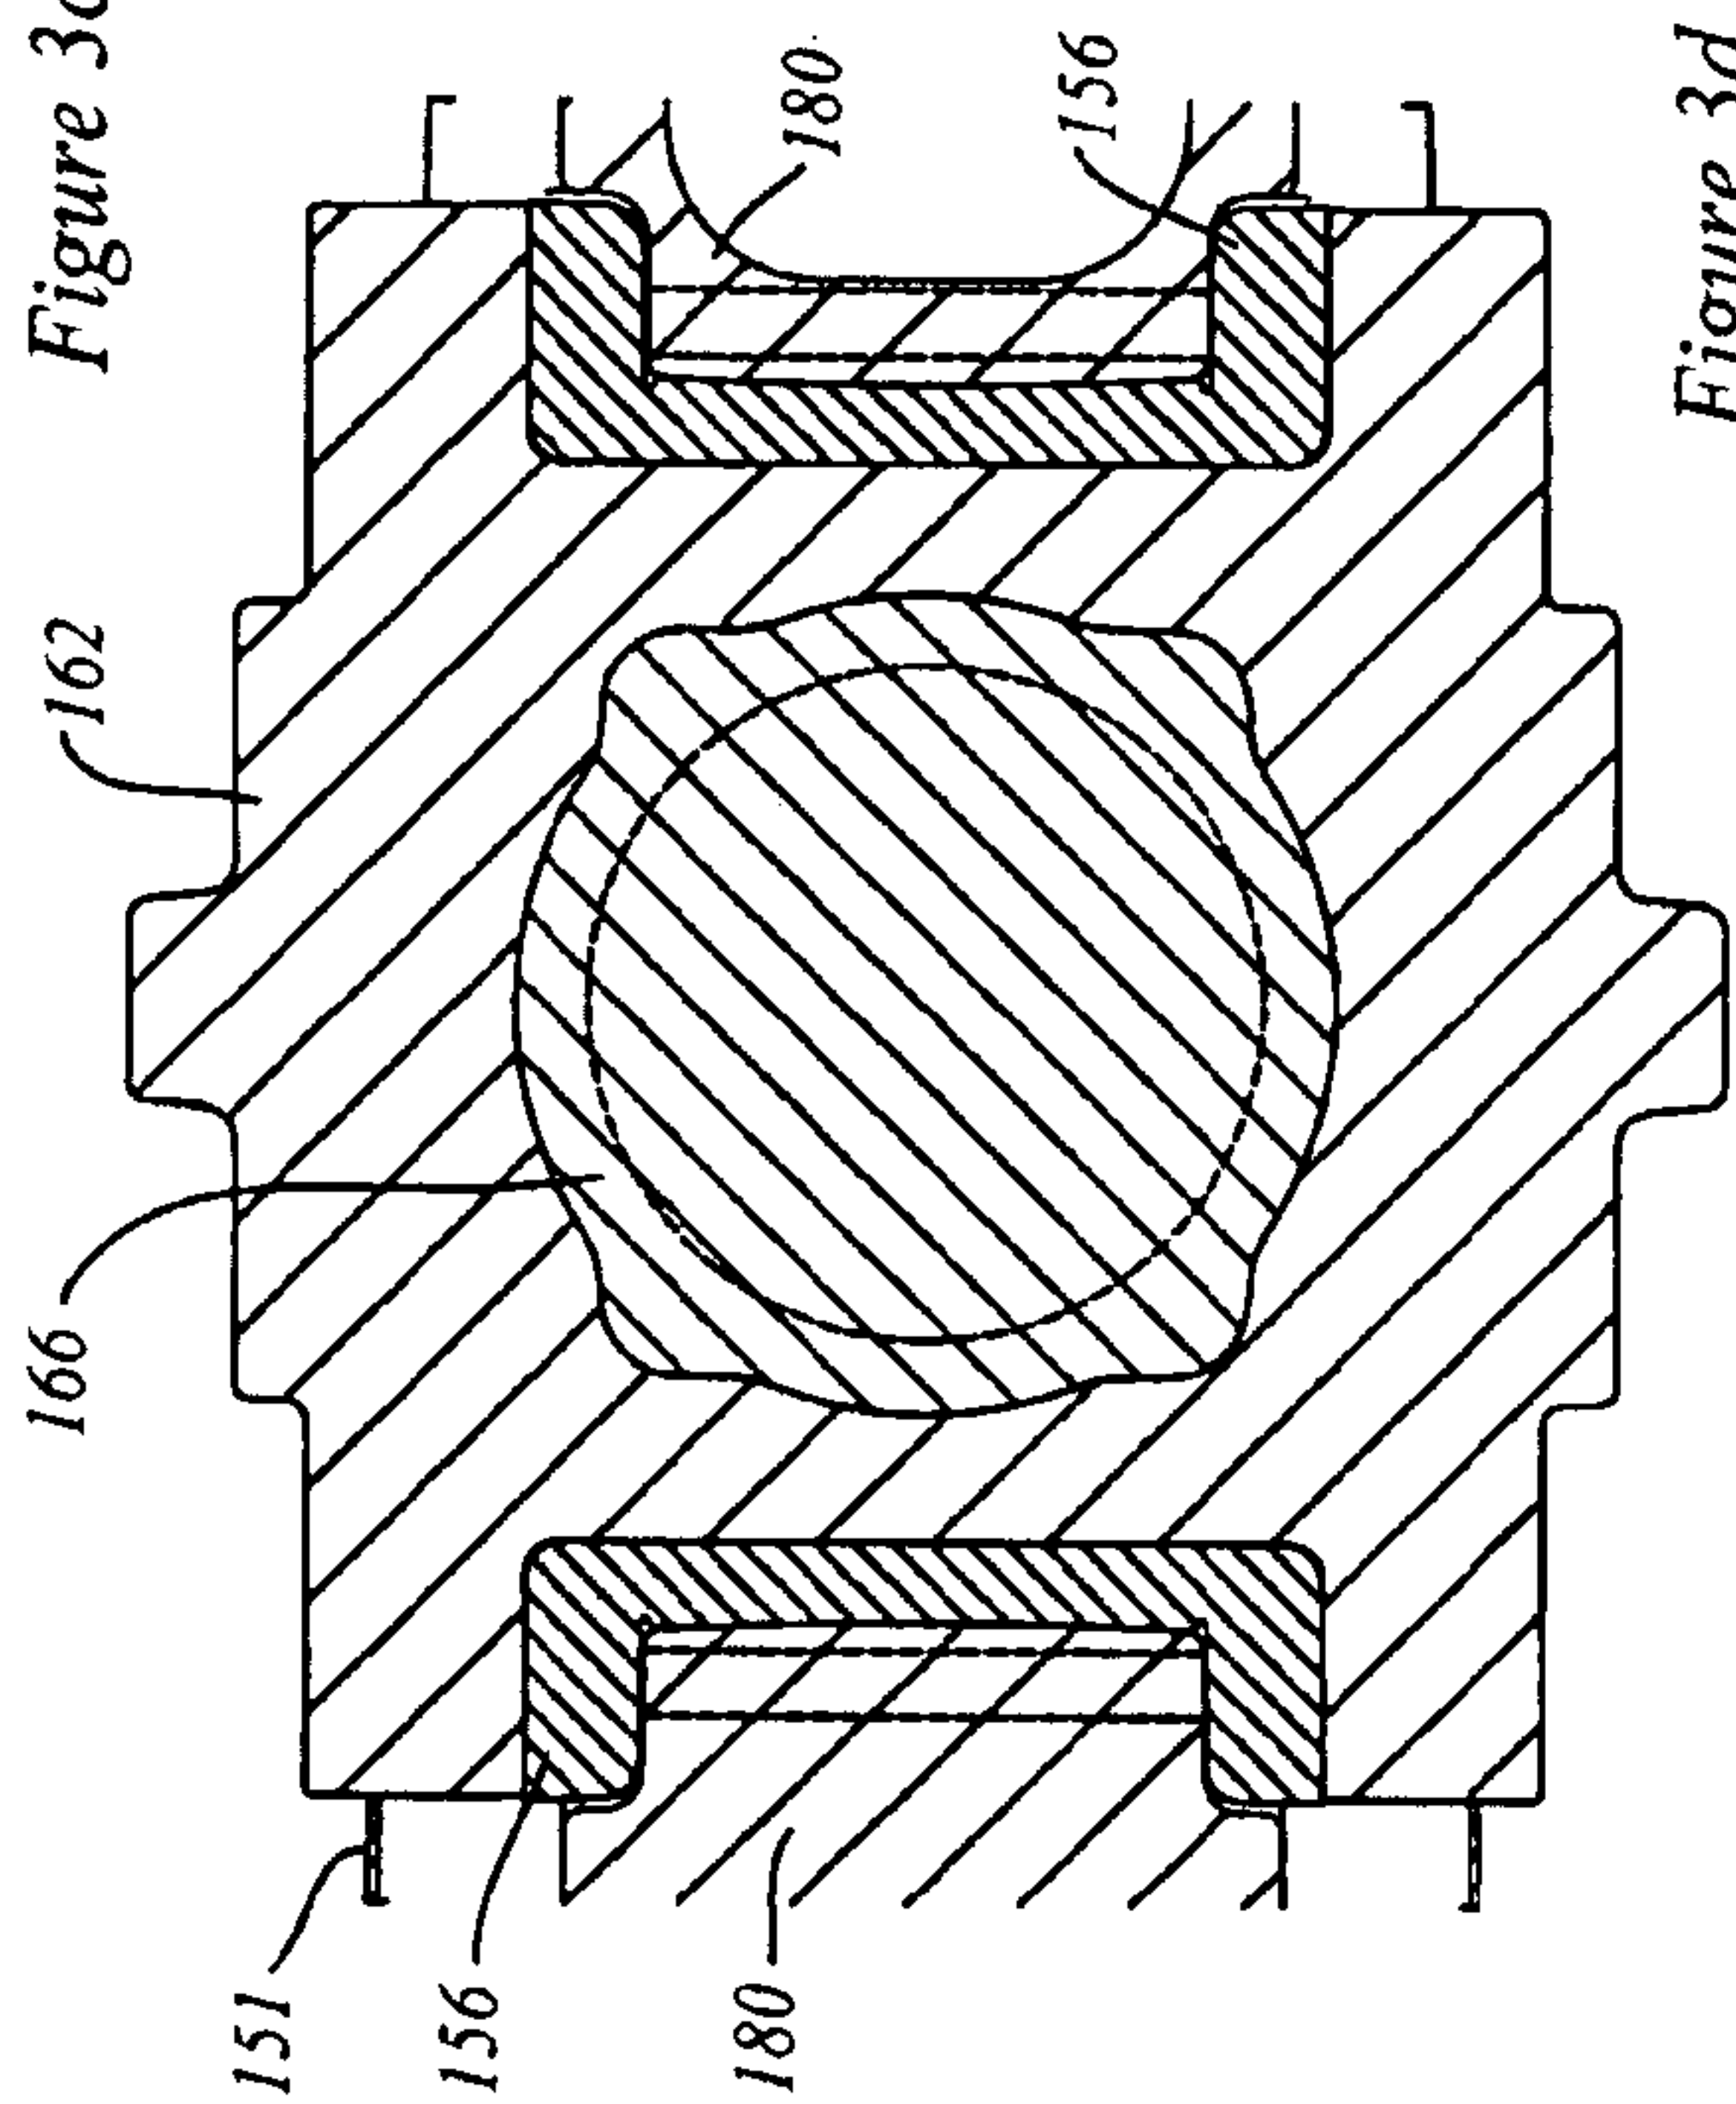


Figure 3d

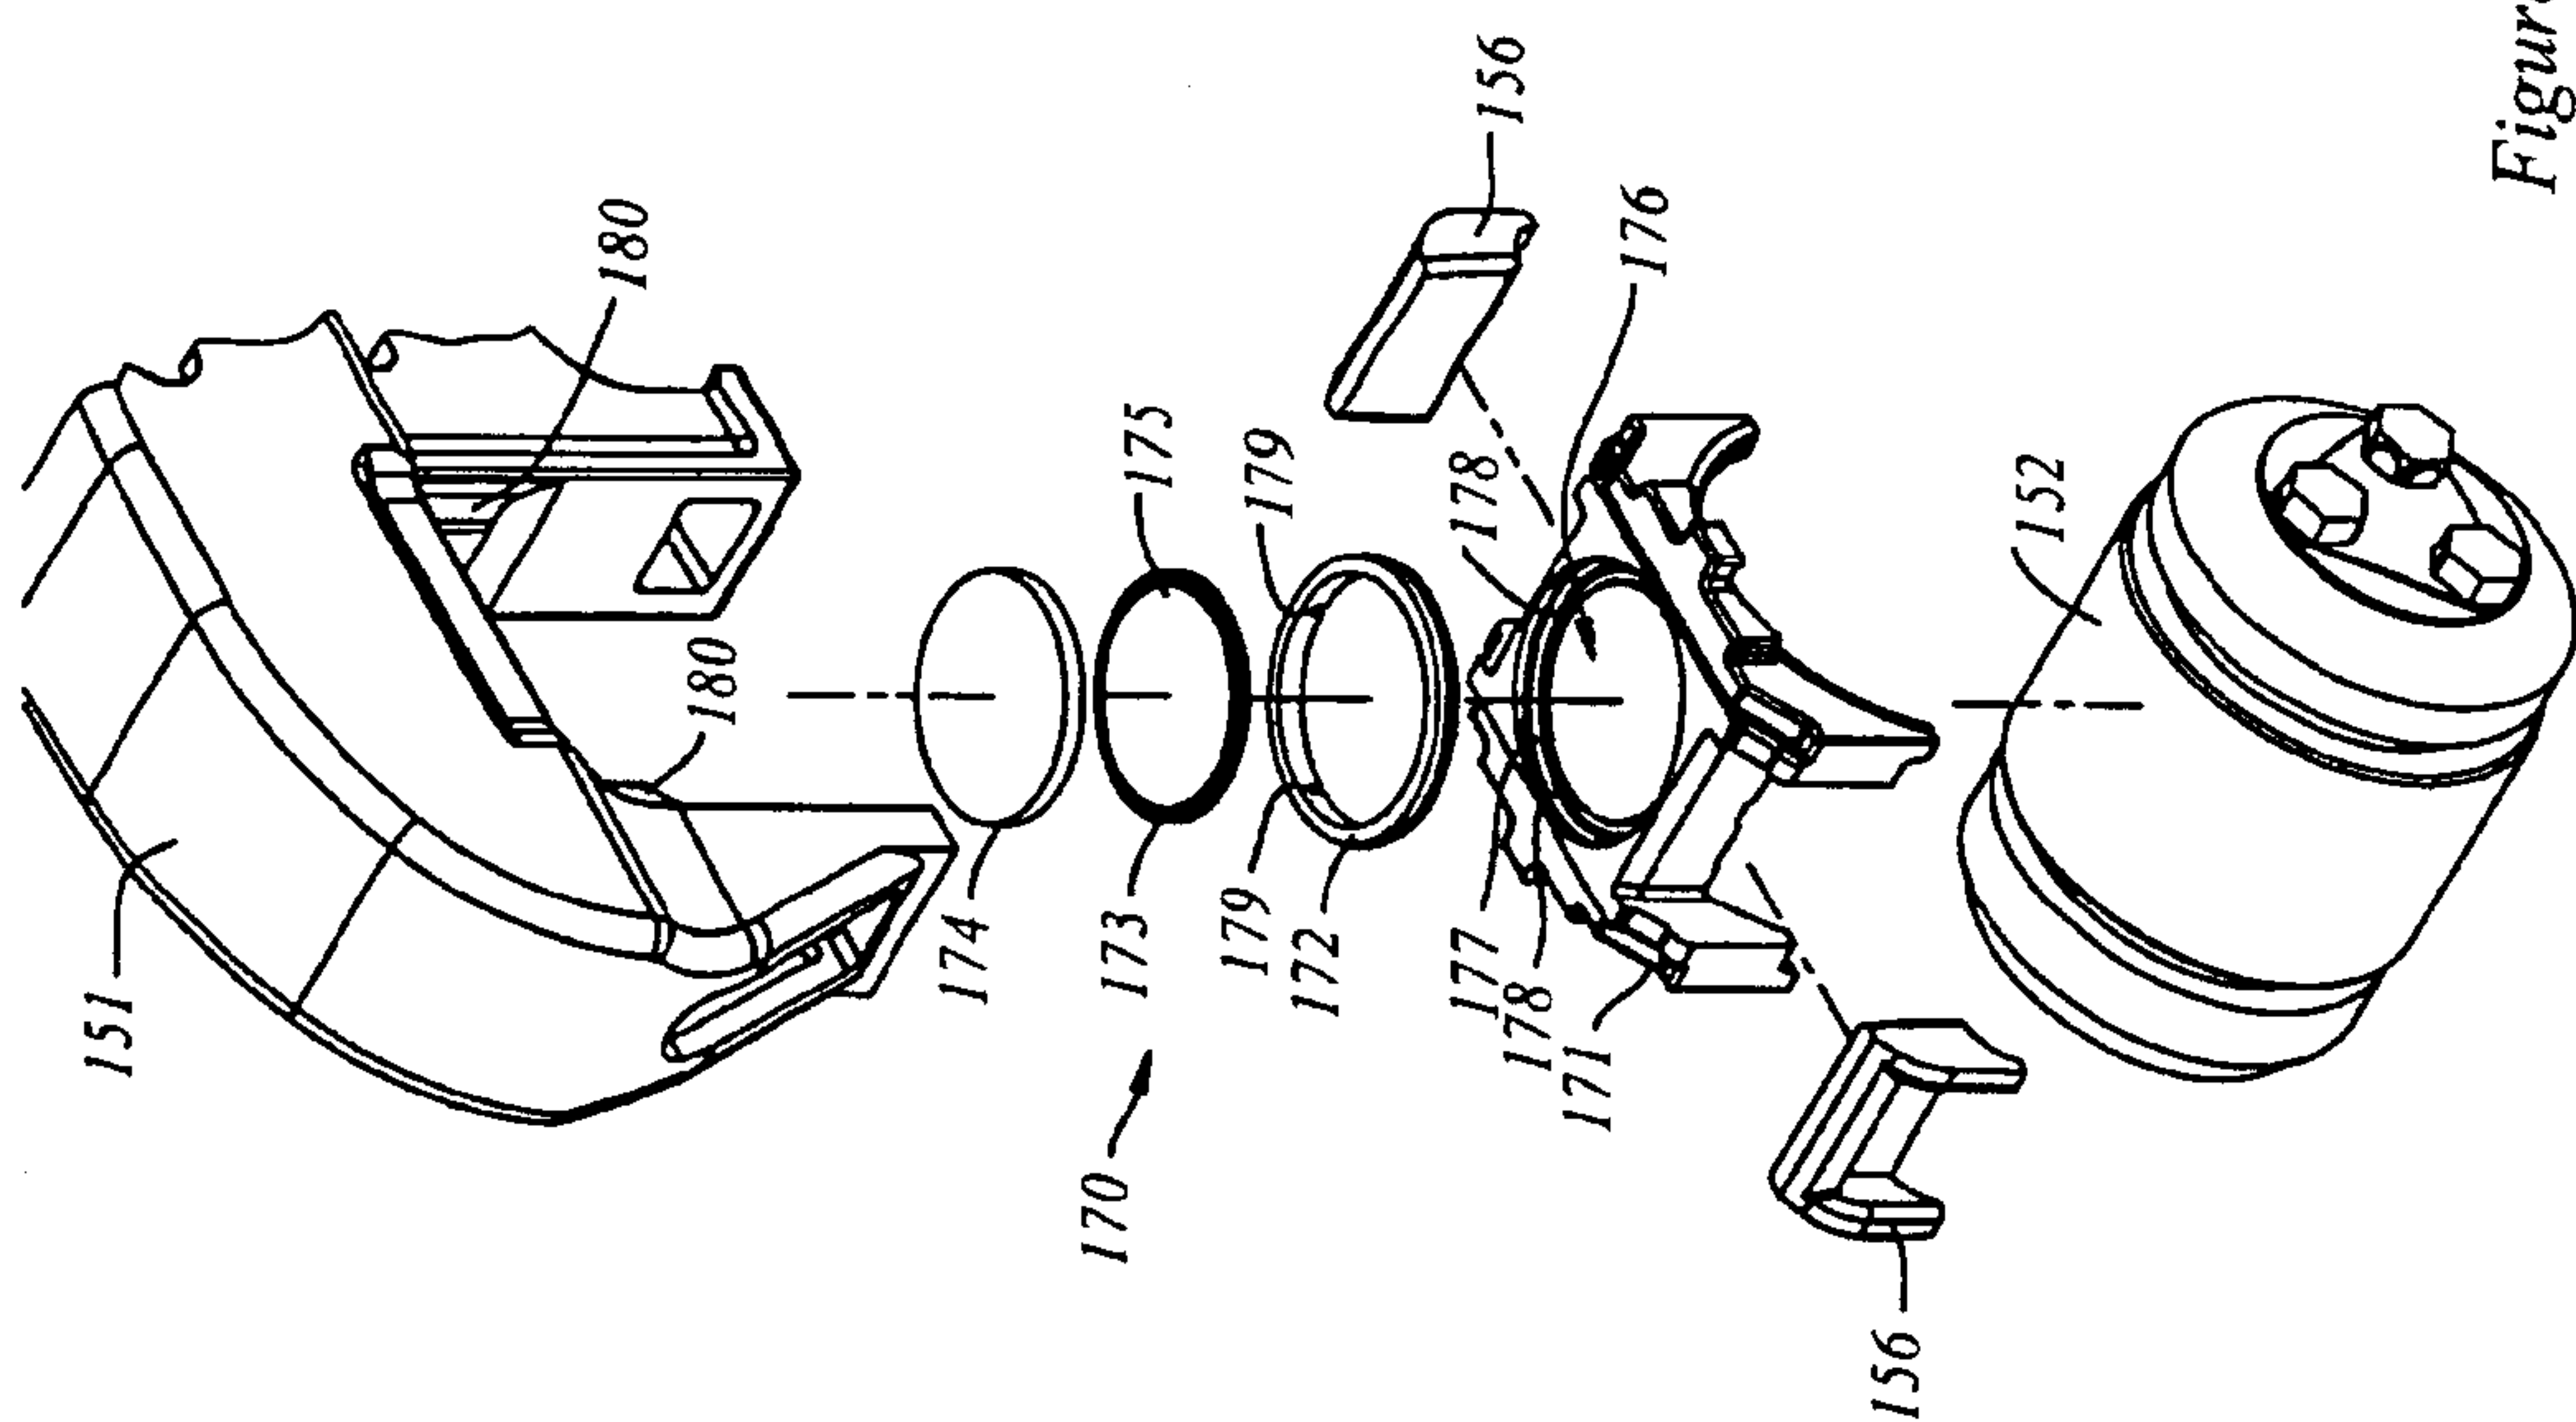


Figure 3e

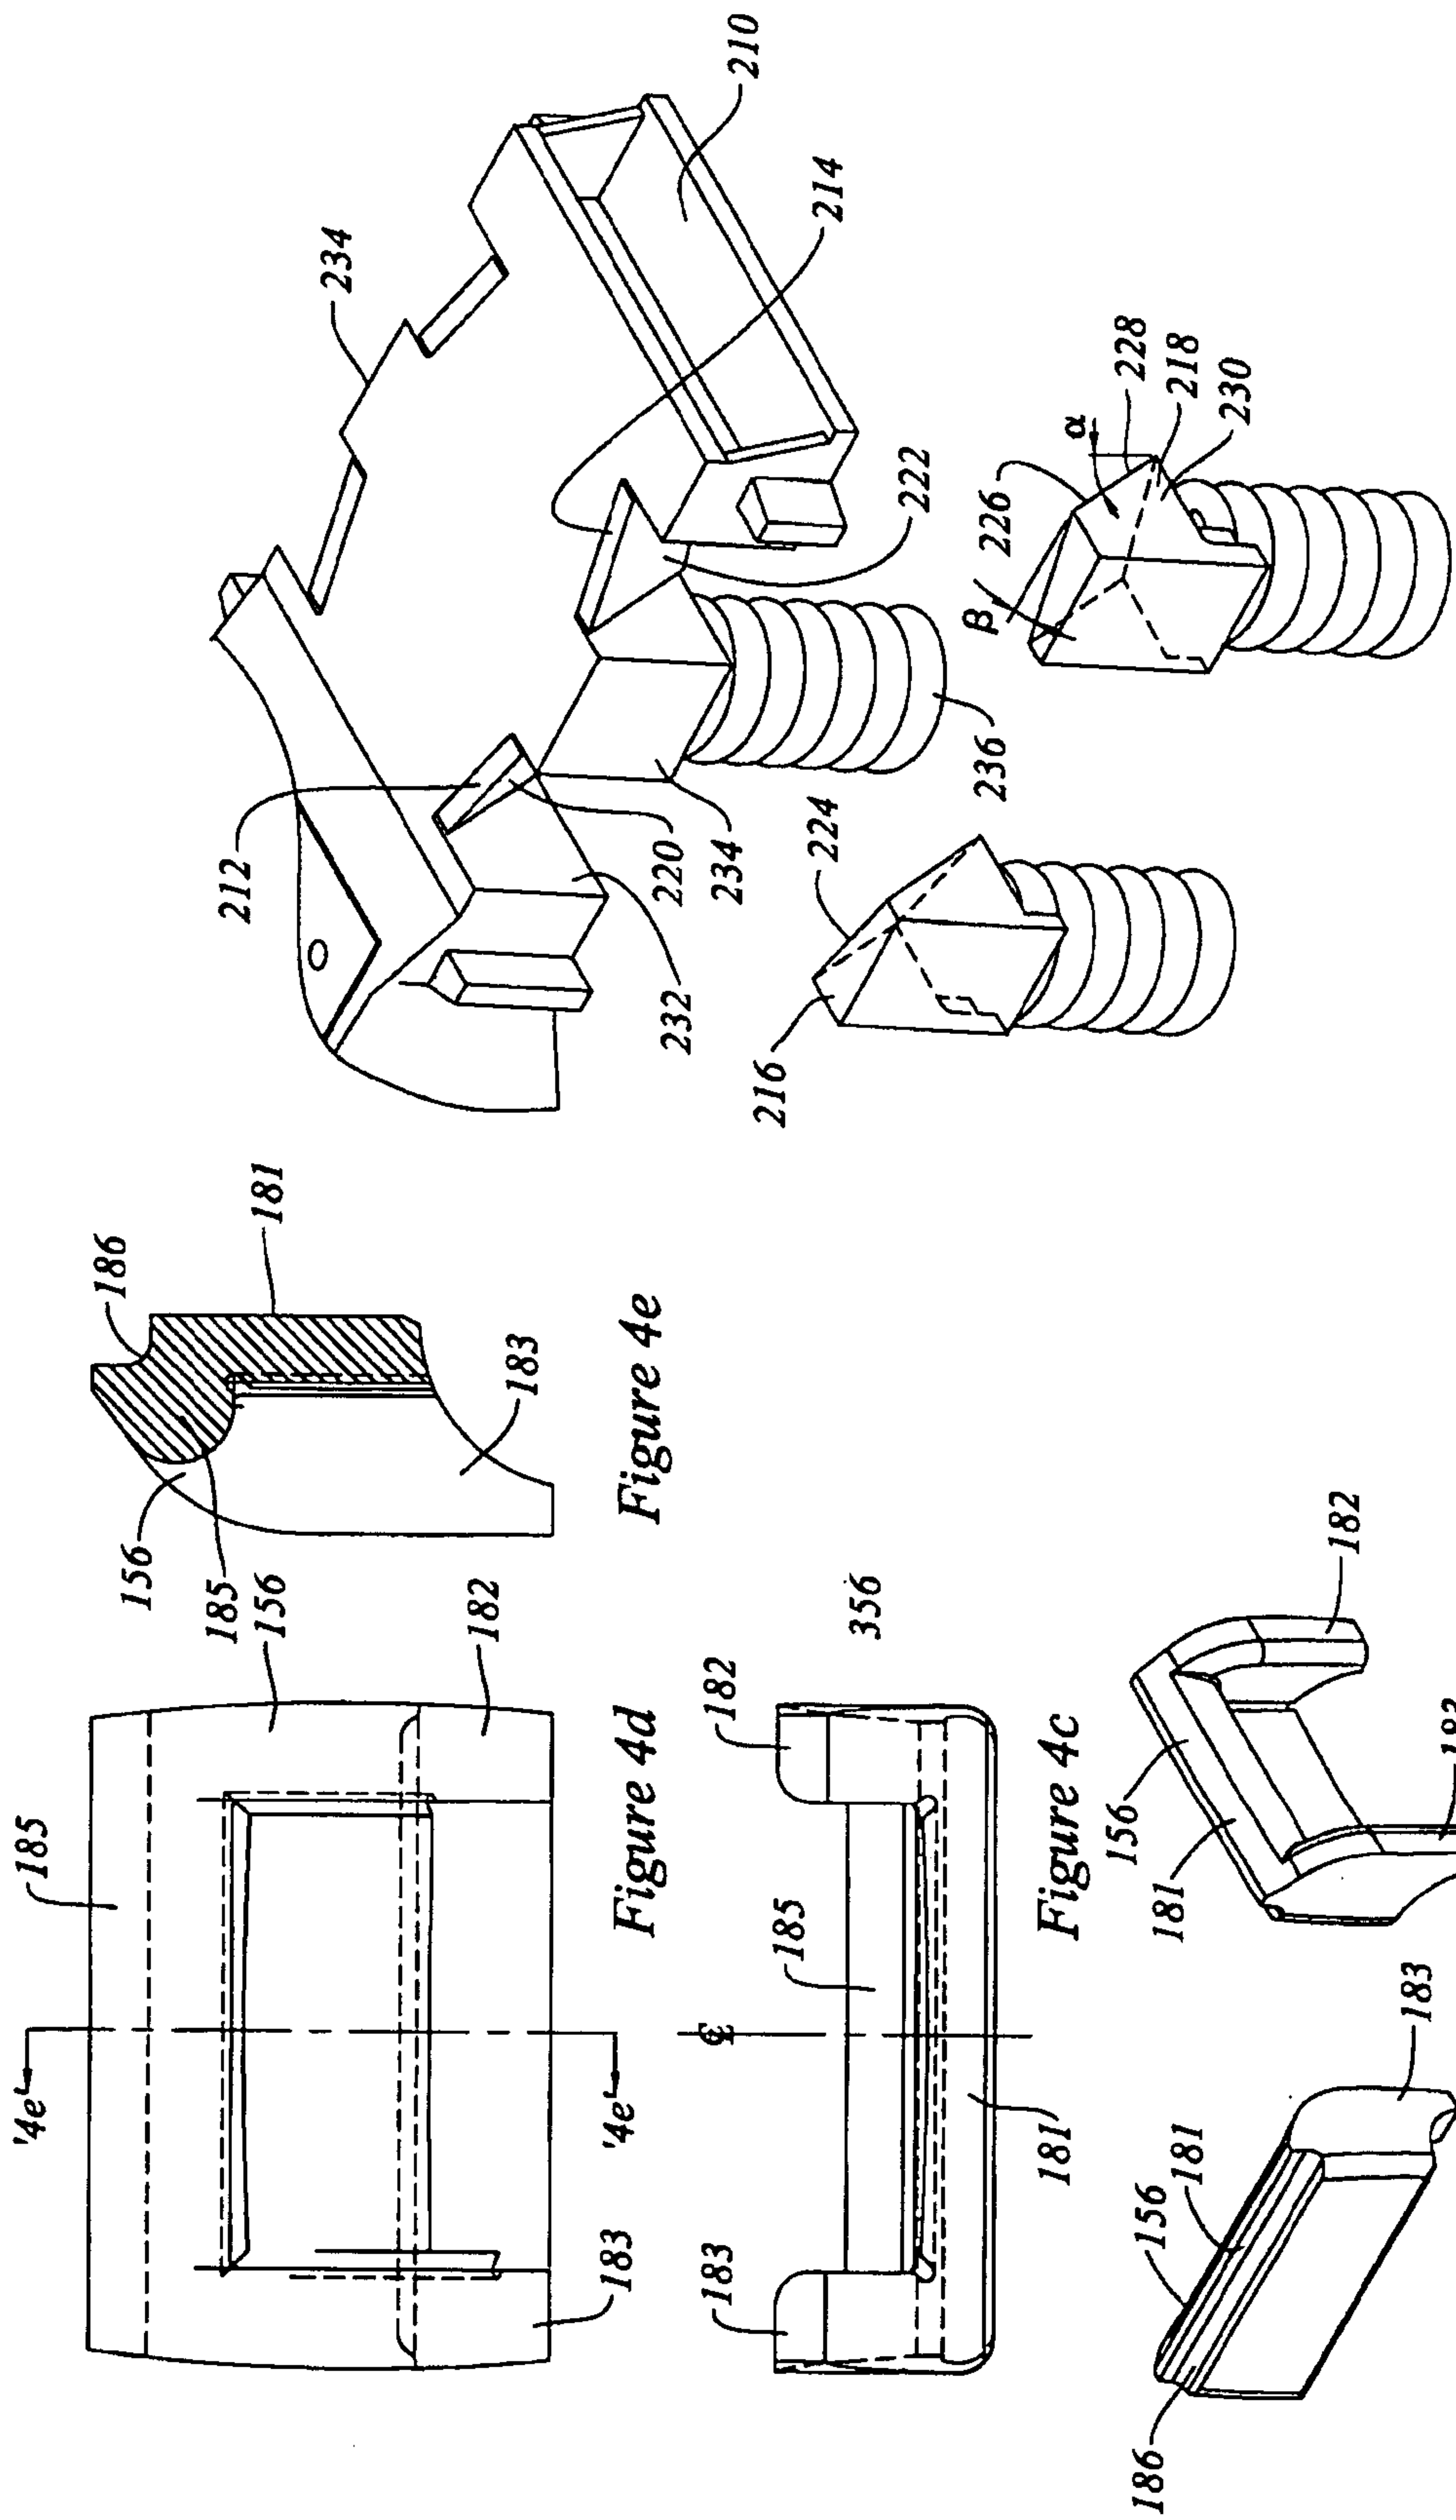


Figure 5



Figure 4a


Figure 4b


Figure 4c



Figure 4e



Figure 4d

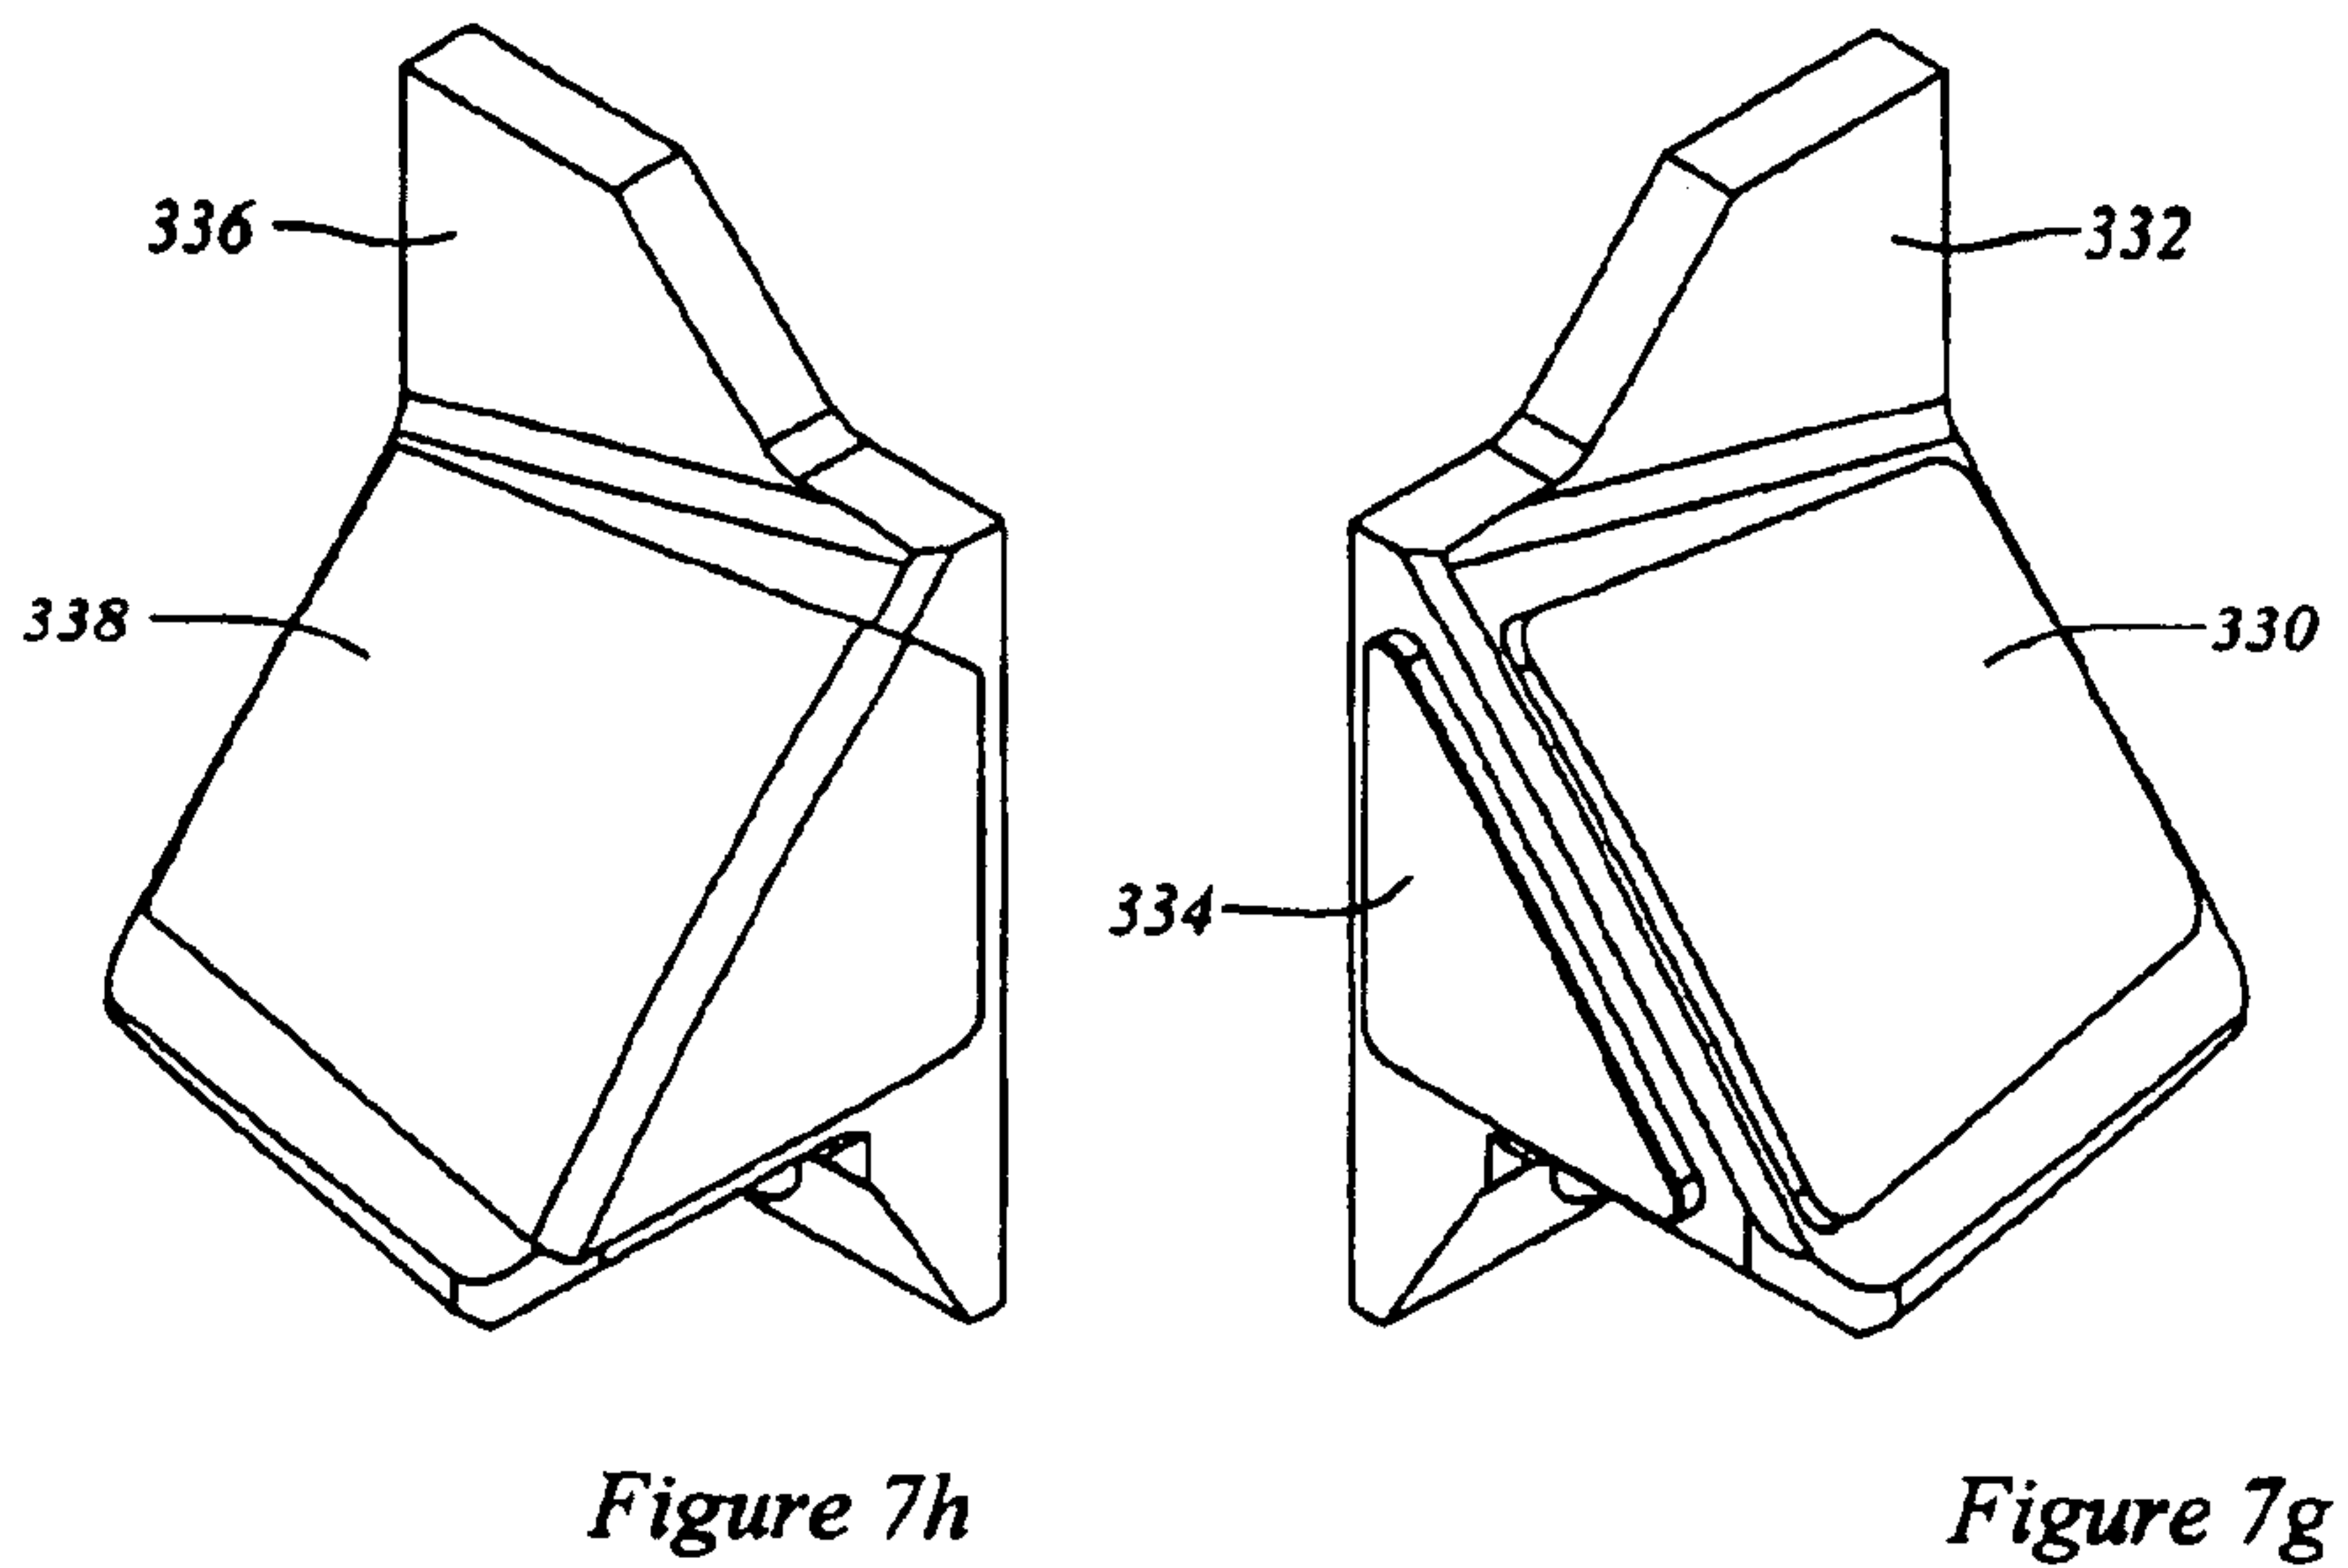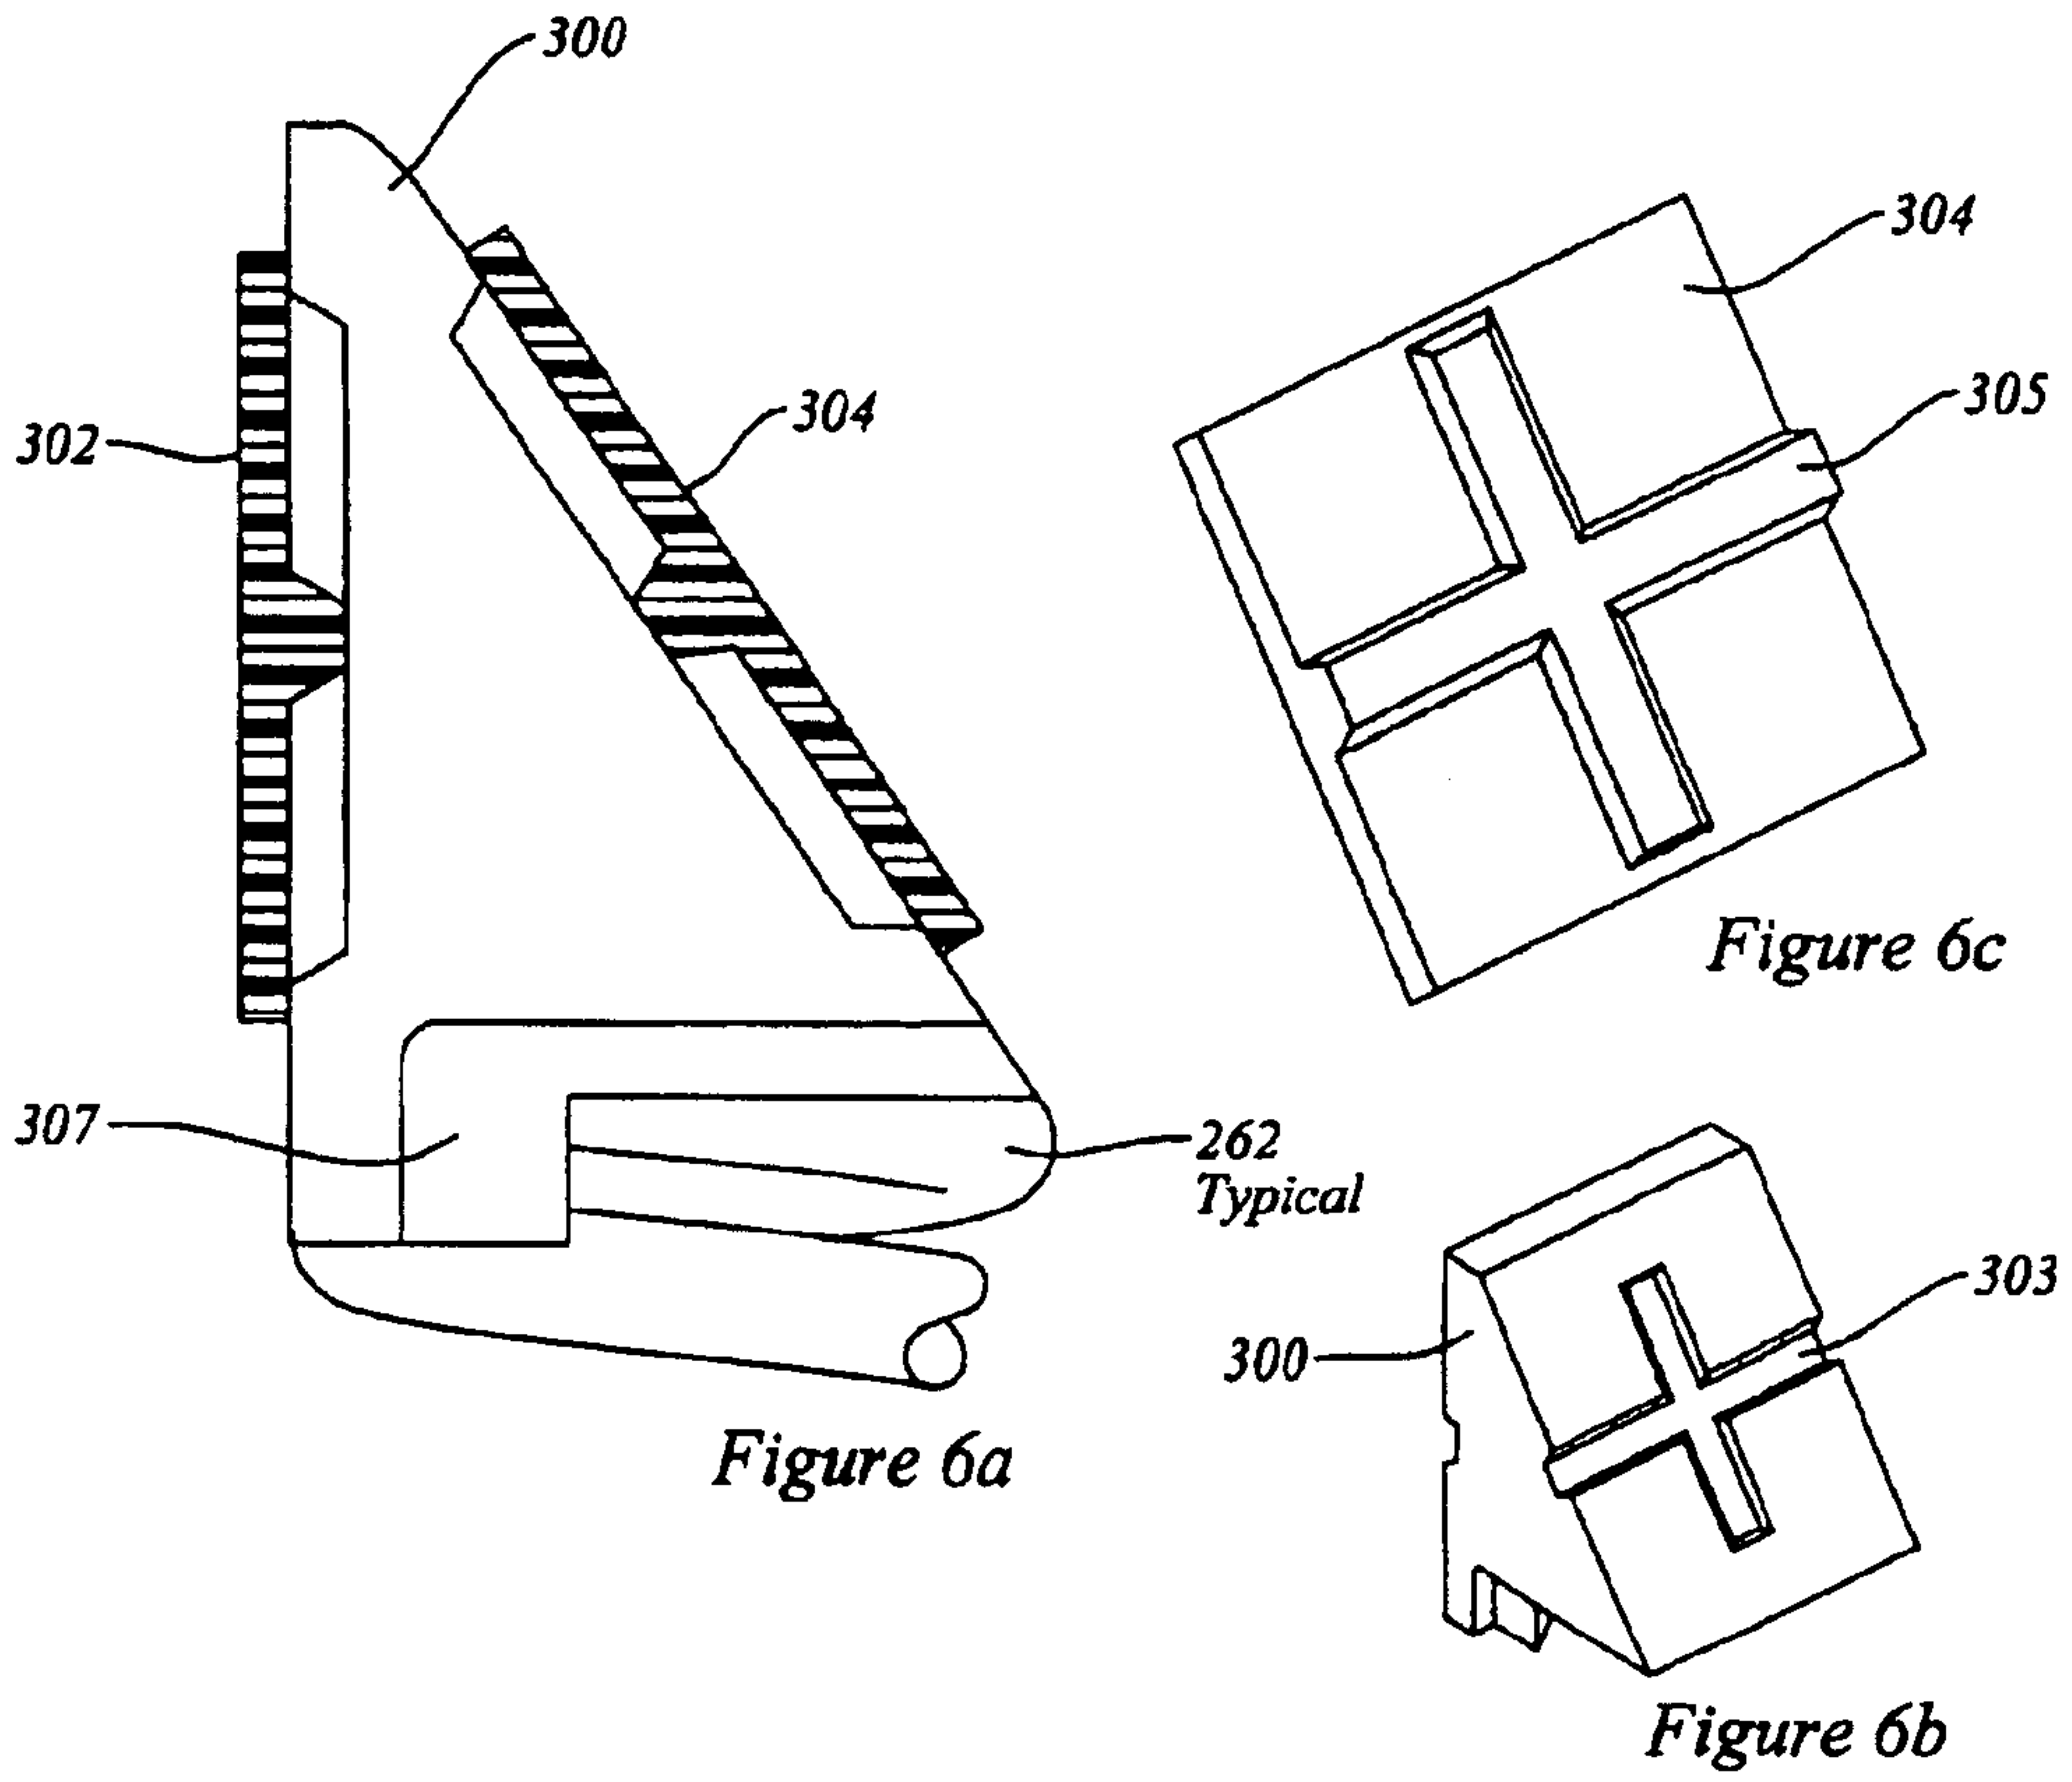


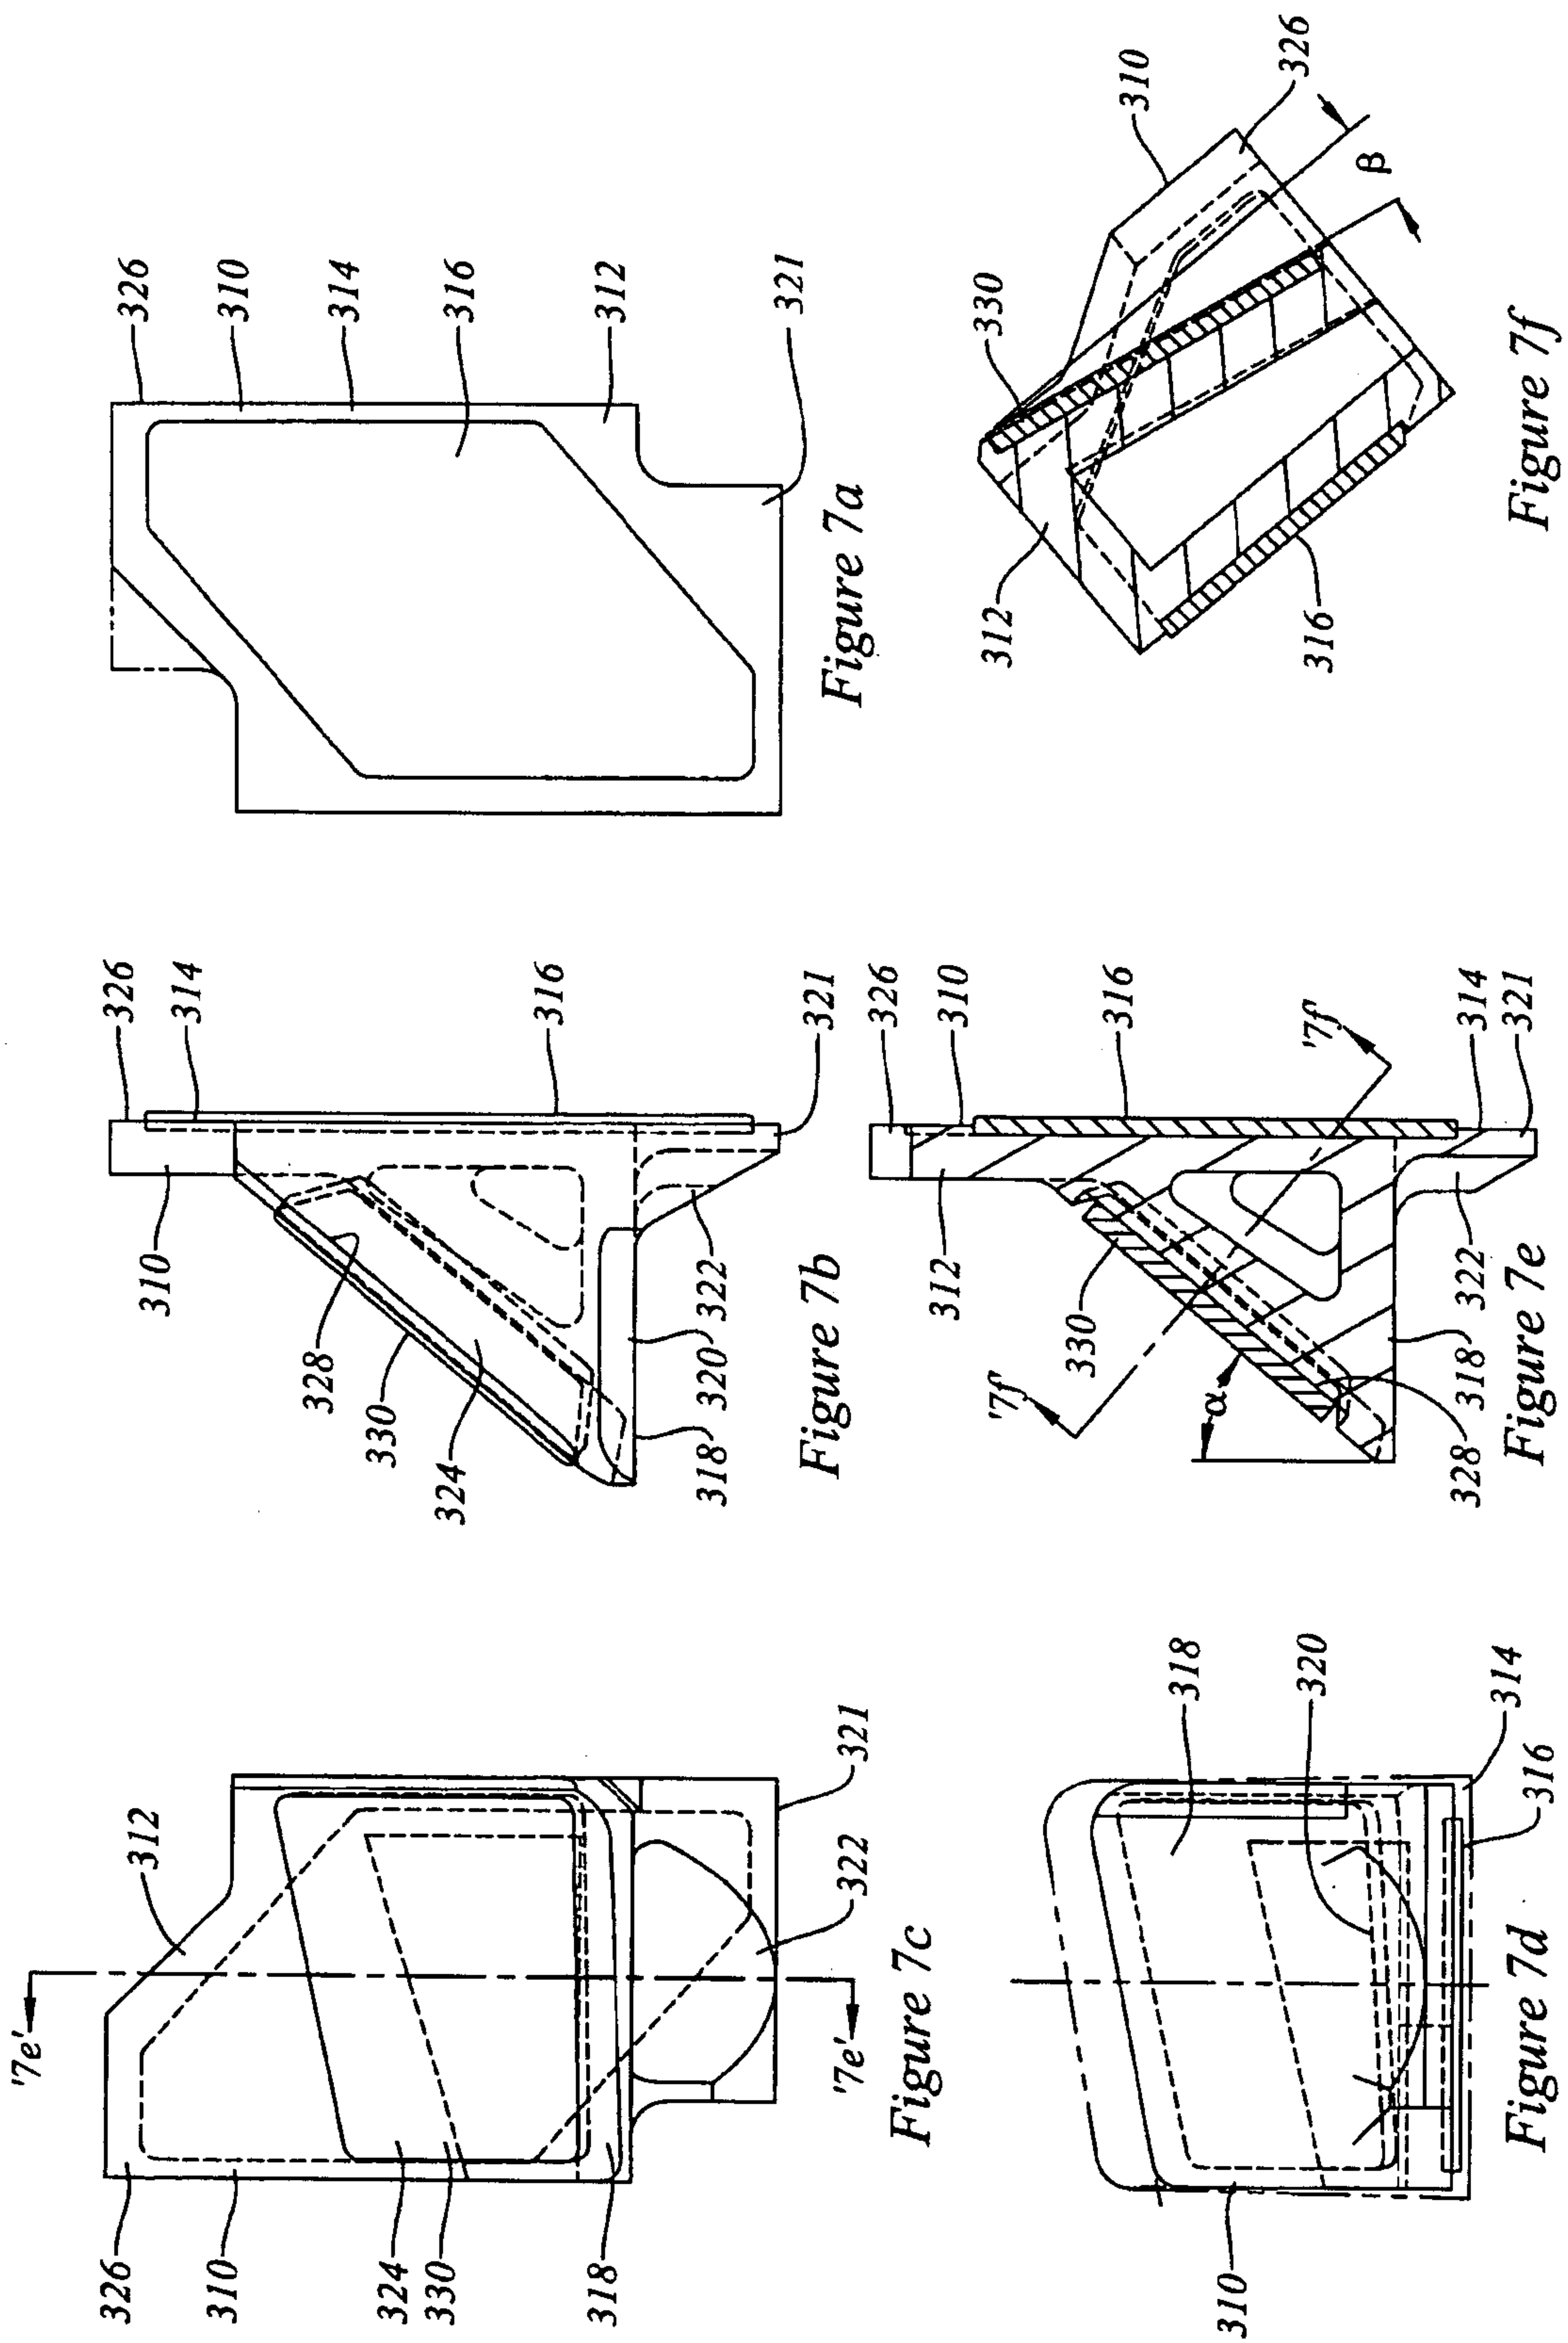

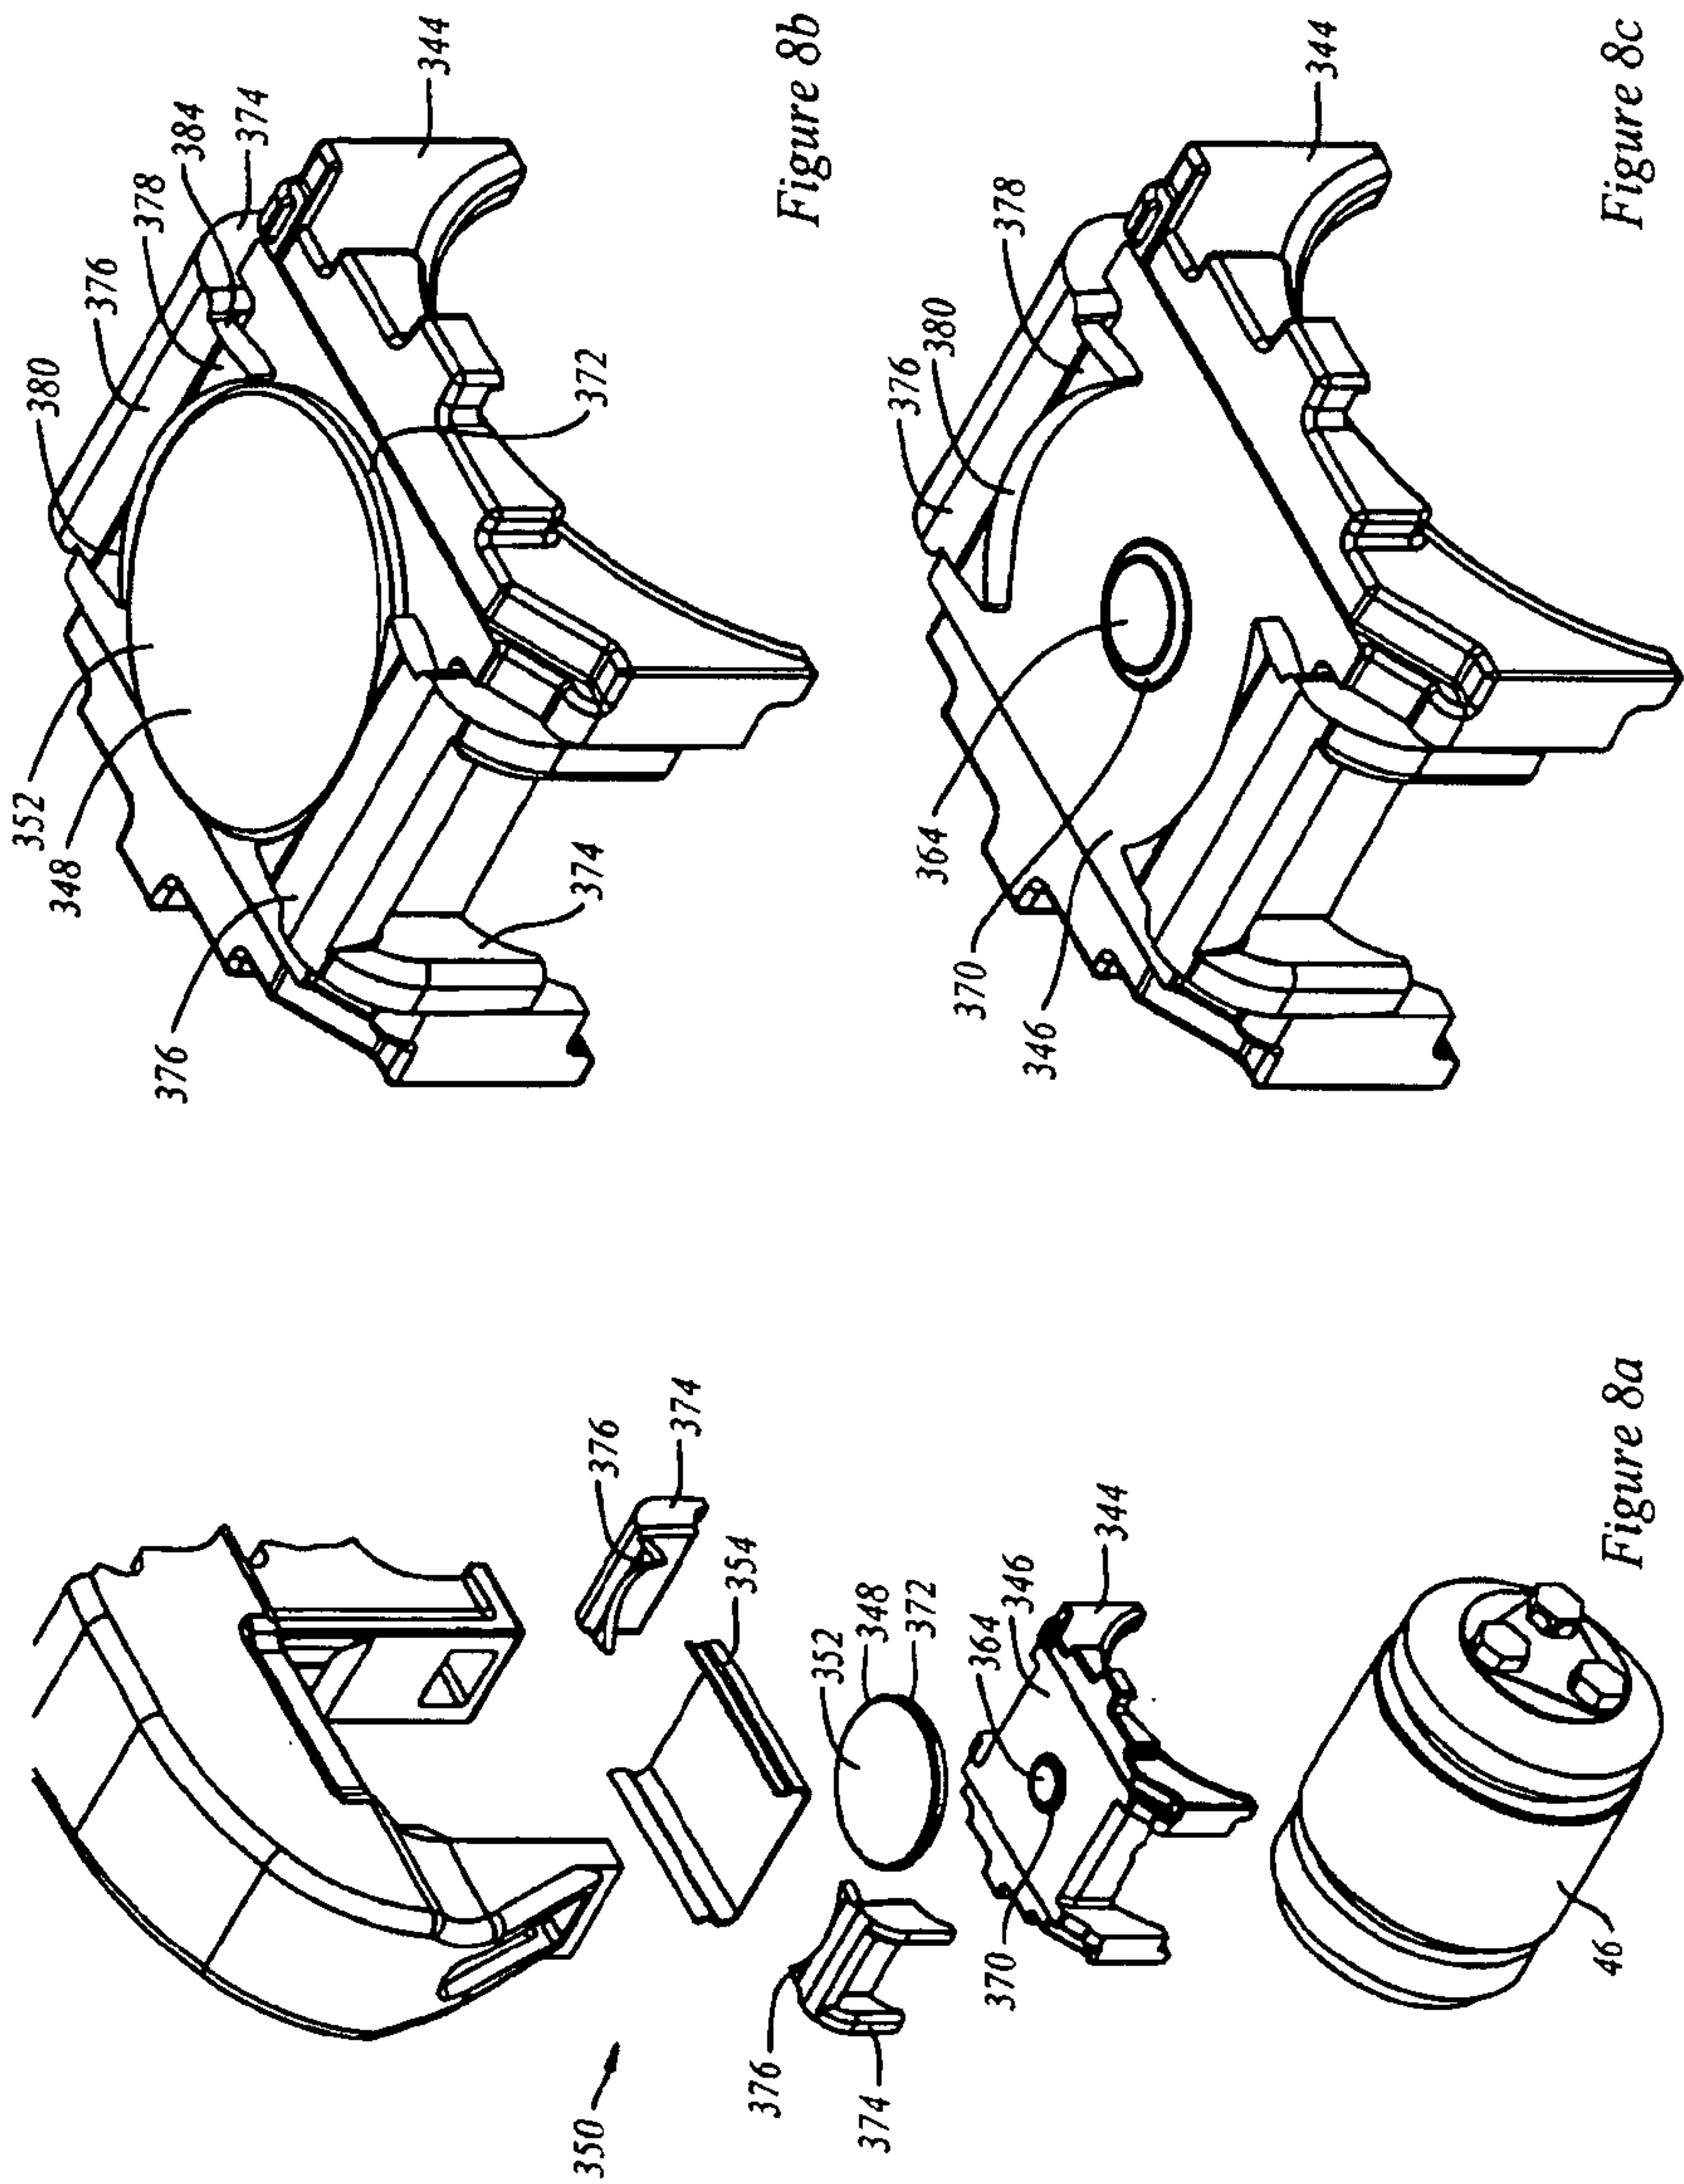

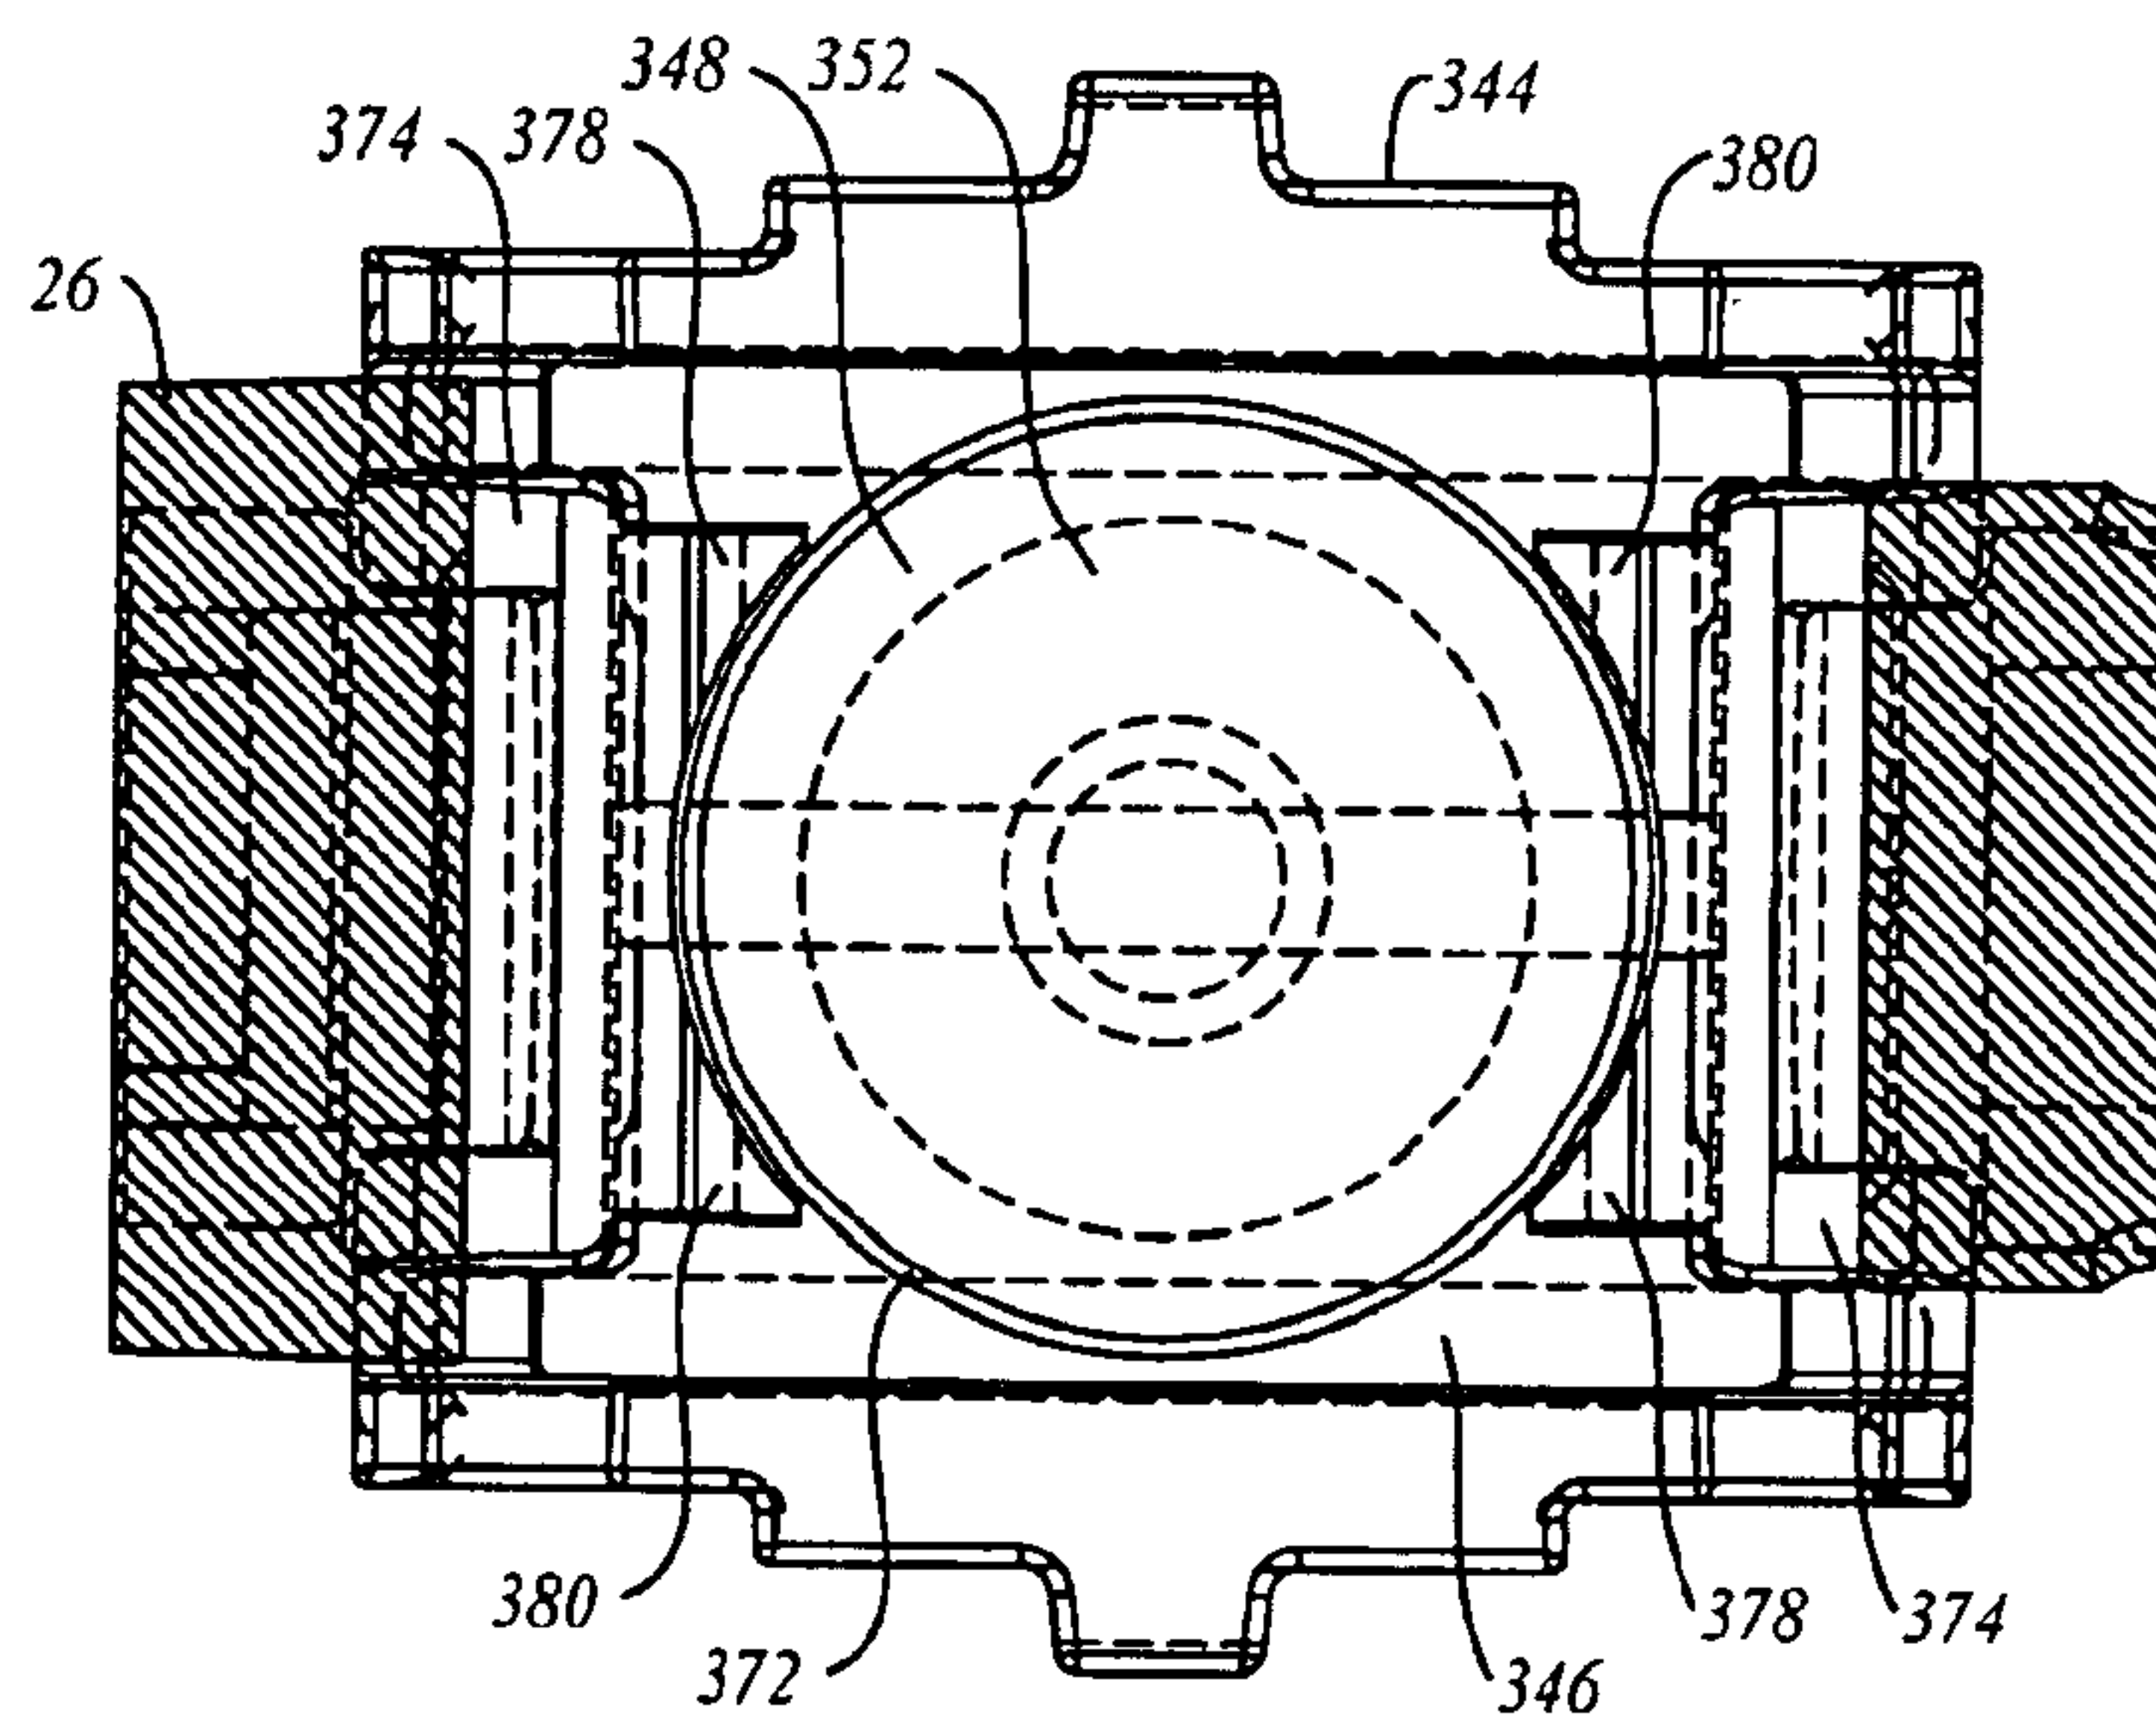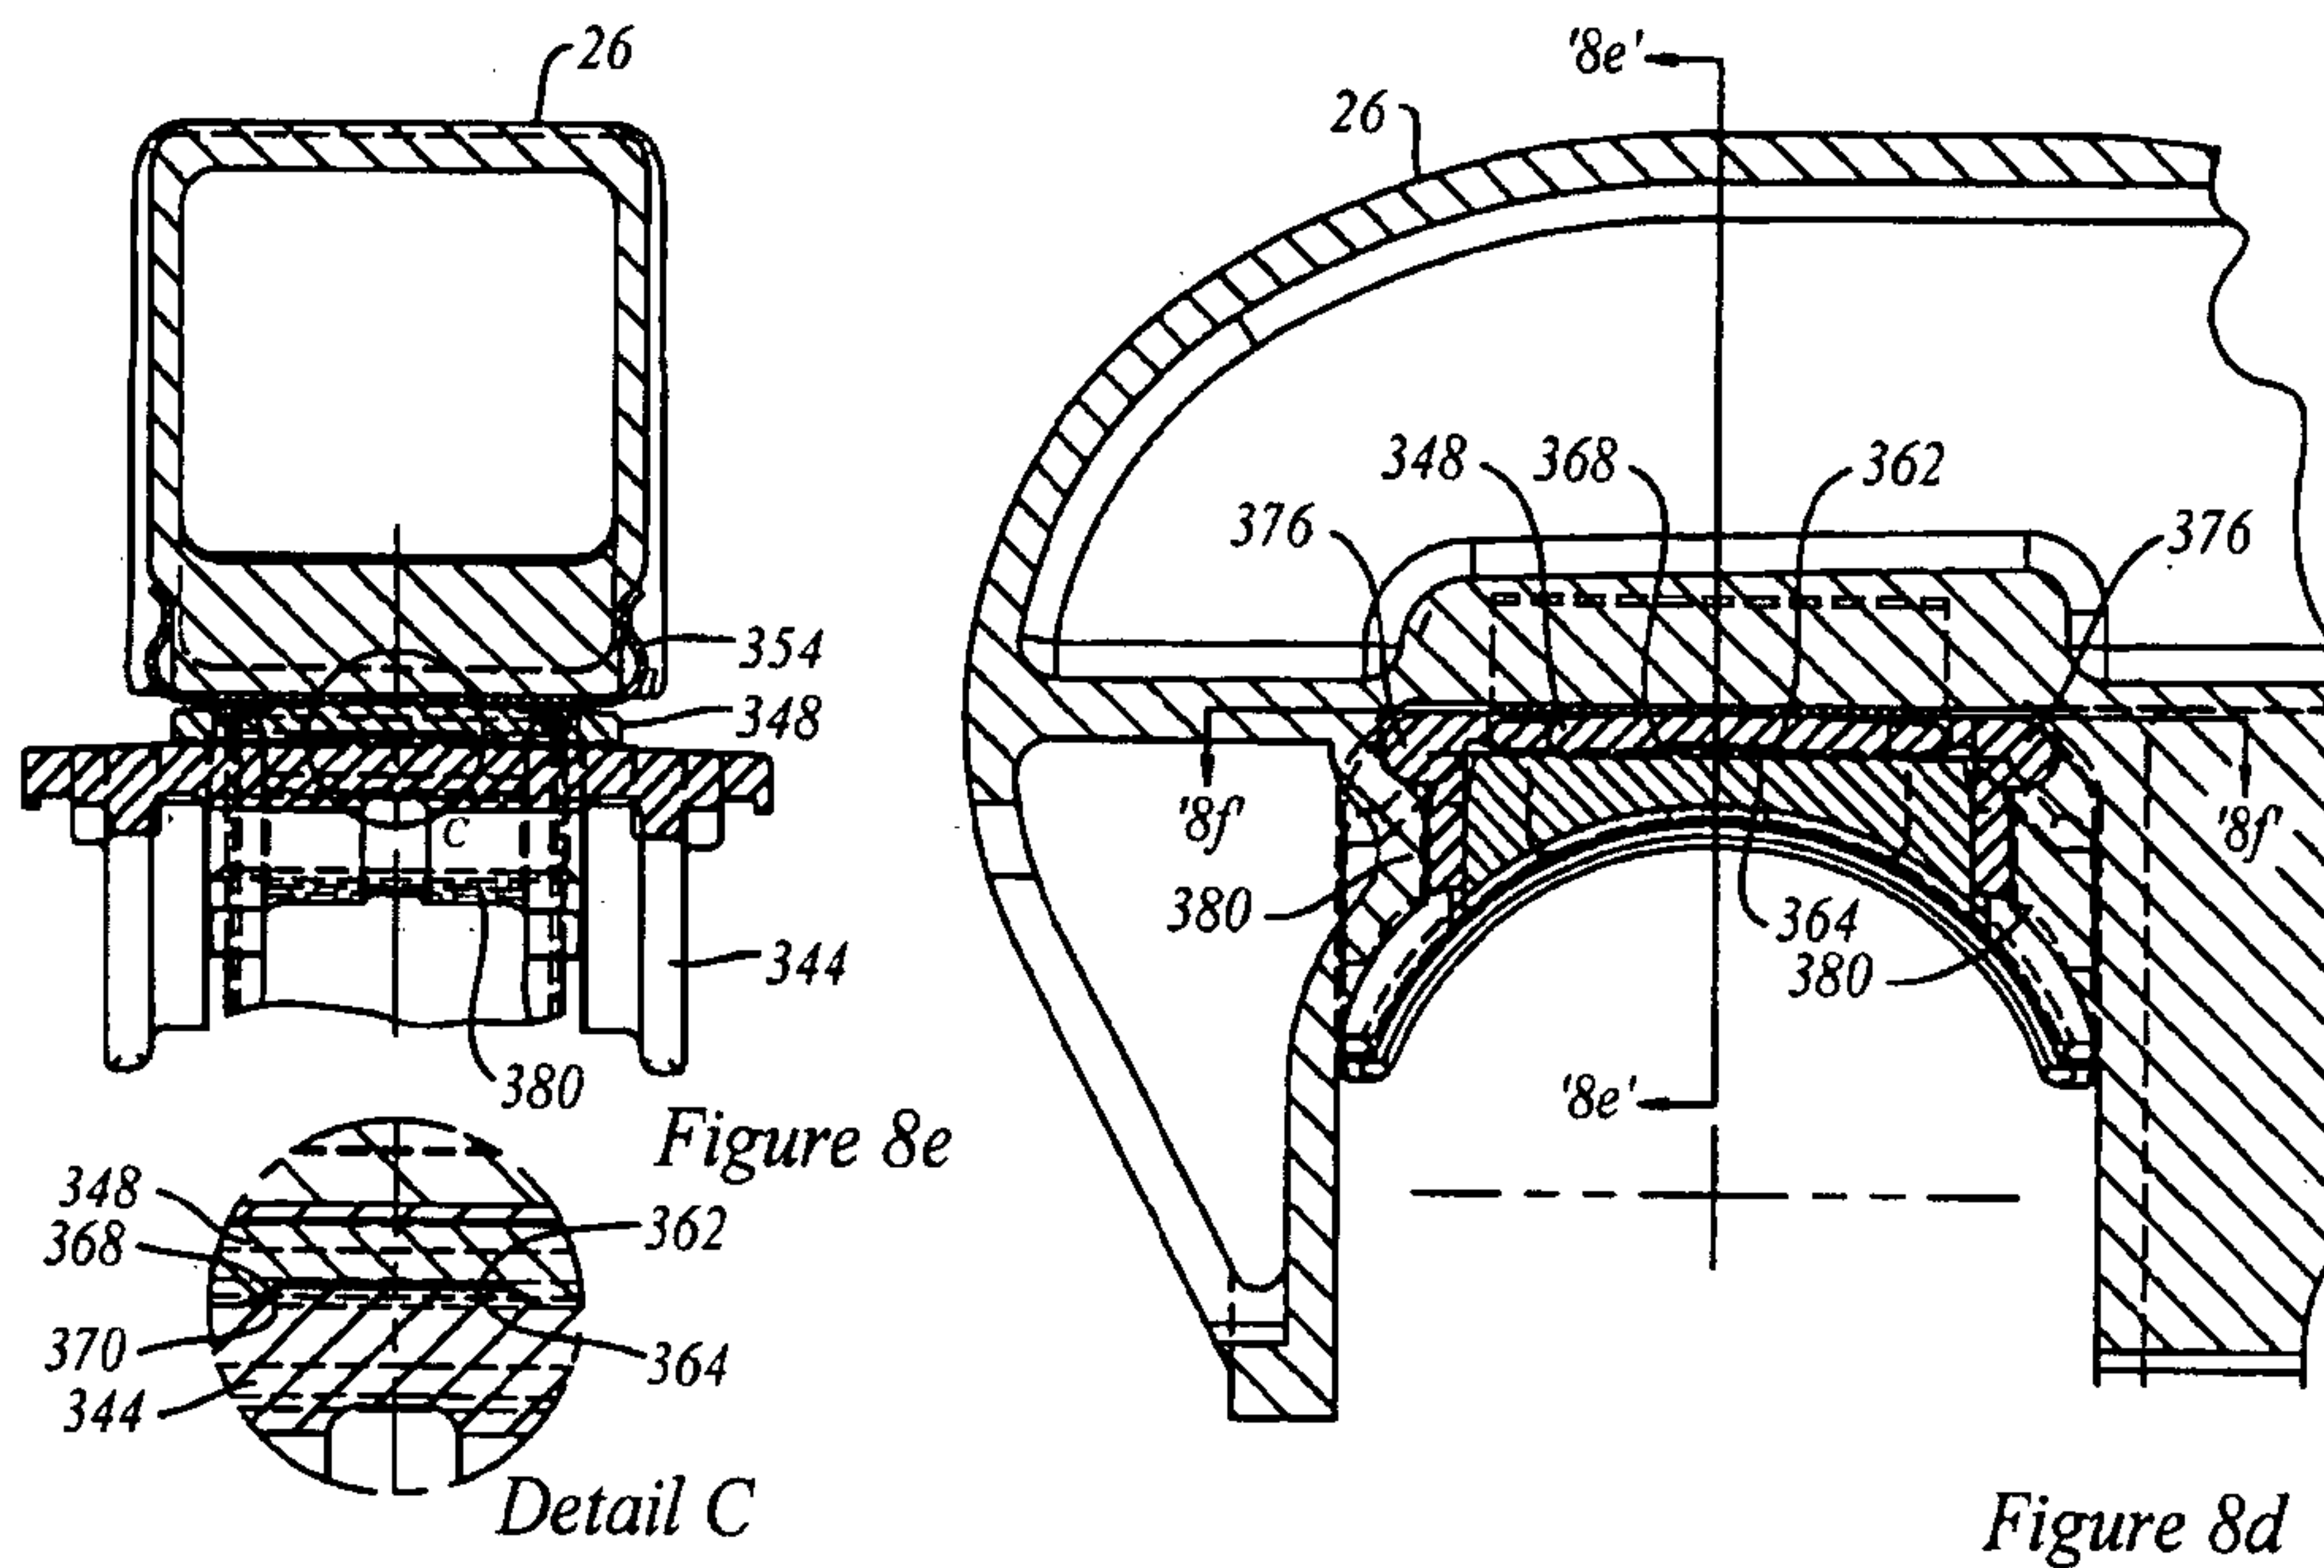

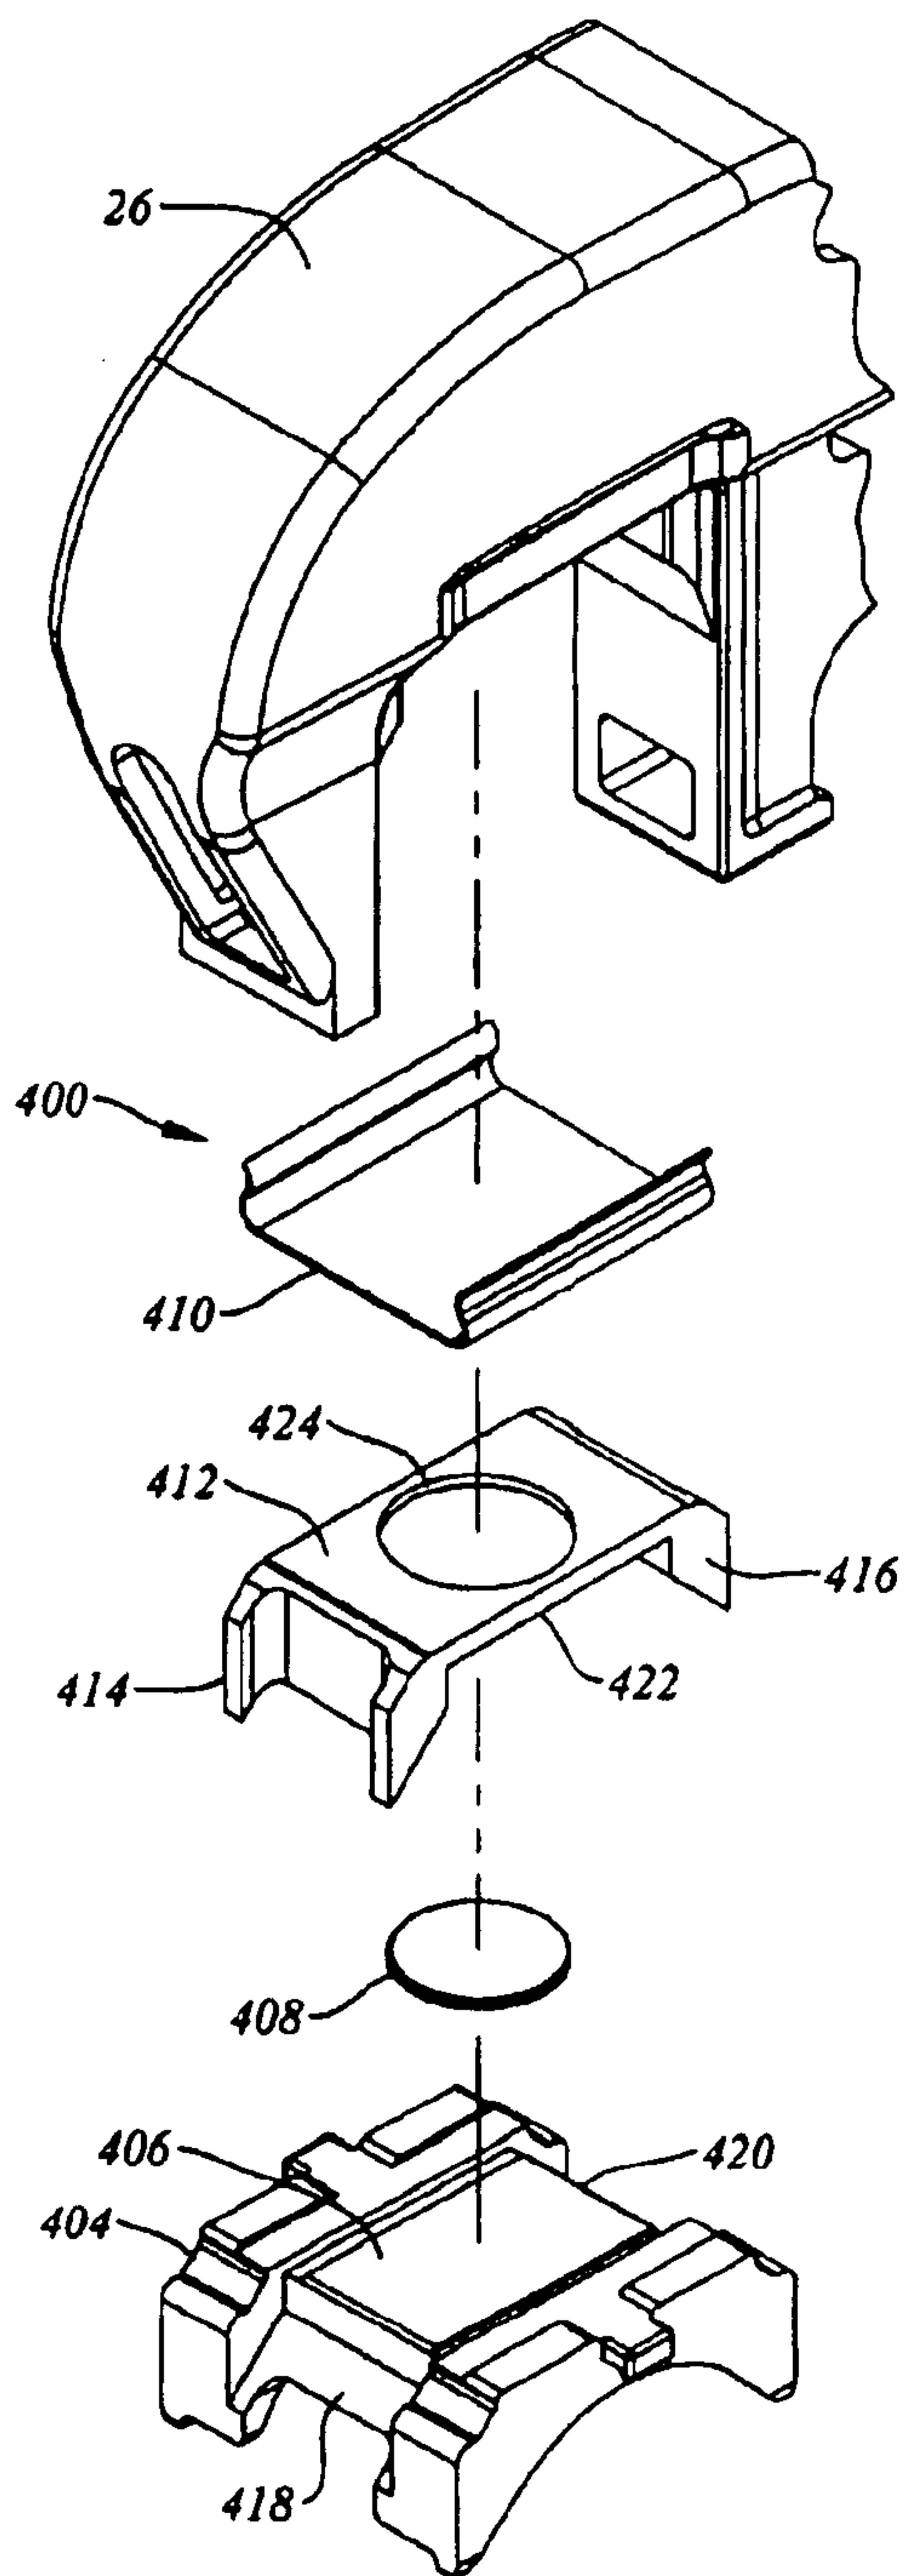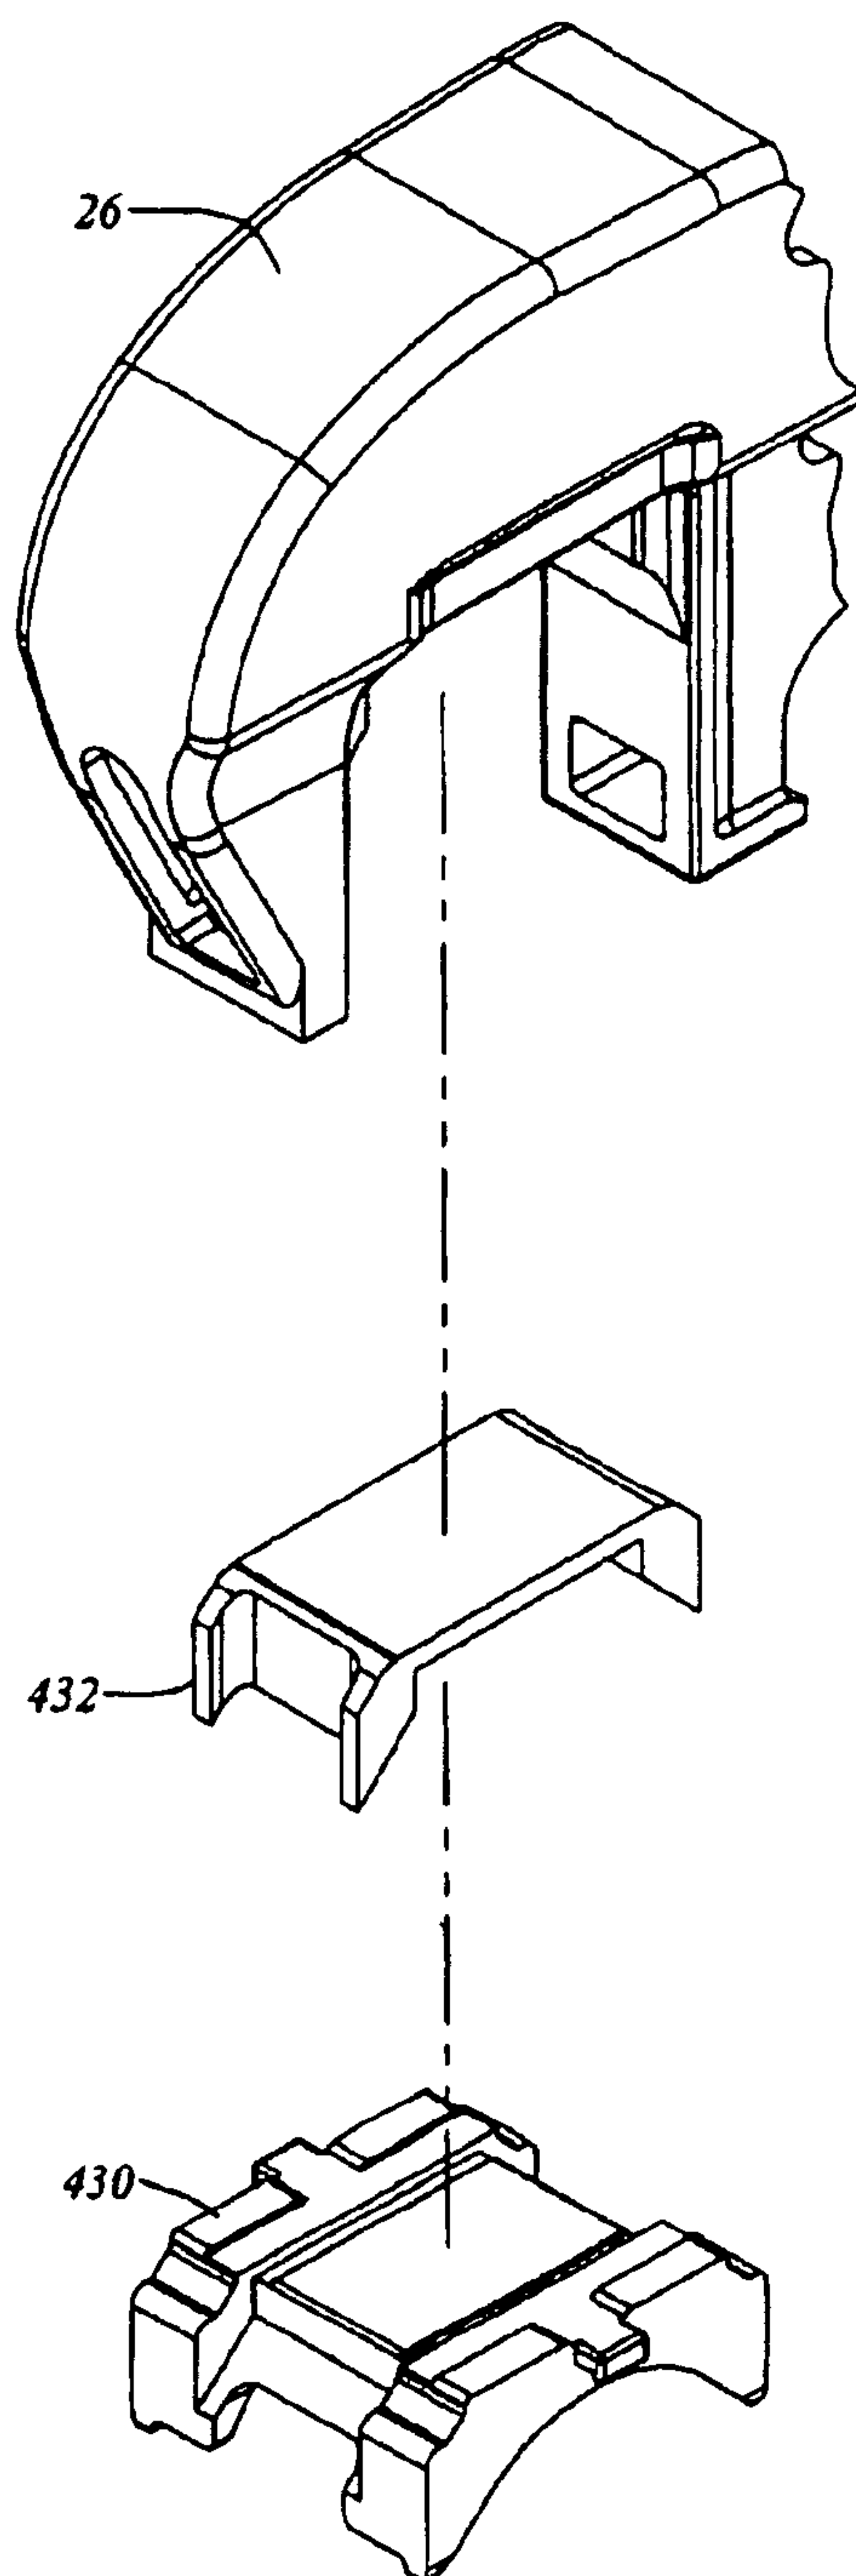*Figure 9a**Figure 9b*

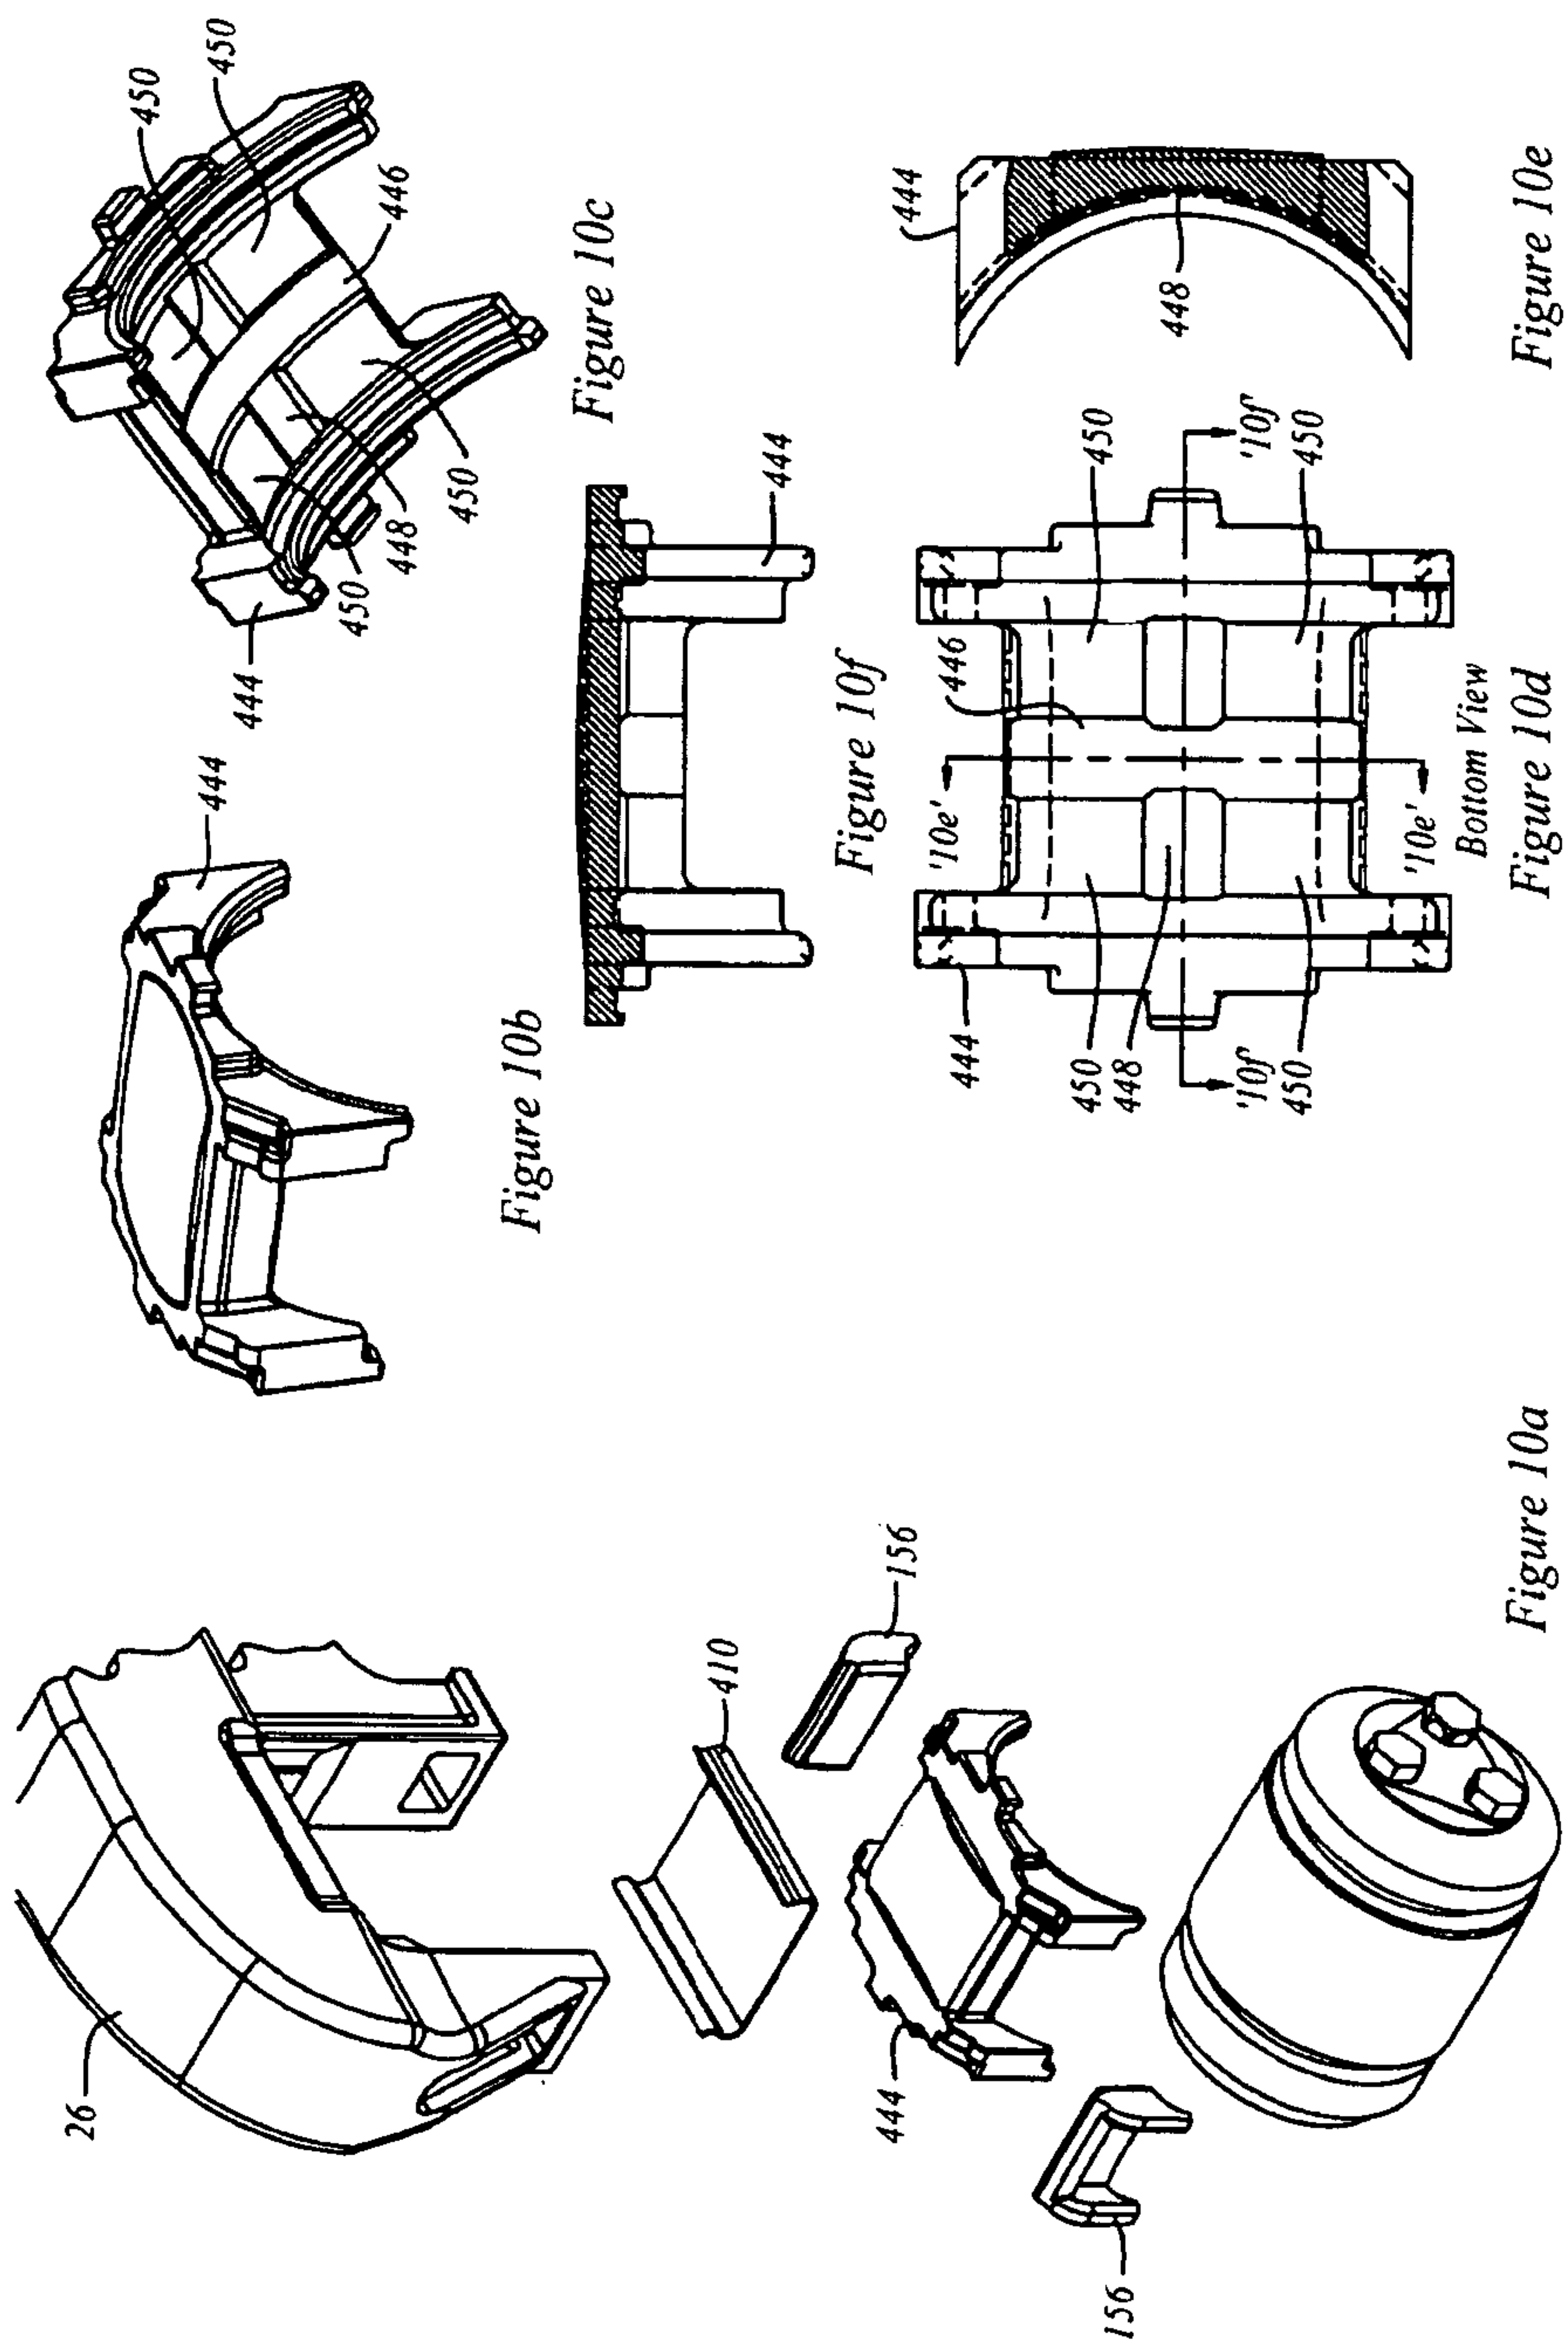

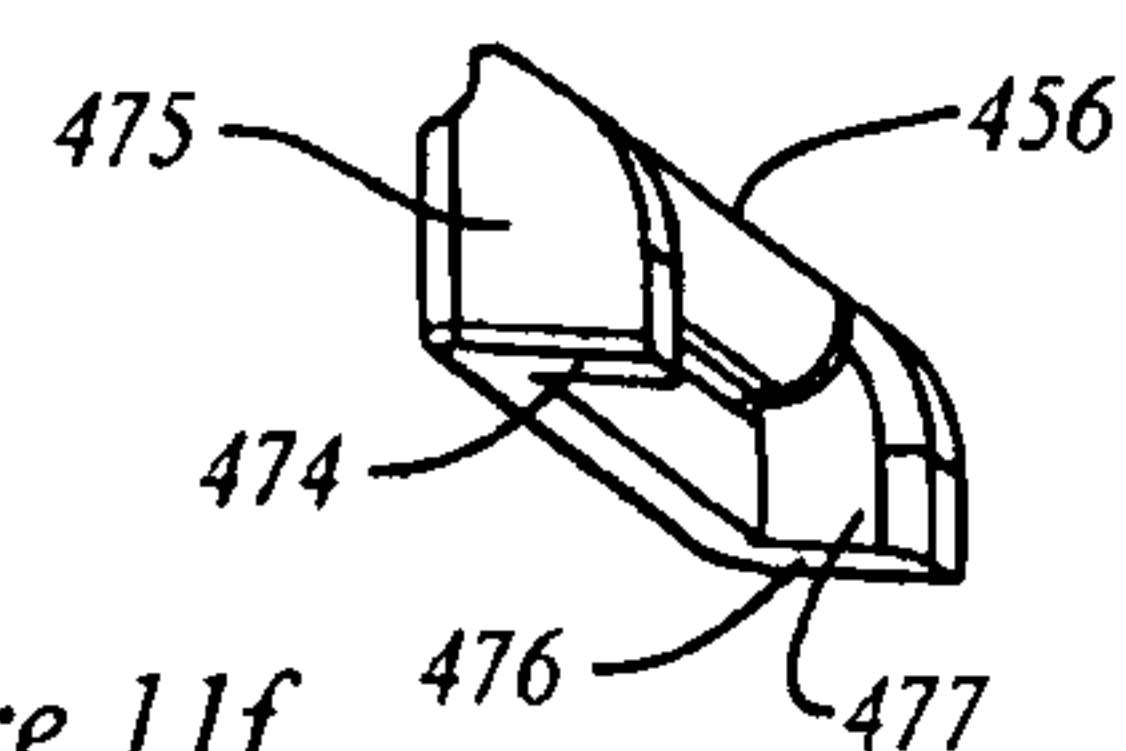
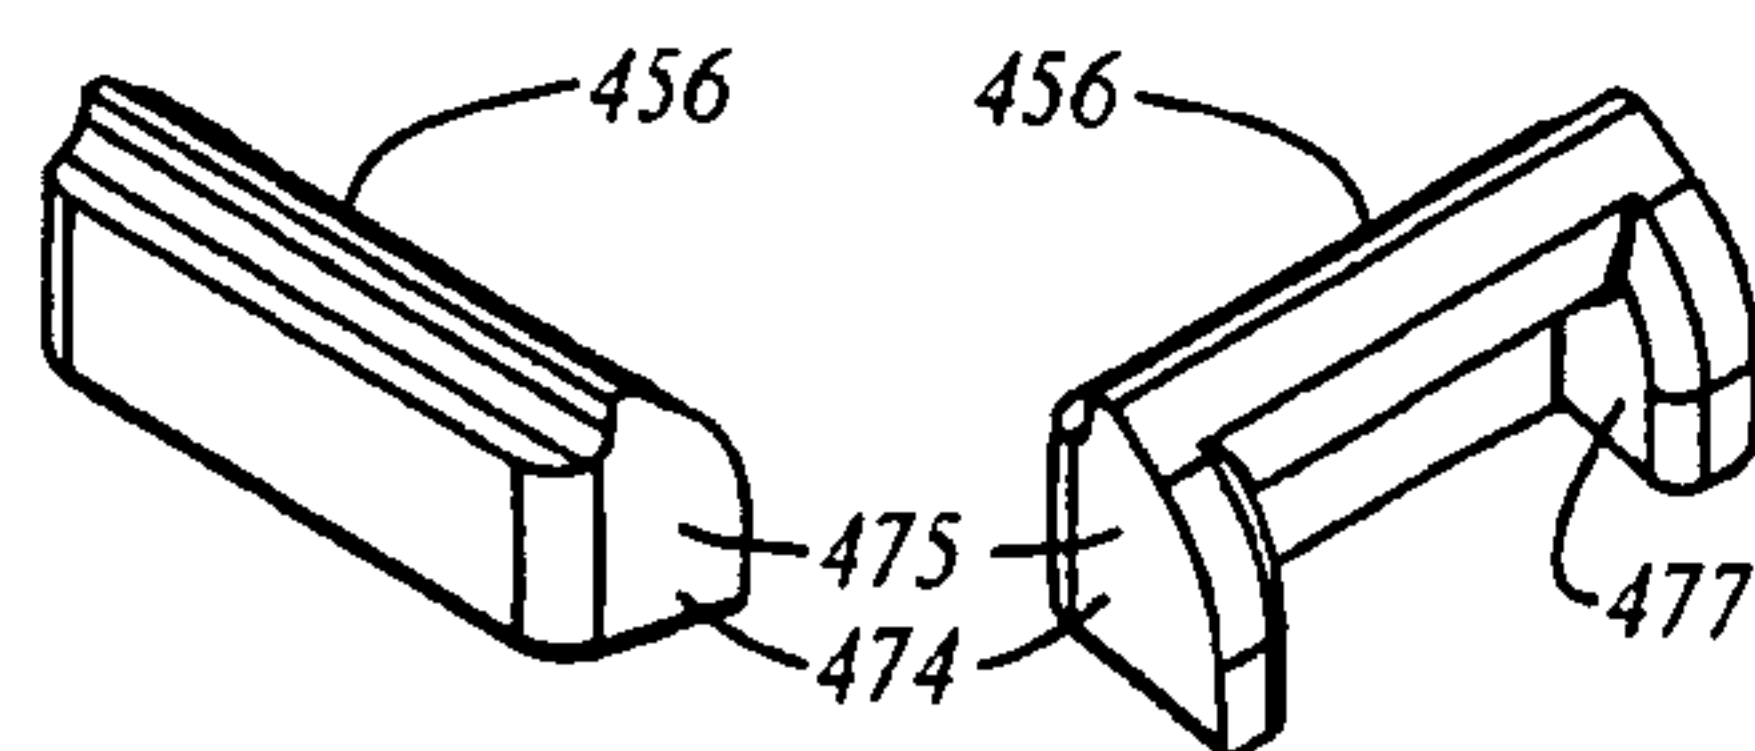
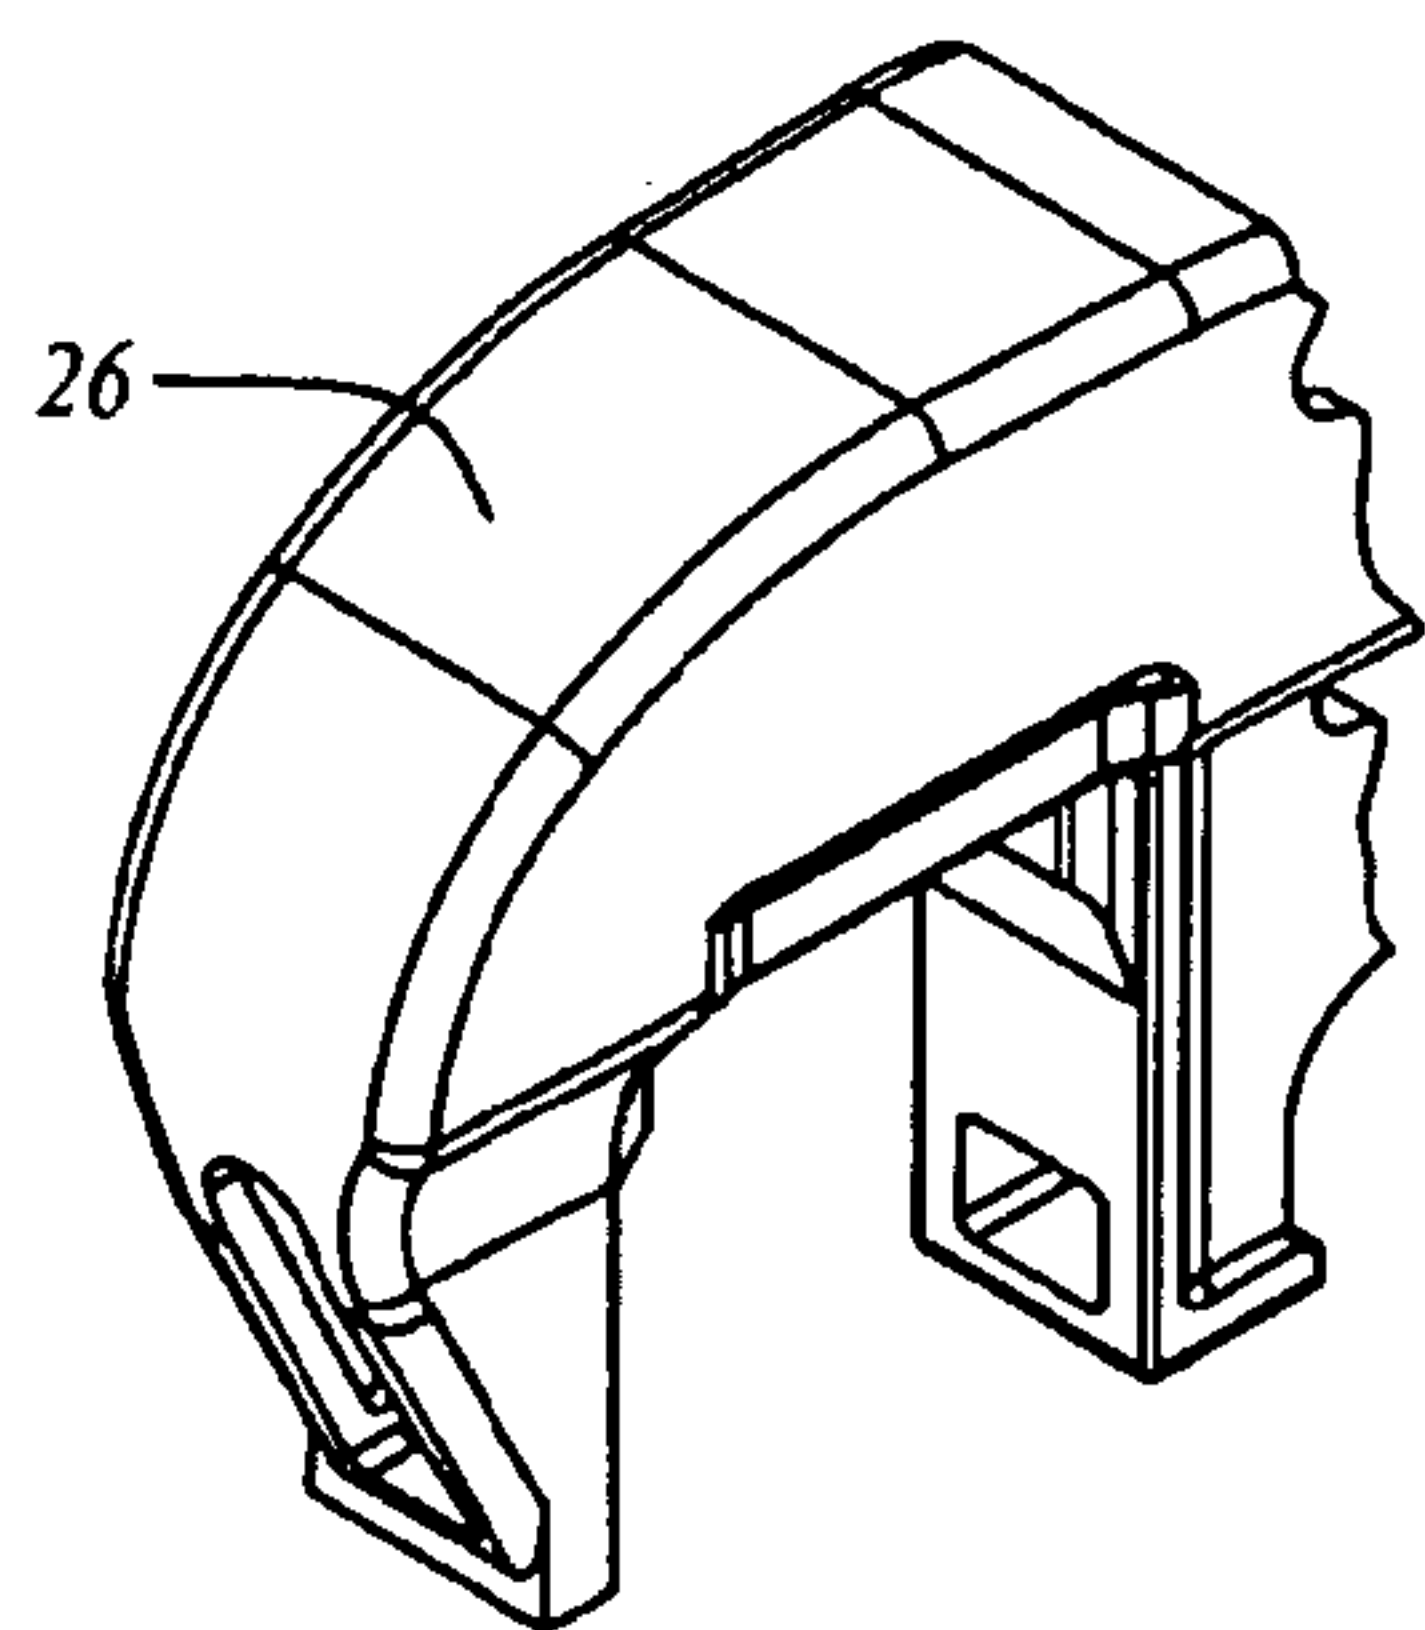


Figure 11f

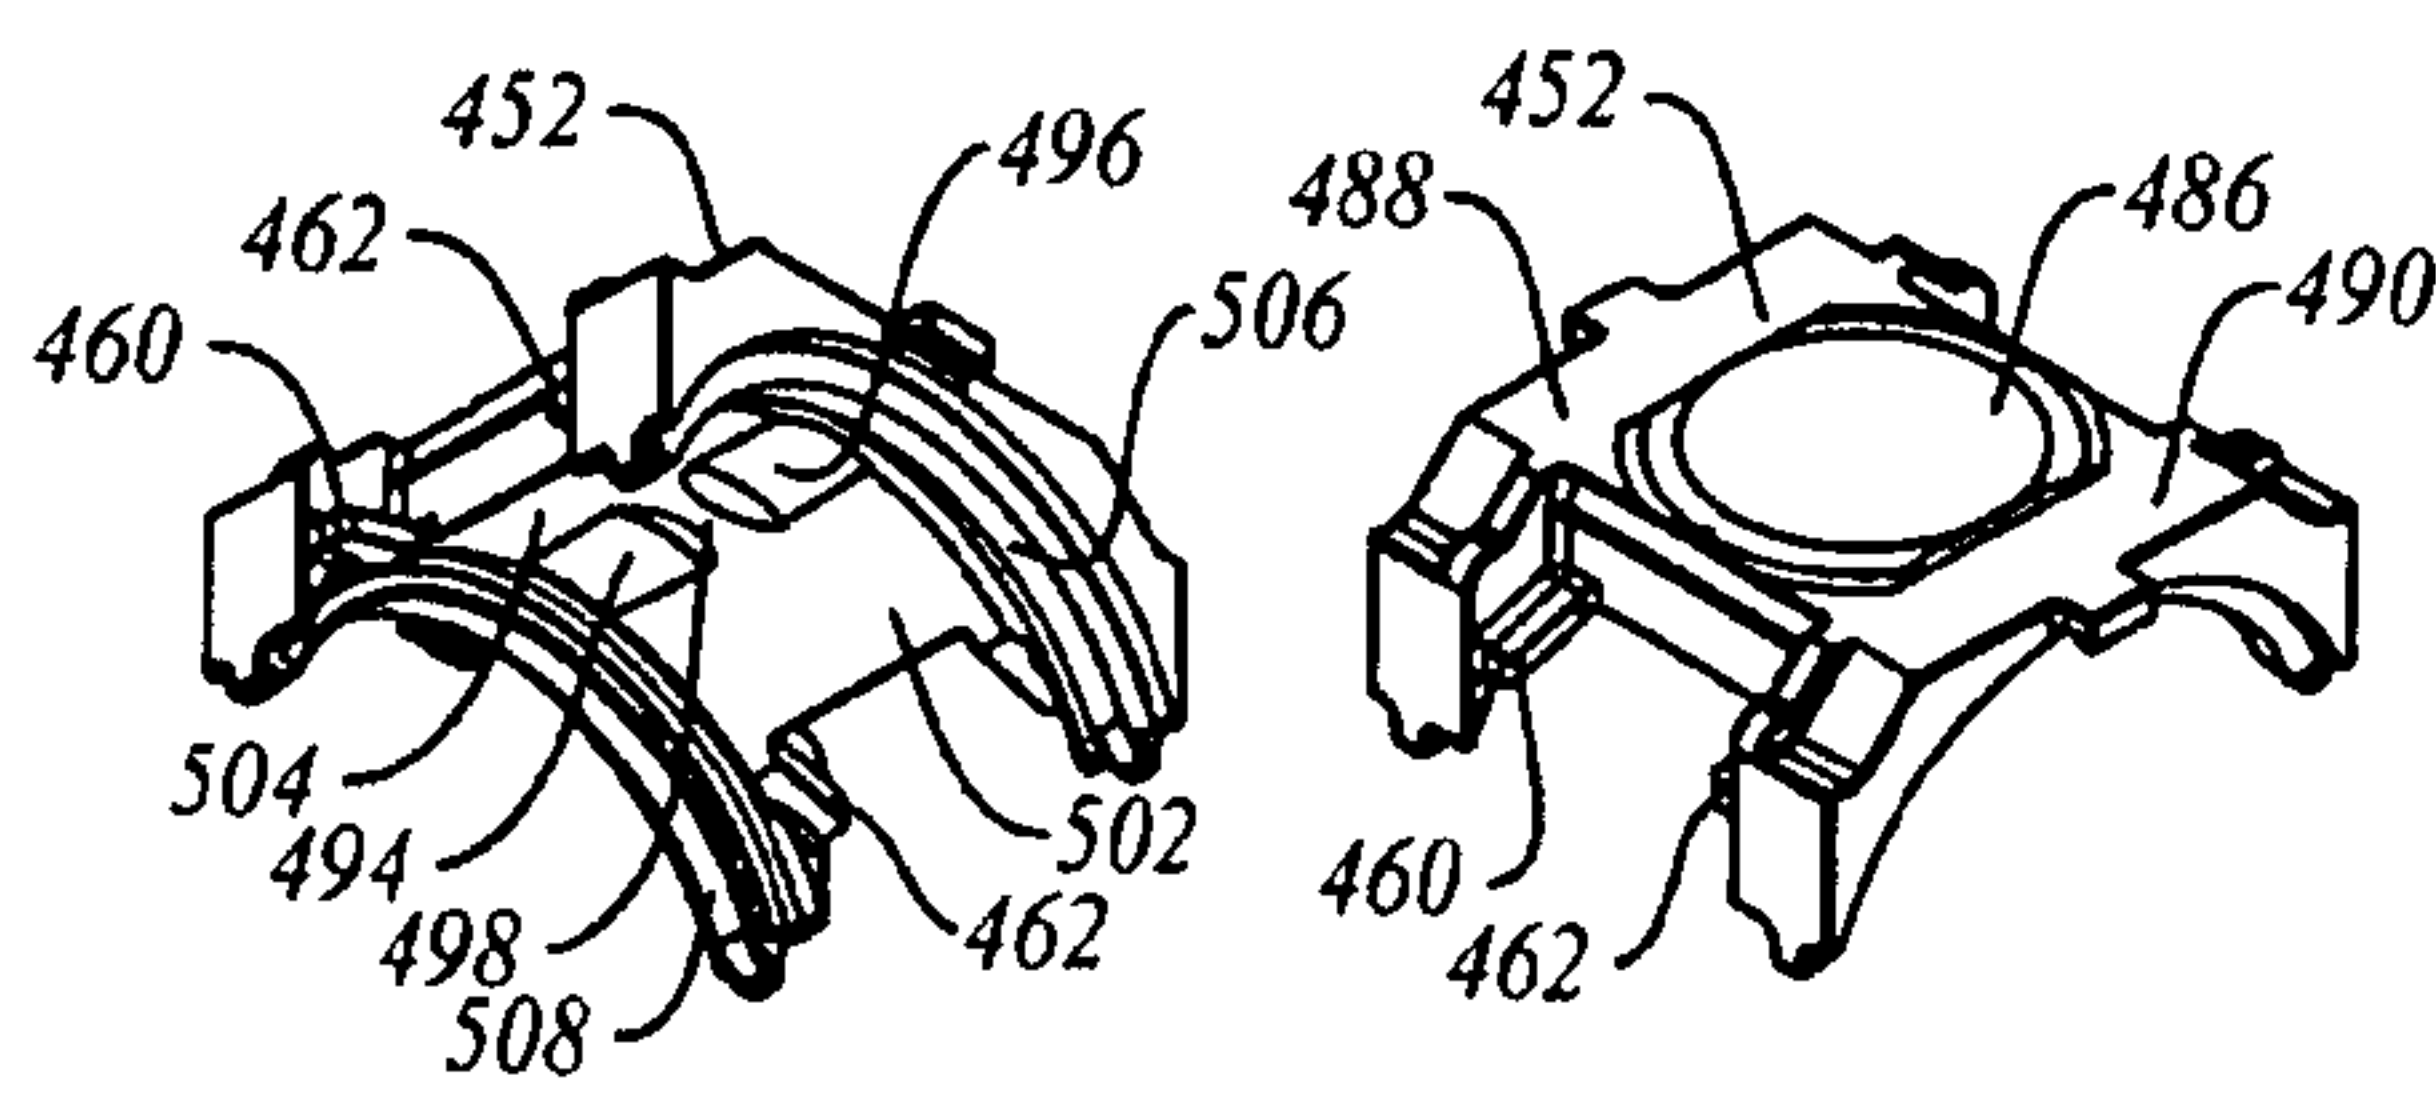
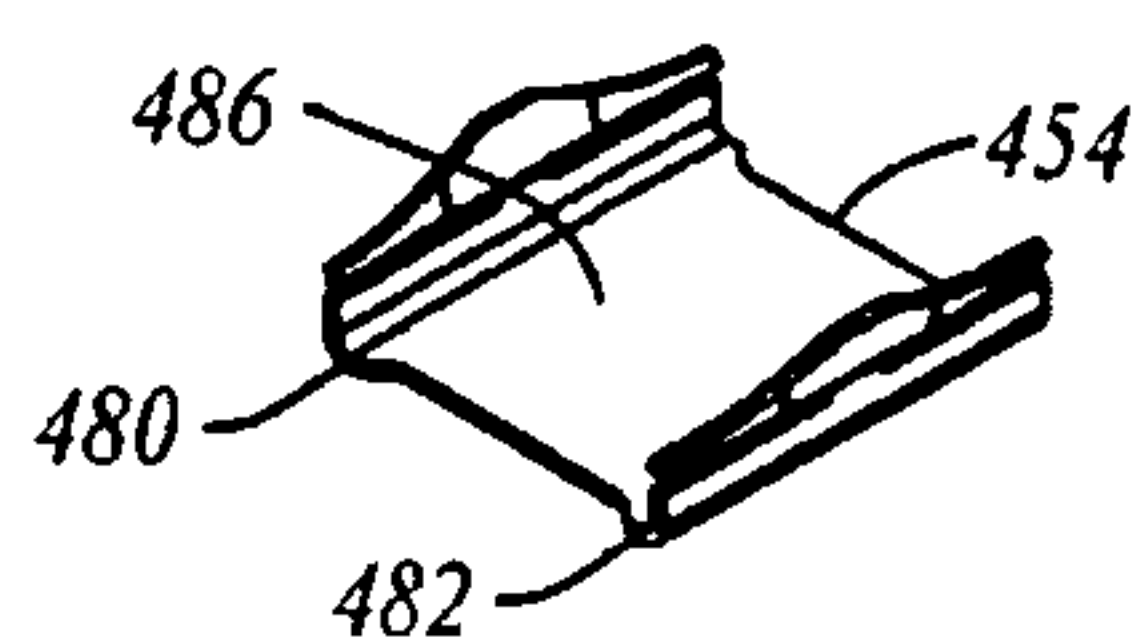


Figure 11b

Figure 11g

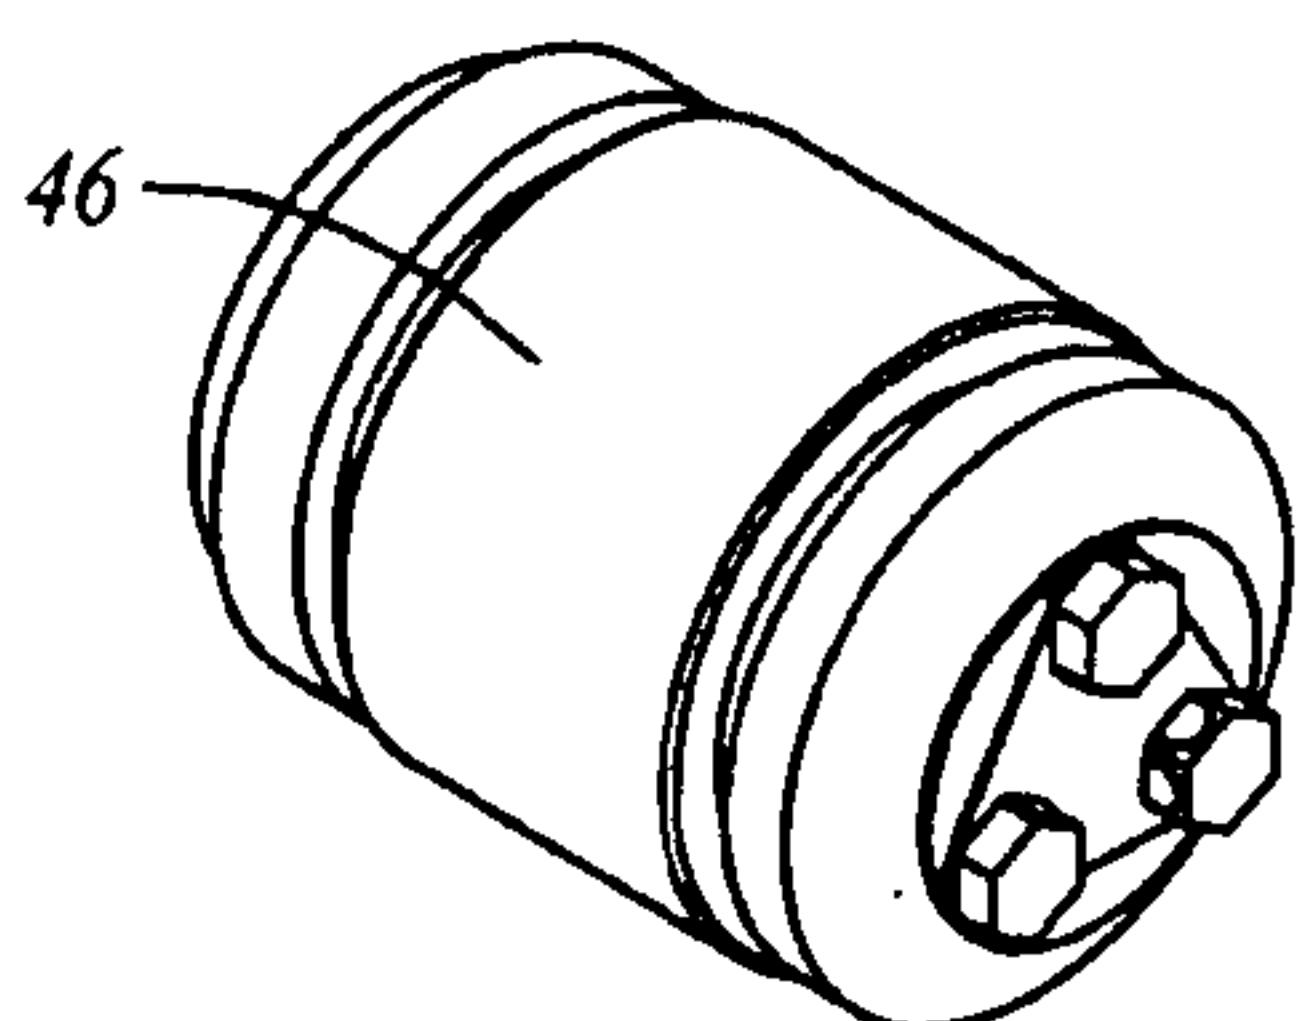
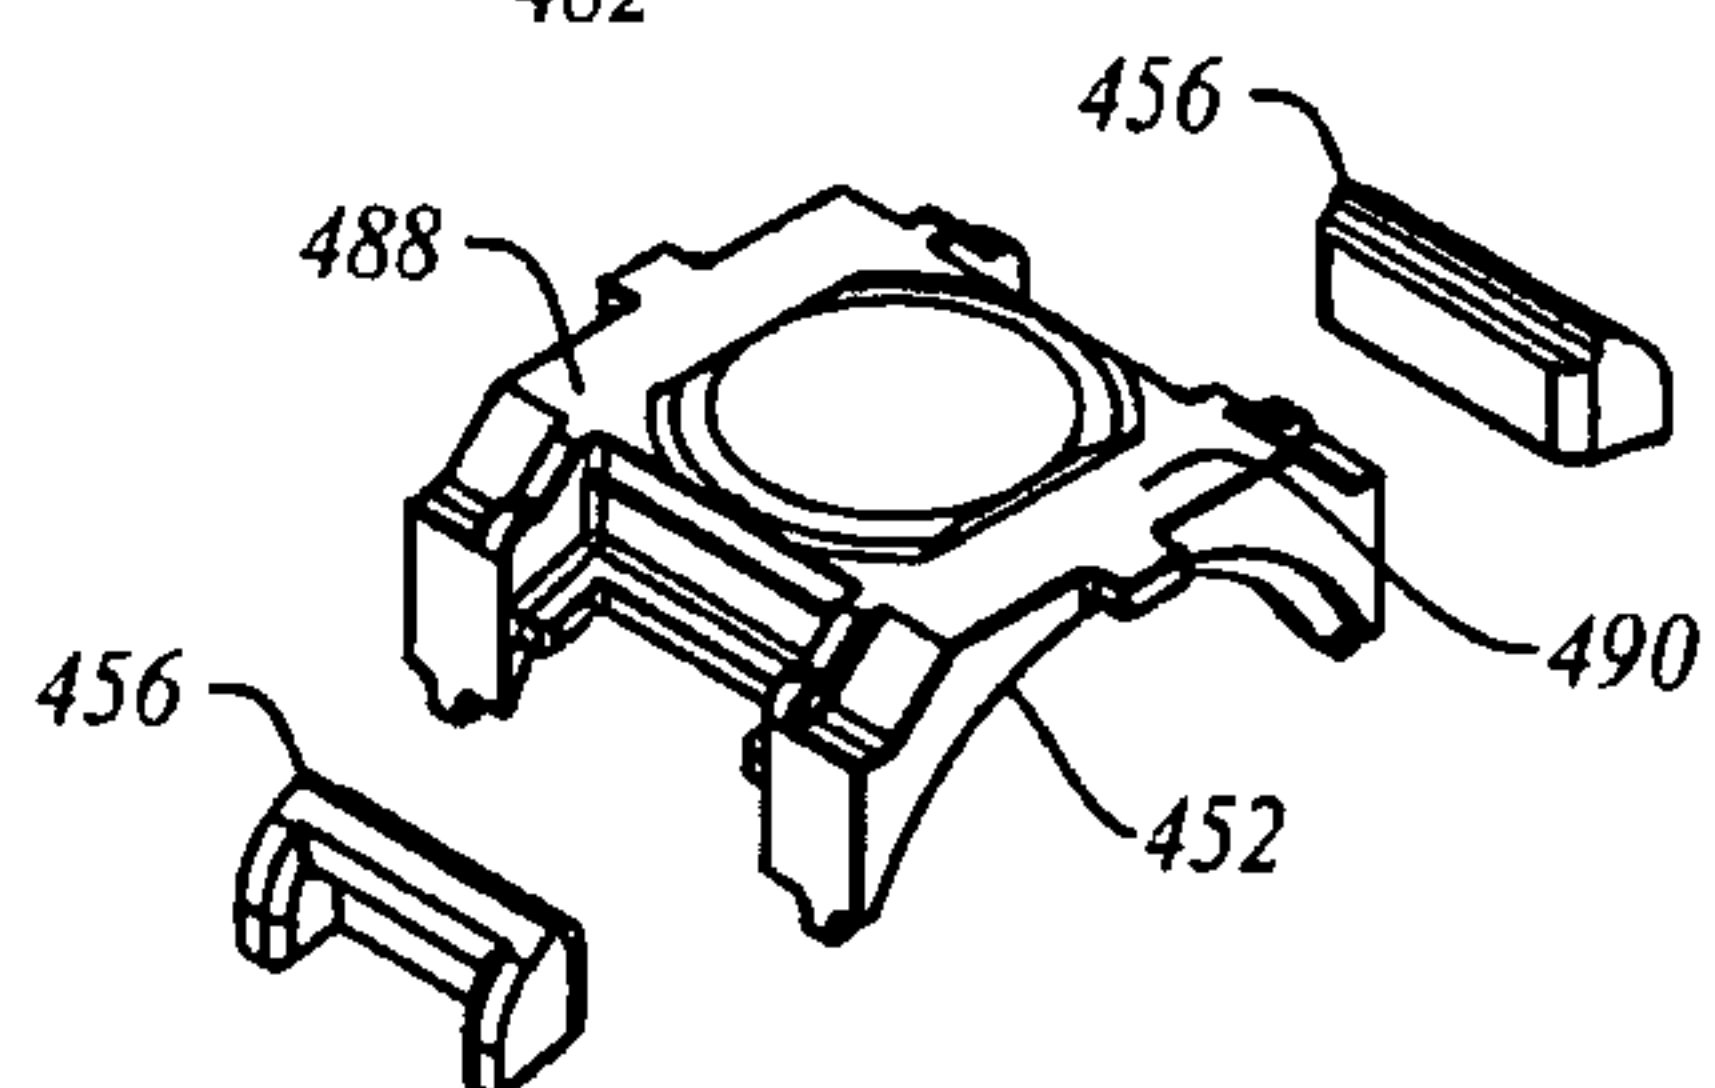


Figure 11a

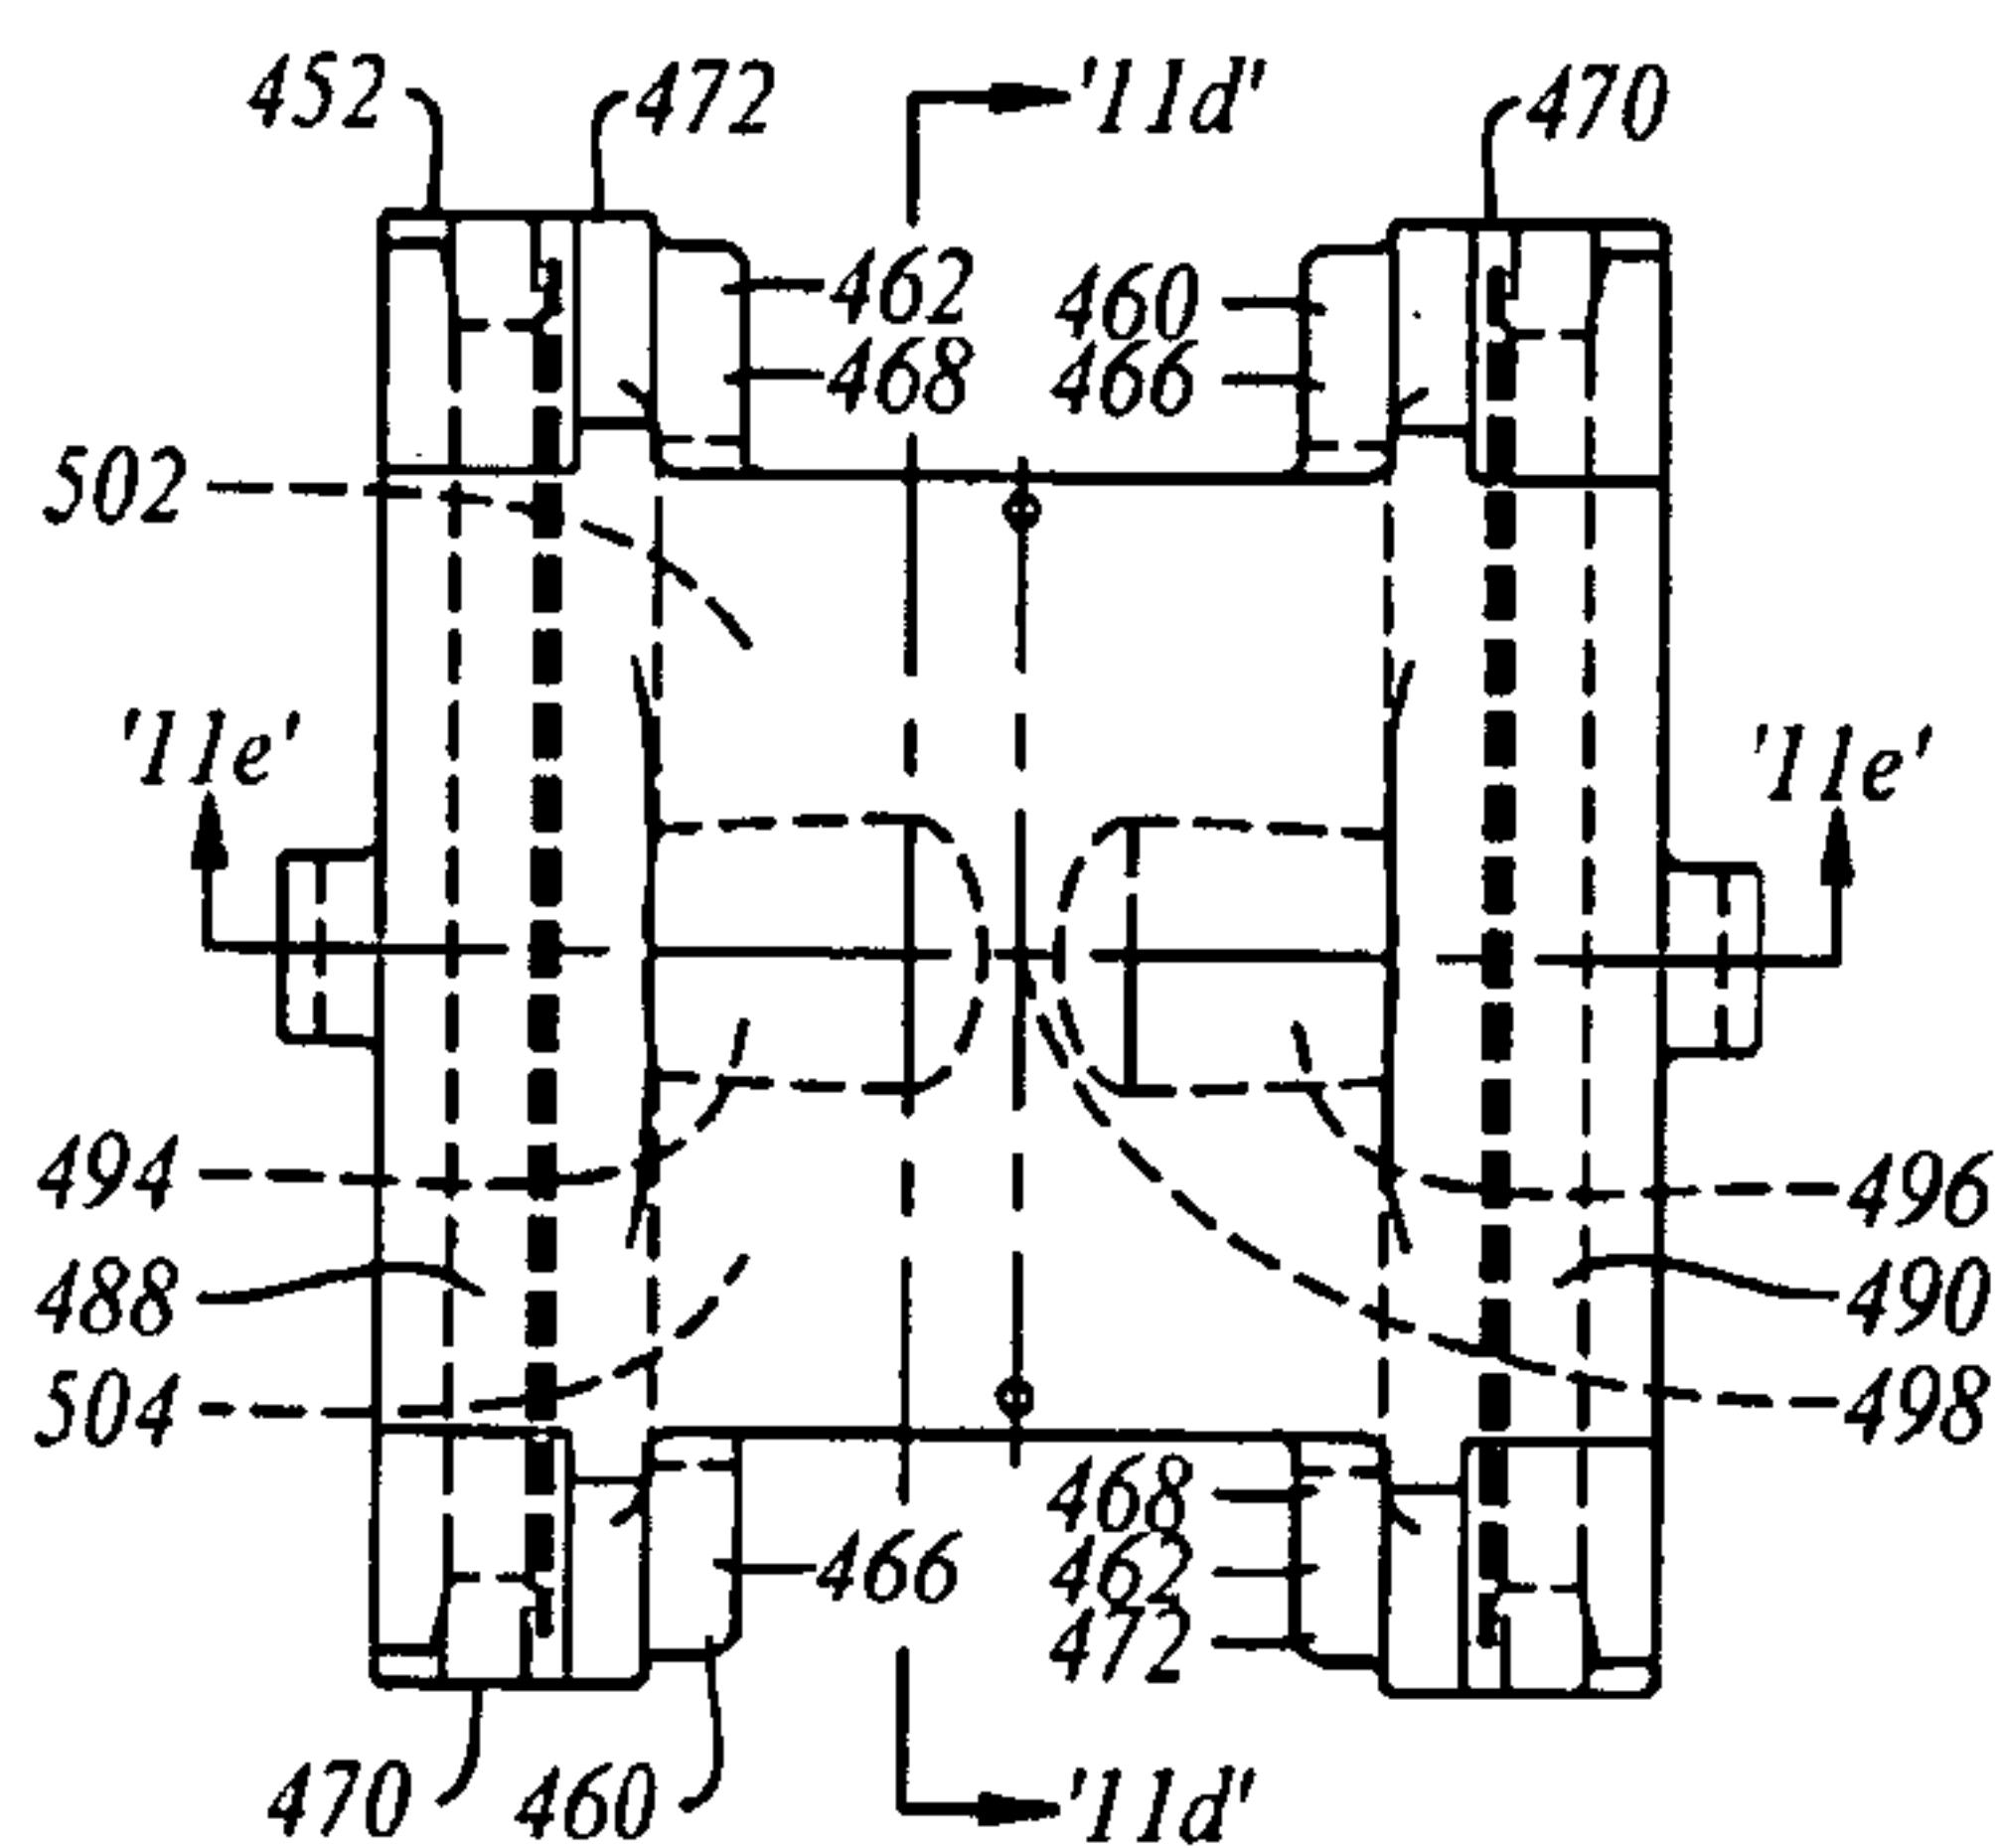


Figure 11c

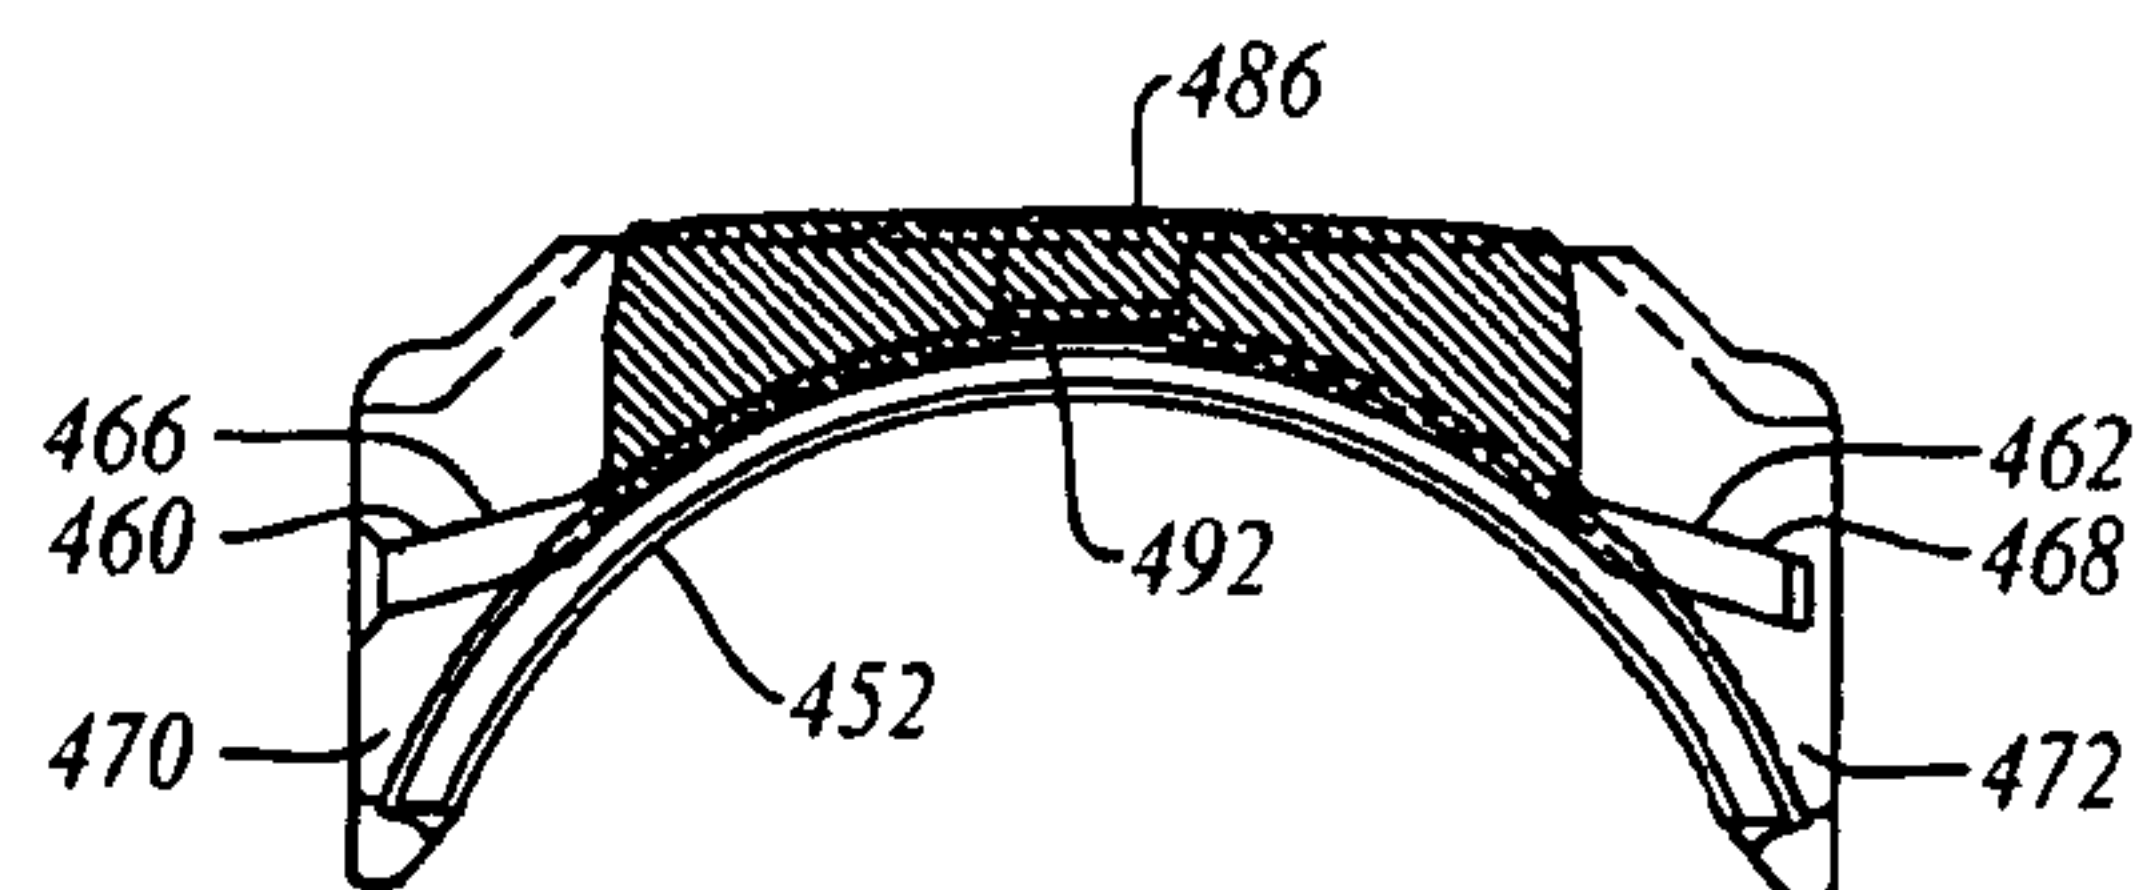


Figure 11d

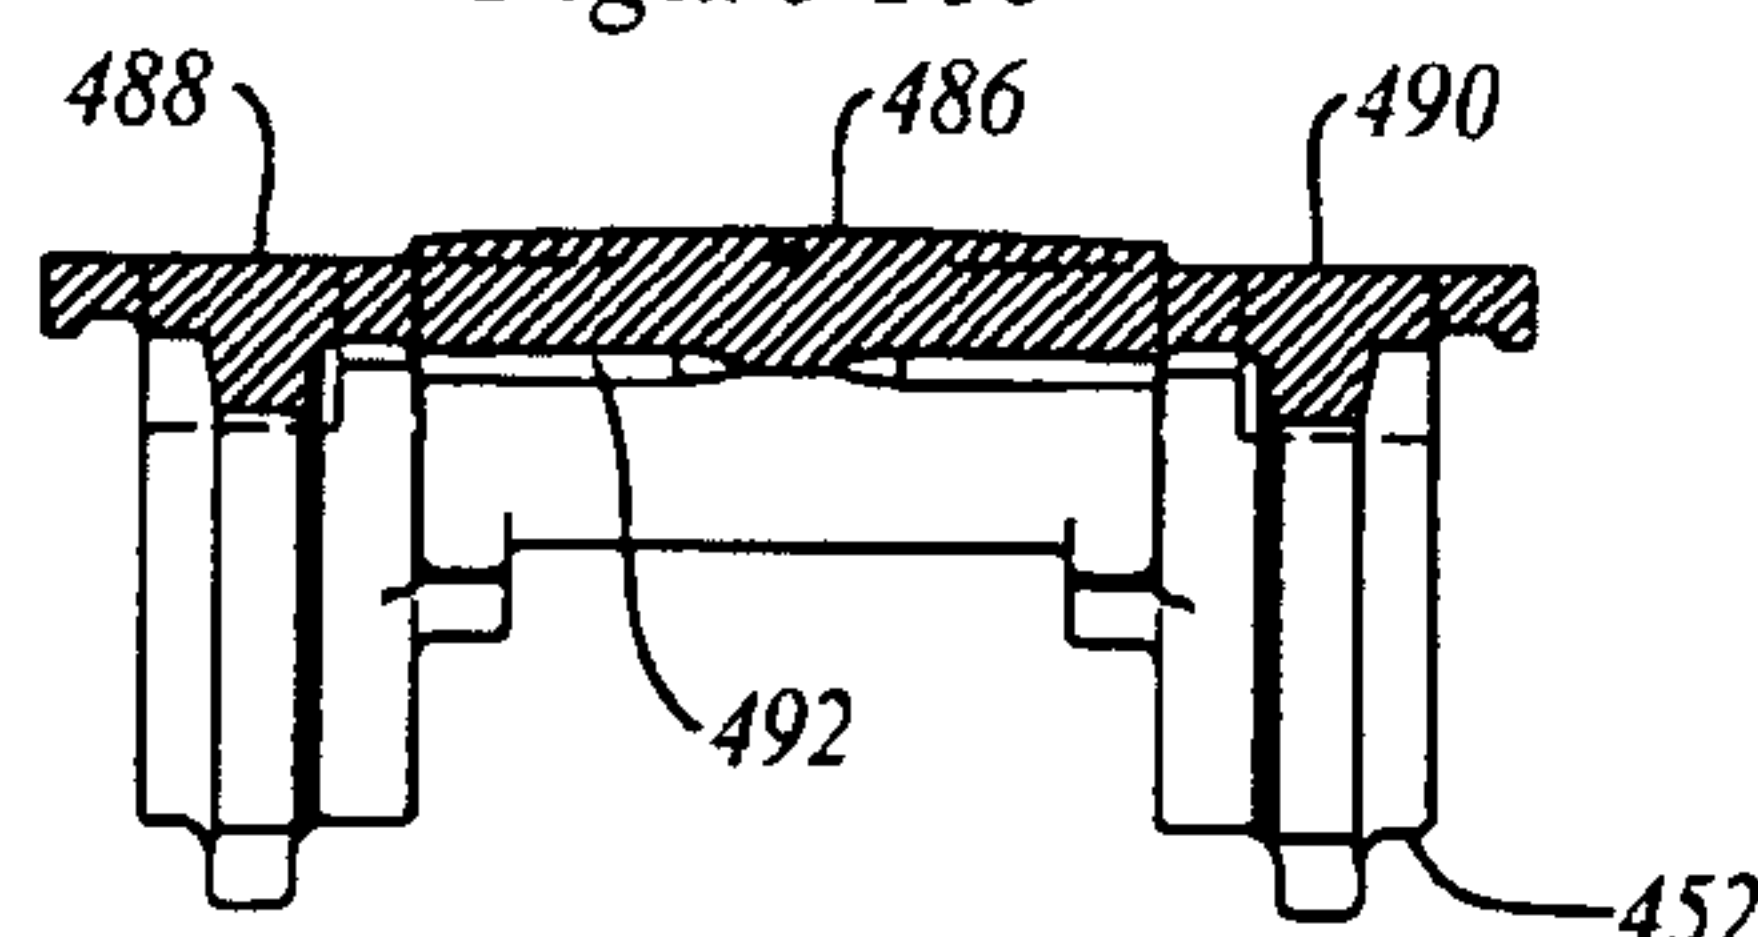


Figure 11e

