




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : G07C 9/00, A61B 5/117 G06K 9/00	A1	(11) International Publication Number: WO 93/18486 (43) International Publication Date: 16 September 1993 (16.09.93)
(21) International Application Number: PCT/NL93/00048 (22) International Filing Date: 3 March 1993 (03.03.93) (30) Priority data: 9200439 10 March 1992 (10.03.92) NL (71)(72) Applicant and Inventor: VAN RUYVEN, Lodewijk, Johan [NL/NL]; Waalkade 16 d, NL-5301 CH Zaltbommel (NL). (74) Agent: SCEELE, Edial, François; Stelt 14, NL-5521 HB Eersel (NL). (81) Designated States: JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).		Published <i>With international search report.</i>

(54) Title: FRAUD-PROOF IDENTIFICATION SYSTEM**(57) Abstract**

A fraud-proof identification system is provided with a point-to-point in focus imaging system preferably a line tracking arrangement for imaging skin profiles particularly of the thumb-top which contains relatively many continuous lines and avoids mental association with criminal finger print actions. Characteristics from skin profiles, preferably mutual line distances progressively measured along a selected skin line are compared with such information stocked in the system in order to discriminate upon authorization. A line tracking system is preferably provided with a servo-mechanism, a control signal of which acting as measuring signal.

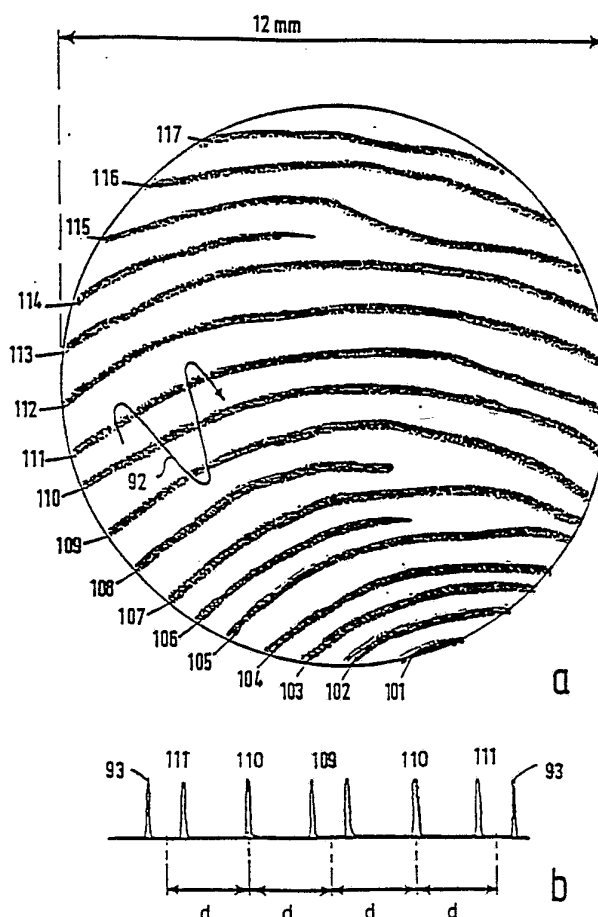

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LJ	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TG	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

Fraud-proof identification system.

The invention relates to a fraud-proof identification system. The invention also pertains to means to be applied in such systems.

Fraud-proof identification systems, usable to discriminate whether or not a person is authorized to do a certain action. Known systems of this kind are usually
5 based on a code such as a pin-code etcetera which is exclusively known to an authorized person. The need to make use of tools such as a card with a personal code or something equivalent has the disadvantage that an authorized person must have this available at the right place and at the right time. Such a tool can relatively easily come into the hands of un-authorized persons. Codes do have the disadvantage that they can be stolen and need
10 to be remembered at any time by the authorized persons.

It is an object of the invention to mitigate these drawbacks and to this end a fraud-proof identification system as listed in the preamble is characterized in that it is provided with means for an automatic position dependent focusing recording of skin-line patterns and with means to extract geometrical characteristics from such a recording of
15 a skin-line profile to be compared with characteristics stored in a memory.

Position dependent focusing in reading finger prints can be realized by adjusting the optical axis of the detection system preferably by an electro-mechanical system. With such a system it is possible to track any finger line and to determine its geometrical characteristics. The measured characteristics of a finger line can be
20 compared with finger line characteristics stored in a memory. The distance between finger lines can now be measured very accurately as a function of the distance measured along a selected line. This measurement technique yields a continuous function having a single derivative in every point. The finger line representation is independent of finger orientation and independent of the pressure. Since such a line representation is unique
25 for each finger line pattern a unique code can be extracted from the data and compared to a code stored in the memory.

In a system according to the invention the use of memorized codes is avoided and thus stealing and forgetting is not a further problem whilst reconstruction of

the finger print line profile from the code is impossible.

The fact that the imaging system for recording finger print profiles works with an automatic position dependent focusing system, no problem due to different finger positioning or finger pressure on an imaging surface occurs characteristics from a skin-profile or a complete skin line representation are compared with characteristics stored in any memory consisting also of selected characteristics or a full skin line profile.

In a preferred embodiment the finger line pattern is obtained by pressing the finger against an elastomer foil such as described in US 4,428,670 or EP 45 915. Preferably the foil is covered with a reflective coating. The reflecting elastomer layer copies the skin line pattern being represented by a relief giving concave and convex regions. These ridges act as concave and convex mirrors in the optical system amplifying the relief such that an optical focusing system such as a CD stylus generates an amplified electrical focusing signal. This signal can be used to determine the valleys and ridges of the skin profile. Now a total finger line profile can be realized from as well the ridges as the valleys. The electrical focusing signal used for this registration now can be used for identification. The reflecting covering also avoids laser light to escape from the system. A plane surface of a field lens or a side wall of a prism of the optical system acts as substrate for the foil. The foil follows ribs of the skin profile and creates a reflecting surface readable in an optical system. With an electric conductive reflecting covering use can be made from the well known tangens delta method to discriminate between real skin pressure as an artificial print earlier registered on a rubber foil or the like.

In a preferred embodiment the system for selecting characteristics geometrical parts from the skin line profile is provided with a line tracking system for scanning preselected lines out of a total of skin line profiles. From these measurements a unique code can be extracted. The use of such characteristics and of a tracking mechanism in the imaging system substantially reduces the number of information bits to be stored and enables fast measurements. The choice of the amount of characteristics is strongly dependent on the measurement reliability and can be adapted to any required reliability. Use can also be made of information within the skin line profile to direct the tracking system such that an interactive mode of image reading can be realized.

The line tracking system can in particular be provided with an optical

stylus servo mechanism for example as used in commercial CD players and with an error signal for the servo mechanism can also be used as measurement signal.

An effective recording of the geometrical characteristics of a skin profile can be obtained with the help of an optical stylus scanning only a reduced area of the skin profile image or even a single line. Such a scanning systems, particularly for CD players, are described in US 3,876,842 and US 3,909,608. If necessary the amplitude of the scanning can be enlarged with the aid of an optical magnification system such as a microscope objective lens.

The inter finger line distance can be measured as a function of the position along any finger line for all inter finger line distance with respect to the preselected line. If the inter finger line distance relative to a single pre-selected line is sufficient for reliable identification, the selected line may be represented by a straight line to simplify the code extraction procedure. It will be clear that the number of distances measured and the area of the skin profile registered is relevant for the reliability and measuring time.

In a preferred embodiment the tracking system applies an error signal in that the optical axis of a light spot and a detector follows a sinusoidal path guided by the optically detected intersections, thus crossings with finger print lines. The amplitude and frequency of the error signal can be chosen in such a way that the intersections with the neighbouring lines are detected. In this way a very accurate measurement of the inter finger line distances as a function of the position along the line can be measured. In contrast to conventional CCD based systems, individual image pixel intensity is not relevant because the representation system can be arranged to form continuously running lines from a skin line profile and if appropriate a straight line. The inter line distance to a neighbouring line is subsequently measured as a function of the distance travelled along the selected line. The measurement is preferably done twice so that inter line distances of two neighbouring lines next to the selected line are determined. Also distances to lines further away from the selected line can be measured and used to determine characteristics to be compared. Due to the fact that mutual distances are used to extract characteristics for comparison the possibility to fraud with line profile patterns copied earlier and recorded on a flexible foil or the like is strongly reduced.

In a preferred embodiment, a person to be authorized gets a blanc information carrier such as a card as described in FR 2603406. Preferably a thumb-top

profile of the person to be authorized is transferred into a unique code with an optical thumb-top reader and is printed on the blanc card and recorded on a flexible foil or the like is strongly reduced. This action is executed under supervision. The authorized person from then on uses his personal card of which the stored information will be
5 compared with on-line recorded thumb-top profile information. If both images or codes coincide the desired action is released.

In a further embodiment characteristics are formed by mutual line distances measured in running points along a selected line of a skin line profile. Here the amount of data points determines the degree of security of the system and also
10 increase the costs of the system as well as the measuring time. In particular the thumb-top profile is chosen because this profile consists of nearly parallel lines and is thus easily to be processed. In addition the use of the thumb-top avoids any mental association with finger print taking procedure in a police station.

In a further preferred embodiment the imaging system has an object
15 surface for imaging the profile provided with means to discriminate between direct and non-direct actual of a living skin. Preferably use is made here of the well known tangens delta measurement for the capacitance between the human finger and the metal foil method. Thus the use of a line profile recorded earlier and prepared on any support for un-authorized activation of desired action is avoided.

20 The invention is applicable within security systems as described in the already mentioned document FR 2603406 for example money transfer systems in any form. The need for a forgettable pin-code is avoided in that this information is extracted from the skin profile. This skin profile information can be carried by the relevant person or can be stored in the apparatus to be used for admittance. Money transfer
25 systems encompass all kinds of systems to be used in exchange of valuables even if not directly by a human hand. In order to increase the necessity level use can be made of information in a personal card as well as information stored in an apparatus protecting the device.

An embodiment of means to be used in a fraud-proof identification system
30 according to the invention consists of a card provided with relevant characteristics and a skin line profile of an authorized person. Such characteristics can be formed by an image of a skin profile or by a digital code characterizing such a skin profile. Registration thereof in a system according to the invention can be realized optically,

electronically or with any further method. Such a card can be provided with a skin profile whilst coincidence with a real skin profile of the owner of the card gives a signal enabling said person to execute a desired action.

Some preferred embodiments in accordance with the invention will be described in detail hereafter with reference to the drawing. Therein shows

Figure 1 a schematical representation of an identification system according to the invention;

Figure 2 a door-lock system provided with such a system;

Figure 3 a schematical representation of an automatic money supply system provided with such a system and of an information card to be used therein;

Figures 4 and 5 optical imaging systems to be used in such systems;

Figure 6 an example of a line tracking system to be used;

Figure 7 an example of a thumb-top profile with mutual line distances determinating peaks;

Figure 8 a general block scheme of such a system;

Figure 9 progressive steps in image enhancement of a skin profile to be used in such a system; and

Figure 10 an example of an embodiment of such a system.

A fraud-proof system as given in Figure 1 shows a knob 2 for activating a lock 4 of a secured arrangement 6. The knob 2 is provided with a skin profile imaging system 8 comprising a CCD camera 7 or a line tracking device mounted reverse to a skin profile object surface 10. For imaging a skin profile particularly of a thumb-top the object surface 10 is ergonomically designed for a thumb-top 12 which preferably also need to be positioned there fore activating the lock 4. Signal leads 5 of the imaging system are connected to an electronic processing unit 14 of the fraud-proof system. Such a processing arrangement encloses a signal processing unit 15, a memory 16 to which potentially a hard copy unit 17 is coupled. Also skin profiles of non-authorized persons can be registered facilitating tracing thereof. The processing unit 14 further comprises a comparison device 18 in which an on-line registered skin profile can be compared with skin profile information previously registered in the memory. Although shown as separate blocks, the electronic processing arrangement 14 can be very small when build up with micro electronic elements.

Figure 2 shows as an example a door-lock system 20 with a latch 22

having the shape of a normal door latch. The lock system 20 is provided with a knob 24 which must be pushed-in for opening a door 28. The knob preferably is shaped in an ergonomical thumb-top location activating the arrangement. The knob 24 is provided with a skin profile imaging system according to the invention. Care should be taken that
5 activating the lock without thumb-top pressing can also not be executed by authorized persons. Authorized persons thus should know that this must be done and consequently it is not a necessity for the thumb-top location to be ergonomically located.

Further parts of the system like a processing unit 14 preferably are located near to the door lock 26 of the door 28.

10 A security system also can enclose a lot of secured arrangements being connected to a common electronic processor for example for safeguarding a complex building or the like.

The processing unit comprises a memory in which a group of authorized skin profiles are stacked. If an on-line read-in profile belongs to the group, the action looked for can
15 be executed. If the read-in profile does not belong to the stacked groups, the read-in profile may nevertheless be registered in order to facilitate tracing of the relevant person. To this end the system can directly be coupled to a guard station either.

Figure 3a shows an automatic money supply arrangement according to the invention provided with an electronic processing unit 14 with a signal processing unit
20 15, a memory 16, a comparison unit 18 and a line follower 19 preferably provided with a servo-mechanism such as described in US 4,491,940. A correction signal of the servo-mechanism now can be joined to the comparison unit 18. Information for the line follower can be taken from the signal processing unit 15 or alternatively directly from an imaging surface of a skin line profile imaging system. The money supply
25 arrangement further shows a housing 21 for a card pick-up unit 23, a skin line profile pick-up system indicated here as known 25 for thumb-top profile registration. The now can be arranged that the card pick-up device can exclusively be used after pushing in the knobs and the knobs can be provided with means enabling discrimination between direct and non-direct contact between the object surface and a skin profile preferably
30 these means are based on tangens delta measuring. The housing 21 further comprises a keyboard 27 for example to type in information, such as the amount of money asked for etcetera, a discriminator 29 enabling to act with a money supply upon approval of the registered skin profile and the skin profile taken in on-line.

Figure 3b shows a card 33 to be used in a fraud-proof system according to the invention. Such a card may comprise an area 35 for a passport photograph or any other identifying image information, an area 37 for alpha-numerical information such as a running number etcetera and an area 39 for a skin profile particularly a thumb-top profile directly imaged from a thumb-top and registered in a coded shape, preferably. Such a card can be arranged to be used in a fraud-proof system for example in the money supply system as described. It is alternatively also possible to use a real skin profile registered on the card to be read out by an arrangement according to the invention. To this end the arrangement is provided with a card support enabling translation of the card in the thumb-top profile imaging system. The arrangement generates a signal upon coincidence in position and shape of the profile. The signal indicates that the action looked for is allowed and possible. Such a signal can be a light signal generated in a phosphor layer fixed to the card and having preferably a specific spectrum to be discriminated by the system. Alternatively an electric signal can be generated.

Figure 4 shows schematically an optical imaging system arranged to record an image of a skin profile, preferably with a reduced scale. A base surface 52 of a prism 50 functions as object surface for a skin profile to be imaged. A light beam 56 from a light source 58 for example an LED or a laser is reflected on a mirror 60 being arranged on an inner wall of a hollow cylinder 62 preferably provided in a secured system. The light beam is parallelized by a field lens 66 and impinges as a parallel beam 67 upon the inner side of the base surface 52 of the prism 50. An image supporting light beam 68 being reflected at the object surface forms with the help of a second field lens 70, a second mirror 72 and a lens 74 provides an image on the image surface 7 here for example of a CCD matrix 76.

The field lenses are preferably optically bonded to the prism and are to this end preferably plan convex shaped or may alternatively form part of the prism. The function of the field lenses can be fulfilled with mirrors, surfaces of which should be parabolically adapted to the optical imaging system. The lens strength determined by the distance to the light source or to an image of the light source in the imaging lens can be optimized in order to obtain an appropriate geometrical structure.

Figure 5 shows an optical imaging system discriminating on the base of whether or not total reflection occurs from the object surface for the skin profile to be

imaged. Such an action easily enables to work digitized in the imaging system already, substantially facilitating further signal processing. The system is provided with a prism 50 and field lenses 66 and 70. In order to ensure a well defined discrimination between total reflection and non-total reflection, the light beam illuminating the prism should have a high degree of parallelism stipulating relatively high quality standards to the optical elements. A mirror system is less appropriate here but can nevertheless be used. For the imaging on an imaging surface for a sensor 76 there is incorporated an imaging lens 74. As an example a 45° prism 50 is used being compared of material having an index of refraction of about 1,5 resulting in a Brewster angle of about 42° . This stipulates a top half beam opening for the illuminating light beam of about 3° . A field lens with a focusing distance of about 45 mm then gives at the image lens 74 a beam diameter of about 4,5 mm easily fulfilling the tasks to fill the whole opening thereof. If a thumb-top profile 55 of a thumb 12 is pushed on the base surface 52 of the prism 50, skin ribs of the thumb-top destroy total reflection of light infringing on the inner surface 52. At the location of the ribs the light is reflected in a substantial lower degree and thus dark line profiles in a light image field appear. This pattern is imaged with the aid of an imaging lens 74 on the image surface 7, potentially an entrance surface of a CCD sensor 76 having a sensitive surface geometry of for example $6,0 \times 4,5 \text{ mm}^2$ and being composed of detecting elements of about $15 \times 10 \text{ }\mu\text{m}^2$. By adjusting a small angle between the cardinal plane of lens 74 and the image surface 7 an in focus image can be realized over the whole surface. The image surface 7 preferably may have a cross section adapted to the area to be scanned by a light pen skin profile registration according to the invention.

An example of such a light pen skin profile registration system is given in Figure 6. The system shows a light pen device 82 supported by a ball bearing 80. Thus a light spot 84 can be scanned over an image of a skin profile in the image plane 7 with the help of a first pair of beam bending elements 87 and a second pair of beam bending elements 88. For the imaging of a thumb-top profile 55 of a thumb 12 the system comprises a field lens 89, a surface 52 of which forms an entrance window thus an object plane for an optical demagnification system 90 with an objective lens 91. The optical demagnification system 90 images the thumb-top profile and reduces the measuring of the profile with about a factor 20. Thus an object plane having a diameter of for example 12 mm as given in Figure 7 is reduced to an image to be scanned of

about 0,6 mm. With beam bending elements 87 being preferably electromagnetic coils the light spot is scanned preferably in the direction of skin ribs indicated 101 through 117 in Figure 7a. The beam bending elements 88 also are electromagnetic coils and ensure skin line following along said skin ribs. thus a light spot 84 wobbles for example
5 with a frequency of 1 kHz across the lines of the profile as indicated with a line 92 in Figure 7. Line crossings generate measuring peaks 83 and thus distances d_i to a central line 100 as a reference line can be determined. The choice of the number of lines to which distances are measured define the degree of security of the measuring.

With respect to a block scheme as given in Figure 8 the working of a
10 preferred embodiment according to the invention will now be described. The block scheme shows an imaging system 121 to be compared with element 21 in Figure 3a and having an input opening 122 for example for an identification card, an opening 124 for location of a finger- or thumb-top for skin profile reading and a display 126. The thumb-top location may be performed such that only after a right thumb-top positioning
15 the entrance for the card becomes opened. Information read from the card activates a memory 128 from which stocked information is furnished to the comparison unit 130 for identification. If the card functions as information support of skin profile information this information can be given directly to the comparison device 130. The registered thumb-top information is supplied to a conversion device 132 or if the profile
20 image as such is used, this will be directly supplied to the comparison unit. If the comparison is positive the secured system 134 becomes accessible. If the comparison is negative a second proof will potentially be asked for registration of profiles for registration of arrival and departure etcetera.

Figure 9 shows three successive stages in image enhancement to be
25 processed in a system according to the invention. Figure 9a shows an image as registered with a line tracking system from a thumb-top profile. In Figure 9 the profile lines or ribs are transformed into continuous lines and Figure 9c mathematical white lines deduced from the lines in Figure 9b indicating central lines from those lines. Figure 9d shows schematically such a line profile image in which a selected line, line
30 number 110 in Figure 7, Figures 9a, 9b and 9c is converted into a straight line from which distances to neighbouring lines are determined.

An apparatus as given in Figure 10 shows a base plate 200 on which two clamping leaves 202 are mounted enclosing a leaf spring system 204 to enable lateral

movement with the aid of a linear translation drive 206 such as an inchworm known in the literature. Upon a mounting plate 208 a scanning system 210 is mounted whereof a CD light pen system for radial movement with a microscope objective lens 214, a mirror system comprising three mirrors 216 to fold the light beam path for the light beam to be used for the recording of a finger print, an object holder 218 to put the having an object surface corresponding with the surface 55 in Figure 6. The object plane is for example a flat plane of a plane convex field lens acting as object window for the imaging system. The object surface may be provided with a resilient foil to improve imaging as described. This arrangement results in a rather compact apparatus, most parts of which are known elements and thus can be relatively cheap, but nevertheless be very reliable.

CLAIMS:

1. Fraud-proof identification system characterized in that it comprises means for automatic position dependent focusing for recording skin line profiles and means to extract geometrical characteristics from such recordings to be compared with characteristics stored in a memory.
- 5 2. Fraud-proof system as claimed in Claim 1 characterized in that the skin line profile recording means comprise a line tracking system for scanning selected lines of the profile.
3. Fraud-proof system as claimed in Claim 2 characterized in that the line tracking system is provided with a servo-mechanism which generates an error signal to
10 be used for determination of a line trajectory.
4. Fraud-proof system as claimed in Claim 2 characterized in that the line tracking system is provided with a servo-mechanism generating an error signal enlarged to encompass neighbouring lines in order to determinate interline distances as a function of the travelled distance along a selected finger line.
- 15 5. Fraud-proof system as claimed in Claim 1, 2, 3 or 4, characterized in that a finger should be pressed on an elastic layer provided with a reflecting covering generating skin profiles in a relief to be tracked by an optical stylus.
6. Fraud-proof system as claimed in Claim 1 or 5 characterized in that a relief of a finger print is generated on a reflecting foil on an object surface, a focusing
20 signal for imaging valleys and ribs of the finger print being used as identification signal.
7. Fraud-proof system as claimed in Claim 1 characterized in that geometrical characteristics of skin line profiles are represented by interline distance of the profile as a function of the distance travelled over a finger line profile.
8. Fraud-proof system as claimed in Claims 2, 3, 4, 5, 6 or 7 characterized
25 in that the line tracking system is controlled by a signal derived from stored information in an interactive mode of operation.
9. Fraud-proof system as claimed in any one of the preceding Claims characterized in that geometrical characteristics are derived from distances between

skin profile lines of a thumb-top profile.

10. Fraud-proof system as claimed in any one of the preceding Claims characterized in that an object surface for the imaging system comprises means for discriminating between direct and indirect contact between an object surface of a skin
- 5 lien profile support and a profile object surface.
11. Fraud-proof system as claimed in any one of the preceding Claims characterized in that the stored information is recording an information carrier to be used in a safeguarded system.
12. Fraud-proof system as claimed in any one of the preceding Claims
- 10 characterized in that the memory for stored information is part of an internal or external memory for a processor of a safeguarded system.
13. Information carrier provided with a memory for skin line profile information to be used in a fraud-proof system as claimed in any one of the preceding Claims.

1/7

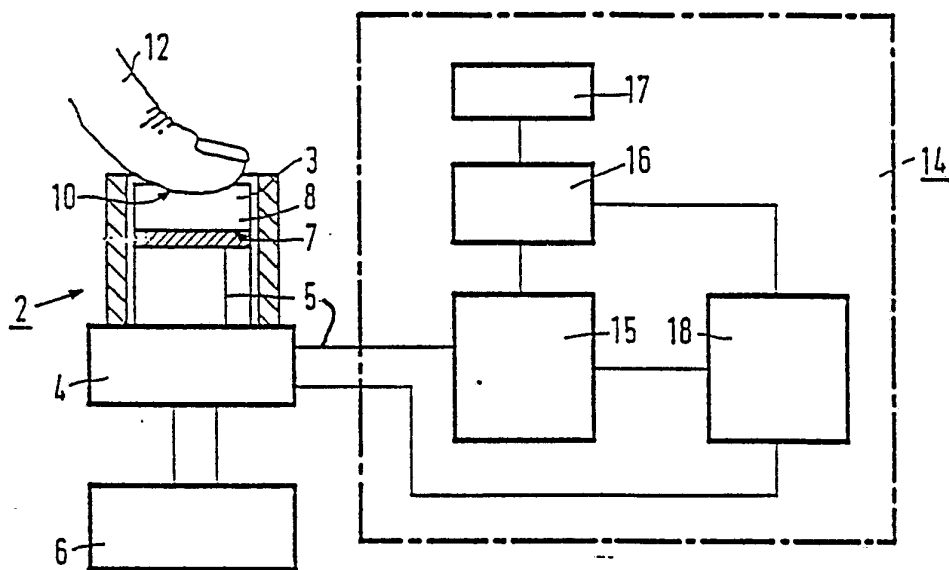
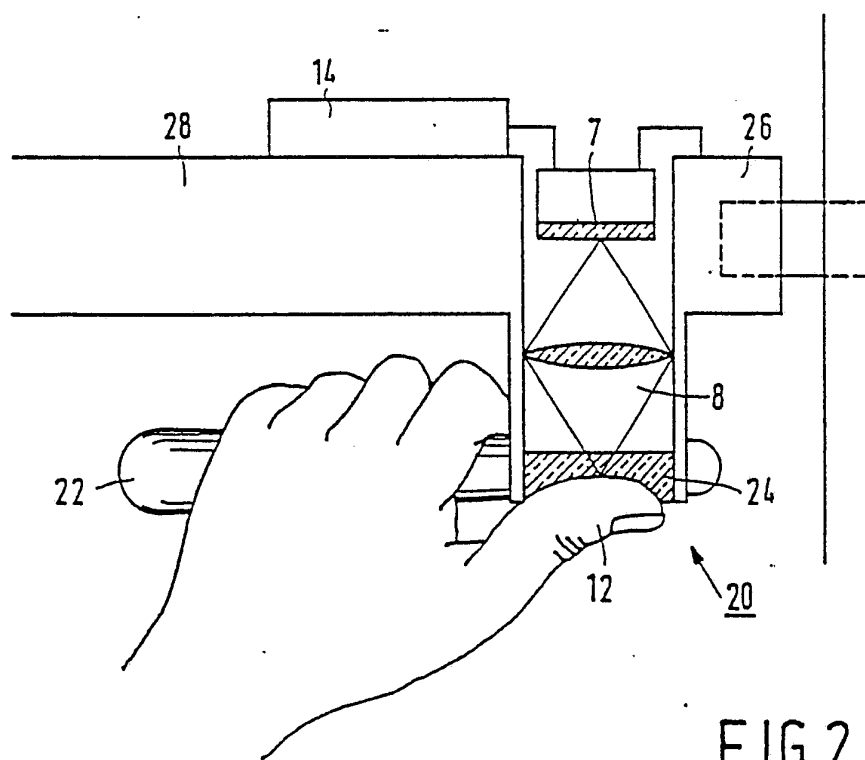


FIG.1



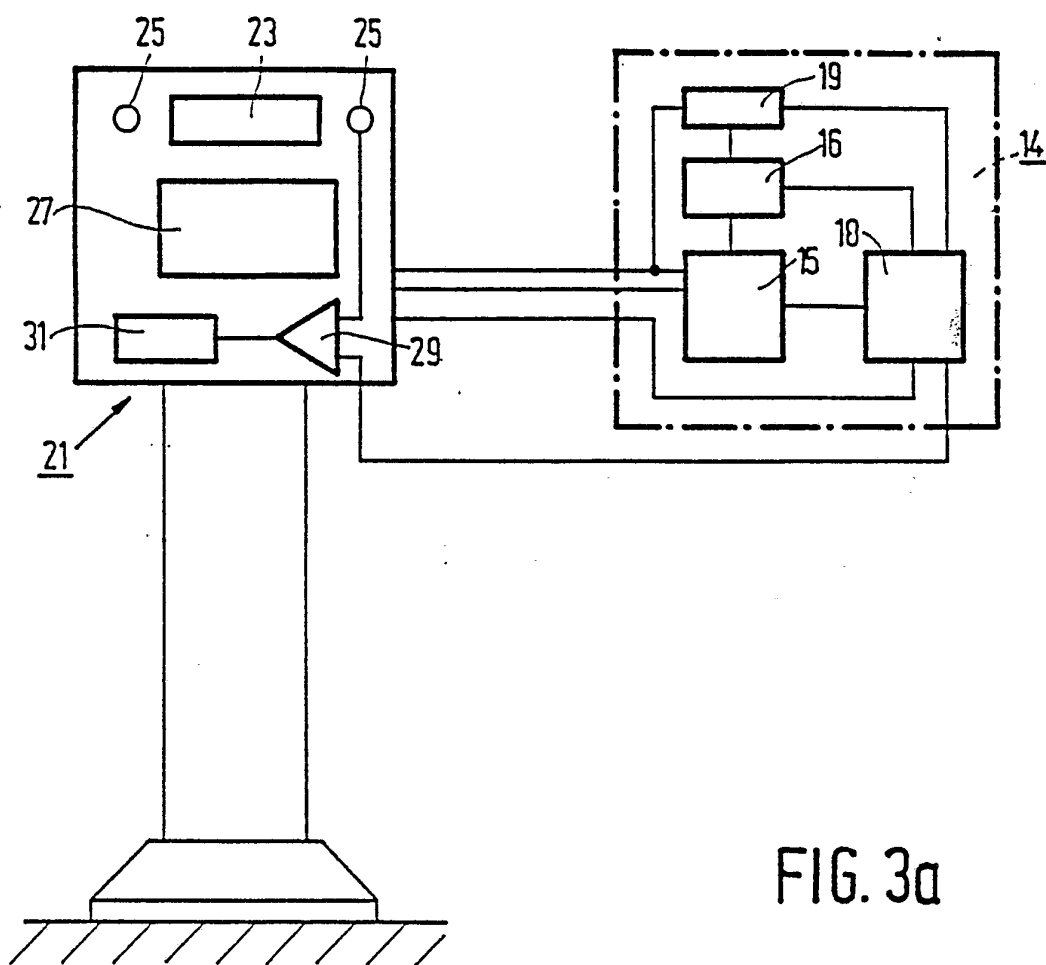


FIG. 3a

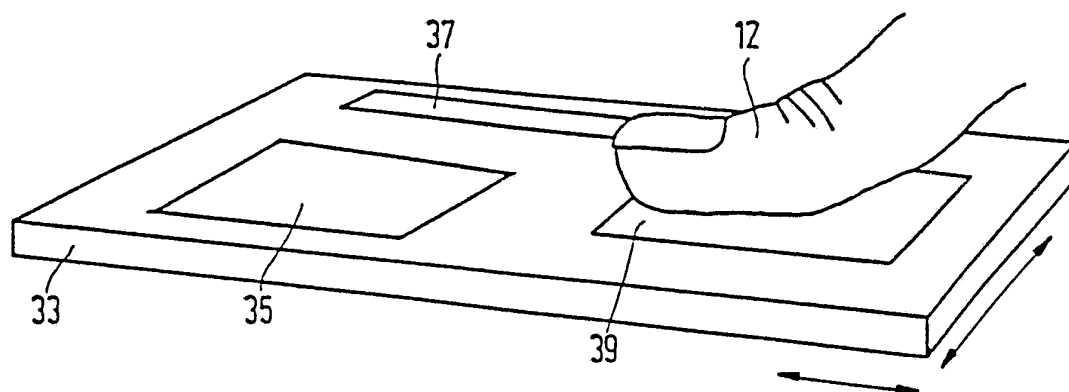


FIG. 3b

3/7

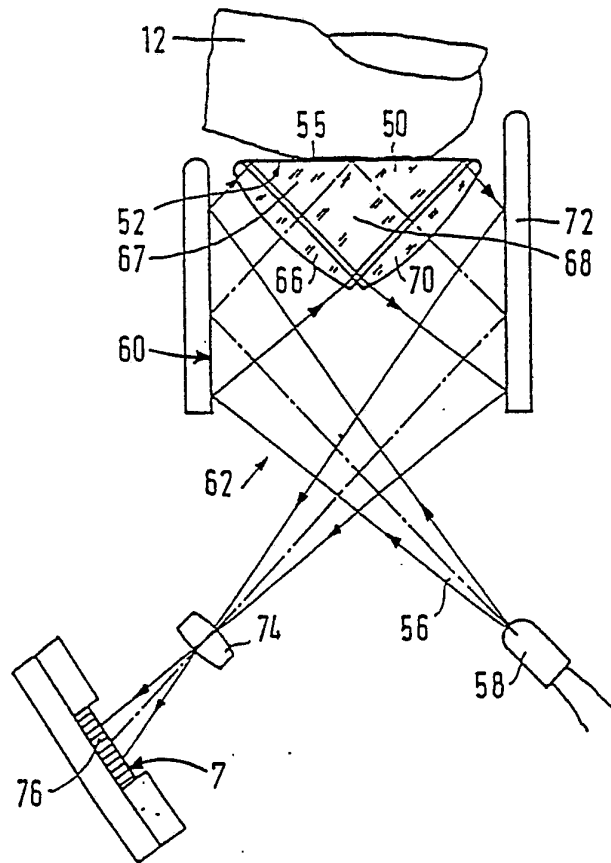


FIG. 4

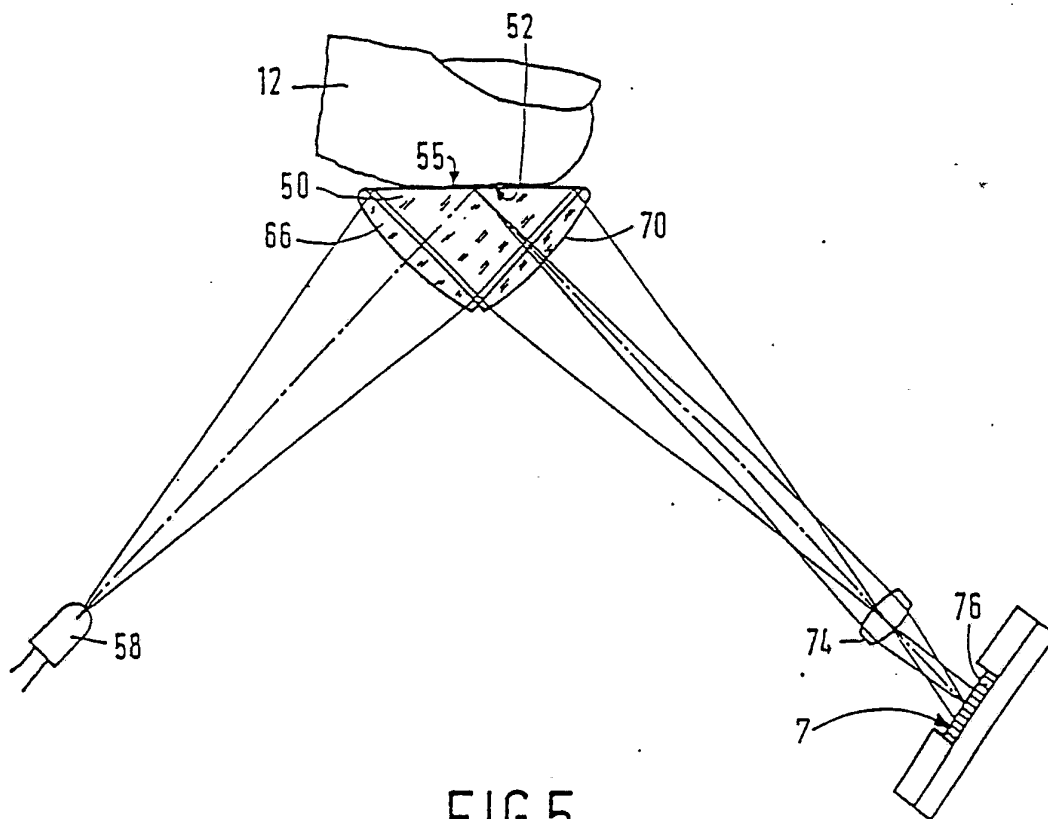
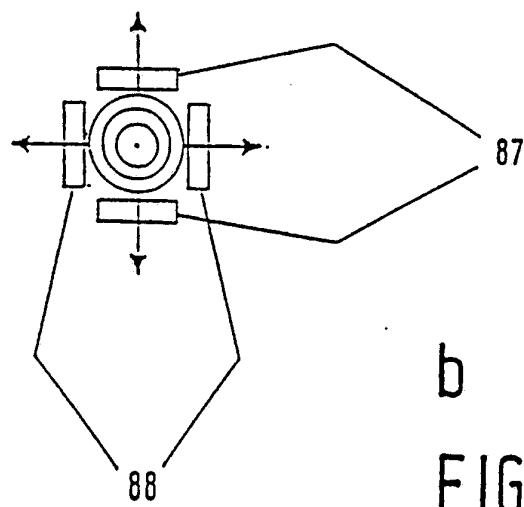
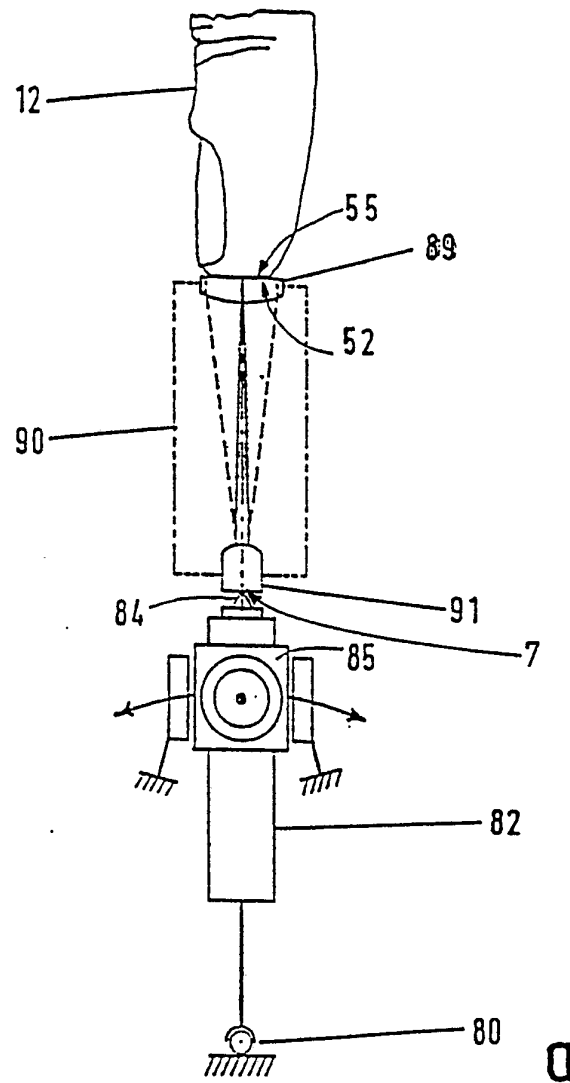


FIG. 5

4/7

b
FIG. 6

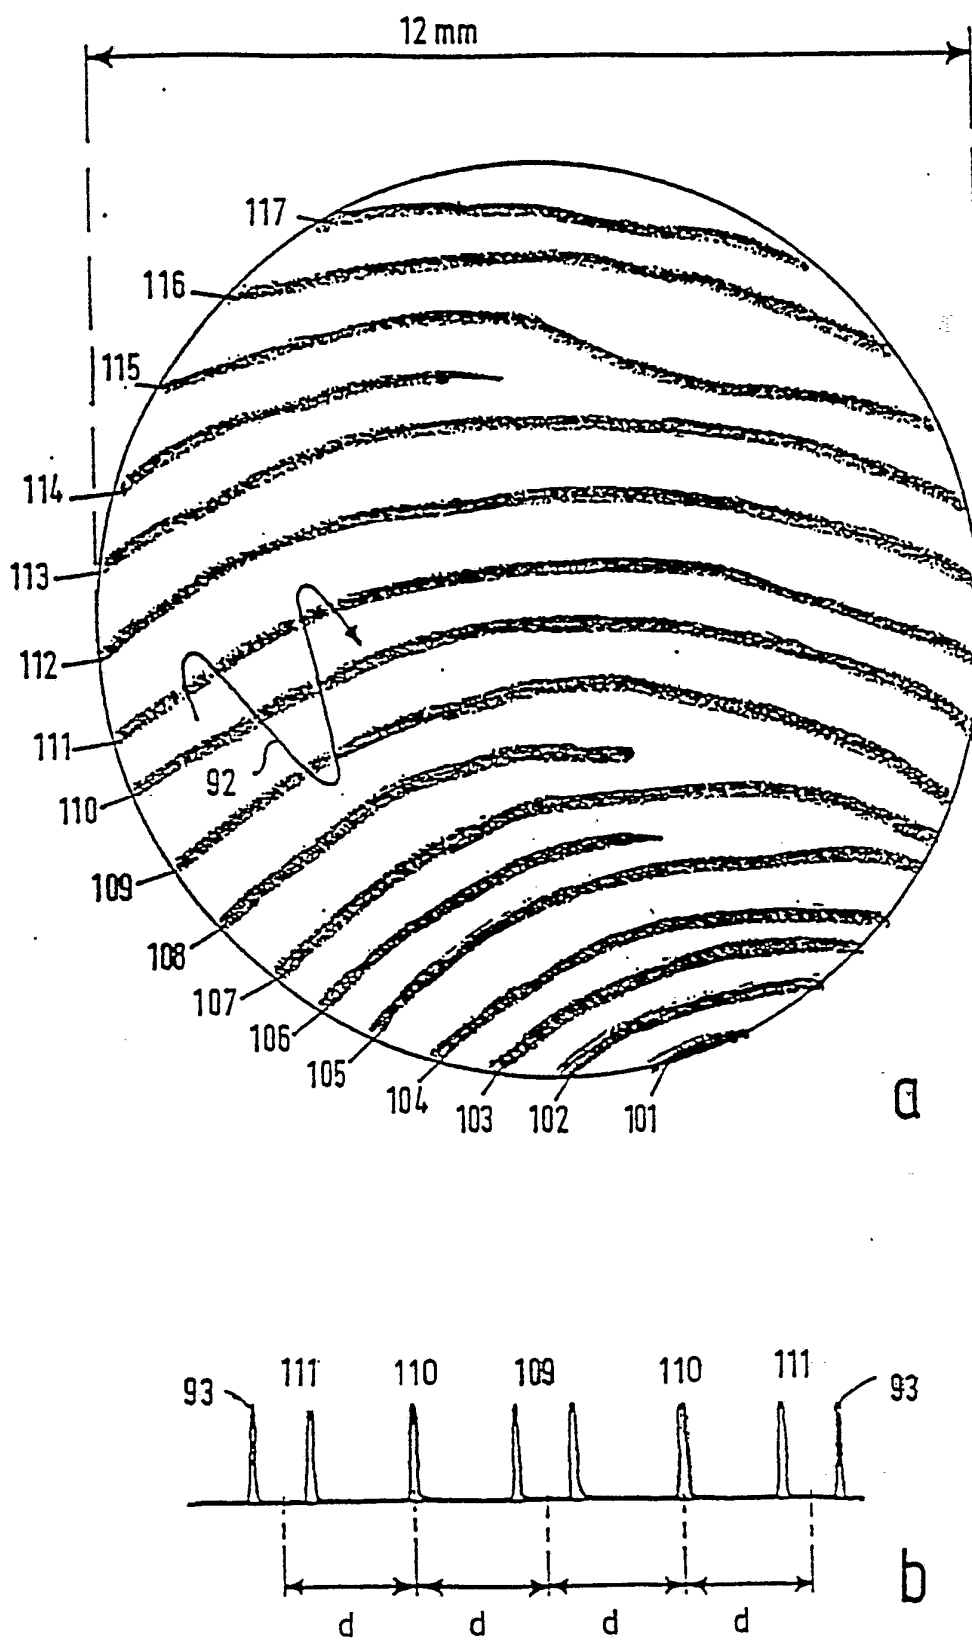


FIG.7

VRUPTIO 92-02

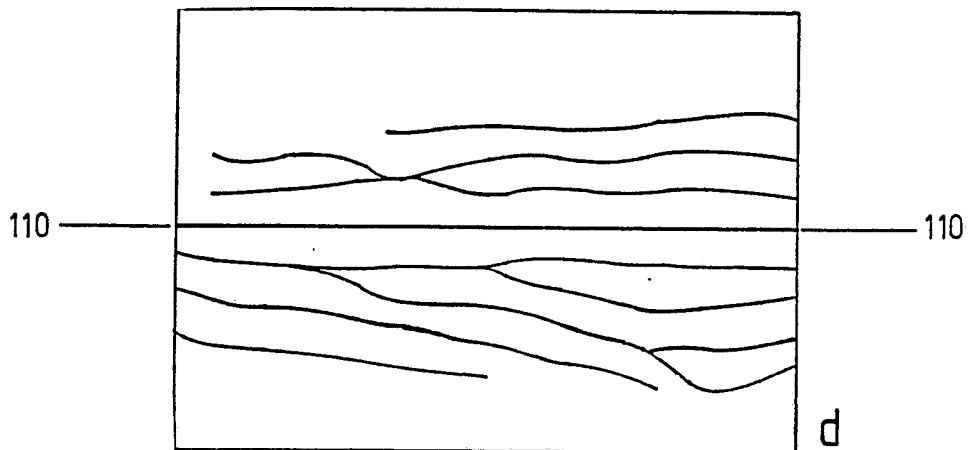
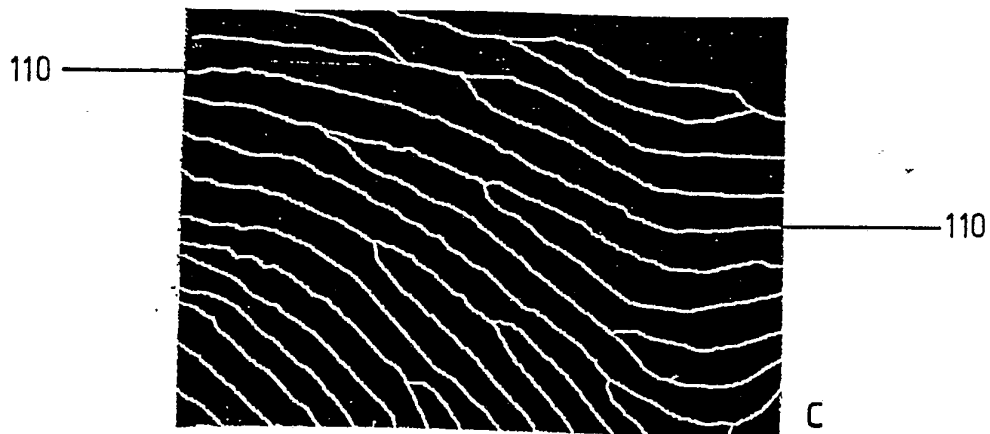


FIG. 9

INTERNATIONAL SEARCH REPORT

International Application No

PCT/NL 93/00048

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC Int.Cl. 5 G07C9/00; A61B5/117; G06K9/00		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl. 5	G07C ; A61B ; G06K	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X	WO,A,8 902 722 (SIEMENS) 6 April 1989 see page 2, line 9 - page 5, line 25 see page 11, line 4 - page 12, line 7 see page 18, line 18 - page 20, line 23; figures	1,5,6
Y	WO,A,8 903 099 (IMAGEPACK) 6 April 1989 see page 1, line 21 - page 3, line 14 see page 4, line 10 - page 5, line 17; figures	1,2,7-9, 10,13
Y	US,A,4 428 670 (RUELL) 31 January 1984 cited in the application see column 6, line 24 - line 41; figures	1
-/--		
¹⁰ Special categories of cited documents : ¹⁰ "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
09 JUNE 1993	29. 06. 93	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	MEYL D.	

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category °	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
Y	US,A,3 558 864 (FRENCH) 26 January 1971 see column 1, line 59 - column 2, line 6 see column 3, line 29 - line 55; figures ---	2,8
Y	DE,A,3 222 112 (BRODMANN) 8 March 1984 see page 7, line 7 - line 19; figures ---	7,9,10, 13
A	---	1,2
A	EP,A,0 300 167 (THUMBSCAN) 25 January 1989 see page 5, line 4 - page 6, line 31; claims; figures ---	1,11-13
A	EP,A,0 251 504 (IDENTIX) 7 January 1988 see column 10, line 15 - column 13, line 38; figures ---	1,8, 11-13
A	PATENT ABSTRACTS OF JAPAN vol. 013, no. 269 (P-888) 21 June 1989 & JP,A,10 61 870 (FUJITSU) 8 March 1989 see abstract ---	1
A	US,A,3 289 004 (GREANIAS) 29 November 1966 see claims; figures ---	
A	DE,A,3 423 886 (SIEMENS) 2 January 1986 see page 4, line 1 - page 6, line 2; figures ---	
A	IBM TECHNICAL DISCLOSURE BULLETIN. vol. 9, no. 9, February 1967, NEW YORK US pages 1162 - 1164 GUIDI 'Scan patterns for bifurcation location and direction detection' see page 1164, line 3 - line 13; figures -----	

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.**

NL 9300048
SA 71613

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09/06/93

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-8902722	06-04-89	EP-A- 0389483	03-10-90
WO-A-8903099	06-04-89	AU-A- 2539688	18-04-89
		EP-A- 0333826	27-09-89
		JP-T- 2501684	07-06-90
US-A-4428670	31-01-84	EP-A, B 0045917	17-02-82
US-A-3558864	26-01-71	DE-B- 1298322	
		FR-A- 1506075	
		GB-A- 1117069	
DE-A-3222112	08-03-84	None	
EP-A-0300167	25-01-89	US-A- 4896363	23-01-90
EP-A-0251504	07-01-88	US-A- 5067162	19-11-91
		JP-A- 63041989	23-02-88
US-A-3289004		CH-A- 431157	
		DE-B- 1207684	
		FR-A- 1411303	
		GB-A- 1018634	
DE-A-3423886	02-01-86	None	