

(51) International Patent Classification:
F24F 3/14 (2006.01) C02F 1/04 (2006.01)

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:
PCT/EP2017/065091(22) International Filing Date:
20 June 2017 (20.06.2017)(25) Filing Language:
English(26) Publication Language:
English(30) Priority Data:
10201605165X 22 June 2016 (22.06.2016) SG

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(71) Applicant: **ENZENHOFER, Matthias** [DE/DE]; Oststraße 18/1, 74072 Heilbronn (DE).(74) Agent: **GLAWE DELFS MOLL PARTNERSCHAFT MBB VON PATENT- UND RECHTSANWÄLTEN**; Postfach 13 03 91, 20103 Hamburg (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: HUMIDITY MANAGEMENT DEVICE, POTABLE WATER GENERATION SYSTEM AND METHOD

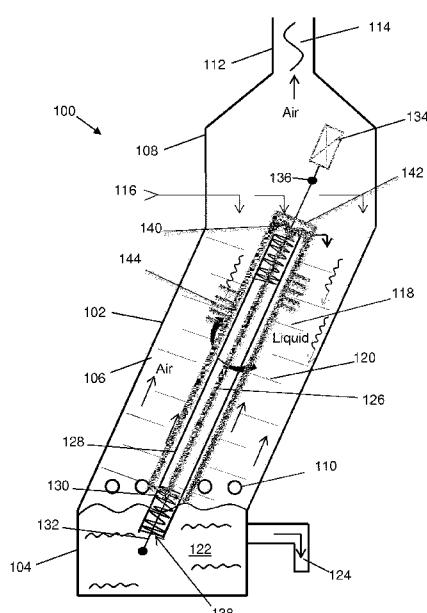


Figure 1

(57) **Abstract:** A humidity management device and a potable water generation system and method using such a device are provided. The humidity management device includes a chamber having an air inlet disposed adjacent a first end and an air outlet disposed adjacent a second end, and a dispensing mechanism configured to dispense a moisture-regulating substance into a space between the first and second ends. The dispensing mechanism includes a liquid inlet disposed adjacent the second end for supplying a flow of the moisture-regulating substance into the chamber toward the first end and a conveyor configured to transport a portion of the moisture-regulating substance collected adjacent the first end and re-distribute said moisture-regulating substance into the space between the first and second ends. The conveyor includes an Archimedes' screw at least partially enclosed in an elongated sleeve. The air inlet is configured to receive a flow of in-put air having a first humidity level. The air outlet is configured to draw the input air to contact the moisture-regulating substance to thereby change a moisture content of the input air such that output air exiting the chamber has a second humidity level different from the first humidity level.

5

**HUMIDITY MANAGEMENT DEVICE, POTABLE WATER GENERATION SYSTEM
AND METHOD**

10

FIELD OF INVENTION

[0001] The present invention relates broadly, but not exclusively, to a humidity management device, to a potable water generation system and to a method of generating potable water from raw water.

BACKGROUND

20

[0002] The contact of a gas with a liquid medium can be used, for example, to mix the gas with the liquid medium. In practice, air for example can be moistened to achieve a more pleasant indoor climate. Conversely, humid air can be dehumidified through contact with a liquid sorbent, which can remove moisture from the humid air. Such humidification and dehumidification are typically used in heating, ventilation and air-conditioning (HVAC) or climate control systems to provide air having the desired humidity and/or temperature.

25

[0003] To moisten the air at room temperature sufficiently, a large evaporation surface is typically needed, but this is

commonly not available. Further, in order to reprocess and recycle the liquid sorbent, significant amounts of energy may be required, thus reducing the energy efficiency of the system. This can be undesirable in the context of increasing sustainability and climate-change awareness.

5 [0004] Energy consumption is also a concern in the generation of potable water from raw water such as saltwater or brackish water. Desalination systems have been used to generate potable 10 water for consumption and irrigation but such systems are not only expensive and complex to build but also not suitable for operation on a small scale, for example, in remote areas or stand-alone dwellings.

15 [0005] A need therefore exists to provide a device, system and method that may address at least some of the above problems.

SUMMARY

20 [0006] According to a first aspect of the present invention, there is provided a humidity management device comprising:
a chamber having an air inlet disposed adjacent a first end and an air outlet disposed adjacent a second end; and
25 a dispensing mechanism configured to dispense a moisture-regulating substance into a space between the first and second ends, the dispensing mechanism comprising:

a liquid inlet disposed adjacent the second end for supplying a flow of the moisture-regulating substance into the chamber toward the first end; and
30 a conveyor configured to transport a portion of the moisture-regulating substance collected adjacent

the first end and re-distribute said moisture-regulating substance into the space between the first and second ends, the conveyor comprising an Archimedes' screw at least partially enclosed in an elongated sleeve;

5 wherein the air inlet is configured to receive a flow of input air having a first humidity level; and

wherein the air outlet is configured to draw said input air to contact the moisture-regulating substance to thereby change a moisture content of said input air such that output 10 air exiting the chamber has a second humidity level different from the first humidity level.

[0007] The elongated sleeve may have a cylindrical radial surface, the radial surface having a plurality of holes.

15

[0008] The humidity management device may further comprise a plurality of hollow tubes, each tube being attached to a corresponding hole such that the tubes are in fluid communication with the sleeve.

20

[0009] Each of the tubes may comprise a porous surface capable of carrying the moisture-regulating substance.

25 **[0010]** The dispensing mechanism may be configured to redistribute the moisture-regulating substance as a liquid film on the porous surface.

30 **[0011]** The dispensing mechanism may be configured to redistribute the moisture-regulating substance as a mist in the space between the first and second ends.

[0012] The humidity management device may further comprise an actuator coupled to the conveyor to drive the conveyor.

[0013] The actuator may further be coupled to the sleeve to rotate the sleeve.

5 **[0014]** The humidity management device may be operable as a dehumidifier unit, and the moisture-regulating substance may be configured to remove moisture from the input air such that the second humidity level is lower than the first humidity level.

10

[0015] A temperature of the input air may be higher than a temperature of the moisture-regulating substance.

15 **[0016]** The humidity management device may be operable as a humidifier unit, and the moisture-regulating substance may be configured to release moisture into the input air such that the second humidity level is higher than the first humidity level.

20 **[0017]** A temperature of the input air may be lower than a temperature of the moisture-regulating substance.

25 **[0018]** According to a second aspect of the present invention, there is provided a potable water generation system comprising:

an evaporator unit; and

a condenser unit in fluid communication with the evaporator unit,

30 wherein the evaporator unit comprises a chamber having an air inlet disposed adjacent a first end and an air outlet disposed adjacent a second end, and a dispensing mechanism configured to dispense raw water into a space between the first and second ends, the dispensing mechanism comprising:

a liquid inlet disposed adjacent the second end for supplying a flow of the raw water into the chamber toward the first end; and

5 a conveyor configured to transport a portion of the raw water collected adjacent the first end and redistribute said raw water into the space between the first and second ends, the conveyor comprising an Archimedes' screw at least partially enclosed in an elongated sleeve;

10 wherein the air inlet is configured to receive a flow of input air having a first humidity level;

wherein the air outlet is configured to draw said input air to contact the raw water to thereby moisten said input air such that output air exiting the chamber has a second 15 humidity level higher than the first humidity level; and

wherein the condenser unit is configured to receive the output air from the evaporator unit and condense water molecules from said output air, to thereby generate potable water.

20

[0019] The condenser may comprise a fixed-bed condenser.

[0020] The condenser may comprise a pressurized chamber.

25 **[0021]** The condenser unit may be further configured to pre-heat cool incoming raw water using the output air from the evaporator unit.

30 **[0022]** The system may further comprise a heat exchanger configured to receive the incoming raw water from the condenser unit and to further pre-heat the incoming raw water using warm raw water from the evaporator.

5 [0023] The system may further comprise a heater disposed downstream of the heat exchanger and configured to further heat the incoming raw water to a predetermined working temperature prior to the raw water entering the chamber of the evaporator unit.

[0024] The working temperature may be in the range of between 50°C and 70°C.

10 [0025] According to a third aspect of the present invention, there is provided a method for generating potable water from raw water, the method comprising the steps of:

15 supplying a flow of the raw water into an evaporator unit, the evaporator unit comprising a device as defined in the first aspect;

supplying a flow of input air having a first humidity level into the evaporator unit;

20 directing the flow of input air to contact the raw water to thereby moisten said input air such that output air exiting the evaporator unit has a second humidity level higher than the first humidity level; and

25 directing the output air from the evaporator unit to a condenser unit to condense water molecules from said output air, to thereby generate potable water.

25

30 [0026] Supplying the flow of the raw water into the evaporator unit may comprise pre-heating the raw water through heat exchange at the condenser unit with the output air from the evaporator unit and/or at a heat exchanger with warm raw water from the evaporator unit.

BRIEF DESCRIPTION OF THE DRAWINGS

5 [0027] Embodiments of the invention will be better understood and readily apparent to one of ordinary skill in the art from the following written description, by way of example only, and in conjunction with the drawings, in which:

10 [0028] Figure 1 shows a schematic diagram illustrating a humidity management device according to an example embodiment.

15 [0029] Figure 2 shows a schematic diagram illustrating a system for generating potable water according to an example embodiment.

20 [0030] Figure 3 shows a flow chart illustrating a method for generating potable water from raw water according to an example embodiment.

DETAILED DESCRIPTION

25 [0031] Figure 1 shows a schematic diagram of a humidity management device 100 according to an example embodiment. The humidity management device 100 comprises a casing or chamber 102 having a lower section 104 (hereinafter interchangeably referred to as the first end 104), a middle section 106 and an upper section 108 (hereinafter interchangeably referred to as the second end 108). As shown in Figure 1, the middle section 106 is tilted or inclined in relation to the lower section 104 and the upper section 106. However, it will be appreciated that there may be no tilting in alternate embodiments and the sections form a generally straight or upright chamber for example.

[0032] The casing 102 further includes one or more gas inlets 110 adjacent the lower section 104 and a gas outlet 112 at the top end of the upper section 108, where there can be assembled a ventilator 114 to produce a gas flow, typically an air flow, 5 from the gas inlets 110 to the upper section 108 of the casing or chamber 102. The humidity management device 100 also includes one or more liquid inlets 116 adjacent the second end 108. In use, the one or more liquid inlets 116 receive a moisture-regulating substance in liquid form and dispense the moisture-regulating substance into the chamber 102 to interact with the air flow to thereby change a humidity level of the air before the 10 air exits the chamber 102.

[0033] A brush 118 having a plurality of bristles 120 is 15 disposed in the middle section 106 below the one or more liquid inlets 116, such that a moisture-regulating substance, e.g. a liquid, water or a water-based solution, that is dispensed from the one or more liquid inlets 116 can moisten the bristles 120 of the brush 118. The bristles 120 preferably are made of an 20 elastic material and advantageously possess a porous surface. Additionally, the bristles 120 can be hollow to carry more of the moisture-regulating substance and effectively increase the transit time of the moisture-regulating substance in the chamber 102. As a result, the chamber 102 can be moistened in the middle 25 section 106 with the introduced moisture-regulating substance and serves as a contact surface for the moisture-regulating substance. Under the effect of gravity, the moisture-regulating substance flows through the middle section 106, e.g. between bristles 120 or along an inner surface of the casing 102, and is 30 collected at a reservoir 122 at the bottom of the casing 102 adjacent the lower section 104. In some implementations, the humidity management device 100 further includes an outlet 124 in

fluid communication with the reservoir 122 for draining excess liquid from the reservoir 122.

[0034] As shown in Figure 1, to improve or enhance the inter-

5 action between the moisture-regulating substance and the air flow, at least a portion of the moisture-regulating substance collected at the reservoir 122 is transported upward using a conveyor, and re-distributed to the space in the middle section 106, e.g. over the bristles 120 of the brush 118. Here, the
10 conveyor is in the form of an Archimedes' screw 126 which runs parallel to the axis of the middle section 106. The Archimedes' screw 126 comprises a tube 128 containing a loop 130 and a drive axle 132, which is driven by an actuator in the form of a motor 134 and which is pivot-mounted to bearing 136. Through the axle
15 132, the loop 130 is rotatable. One end 138 of the tube 128 is in fluid communication with the reservoir 122 while the rest of the tube 128 including the opposite end 140 of the tube 128 is enclosed by an elongated sleeve 142. When the motor 134 is powered, it can rotate the loop 130 to transport a portion of the
20 moisture-regulating substance from the reservoir 122 to the opposite end 140 of the tube 128 where the moisture-regulating substance flows into an interior space of the elongated sleeve 142.

25 **[0035]** In the example embodiments, the elongated sleeve 1142 helps to re-distribute the moisture-regulating substance to the space in the middle section 106 more effectively. For example, the elongated sleeve 142 has a cylindrical radial surface which has a plurality of holes through which a liquid can
30 exit as the sleeve 142 is rotated by the motor 134. In a preferred implementation, a plurality of hollow tubes 144 are connected to the holes, with each tube being attached to a corresponding hole, such that the tubes 144 are in fluid

communication with the interior space of the sleeve 142. The hollow tubes 144 are typically made of a polymeric material and include a porous surface capable of carrying the moisture-regulating substance. As a result, the moisture-regulating 5 substance may be re-distributed as a liquid film on the porous surface. Alternatively or in addition, the moisture-regulating substance may be re-distributed as a mist from the porous surface into the space of the middle section 106 where the moisture-regulating substance may collect on the bristles 120 of 10 the brush 118.

[0036] With reference to Figure 1, the operation of the humidity management device 100 is now described. Typically, a moisture-regulating substance in liquid form is introduced into 15 the chamber 102 via the one or more first liquid inlets 116. Moreover, within the chamber 102, the liquid which is collected in the lower section 104, is lifted by using the Archimedes' screw 126 and is conveyed to the elongated sleeve 142 enclosing at least part of the Archimedes' screw 126. The sleeve 142 re- 20 distributes the liquid to the space in the middle section 106, and the liquid is moved by gravity back to the lower section 104 of the chamber 102. Because of the rotational motion of the Archimedes' screw, the brush 118, sleeve 142 and hollow tubes 144 connected thereto are simultaneously put into motion. Addi- 25 tionally, because of the ventilator 114 and gas inlets 110, an air flow is produced from gas inlets 110 to the upper section 108.

[0037] The surfaces of the individual bristles 120 of the 30 brush 118 and the surfaces of the hollow tubes 144 are moistened by the liquid moisture-regulating substance, thus providing ample opportunity for the air flow to come into contact with the

moisture regulating substance. The sleeve 142 helps to re-distribute the moisture-regulating substance more effectively since the liquid pressure inside the sleeve 142 is substantially uniform. In other words, the sleeve 142 works to re-distributes the 5 moisture-regulating substance over its entire length, thus providing a more efficient re-use of the liquid collected at the reservoir 122. During rotation of the brush 118 and the sleeve 142, a fine droplet mist of the moisture-regulating substance can be created to provide an additional contact surface for the 10 liquid. In other words, the interaction between the air flow and the liquid can be more thorough. The moisture-regulating substance which has contacted the air flow, flows back through gravity into the reservoir 122 at the lower section 104 of the chamber 102 and can be discharged via outlet 124.

15

[0038] When using humidity management device 100 as described above to dehumidify or humidify air, the interaction between the air flow and the liquid moisture-regulating substance can be further enhanced by introducing a temperature difference between 20 the air flow and the liquid. For example, to promote the removal of moisture from the air flow, the input air flow can be heated while the liquid can be cooled. Conversely, to promote the evaporation and release of water from the liquid into the air flow, the liquid can be heated while the input air flow can be cooled.

25

[0039] The humidity management device 100 of Figure 1 can be configured to operate as a dehumidification unit of an air-conditioning system. In such application, the gas being supplied to the gas inlets 110 is typically humid input air, while the 30 liquid moisture-regulating substance supplied to inlets 116 is a moisture-low adsorbent or absorbent. Through contact between the humid air and the liquid in the chamber 102, moisture is removed from the input air such that output air exiting the

ventilator 114 has a humidity level lower than that of the input air. Preferably, the temperature of the input air is higher than the temperature of the liquid, and the output air may be partially cooled as a result of it contacting the liquid sorbent.

5 The moisture-high liquid collected at the reservoir 122 at the lower section 104 can be discharged or recycled after reprocessing.

[0040] Conversely, the humidity management device 100 of Figure 1 can also be configured to operate as a humidification unit

10 of an air-conditioning system. In such application, the gas being supplied to the gas inlets 110 is typically dry input air, while the liquid moisture-regulating substance supplied to inlets 116 can be water or a water-carrying liquid. Through contact between

15 the dry air and the liquid in the chamber 102, moisture is removed from liquid and released into the air flow such that output air exiting the ventilator 114 has a humidity level higher than that of the input air. Preferably, the temperature of the input air is lower than the temperature of the liquid to promote

20 evaporation and release of water from the liquid into the air.

[0041] The humidity management device 100 of Figure 1 can further be configured to operate as an evaporator unit to extract water from a water-carrying liquid. Such application is similar

25 to the humidification unit described above; however, output air from the evaporator unit is typically used to generate water instead of being provided a room or place of comfort. Here, the water-carrying liquid is supplied to the liquid inlets 116 and, by passing the chamber 102, comes into contact with the dry input

30 air. Water is removed, e.g. evaporated, from the liquid such that output air exiting the evaporator unit is relatively saturated with water vapour. The output air can then be channelled past a condenser where water is separated and collected for use.

[0042] Figure 2 shows a schematic diagram illustrating a system 200 for generating potable water from raw water and employing such an evaporator unit according to an example embodiment. The 5 raw water, such as brackish water or saltwater, may be provided through use of a pump, and may have a temperature in the range of about 20-30°C. Typically, the raw water is provided to an evaporator unit 202, similar to one as described above, while input air having a first humidity level is also provided to the 10 same evaporator unit 202 but is directed to flow in opposite direction to the flow of the raw water. For example, the inlet for the raw water is positioned above the inlet for the input air. The input air is directed to contact the raw water in the manner as described above and become moistened such that 15 output air exiting the evaporator unit 202 has a second humidity level higher than the first humidity level. In other words, the output air becomes substantially saturated with the water vapour from the raw water, while salt molecules and other impurities stay in the water and the waste water is 20 discharged. The output air is then directed from the evaporator unit 202 to a condenser unit 204 to condense water molecules from the output air, to thereby generate potable water. The potable water is collected for use while the waste air is expelled to the environment.

25

[0043] For example, the condenser unit 204 may be a fixed-bed condenser equipped with fixed-bed-condensation seed, on which the water molecules condense from the air. Further, to accelerate the condensation process, the condenser unit 204 may 30 have a pressurized chamber (not shown) that provides an over-pressure.

[0044] To improve energy efficiency, in the example embodiments, the raw water may be heated to a temperature higher than that of the input air in multiple steps. First, the raw water is conducted through the condenser unit 204, without becoming into 5 physical contact with the moistened air undergoing condensation, to be pre-heated to a temperature of about 30°C or higher. Next, the raw water undergoes a heat exchange at a heat exchanger 206 with the waste water that is drained from the evaporator unit 202, to achieve a temperature in the range of 30-70°C. Further, 10 heating means in the form of a heater or heat pump 208 is used to further heat the raw water to an operating temperature of approximately 60-70°C before the raw water is provided to the evaporator unit 202. The heat pump 208 may utilise heat recovered from other systems for this purpose.

15

[0045] As described, the system 200 maximises use of the heating/cooling capacities that are available such that the energy requirement may be reduced. Moreover, the waste water that is discharge to the environment, e.g. back to the sea, is at a 20 reduced temperature of about 20-40°C that may not adversely impact the ecosystem.

[0046] Figure 3 shows a flow chart 300 illustrating a method for generating potable water from raw water according to an 25 example embodiment. At step 302, a flow of the raw water is supplied into an evaporator unit as described above with reference to Figure 1. At step 304, a flow of input air having a first humidity level is supplied into the evaporator unit. At step 306, the flow of input air is directed to contact the 30 raw water to thereby moisten said input air such that output air exiting the evaporator unit has a second humidity level higher than the first humidity level. At step 308, the output air from the evaporator unit is directed to a condenser unit

to condense water molecules from said output air, to thereby generate potable water.

[0047] It will be appreciated by a person skilled in the art

5 that numerous variations and/or modifications may be made to the present invention as shown in the specific embodiments without departing from the spirit or scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects to be illustrative and not restrictive.

CLAIMS

1. A humidity management device comprising:

a chamber having an air inlet disposed adjacent a first

5 end and an air outlet disposed adjacent a second end; and

a dispensing mechanism configured to dispense a moisture-regulating substance into a space between the first and second ends, the dispensing mechanism comprising:

a liquid inlet disposed adjacent the second end

10 for supplying a flow of the moisture-regulating substance into the chamber toward the first end; and

15 a conveyor configured to transport a portion of the moisture-regulating substance collected adjacent the first end and re-distribute said moisture-regulating substance into the space between the first and second ends, the conveyor comprising an Archimedes' screw at least partially enclosed in an elongated sleeve;

wherein the air inlet is configured to receive a flow of input air having a first humidity level; and

20 wherein the air outlet is configured to draw said input air to contact the moisture-regulating substance to thereby change a moisture content of said input air such that output air exiting the chamber has a second humidity level different from the first humidity level.

25

2. The humidity management device as claimed in claim 1, wherein the elongated sleeve has a cylindrical radial surface, said radial surface having a plurality of holes.

30

3. The humidity management device as claimed in claim 2, further comprising a plurality of hollow tubes, each tube being attached to a corresponding hole such that the tubes are in fluid communication with the sleeve.

4. The humidity management device as claimed in claim 3, wherein each of the tubes comprises a porous surface capable of carrying the moisture-regulating substance.

5

5. The humidity management device as claimed in claim 4, wherein the dispensing mechanism is configured to re-distribute the moisture-regulating substance as a liquid film on the porous surface.

10

6. The humidity management device as claimed in any one of the preceding claims, wherein the dispensing mechanism is configured to re-distribute the moisture-regulating substance as a mist in the space between the first and second ends.

15

7. The humidity management device as claimed in any one of the preceding claims, further comprising an actuator coupled to the conveyor to drive the conveyor.

20

8. The humidity management device as claimed in claim 7, wherein the actuator is further coupled to the sleeve to rotate the sleeve.

25

9. The humidity management device as claimed in any one of the preceding claims, operable as a dehumidifier unit, wherein the moisture-regulating substance is configured to remove moisture from the input air such that the second humidity level is lower than the first humidity level.

30

10. The humidity management device as claimed in claim 9, wherein a temperature of the input air is higher than a temperature of the moisture-regulating substance.

5 11. The humidity management device as claimed in any one of claims 1 to 8, operable as a humidifier unit, wherein the moisture-regulating substance is configured to release moisture into the input air such that the second humidity level is higher than the first humidity level.

10

12. The humidity management device as claimed in claim 11, wherein a temperature of the input air is lower than a temperature of the moisture-regulating substance.

15 13. A potable water generation system comprising:
an evaporator unit; and
a condenser unit in fluid communication with the evaporator unit,

20 wherein the evaporator unit comprises a chamber having an air inlet disposed adjacent a first end and an air outlet disposed adjacent a second end, and a dispensing mechanism configured to dispense raw water into a space between the first and second ends, the dispensing mechanism comprising:

25 a liquid inlet disposed adjacent the second end for supplying a flow of the raw water into the chamber toward the first end; and

30 a conveyor configured to transport a portion of the raw water collected adjacent the first end and redistribute said raw water into the space between the first and second ends, the conveyor comprising an Archimedes' screw at least partially enclosed in an elongated sleeve;

wherein the air inlet is configured to receive a flow of input air having a first humidity level;

wherein the air outlet is configured to draw said input air to contact the raw water to thereby moisten said input air such that output air exiting the chamber has a second humidity level higher than the first humidity level; and

wherein the condenser unit is configured to receive the output air from the evaporator unit and condense water molecules from said output air, to thereby generate potable water.

13. The system as claimed in claim 12, wherein the condenser comprises a fixed-bed condenser.

15 14. The system as claimed in claim 12 or 13, wherein the condenser comprises a pressurized chamber.

15. The system as claimed in any one of claims 12 to 14, wherein the condenser unit is further configured to pre-
20 heat cool incoming raw water using the output air from the evaporator unit.

16. The system as claimed in claim 15, further comprising a heat exchanger configured to receive the incoming raw water from the condenser unit and to further pre-heat the incoming raw water using warm raw water from the evaporator.

17. The system as claimed in claim 16, further comprising a heater disposed downstream of the heat exchanger and configured to further heat the incoming raw water to a predetermined working temperature prior to the raw water entering the chamber of the evaporator unit.

18. The system as claimed in claim 17, wherein the working temperature is in the range of between 50°C and 70°C.

5

19. A method for generating potable water from raw water, the method comprising the steps of:

supplying a flow of the raw water into an evaporator unit, the evaporator unit comprising a device as claimed in 10 any one of claims 1 to 12;

supplying a flow of input air having a first humidity level into the evaporator unit;

15 directing the flow of input air to contact the raw water to thereby moisten said input air such that output air exiting the evaporator unit has a second humidity level higher than the first humidity level; and

directing the output air from the evaporator unit to a condenser unit to condense water molecules from said output air, to thereby generate potable water.

20

20. The method as claimed in claim 19, wherein supplying the flow of the raw water into the evaporator unit comprises pre-heating the raw water through heat exchange at the condenser unit with the output air from the evaporator 25 unit and/or at a heat exchanger with warm raw water from the evaporator unit.

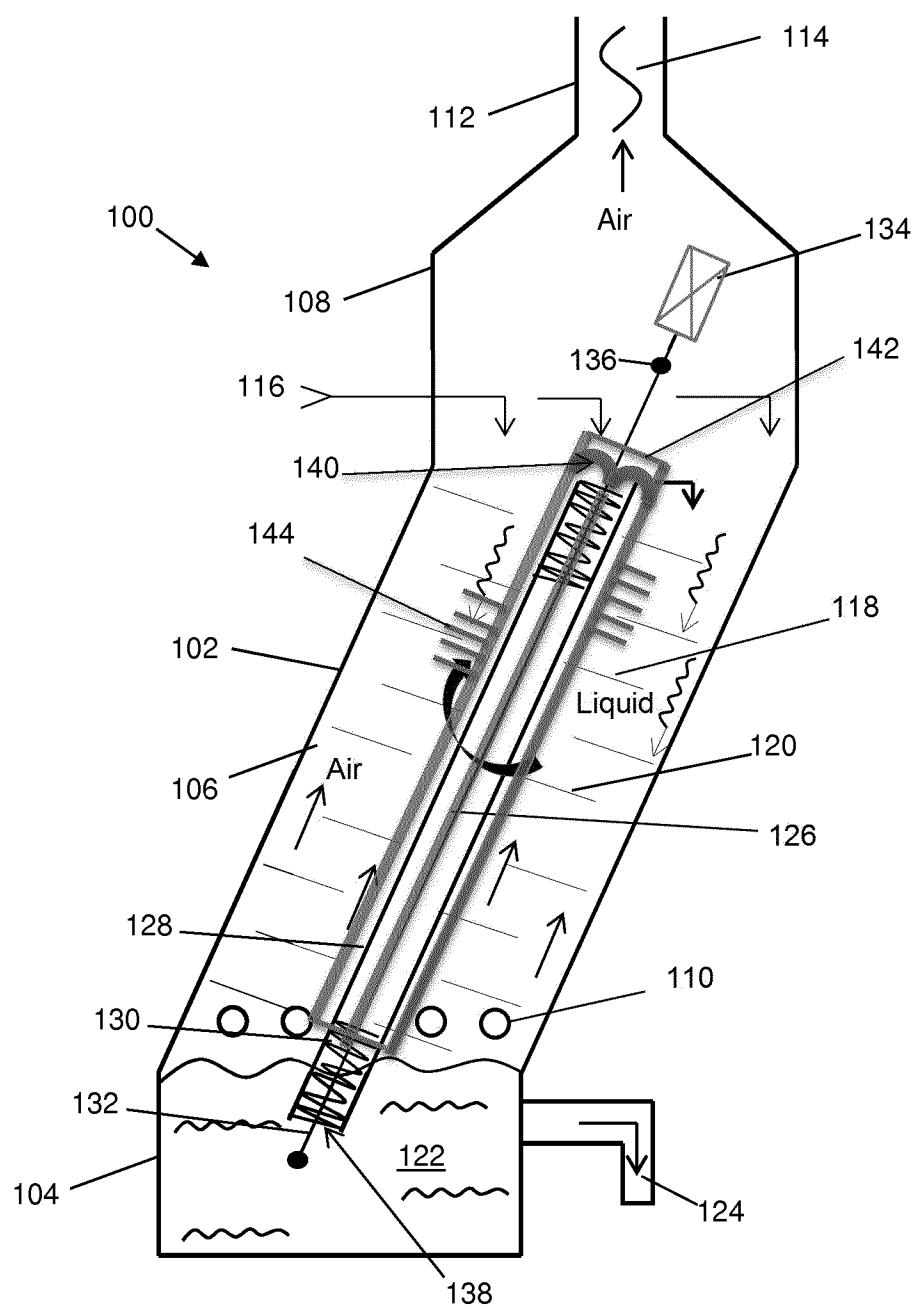


Figure 1

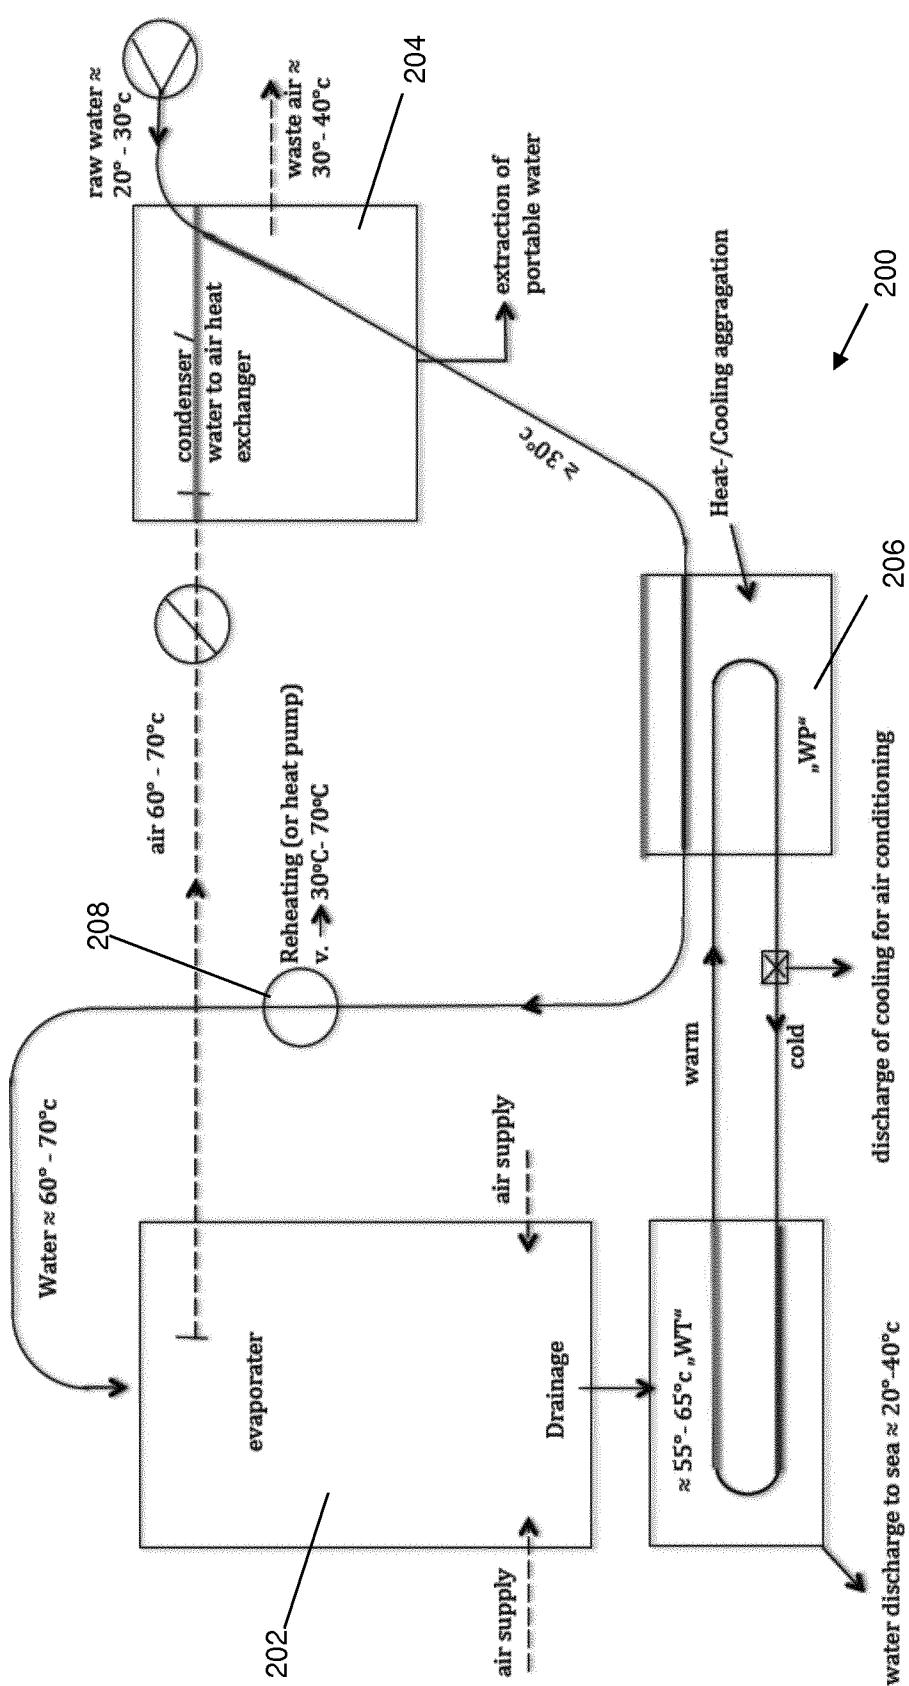


Figure 2

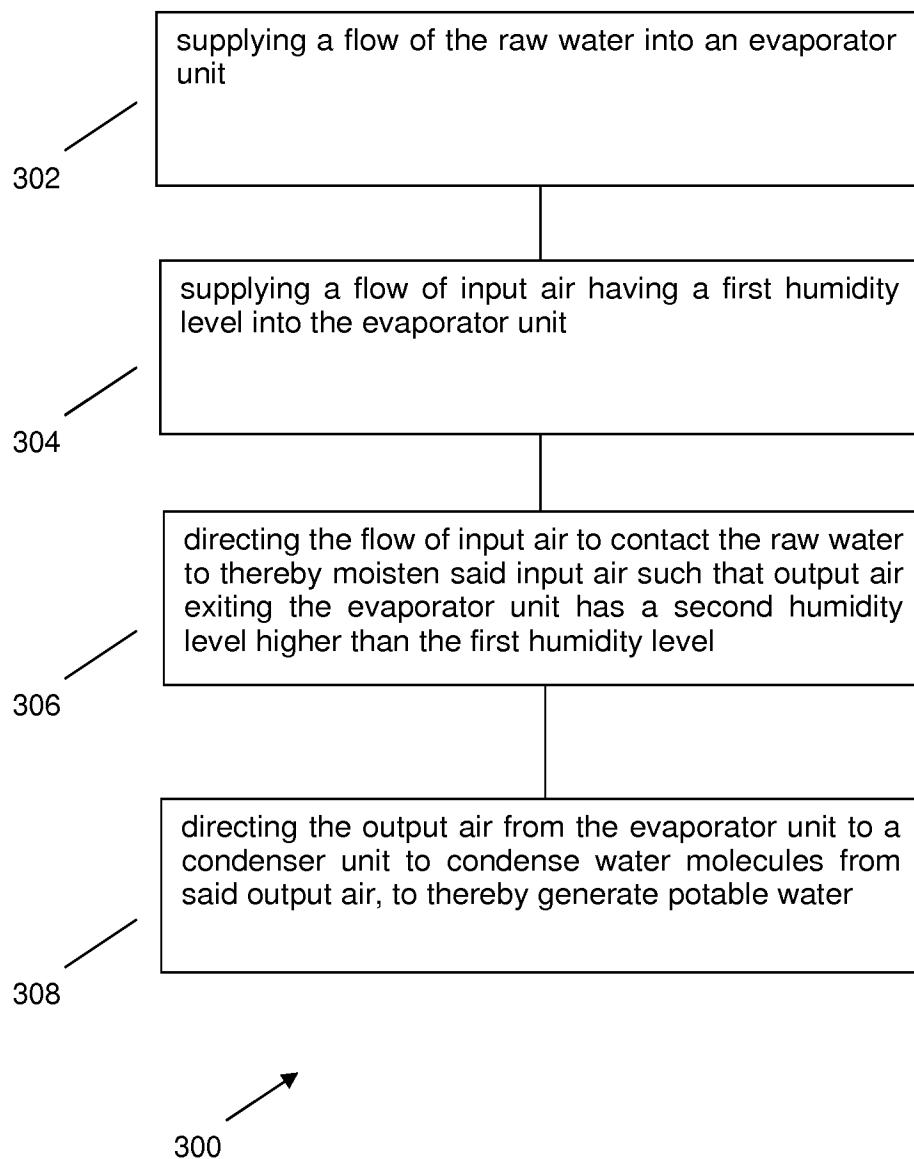


Figure 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/065091

A. CLASSIFICATION OF SUBJECT MATTER
INV. F24F3/14 C02F1/04
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C02F B01D F24F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2015/063076 A1 (ENZENHOFER MATTHIAS [DE]; GRUBER SIEGFRIED [DE]) 7 May 2015 (2015-05-07) page 5 - page 8; figure 1 -----	1-12
Y	DE 102 07 101 A1 (UFERMANN RUEDIGER [DE]) 28 August 2003 (2003-08-28) claims 1-8; figure 1 -----	13-20 1,6,7, 11,12
Y	US 8 820 723 B1 (SPARROW BENJAMIN STUART [CA] ET AL) 2 September 2014 (2014-09-02) column 15, line 5 - column 16, line 15; figure 2 -----	13-20
A	----- -/-	1

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
8 September 2017	18/09/2017
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Anconetani, Mirco

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/065091

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	AU 2011 214 400 A1 (BASF SE) 30 August 2012 (2012-08-30)	13-20
A	page 1, line 5 - page 1, line 10; figures 1-6 page 4, line 5 - page 4, line 32 -----	1
A	US 2009/020481 A1 (BAILIE ROBERT E [US] ET AL) 22 January 2009 (2009-01-22) paragraph [0034] - paragraph [0050]; figures 5-7 -----	1,13-20
A	GB 2 091 582 A (MACDONALD STELLARC ENGINEERING) 4 August 1982 (1982-08-04) page 1, line 102 - page 2, line 38; figure 1 -----	1-12
1		

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/065091

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
WO 2015063076	A1	07-05-2015	CN 106102854 A		09-11-2016
			DE 102013222343 A1		07-05-2015
			EP 2922602 A1		30-09-2015
			US 2016296857 A1		13-10-2016
			WO 2015063076 A1		07-05-2015
DE 10207101	A1	28-08-2003	NONE		
US 8820723	B1	02-09-2014	AU 2012260387 A1		18-04-2013
			CA 2816746 A1		29-11-2012
			CA 2821453 A1		29-11-2012
			CA 2821458 A1		29-11-2012
			EP 2753405 A1		16-07-2014
			US 8820723 B1		02-09-2014
			US 8857798 B1		14-10-2014
			US 2014061958 A1		06-03-2014
			WO 2012159203 A1		29-11-2012
AU 2011214400	A1	30-08-2012	AU 2011214400 A1		30-08-2012
			CN 102753484 A		24-10-2012
			EP 2534104 A1		19-12-2012
			MA 33957 B1		02-01-2013
			TN 2012000404 A1		30-01-2014
			US 2012292176 A1		22-11-2012
			WO 2011098478 A1		18-08-2011
US 2009020481	A1	22-01-2009	AU 2008279399 A1		29-01-2009
			CA 2692821 A1		29-01-2009
			US 2009020481 A1		22-01-2009
			WO 2009014945 A1		29-01-2009
GB 2091582	A	04-08-1982	NONE		