



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
30.11.2016 Bulletin 2016/48

(51) Int Cl.:
H04W 76/02 ^(2009.01) **H04W 52/18** ^(2009.01)

(21) Application number: **15740505.1**

(86) International application number:
PCT/CN2015/071301

(22) Date of filing: **22.01.2015**

(87) International publication number:
WO 2015/110033 (30.07.2015 Gazette 2015/30)

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME

(71) Applicant: **Sony Corporation**
Tokyo 108-0075 (JP)

(72) Inventor: **WEI, Yuxin**
Beijing 100190 (CN)

(74) Representative: **D Young & Co LLP**
120 Holborn
London EC1N 2DY (GB)

(30) Priority: **24.01.2014 CN 201410035377**

(54) **USER EQUIPMENT, BASE STATION AND METHOD FOR CONDUCTING DEVICE-TO-DEVICE COMMUNICATIONS**

(57) The present disclosure relates to a user equipment, base station and method for conducting device-to-device communications. A wireless communication system at least comprises the user equipment of the present disclosure and another user equipment. The user equipment comprises a control unit; and a transmission unit which is controlled by the control unit and is used for transmitting control information to another user equip-

ment by means of an uplink channel, wherein the control information comprises at least one of data transmission format information and power control information. According to the user equipment, base station and method of the present disclosure, the efficiency of communication between devices conducting device-to-device communications can be increased, thereby improving the data transmission performance.

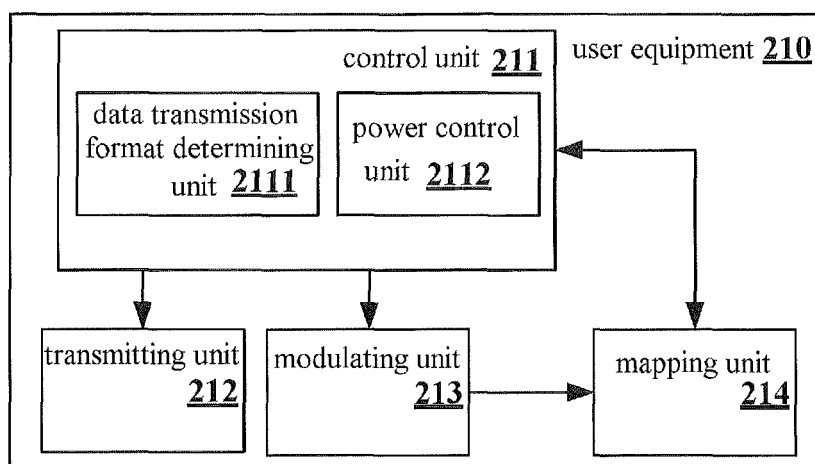


Fig.2

Description

FIELD

[0001] The present disclosure relates to the technical field of wireless communication, and in particular to a user equipment, a base station and a method for performing D2D (Device-to-Device) communication in a wireless communication system.

BACKGROUND

[0002] This section provides background information related to the present disclosure, which is not necessarily the conventional technology.

[0003] The explosive growth of user data improves the requirement for a data transmission rate and transmission efficiency. With increasing communication load between a user and a base station, direct communication is performed between geographical adjacent devices without relay of the base station, in this case, not only load of the base station can be reduced but also a signal is good due to a small communication distance. Furthermore, transmitting power between the devices may be low, which is beneficial to reduce communication interference to other devices. D2D communication technology is developed under such background.

[0004] The D2D communication changes the conventional user-to-base-station communication mode, a part of functions of the base station are conveyed to a user equipment, hence, it is a challenge to design protocols for both a physical layer, an MAC (Media Access Control) layer and a high layer.

SUMMARY

[0005] This section provides a general overview for the present disclosure, rather than the full disclosure for all scope or all features of the present disclosure.

[0006] An object of the present disclosure is to provide a user equipment, a base station and a method for performing D2D communication in a wireless communication system, to raise efficiency of communication between D2D devices by designing reasonable control signaling, thereby improving data transmission performance.

[0007] According to an aspect of the present disclosure, a user equipment for performing D2D communication in a wireless communication system including at least the user equipment and another user equipment is provided, the user equipment includes: a control unit; and a transmitting unit controlled by the control unit for transmitting control information to the another user equipment via an uplink channel, wherein the control information includes at least one of data transmission format information and power control information.

[0008] According to another aspect of the present disclosure, a base station for performing D2D communication

in a wireless communication system including a first user equipment, a second user equipment and the base station is provided. The base station includes: a control unit; a receiving unit controlled by the control unit for receiving a signal from the first user equipment; and a transmitting unit controlled by the control unit for transmitting uplink scheduling grant information to the first user equipment with a PDCCH (Physical Downlink Control Channel) when the receiving unit receives a D2D SR (Scheduling Request), to perform D2D communication between the first user equipment and the second user equipment from the first user equipment, where the control unit makes a representation of whether a resource is allocated for device-to-device or device-to-base-station by adding a bit to the uplink scheduling grant information.

[0009] According to another aspect of the present disclosure, an electronic device at a base station side applicable to a wireless communication system including a first user equipment, a second user equipment and the base station is provided, the electronic device includes: a processing circuit configured to generate uplink scheduling grant information for D2D communication to be performed between the first user equipment and the second user equipment based on a D2D Scheduling Request, SR, relative to the D2D communication from the first user equipment; and map the uplink scheduling grant information onto a Physical Downlink Control Channel, PDCCH, to indicate a resource for the first user equipment to perform the D2D communication.

[0010] According to another aspect of the present disclosure, an electronic device at a user equipment side applicable to a wireless communication system including the user equipment, another user equipment and a base station is provided, the electronic device includes: a processing circuit configured to generate a D2D Scheduling Request, SR, for requesting performing D2D communication between the user equipment and the another user equipment to the base station; and map the D2D Scheduling Request, SR, onto a Physical Uplink Control Channel PUCCH, to indicate a resource for the D2D communication requested by the user equipment.

[0011] According to another aspect of the present disclosure, a communication method at a base station side applicable to a wireless communication system including a first user equipment, a second user equipment and the base station is provided, the method includes: generating uplink scheduling grant information for D2D communication to be performed between the first user equipment and the second user equipment based on a D2D Scheduling Request, SR, relative to the D2D communication from the first user equipment; and mapping the uplink scheduling grant information onto a Physical Downlink Control Channel, PDCCH, to indicate a resource for the first user equipment to perform the D2D communication.

[0012] According to another aspect of the present disclosure, a communication method at a user equipment side applicable to a wireless communication system including the user equipment, another user equipment and

a base station is provided, the method includes: generating a D2D Scheduling Request, SR, for requesting performing D2D communication between the user equipment and the another user equipment to the base station; and mapping the D2D Scheduling Request, SR, to a Physical Uplink Control Channel PUCCH, to indicate a resource for the D2D communication requested by the user equipment.

[0013] According to another aspect of the present disclosure, a user equipment for performing D2D communication in a wireless communication system including at least the user equipment and another user equipment according to the present disclosure is provided, the user equipment includes: a control unit; and a receiving unit controlled by the control unit for receiving control information transmitted by the another user equipment, where the control information includes at least one of data transmission format information and power control information.

[0014] According to another aspect of the present disclosure, a method for performing D2D communication in a wireless communication system including at least a first user equipment and a second user equipment is provided, the method includes: transmitting, by the first user equipment, control information to the second user equipment via an uplink channel, where the control information includes at least one of data transmission format information and power control information.

[0015] By using the user equipment, the base station and the method for performing D2D communication in the wireless communication system according to the present disclosure, a user equipment transmits the control information including at least one of the data transmission format information and the power control information to another user equipment via the uplink channel. The efficiency of communication between D2D equipments can be raised by such design, thereby improving the data transmission performance.

[0016] A further applicable scope will become apparent based on the description provided herein. The description and specific examples in the overview are only for schematic purposes and are not intended to limit the scope of the present disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The drawings described herein are only for schematic purposes of the selected embodiments rather than all possible implementation, and are not intended to limit the scope of the present disclosure. In the drawings,

Figure 1a is a schematic diagram showing a scenario for performing D2D communication in a wireless communication system according to an embodiment of the present disclosure;

Figure 1b is a schematic diagram showing another

scenario for performing D2D communication in a wireless communication system according to an embodiment of the present disclosure;

Figure 2 is a block diagram showing a structure of a user equipment according to an embodiment of the present disclosure;

Figure 3 is a schematic diagram showing an example of content of a PUCCH from a UE to a UE;

Figure 4 is a flowchart showing a modulation and coding mode for control signaling according to an embodiment of the present disclosure;

Figure 5 is a schematic diagram showing a resource mapping mode for control signaling according to an embodiment of the present disclosure;

Figure 6 is a flowchart showing a modulation and coding mode for control signaling according to another embodiment of the present disclosure;

Figure 7 is a schematic diagram showing a resource mapping mode for control signaling according to another embodiment of the present disclosure;

Figure 8 is a schematic diagram showing a resource mapping mode for control signaling according to still another embodiment of the present disclosure;

Figure 9 is a block diagram showing a structure of a user equipment according to another embodiment of the present disclosure;

Figure 10 is a flowchart showing a modulation and coding mode in a case that control information and data information are transmitted simultaneously according to an embodiment of the present disclosure;

Figure 11 is a flowchart showing a resource mapping mode in a case that control information and data information are transmitted simultaneously according to an embodiment of the present disclosure;

Figure 12 is a schematic diagram showing an example of content of a PUCCH from a UE to a BS (base station) and content of a corresponding PDCCH;

Figure 13 is a block diagram showing a structure of a base station according to an embodiment of the present disclosure;

Figure 14 is a block diagram showing a structure of a user equipment according to still another embodiment of the present disclosure; and

Figure 15 is a block diagram showing an exemplary

structure of a general-purpose personal computer for implementing a method for performing D2D communication in a wireless communication system according to an embodiment of the present disclosure.

[0018] While the present disclosure is susceptible to various modifications and alternative forms, specific embodiments thereof have been shown by way of example in the drawings and are herein described in detail. It should be understood, however, that the description herein of specific embodiments is not intended to limit the present disclosure to the particular forms disclosed, but on the contrary, the intention of the present disclosure is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the present disclosure. Note that corresponding reference numerals indicate corresponding parts throughout the several views of the drawings.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0019] Examples of the present disclosure will now be described more fully with reference to the accompanying drawings. The following description is merely exemplary in nature and is not intended to limit the present disclosure, application, or uses.

[0020] Example embodiments are provided so that this disclosure will be thorough, and will fully convey the scope to those skilled in the art. Numerous specific details are set forth such as examples of specific components, devices, and methods, to provide a thorough understanding of embodiments of the present disclosure. It will be apparent to those skilled in the art that specific details need not be employed, that example embodiments may be implemented in many different forms and that neither should be construed to limit the scope of the disclosure. In some example embodiments, well-known processes, well-known structures, and well-known technologies are not described in detail.

[0021] The present disclosure relates to D2D (Device-to-Device) communication in a wireless communication network. A device related to the present disclosure includes but not limited to a terminal having a wireless communication function such as a mobile terminal, a computer or a vehicle equipment. For a challenge brought to control signaling on a physical layer due to the introduction of D2D technology, control signaling applicable to the D2D communication is designed in the present disclosure.

[0022] Based on the current standardization process, it is unanimously decided that the D2D communication is performed in an uplink resource. Compared with the conventional technology, the D2D communication has the following differences.

[0023] First, in the conventional design for the uplink control signaling, the base station completely controls actions of the terminal, and has known which mode (a modulation and demodulation mode, the size of a trans-

mission block) the uplink data is transmitted in before the data is transmitted, hence, the uplink control signaling does not need to carry related transmission information. However, in D2D peer-to-peer communication, the information must be agreed upon between communication equipments.

[0024] Second, in an HARQ (Hybrid Automatic Repeat Request) process of the conventional user-to-base-station communication, a confirmation for the received downlink channel is transmitted over an uplink control channel. A PHICH (Physical Hybrid ARQ Indicator Channel) is designed for the downlink channel to transmit a confirmation for uplink data. In the D2D communication, it is necessary to transmit the confirmation for the downlink data over the uplink channel, hence, the uplink control channel needs to be changed.

[0025] Third, in a case that the D2D communication and the conventional user-to-base-station communication are performed simultaneously, the control signaling thereof must be designed so that a resource is allocated reasonably in the two communication modes.

[0026] To this end, it is necessary to consider the following problems: information, necessary for the D2D communication, carried on the control channel; a format design for the control channel and a correspondence between the format design for the control channel and transmission resource; a transmission mode of the control information, and the like.

[0027] The present disclosure aims at providing a user equipment, a base station and a method for performing the D2D communication in a wireless communication system, to solve at least one of the above problems.

[0028] Figure 1a and Figure 1b show two scenarios for performing D2D communication in a wireless communication system according to the embodiments of the present disclosure. In the scenario as shown in Figure 1a, D2D communication is performed between a UE (User Equipment) 200 and a UE 300 in the wireless communication system. The UE 200 and the UE 300 perform a direct communication within a monitoring area of a base station 100 in a case that both the UE 200 and the UE 300 fall within a coverage area a of the base station 100. On the other hand, in a case that the coverage area of the base station is small, one (the UE 200) of the UE 200 and the UE 300 may be located outside of the coverage area of the base station 100 (as shown by the curve b in Figure 1), or both the UE 200 and the UE 300 are located outside of the coverage area of the base station 100 (as shown by the curve c in Figure 1). In the scenario as shown in Figure 1b, the UE 300 belongs to a cell in which the base station 100 is located and is located at the edge of the cell, and the UE 200 belongs to a cell in which a base station 100' is located and is located at the edge of the cell, and the UE 300 and the UE 200 perform D2D communication in the wireless communication system. The technical solution according to the embodiments of the present disclosure is applicable to any one of the above scenarios. In addition, it will be realized by those

skilled in the art that, although only two UEs are shown in Figure 1a and Figure 1b, the number of UEs in the wireless communication system may be three or more, which is not specially limited in the present disclosure.

[0029] It is provided in the present disclosure that peripheral devices (such as the UE 200 and the UE 300) are found by a discovering signal between D2D equipments, then the D2D communication is performed. Before this, certain control signaling is transmitted to implement real D2D communication.

[0030] Control information and data information may be transmitted separately or in a merged way in a case that the D2D communication is performed between the UE 200 and the UE 300. In a case that the control information and the data information are transmitted separately, the base station 100 may participate in the D2D communication performed between the UE 200 and the UE 300, or may not participate in the D2D communication performed between the UE 200 and the UE 300. In a case that the control information and the data information are transmitted in a merged way, the base station 100 does not participate in the D2D communication performed between the UE 200 and the UE 300.

[0031] Figure 2 shows a structure of a UE 210 according to an embodiment of the present disclosure. As shown in Figure 2, the UE 210 may include a control unit 211 and a transmitting unit 212. The UE 210 may further include a modulating unit 213 and a mapping unit 214. Furthermore, the control unit 211 may further include a data transmission format determining unit 2111 and a power control unit 2112.

[0032] The transmitting unit 212 is controlled by the control unit 211, and may be for transmitting control information to another UE via an uplink channel. Here, the control information may include at least one of data transmission format information and power control information.

[0033] For example, the data transmission format information may include at least one of: transmission block allocation for allocating a resource block transmitted on a PUSCH (Physical Uplink Shared Channel) of the opposite equipment, for example, the transmission block allocation may have a same or similar format as resource block assignment bits in the 3GPP standard; MCS (Modulation and Coding Scheme) which, for example, occupies 5 bits for indicating a modulation and coding format; new data indication, which, for example, occupies 1 bit for identifying whether the data is new data or retransmission data, for example, the new data indication may have a same or similar format to a new data indicator in the 3GPP standard; and a cell ID and a cell bandwidth for calculating frequency hopping mapping from a virtual resource block to a physical resource block.

[0034] For example, the power control information may include a power control command indication (the number of bits thereof is determined based on a specific power control scheme) for indicating a power control mode of the opposite equipment. For example, the power control

information may have a same or similar format as a TPC command in the 3GPP standard.

[0035] As mentioned above, in the conventional design for uplink control signaling, the base station completely controls actions of a terminal, and has known which mode the uplink data is transmitted in before the data is transmitted, hence, the uplink control signaling does not need to carry related transmission information. However, in D2D peer-to-peer communication, this information must be agreed upon between communication equipments. Hence, the control information including at least one of the data transmission format information and the power control information transmitted to another UE by the transmitting unit 212 of the UE 210 via the uplink channel may be agreed upon between the UE 210 and another UE, thereby performing the D2D communication. It should be noted that, the UE 210 described above may be a party directly participating in the D2D communication, or may be a UE (such as a cluster head) for providing control for D2D communication performed between other two or more UEs. In the latter case, the UE 210 transmits the control information described above to other at least two UEs via the uplink channel, so that information is agreed upon between the UEs participating in the D2D communication.

[0036] According to an embodiment of the present disclosure, the data transmission format determining unit 2111 of the control unit 211 may determine data transmission format information. In particular, for transmission block allocation in the data transmission format information, for example, the data transmission format determining unit 2111 may select an appropriate resource from resource blocks allocated by the base station for the D2D communication, based on the size of traffic and interference situation, or select a resource which is negotiated in a D2D discovering process before the D2D communication is performed. For the MCS in the data transmission format information, the data transmission format determining unit 2111 may select the MCS based on a channel condition. For example, a high-order modulation and demodulation mode may be used in a case that the channel condition is good. In addition, for example, a low-order modulation and demodulation mode may be used in a case of broadcasting. The new data indication in the data transmission format information is used to identify whether the data is new data or retransmission data. For example, the data transmission format determining unit 2111 may set the new data indication to be 1 in a case of the new data, and may set the new data indication to be 0 in a case of the retransmission data. The data transmission format determining unit 2111 may set the cell ID and the cell bandwidth in the data transmission format information to be a cell ID and a cell bandwidth of a cell where the UE 210 is located.

[0037] In a case that the transmission block allocation and the MCS are determined, for example, the data transmission format determining unit 2111 may negotiate with the base station to ensure that: resource allocation for

UE-to-UE and resource allocation for UE-to-base-station does not cause serious mutual interference while maximizing respective communication capacity thereof; and no serious mutual interference is caused between different UE-to-UE communication pairs. In a case of no base station, for example, the data transmission format determining unit 2111 may enable no serious mutual interference between different UE-to-UE communication pairs based on a preset algorithm and channel feedback (if any) from other UEs.

[0038] According to an embodiment of the present disclosure, the power control unit 2112 of the control unit 211 may determine power control information. In particular, for the power control command indication in the power control information, the power control unit 2112 may use different power control methods based on different communication conditions. Those skilled in the art may use various power control algorithms for the D2D communication, which is not specially limited in the present disclosure.

[0039] For example, the power control unit 2112 may adjust transmitting power reasonably based on information such as a distance, relative motion, surrounding interference situation between D2D communication terminals and residual electricity quantity of the terminal by interacting with the base station, so that throughout can be ensured without strongly interfering peripheral equipments.

[0040] Furthermore, the control information transmitted by the transmitting unit 212 may further include at least one of channel status report information, HARQ (Hybrid Automatic Repeat Request) confirmation information, transmission priority information and transmission stability indication information.

[0041] For example, the channel status report information may include: a channel status transmitting request, for example, which occupies 1 bit for displaying a request to transmit a channel status report; and the channel status report which is a status report for the uplink channel.

[0042] For example, the HARQ confirmation information occupies 1 bit for indicating HARQ ACK or NACK, which is a confirmation for UL-SCH (Uplink Shared Channel) received before.

[0043] For example, the transmission priority information may include data priority indication, which, for example, occupies 2 bits for identifying a priority of PUSCH transmission data (if any) of a local equipment. The highest priority corresponds to a public security incident. The data priority indication may also be used to distinguish priority between cluster-header-to-user data and user-to-user data in a case that a cluster head exists. A reasonable resource allocation mode may be set by the opposite equipment based on the transmission priority information.

[0044] For example, the transmission stability indication information may include data transmission stability indication which, for example, occupies 2 bits for identifying the stability of data transmission (if any) of the local

equipment. The D2D communication has a feature of immediacy. Data transmission may be unstable due to factors such as mobility and residual electricity quantity of the terminal, and interference from the peripheral equipments. In a case that the local equipment has a high mobility or has low residual electricity quantity, the transmission stability indication information may be set, so that the opposite equipment determines a receiving mode for subsequent data based on the transmission stability indication information, even initiates a discovering process or a communication process to other equipments again.

[0045] It should be noted that, in the above description, preferably, the control information transmitted to another UE from the UE 210 according to the embodiment of the present disclosure includes at least one of the data transmission format information and the power control information, however, which is not intended to limit the present disclosure. For example, the control information transmitted to another UE from the UE 210 via the uplink channel may not include the data transmission format information or the power control information described above, and may include at least one of the channel status report information, the HARQ confirmation information, the transmission priority information and the transmission stability indication information, such technical solution also falls within the scope of the present disclosure.

[0046] According to the embodiment of the present disclosure, the transmitting unit 212 may directly transmit the control information to another user equipment by using a PUCCH (Physical Uplink Control Channel). In this case, the base station will not participate in transmission for control signaling between D2D equipments. In order to distinguish from the PUCCH in the conventional technology, hereinafter, the PUCCH in this case is referred to as a DPUCCH (Device PUCCH). In this case, transmitting content, a modulation and demodulation mode of the DPUCCH and a mapping relation between the DPUCCH and time-frequency resource should be designed in consideration of characteristics of the D2D communication.

[0047] Based on a classification of the transmission content, the DPUCCH may have at least one of the following formats:

a first DPUCCH format for transmitting at least one of the channel status report information and the HARQ confirmation information;

a second DPUCCH format for transmitting the data transmission format information and the power control information, or for transmitting the data transmission format information, the power control information and at least one of the transmission priority information and the transmission stability indication information; and

a third DPUCCH format for transmitting the data

transmission format information, the power control information, the channel status report information and the HARQ confirmation information, or for transmitting the data transmission format information, the power control information, the channel status report information, the HARQ confirmation information and at least one of the transmission priority information and the transmission stability indication information.

[0048] Specifically, for example, the DPUCCH may have the following formats:

DPUCCH Format 1: the channel status report information;

DPUCCH Format 1a: the channel status report information and the HARQ confirmation information;

DPUCCH Format 1b: the HARQ confirmation information;

DPUCCH Format 2: the data transmission format information and the power control information;

DPUCCH Format 2a: the data transmission format information and the power control information and the transmission priority information and the transmission stability indication information;

DPUCCH Format 3: the data transmission format information and the power control information and the HARQ confirmation information and the channel status report information;

DPUCCH Format 3a: the data transmission format information and the power control information and the HARQ confirmation information and the channel status report information and the transmission priority information and the transmission stability indication information.

[0049] Figure 3 shows an example of content of a PUCCH from a UE to a UE. The PUCCH as shown in Figure 3 may be considered as the DPUCCH mentioned above. It should be noted that, Figure 3 is only exemplary to enable the present disclosure to be understood easily, rather than limit the DPUCCH according to the present disclosure.

[0050] A modulation and resource mapping mode may be different depending on different transmission formats. In this case, the modulating unit 213 is controlled by the control unit 211 for modulating the DPUCCH into OFDM (Orthogonal Frequency Division Multiplexing) symbols.

[0051] Furthermore, the mapping unit 214 is controlled by the control unit 211 for mapping the OFDM symbols onto time slots in subframes. A location of a reference symbol on the time slots may be disposed by the mapping unit 214 depending upon a format of the DPUCCH. Various

DPUCCH formats may have various locations of the reference symbol.

[0052] For example, the channel status report information and/or the HARQ confirmation information are transmitted when DPUCCH uses the first DPUCCH format (that is, the DPUCCH Format 1, DPUCCH Format 1a or DPUCCH Format 1b above). The channel status report information may have multiple information bits, which data block coding and QPSK (Quadrature Phase Shift Keying) modulation is performed on, and then is converted into OFDM symbols by IFFT (Inverse Fast Fourier Transform) and is mapped.

[0053] Figure 4 shows a flowchart of a modulation and coding mode when DPUCCH uses the first DPUCCH format according to an embodiment of the present disclosure. As shown in Figure 4, the modulating unit 213 may perform a data block coding process S310, a scrambling process S320, a QPSK process S330 and an IFFT process S340 in sequence, the OFDM symbols is obtained in this way. Here, the data block coding process, the scrambling process, the QPSK process and the IFFT process are well-known for those skilled in the art, hence, which are not described in detail in the present disclosure.

[0054] Figure 5 shows an example of a resource mapping mode when DPUCCH uses the first DPUCCH format according to an embodiment of the present disclosure. In Figure 5, a box having a grid represents a reference symbol, and a blank box represents a control symbol.

[0055] As shown in Figure 5, in a case of a normal CP (Cyclic Prefix) length, seven OFDM symbols of one time slot includes two reference symbols for channel measurement and five symbols for transmitting control information. This allocation mode is to balance accuracy of the channel measurement and energy of useful information, and two symbols are enough to reach a performance index for the channel measurement.

[0056] Specifically, in an example as shown in Figure 5, one time slot includes two reference symbols. One time slot includes seven OFDM symbols in a case that the subframe has a normal CP length. The mapping unit 214 may dispose the two reference symbols at a location of a third OFDM symbol and a location of a fourth OFDM symbol respectively in a case that the DPUCCH uses the first DPUCCH format.

[0057] One time slot only includes six OFDM symbols in a case that an extended CP length is required for the D2D communication. In this case, the last one OFDM symbol on each time slot having the normal CP length is removed by the mapping unit 214, and the symbol number and the mapping of the reference signals are unchanged.

[0058] Specifically, one time slot includes two reference symbols. One time slot includes six OFDM symbols in a case that the subframe has the extended CP length. The mapping unit 214 may dispose two reference symbols at a location of a third OFDM symbol and a location of a fourth OFDM symbol respectively in a case that the DPUCCH uses the first DPUCCH format.

[0059] Furthermore, for example, the data transmission format information and the power control information or further at least one of the transmission priority information and the transmission stability indication information are transmitted in a case that the DPUCCH uses the second DPUCCH format (that is, the DPUCCH Format 2 or DPUCCH Format 2a above). In this case, OFDM modulation pre-coded by the DFT (Discrete Fourier Transform) is performed on data to be transmitted, data block coding is performed on the data first, and then the data is modulated by QPSK, frequency-domain averaging is performed on the data by the DFT before OFDM modulation, and the data is converted into OFDM symbols by the IFFT, and is then mapped.

[0060] Figure 6 shows a flowchart of a modulation and coding mode when DPUCCH uses the second DPUCCH format according to another embodiment of the present disclosure. As shown in Figure 6, the modulating unit 214 may perform a data block coding process S510, a scrambling process S520, a QPSK process S530, a DFT process S540 and an IFFT process S550 in sequence, OFDM symbols are obtained in this way. Here, the data block coding process, the scrambling process, the QPSK process, the DFT process and the IFFT process are well-known for those skilled in the art, hence, which are not described in detail in the present disclosure.

[0061] Figure 7 shows an example of a resource mapping mode when DPUCCH uses the second DPUCCH format according to an embodiment of the present disclosure. In Figure 7, similarly, a box having a grid represents the reference symbol, and a blank box represents the control symbol.

[0062] In the example as shown in Figure 7, one time slot includes two reference symbols. One time slot includes seven OFDM symbols in a case that the subframe has a normal CP length. The mapping unit 214 may dispose two reference symbols at a location of a fourth OFDM symbol and a location of a fifth OFDM symbol respectively in a case that the DPUCCH uses the second DPUCCH format.

[0063] Similarly, one time slot only includes six OFDM symbols in a case that an extended CP length is required for the D2D communication. In this case, the last one OFDM symbol on each time slot having the normal CP length is removed by the mapping unit 214, and the symbol number and the mapping of the reference signals are unchanged.

[0064] Specifically, one time slot includes two reference symbols. One time slot includes six OFDM symbols in a case that the subframe has the extended CP length. The mapping unit 214 may dispose two reference symbols at a location of a fourth OFDM symbol and a location of a fifth OFDM symbol respectively in a case that the DPUCCH uses the second DPUCCH format.

[0065] Furthermore, for example, the data transmission format information, the power control information, the channel status report information and the HARQ information, or further at least one of the transmission pri-

ority information and the transmission stability indication information are transmitted in a case that the DPUCCH uses the third DPUCCH format (that is, the DPUCCH Format 3 or DPUCCH Format 3a above). In this case, the channel status report information may have multiple information bits. The OFDM modulation pre-coded by the DFT is performed on data to be transmitted, data block coding is performed on the data first, and then the data is modulated by QPSK, frequency-domain averaging is performed on the data by the DFT before OFDM modulation, and the data is converted into OFDM symbols by the IFFT, and then is mapped. That is, a modulation and coding mode when DPUCCH uses the third DPUCCH format may be the same as a modulation and coding mode when DPUCCH uses the second DPUCCH format.

[0066] Figure 8 shows an example of a resource mapping mode when DPUCCH uses the third DPUCCH format according to an embodiment of the present disclosure. In Figure 8, similarly, a box having a grid represents the reference symbol, and a blank box represents the control symbol.

[0067] In an example as shown in Figure 8, one time slot includes two reference symbols. One time slot includes seven OFDM symbols in a case that the subframe has a normal CP length. The mapping unit 214 may dispose two reference symbols at a location of a second OFDM symbol and a location of a sixth OFDM symbol respectively in a case that the DPUCCH uses the third DPUCCH format.

[0068] In addition, One time slot only includes six OFDM symbols in a case that an extended CP length is required for the D2D communication. In this case, an OFDM symbol in the middle of the time slot having the normal CP length is removed by the mapping unit 214, and the symbol number and the mapping of the reference signals are unchanged.

[0069] Specifically, one time slot includes two reference symbols. One time slot includes six OFDM symbols in a case that the subframe has the extended CP length. The mapping unit 214 may dispose two reference symbols at a location of a second OFDM symbol and a location of a fifth OFDM symbol respectively in a case that the DPUCCH uses the third DPUCCH format.

[0070] It should be indicated that, the content transmitted by the DPUCCH and the format classification of the DPUCCH described above is different from a way considered in designing a PUCCH of a conventional user-to-base-station, the differences are described as follows.

[0071] First, in the conventional design for the uplink control signaling, the base station completely controls actions of the terminal, and has known which mode (a modulation and demodulation mode, the size of a transmission block) the uplink data is transmitted in before the data is transmitted, hence, the uplink control signaling does not need to carry related transmission information. However, in D2D peer-to-peer communication, the information must be agreed upon between communication equipments. The transmission priority information may

be added considering that the D2D communication may be applied into a public security situation and may have a cluster head structure. Also, since the D2D has a feature of instant messaging, stability information may be added to raise flexibility of resource scheduling.

[0072] Second, formats of control signaling of the conventional user-to-base-station are mainly classified based on types of the transmitted control information. In the present disclosure, various scenarios of D2D communication should also be considered when classifying the formats of DPUCCH. The data may be transmitted in a broadcasting mode under a public security scenario. In the broadcasting mode, the HARQ information and the channel status information are not the control information transmitted necessarily (it can be considered that the control information transmitted in the broadcasting mode is a subset of control information in the point-to-point communication mode). In this case, the Format 2 or the Format 2a is suitable. In the point-to-point D2D communication, it is beneficial to improve the communication performance in a case that the HARQ information and the channel status information are added. Hence, the Format 1, the Format 1a and the Format 1b are suitable to only transmit the control-type information such as the HARQ information and the channel status information, and the Format 3 and the Format 3a are suitable to transmit control information for the subsequent data information, and for joint transmission for the HARQ information and the channel status information with the control information for the subsequent data information.

[0073] Third, when the OFDM symbols are mapped, since a DPUCCH format can be determined based on the location of the reference signals of the received sub-frame, thereby avoiding blind detection.

[0074] D2D communication in various scenarios uses a uniform format of the control signaling by the above design, thereby reducing difficulty of the implementation.

[0075] It should be described that, resource mapping modes as shown in Figure 5, Figure 7 and Figure 8 are merely examples, the present disclosure is not limited to these specific resource mapping modes. The reference symbols may also be disposed at other locations on the time slot, so long as the DPUCCH formats can be distinguished.

[0076] A case that the transmitting unit of the UE directly transmits the control information to another UE using the DPUCCH is described above. Alternatively, the transmitting unit may also transmit the control information to another UE using a PUSCH. In this case, the base station also does not participate in transmission for the control information between D2D equipments.

[0077] Figure 9 shows a structure of a UE 220 according to another embodiment of the present disclosure. As shown in Figure 9, the UE 220 may include a control unit 221, a transmitting unit 222, a modulating unit 223 and a multiplexing unit 225. The UE 220 may further include a mapping unit 224. The transmitting unit 222 as shown in Figure 9 corresponds to the transmitting unit 212 as

shown in Figure 2. However, the transmitting unit 222 herein transmits control information and data information simultaneously.

[0078] Furthermore, the modulating unit 223 is controlled by the control unit 221 for modulating data transmission format information and power control information.

[0079] Thus, the multiplexing unit 225 is controlled by the control unit 221 for causing the data transmission format information and the power control information modulated by the modulating unit 223 to participate in multiplexing with the data information.

[0080] Preferably, the modulating unit 223 may further modulate at least one of transmission priority information and transmission stability indication information. In addition, the control unit 221 may cause the at least one of the transmission priority information and the transmission stability indication information modulated by the modulating unit 223 to incorporate into a bit stream multiplexed by the multiplexing unit 225 in a slotting manner.

[0081] It should be emphasized that, control information on a Scheduling Request is not necessary to be transmitted in a case that control information and data information of the conventional user-to-base-station are transmitted simultaneously. This is because that, a mode in which the control information and the data information are transmitted simultaneously occurs on the premise that respective physical resource has been allocated. The D2D communication may occur without being covered by a base station, in this case, it is necessary to notify an opposite equipment of physical resource dynamically allocated to the opposite party to transmit. Hence, related information on the data transmission format is transmitted.

[0082] Figure 10 shows a flowchart of a modulation and coding mode in a case that control information and data information are transmitted simultaneously according to an embodiment of the present disclosure.

[0083] As shown in Figure 10, a Turbo coding process, a rate matching process and a QPSK/16/64QAM (Quadrature Amplitude Modulation) process are performed on the data information in sequence.

[0084] A convolution coding process, the rate matching process and the QPSK/16/64 QAM process are performed for CQI (Channel Quality Indication) and PMI (Precoding Matrix Indicator) information in sequence.

[0085] The Turbo coding process, the rate matching process and a QPSK process are performed for the data transmission format information in sequence.

[0086] The convolution coding process, the rate matching process and the QPSK/16/64 QAM process are performed for the power control information in sequence.

[0087] A data block coding process, the rate matching process and the QPSK process are performed for RI (rank indication) information in sequence.

[0088] The data block coding process and the QPSK process are performed for the transmission priority information and the transmission stability indication informa-

tion in sequence.

[0089] The data coding process and the QPSK process are also performed for the HARQ confirmation information in sequence.

[0090] Specifically, the modulating unit 223 may modulate the data transmission format information by performing the Turbo coding process, the rate matching process and the QPSK process in sequence. The multiplexing unit 225 may cause the data transmission format information modulated by the modulating unit 223 to participate in multiplexing with the data information.

[0091] Furthermore, the modulating unit 223 may further modulate the power control information by performing the convolution coding process, the rate matching process and the QPSK/16/64 QAM process in sequence. The multiplexing unit 225 may further cause the power control information modulated by the modulating unit 223 to participate in multiplexing with the data information.

[0092] In addition to the data transmission format information, the power control information and the data information, the CQI information, the PMI information and the RI information may also participate in multiplexing.

[0093] In addition, the modulating unit 223 may further module at least one of the transmission priority information and the transmission stability indication information by performing the data block coding process and the QPSK process in sequence. The control unit 221 may cause the at least one of the transmission priority information and the transmission stability indication information modulated by the modulating unit 223 to incorporate into a bit stream multiplexed by the multiplexing unit 225 in a slotting manner.

[0094] Furthermore, the HARQ confirmation information may also be added to the multiplexed bit stream in a slotting manner.

[0095] The DFT process and the IFFT process are performed on the multiplexed bit stream in sequence to obtain OFDM symbols.

[0096] The Turbo coding process, the rate matching process and the QPSK/16/64 QAM process described above are well-known for those skilled in the art, which are not described in detail in the present disclosure.

[0097] It should be described that, since the data transmission format information is important, QPSK modulation having a good robustness is used. QPSK coding may also be used for the transmission priority indication information and the transmission stability indication information to ensure performance. A power control command (the power control information) may use a same modulation mode as the data information.

[0098] In addition, the transmission priority indication information and the transmission stability indication information are control information which is optional based on the priority and the stability of data to be transmitted, and the opposite equipment does not know whether the two bits are transmitted. A data rate of the transmitting terminal does not match with a data rate of the receiving terminal in a case that the two indication information par-

ticipate in rate matching with other data. Hence, processing for the two indication information is the same as the processing for the HARQ confirmation information, that is, the two indication information incorporate into a bit stream coded by other information in a slotting manner.

[0099] According to an embodiment of the present disclosure, the mapping unit 224 is controlled by the control unit 221 for mapping the control information onto subframes. Herein, the mapping unit 224 may dispose the data transmission format information at a location close to that of reference symbols.

[0100] Figure 11 shows a resource mapping mode in a case that control information and data information are transmitted simultaneously according to an embodiment of the present disclosure. As shown in Figure 11, a horizontal axis represents a subframe of 1 ms, a vertical axis represents a DFTS-OFDM (Discrete Fourier Transform Spread OFDM) symbol. A box labeled as a number "1" represents a reference signal, a box labeled as a number "2" represents the data transmission format information, a box labeled as a number "3" represents the HARQ confirmation information, a box labeled as a number "4" represents the power control information, a box labeled as a number "5" represents the RI information, a box labeled as a number "6" represents the transmission priority information and the transmission stability indication information, a box labeled as a number "7" represents the CQI information and PMI information, and the rest of boxes is user data. A general design principle is to dispose important information such as the HARQ confirmation information, the RI information and the data transmission format information to be close to the reference symbols to ensure the accuracy of demodulation.

[0101] In addition, in broadcasting communication, only the HARQ information and the channel status information are removed, and a modulation and coding mode and a resource mapping mode for other information may be unchanged.

[0102] An example in which the D2D communication is controlled by a UE is described above, for example, wherein the base station does not participate in the D2D communication between UEs. In a case that at least one of the UEs (a UE directly participating in the D2D communication or a cluster head for providing control for D2D communication performed between other UEs) related to the D2D communication is located within a coverage area of the base station, specifically, for example, in a case that the UEs for the D2D communication are all located within the coverage area of the base station (as shown by the curve a in Figure 1), the base station may also participate in the D2D communication between the UEs.

[0103] According to an embodiment of the present disclosure, the wireless communication system may further include a base station, and the transmitting unit of the UE may transmit a D2D SR (Scheduling Request) to the base station using a PUCCH.

[0104] A resource for communication between termi-

nals may be allocated by the base station in a semi-static way or in a dynamic way, and an allocation way may also be based on a cell or a terminal. In a case that the allocation way is based on the cell or is a semi-static way, all terminals which support the D2D communication are notified of the allocated resource by high-layer signaling before communication. In this case, the resource allocation is performed without assistance from control signaling in the physical layer. Apparently, the resource allocation mentioned above has no flexibility, so that the base station does not effectively use the resource based on real-time resource usage and interference scenario. However, in a case that resource allocation scheme is changed frequently by the high-layer signaling in order to improve the flexibility of resource usage, a load of RRC (Radio Resource Control) signaling may be increased. Therefore, a dynamic resource allocation way based on the terminal has apparent advantage. In order to support such resource allocation way, enhancement for the existing PUCCH is not complicated. The future network needs to support concurrent communication of user-to-base-station communication and user-to-user communication. In order to implement the concurrent communication of the two communication modes, resources thereof should be allocated simultaneously, and mutual interference should be avoided in a process of allocating the resources. Hence, bit information is added, which is referred to as a D2D Scheduling Request (D2D SR) to identify whether a D2D communication resource is required to be allocated. Next, it is required to determine which PUCCH format the bit information is added to.

[0105] In the existing standard, the PUCCH may have at least one of the following formats:

a first PUCCH format for transmitting the HARQ confirmation information or the SR;

a second PUCCH format for transmitting the channel status information; and

a third DPUCCH format for transmitting the HARQ confirmation information, the SR, or the channel status information.

[0106] It should be described that, the first PUCCH format is used for transmitting the HARQ confirmation information or the Scheduling Request, but the Scheduling Request is implemented by energy detection and is not suitable to be a carrier for loading the D2D SR.

[0107] The second PUCCH is mainly used for transmitting the channel status information, hence, in order to raise backward compatibility, the second PUCCH is not suitable to load the D2D SR, either.

[0108] The third PUCCH format is used for transmitting the HARQ confirmation information, the Scheduling Request and the channel status information. Data transmission amount will not be increased apparently even if bit of the D2D SR is added, since multi-bits transmission are

supported by the third PUCCH format for carrier aggregation. Hence, it is preferable in the present disclosure that the bit of the D2D SR is added using the third PUCCH format, to transmit a resource allocation request for performing the D2D communication to the base station. The subsequent processes such as a coding process, a scrambling process, a modulation process is the same as the existing standard, which is not described repeatedly. However, the above discussion is a preferred solution set forth based on the conventional technology, which is not intended to limit the present disclosure. It should be understood that, with the development of technology, other PUCCH formats may occur or the existing three PUCCH formats are changed. Based on the conception of the present disclosure, the bit of the D2D SR may also be added to other PUCCH formats, thereby realizing a technical effect indicating that a communication resource requested to the base station is used for the D2D communication.

[0109] As described above, for example, the control unit of the UE may represent the D2D SR by adding the bit to the third PUCCH format. Specifically, the control unit of the UE may represent the D2D SR by adding one bit to the third DPUCCH format. In this case, the bit indicates that a resource requested to be allocate is a resource for the D2D. The number of equipments participating in the D2D communication may be one or more since an equipment, such as an opposite equipment, participating in the D2D communication is not indicated clearly. Accordingly, resource allocated by the base station may be a resource pool from which the UE may select. It should be noted that, an UE which transmits the D2D SR to the base station may be a party which directly participates in the D2D communication, or a UE only provides control for D2D communication performed between other UEs, such as a cluster head. In the latter case, the UE such as the cluster head allocates a resource to the corresponding UE via the DPUCCH described above after acquiring the D2D resource allocated by the base station.

[0110] Alternatively, the control unit may also represent the D2D SR by redefining a bit representing the SR in the third PUCCH format. Alternatively, the control unit may also represent the D2D SR by redefining a bit representing the SR in the first PUCCH format and adding modulation and demodulation for the PUCCH having the first PUCCH format. In this case, for example, a Scheduling Request is used for the D2D in a case that the bit is 1; a Scheduling Request is used for device-to-base-station in a case that the bit is 0; and there is no Scheduling Request in a case that the bit does not exist. In addition, the transmitting unit needs to transmit the PUCCH twice in a case that the Scheduling Request for the D2D and the Scheduling Request for the device-to-base-station exist simultaneously.

[0111] In addition, the control unit of the UE may represent another UE which participates in the D2D transmission by further adding an RNTI (Radio Network Tem-

porary Identifier) to the PUCCH.

[0112] Specifically, for example, a RNTI identifier of 16 bits may be added into the third PUCCH format, to specify a D2D opposite equipment with which it is hoped to communicate. The specification may be used to specify unique D2D equipment with which it is hoped to communicate. A standard for selecting the D2D equipment may be information such as user preference, a distance, data information stored by the opposite equipment or terminal energy consumption. The information is especially applicable to specify the opposite equipment in a case that a range of the D2D communication is limited or in a case that communication is performed with the cluster head (if any) in D2D communication. Also, after receiving the information, the base station associates an identifier of uplink scheduling grant for the PDCCH (Physical Downlink Control Channel) with the received RNTI information, to indicate a receiving terminal for the uplink scheduling grant.

[0113] Figure 12 shows an example of content of a PUCCH from a UE to a BS (base station) and content of a corresponding PDCCH. As shown in Figure 12, "a bit for indicating UE-UE or UE-BS" in the PDCCH may correspond to "a bit for indicating UE-UE or UE-BS" in a Scheduling Request in the PUCCH, and an identifier "indicated implicitly by using CRC (Cyclic Redundancy Check)" in UL-Grant in the PDCCH may include "a bit for indicating an RNTI of an opposite UE" in a Scheduling Request in the PUCCH.

[0114] It should be described that, an identifier of the uplink scheduling grant is not necessarily transmitted to a terminal by the base station explicitly, or may be included in CRC calculation implicitly. In a case that a terminal with which it is hoped to communicate is specified in the Scheduling Request, the base station may transmit the uplink transmission grant to a corresponding specified communication terminal in addition to transmitting the uplink scheduling grant to a terminal transmitting a request, identifiers in the grants are all associated with the RNTI of the receiving terminal by CRC implicitly.

[0115] According to the embodiment of the present disclosure, the CRC may be scrambled by the RNTI of the UE on the receiving end. For example, it is provided that a first user equipment UE1 wants to perform D2D communication with a second user equipment UE2 and transmits an SR to the base station. In this case, the base station transmits an uplink scheduling grant to the UE1 after using the RNTI of the UE1 to scramble the CRC, and the base station transmits an uplink scheduling grant to the UE2 after using the RNTI of the UE2 to scramble the CRC.

[0116] Furthermore, according to the embodiment of the present disclosure, two RNTIs may be used to scramble. For example, it is provided that the UE1 wants to perform D2D communication with multiple user equipments UE_i+1 (i=1, 2, 3,.....) and transmits an SR (the SR indicates a list of a single UE or multiple UEs, which is an SR list) to the base station. In this case, the base

station transmits an uplink grant to the UE1 after using an RNTI of the UE1 and an RNTI of the UE_i+1 to scramble the CRC, and the base station transmits an uplink scheduling grant to the UE_i+1 after using the RNTI of the UE1 and the RNTI of the UE_i+1 to scramble the CRC.

[0117] It is provided that the UE_i+1 has recorded RNTIs (a potential RNTI list) of all the UEs which want to perform D2D communication by a D2D discovering signal. In this case, when the uplink scheduling grant is received by the UE1, the UE1 may try every possible combination of a RNTI in the SR list and a RNTI of UE1 until the CRC is descrambled successfully. Meanwhile, when the uplink scheduling grant is received by the UE_i+1, the UE_i+1 may try every possible combination of a RNTI of any UE in the potential RNTI list and a RNTI of the UE_i+1 until the CRC is descrambled successfully.

[0118] In addition, the control unit of the UE may further represent an opposite equipment participating in the D2D by adding other information such as a bit pattern to the PUCCH.

[0119] Specifically, in a case that the base station and the UE agree upon the RNTI, an object which is applied for using the D2D resource may be indicated by information which occupies less resource than the RNTI. For example, the bit pattern is used, in which, a bit 1 indicates that an opposite equipment associated with the bit is applied for the D2D resource, and a bit 0 indicates that an opposite equipment associated with the bit does not apply for the D2D resource. For example, it is provided that the UE hopes to perform D2D communication with two opposite equipments. In this case, there are three user equipments a, b and c which support the D2D communication in the communication network. In this case, an SR bit and a bit pattern 011 transmitted by the UE indicate that two opposite equipments b and c are applied for the D2D communication resource.

[0120] As described above, the D2D SR is especially suitable for a dynamic resource scheduling mode. It can be extended that, a bit of the D2D SR may also be used for a semi-static scheduling mode. In the semi-static scheduling mode, the base station generally changes the resource configuration by RRC signaling actively in a case that the resource configuration mode is required to be changed. After the D2D SR is added, the terminal may evaluate communication quality based on usage of the configured resource, and the terminal actively notifies the base station of reconfiguring the semi-static resource by the D2D SR in a case that the communication quality does not meet a requirement. Thus, the flexibility and the performance of the semi-static scheduling mode are enhanced. Meanwhile, the D2D SR may also be extended into a user-to-cluster-head structure.

[0121] Figure 13 shows a structure of a base station 100 according to an embodiment of the present disclosure. As shown in Figure 13, the base station 100 may include a control unit 101, a receiving unit 102 and a transmitting unit 103.

[0122] The receiving unit 102 is controlled by the con-

trol unit 101 for receiving a signal from at least one of a first UE and a second UE (such as the UE 200 and the UE 300 in Figure 1).

[0123] The transmitting unit 103 is controlled by the control unit 101 for transmitting uplink scheduling grant information to the first UE using a PDCCH when the receiving unit 102 receives a D2D SR for performing D2D communication between the first UE and the second UE, for example, from the first UE. Herein, the control unit 101 makes a representation of whether a resource is allocated for D2D or device-to-base-station by adding a bit (such as one bit) to the uplink scheduling grant information. For example, the uplink scheduling grant information may have a same or similar format as DCI (Downlink Control Information) format 0, DCI format 4 in the 3GPP standard, which may be collectively referred to as UL Grant information.

[0124] Specifically, after the D2D SR is received by the receiving unit 102 of the base station 100, the base station 100 allocates a subsequent transmission resource based on current resource usage, resource configuration of a requesting terminal and resource configuration of peripheral equipments, the allocated resource is indicated by the uplink scheduling grant on the downlink PDCCH of the base station. One bit identifier (D2D Flag) is added in the uplink scheduling grant to identify whether the resource is used for user-to-base-station communication or user-to-user communication.

[0125] According to the embodiment of the present disclosure, the control unit 101 may indicate a second UE participating in the D2D transmission by associating an identifier of the uplink scheduling grant information with an RNTI in a case that a PUCCH signal transmitted by the first UE includes the RNTI.

[0126] Figure 14 shows a structure of an UE 300 according still another embodiment of the present disclosure. As shown in Figure 14, the UE 300 includes a control unit 301 and a receiving unit 302.

[0127] The receiving unit 302 is controlled by the control unit 301 for receiving control information transmitted by another UE. Herein, the control information may include at least one of data transmission format information and power control information.

[0128] The control unit 301 may perform data transmission format setting based on the data transmission format information in the control information received by the receiving unit 302. For example, the control unit 301 may perform resource block allocation for PUSCH transmission based on transmission block allocation in the data transmission format information. The control unit 301 may determine a modulation and coding format based on an MCS in the data transmission format information. The control unit 301 may determine whether data is new data or retransmission data based on new data indication in the data transmission format information. The control unit 301 may calculate a frequency hopping mapping from a virtual resource block onto a physical resource block based on a cell ID and a cell bandwidth

in the data transmission format information.

[0129] Furthermore, the control unit 301 may perform power control setting based on the power control information in control information received by the receiving unit 302. Specifically, the control unit 301 may determine a power control mode of the user equipment 300 based on power control command indication in the power control information.

[0130] Data information to be transmitted by the UE 300 is sent to a corresponding opposite equipment of the D2D communication after being processed by the control unit 301 described above.

[0131] According to an embodiment of the present disclosure, the control unit 301 may determine a format of PUCCH (that is DPUCCH) for transmitting the control information based on information on a location of a reference symbol on each time slot.

[0132] Taking Figure 5, Figure 7 and Figure 8 described above as an example, in a case of a normal CP length, two reference symbols are disposed at a location of the third OFDM symbol and a location of the fourth OFDM symbol respectively (as shown in Figure 5) in a case that the DPUCCH uses the first DPUCCH format; two reference symbols are disposed at a location of the fourth OFDM symbol and a location of the fifth OFDM symbol respectively (as shown in Figure 7) in a case that the DPUCCH uses the second DPUCCH format; and two reference symbols are disposed at a location of the second OFDM symbol and a location of the sixth OFDM symbol respectively (as shown in Figure 8) in a case that the DPUCCH uses the third DPUCCH format.

[0133] Thus, in a case of a normal CP length, the control unit 301 determines the first DPUCCH format is used in a case of finding that two reference symbols are disposed at the location of the third OFDM symbol and the location of the fourth OFDM symbol respectively; the control unit 301 determines that the second DPUCCH format is used in a case of finding that two reference symbols are disposed at the location of the fourth OFDM symbol and the location the fifth OFDM symbol respectively; or the control unit 301 determines that the third DPUCCH format is used in a case of finding that two reference symbols are disposed at the location the second OFDM symbol and the location of the sixth OFDM symbol respectively.

[0134] Furthermore, in a case of the extended CP length, two reference symbols are disposed at a location of the third OFDM symbol and a location of the fourth OFDM symbol respectively in a case that the DPUCCH uses the first DPUCCH format; two reference symbols are disposed at a location of the fourth OFDM symbol and a location of the fifth OFDM symbol respectively in a case that the DPUCCH uses the second DPUCCH format; and two reference symbols are disposed at a location of the second OFDM symbol and a location of the fifth OFDM symbol respectively in a case that the DPUCCH uses the third DPUCCH format.

[0135] Thus, in a case of the extended CP length, the

control unit 301 determines that the first DPUCCH format is used in a case of finding that two reference symbols are disposed at the location of the third OFDM symbol and the location of the fourth OFDM symbol respectively; the control unit 301 determines that the second DPUCCH format is used in a case of finding that two reference symbols are disposed at the location of the fourth OFDM symbol and the location of the fifth OFDM symbol respectively; and the control unit 301 determines that the third DPUCCH format is used in a case of finding that two reference symbols are disposed at the location of the second OFDM symbol and the location of the fifth OFDM symbol respectively.

[0136] As mentioned above, resource mapping modes as shown in Figure 5, Figure 7 and Figure 8 are merely examples, the present disclosure is not limited to these specific resource mapping modes. The reference symbols may also be disposed at other location on the time slot so long as the DPUCCH formats can be distinguished. In any case, the control unit 301 can determine a format of the PUCCH for transmitting the control information based on information on a location of the reference symbols on each time slot once the resource mapping mode is determined.

[0137] A method for performing D2D communication in a wireless communication system is described next. The wireless communication system at least includes a first UE and a second UE. The method may include: transmitting, by the first UE, control information to the second UE via an uplink channel, wherein the control information includes at least one of data transmission format information and power control information.

[0138] Preferably, the control information may further include at least one of channel status report information, HARQ confirmation information, transmission priority information and transmission stability indication information.

[0139] Preferably, the first UE may transmit the control information to the second UE using a DPUCCH.

[0140] Preferably, the DPUCCH may have at least one of the following formats:

a first DPUCCH format for transmitting at least one of the channel status report information and the HARQ confirmation information;

a second DPUCCH format for transmitting the data transmission format information and the power control information, or for transmitting the data transmission format information and the power control information, and at least one of the transmission priority information and the transmission stability indication information; and

a third DPUCCH format for transmitting the data transmission format information, the power control information, the channel status report information and the HARQ confirmation information, or for trans-

mitting the data transmission format information, the power control information, the channel status report information and the HARQ confirmation information, and at least one of the transmission priority information and the transmission stability indication information.

[0141] Preferably, the method may further include modulating the DPUCCH into OFDM symbols, the OFDM symbols are mapped on time slots in a subframe, and a locations of reference symbols on the time slot are disposed depending on a format of the DPUCCH, wherein various DPUCCH formats have various locations of the reference symbols.

[0142] Preferably, the first UE may transmit the control information to the second UE using a PUSCH.

[0143] Preferably, the data transmission format information and the power control information may be modulated, and the modulated data transmission format information is caused to participate in multiplexing with data information.

[0144] Preferably, at least one of the transmission priority information and the transmission stability indication information may be modulated, and at least one of the modulated transmission priority information and the modulated transmission stability indication information is caused to incorporate into a multiplexed bit stream in a slotting manner.

[0145] Preferably, the data transmission format information may be disposed at a location which is close to that of a reference symbol in a case that the control information is mapped onto a subframe.

[0146] Preferably, the wireless communication system may further include a base station, and the first UE may transmit a D2D SR to the base station with a PUCCH.

[0147] Preferably, the PUCCH may have at least one of the following formats:

a first PUCCH format for transmitting HARQ confirmation information or SR;

a second PUCCH format for transmitting channel status information; and

a third PUCCH format for transmitting the HARQ confirmation information, the SR, and the channel status information.

[0148] Specifically, the D2D SR is represented by adding a bit to the third PUCCH format, or the D2D SR is represented by redefining a bit representing the SR in the third PUCCH format, alternatively, the D2D SR is represented by redefining a bit representing the SR in the first PUCCH format and adding modulation and demodulation for the PUCCH with the first PUCCH format.

[0149] Preferably, the base station transmits uplink scheduling grant information to the first UE with a PDCCH when receiving the D2D SR, specifically, the base station

makes a representation of whether a resource is allocated for the D2D or device-to-base-station by adding a bit to the uplink scheduling grant information.

[0150] Preferably, an UE participating in the D2D transmission may be represented by adding an RNTI to the PUCCH.

[0151] Preferably, the base station may transmit uplink scheduling grant information to the first UE with the PDCCH when receiving the D2D SR, where the base station makes a representation of whether the resource is allocated for the D2D or device-to-base-station by adding a bit to the uplink scheduling grant information, and the base station indicates an UE participating in the D2D transmission by associating an identifier of the uplink scheduling grant information with the RNTI.

[0152] Various embodiments of the steps described above of the method for performing the D2D communication in the wireless communication system according to the embodiments of the present disclosure are described in detail above, which are not described repeatedly here.

[0153] An electronic device including a processing circuit may further be provided according to the embodiments of the present disclosure. The processing circuit is configured to control control information transmitted via an uplink channel, and the control information includes at least one of data transmission format information and power control information.

[0154] An electronic device including a processing circuit may further be provided according to the embodiments of the present disclosure. The processing circuit is configured to control uplink scheduling grant information transmitted with a PDCCH, it is indicated whether a resource is allocated for device-to-device or device-to-base-station by adding a bit to the uplink scheduling grant information.

[0155] An electronic device including a processing circuit may further be provided according to the embodiments of the present disclosure. The processing circuit is configured to control receiving for control information transmitted by a user equipment, specifically the control information includes at least one of data transmission format information and power control information.

[0156] An electronic device at a base station side applicable to a wireless communication system including a first user equipment, a second user equipment and the base station may further be provided according to the embodiments of the present disclosure, the electronic device includes: a processing circuit configured to generate uplink scheduling grant information for D2D communication to be performed between the first user equipment and the second user equipment based on a D2D Scheduling Request SR for the D2D communication from the first user equipment; and map the uplink scheduling grant information onto a Physical Downlink Control Channel PDCCH to indicate a resource for the first user equipment to perform the D2D communication.

[0157] Preferably, the processing circuit may be further

configured to associate the uplink scheduling grant information with an RNTI of the first user equipment and an RNTI of the second user equipment, to indicate that the uplink scheduling grant information is used for the D2D communication to be performed between the first user equipment and the second user equipment.

[0158] Preferably, the processing circuit may be configured to scramble a Cyclic Redundancy Check CRC of the uplink scheduling grant information by using the RNTI of the first user equipment and the RNTI of the second user equipment, to perform the association.

[0159] Preferably, the processing circuit may be further configured to determine transmission resource allocation based on current resource usage and resource configuration for the first user equipment, to generate the uplink scheduling grant information for the D2D communication.

[0160] Preferably, the resource for the D2D communication may include a resource in a resource pool.

[0161] Preferably, the electronic device may be a base station, and the electronic device may further include a transmitting unit configured to receive the D2D Scheduling Request SR, and transmit the uplink scheduling grant information to the first user equipment by the Physical Downlink Control Channel PDCCH.

[0162] An electronic device at a user equipment side applicable to a wireless communication system including the user equipment, another user equipment and a base station may further be provided according to the embodiments of the present disclosure, the electronic device includes: a processing circuit configured to generate a D2D Scheduling Request SR for requesting performing D2D communication between the user equipment and the another user equipment to the base station; and map the D2D Scheduling Request SR onto a Physical Uplink Control Channel PUCCH, to indicate resource for the D2D communication requested by the user equipment.

[0163] Preferably, the processing circuit may be further configured to acquire a Physical Downlink Control Channel PDCCH from the base station; and descramble a Cyclic Redundancy Check CRC of uplink scheduling grant information carried on the Physical Downlink Control Channel PDCCH, and determine the uplink scheduling grant information for the D2D communication to be performed between the user equipment and the another user equipment to acquire resource for the D2D communication.

[0164] Preferably, the processing circuit may further be configured to descramble the Cyclic Redundancy Check CRC by using an RNTI of the user equipment and an RNTI of the another user equipment.

[0165] Preferably, the resource for the D2D communication may include a resource in a resource pool.

[0166] Preferably, the electronic device may be the user equipment, the electronic device may further include a transmitting unit configured to transmit the D2D Scheduling Request SR to the base station by the Physical Uplink Control Channel PUCCH.

[0167] It should know that, the electronic device de-

scribed above may further perform other technical solutions according to the present disclosure as described above, which are not described here any more for brevity.

[0168] Apparently, respective operating processes of the method for performing D2D communication in a wireless communication system according to the present disclosure can be implemented in a manner of a computer executable program stored on a machine-readable storage medium.

[0169] And, the object of the present disclosure can be implemented in a manner that the storage medium on which the computer executable program above is carried is provided directly or indirectly to a system or apparatus, a computer or a Central Processing Unit (CPU) of which reads out and executes the computer executable program. Here, the implementation of the present disclosure is not limited to a program as long as the system or apparatus has a function to execute the program, and the program can be in arbitrary forms such as an objective program, a program executed by an interpreter, a script program provided to an operating system, etc.

[0170] The machine-readable storage medium mentioned above includes, but is not limited to, various memories and storage devices, a semiconductor device, a disk unit such as an optic disk, a magnetic disk and a magneto-optic disk, and other medium suitable for storing information.

[0171] Additionally, the present disclosure can also be implemented by connecting to a corresponding web site on the Internet through a computer, downloading and installing the computer executable program according to the present disclosure into the computer, and then executing the program.

[0172] Figure 15 is a block diagram illustrating an exemplary structure of a general-purpose personal computer on which the method for performing D2D communication in a wireless communication system according to the embodiments of the present disclosure can be implemented.

[0173] As shown in Figure 15, a CPU 1301 executes various processing according to a program stored in a Read Only Memory (ROM) 1302 or a program loaded to a Random Access Memory (RAM) 1303 from a storage device 1308. In the RAM 1303, if necessary, data required for the CPU 1301 in executing various processing and the like is also stored. The CPU 1301, the ROM 1302 and the RAM 1303 are connected to each other via a bus 1304. An input/output interface 1305 is also connected to the bus 1304.

[0174] The following components are connected to the input/output interface 1305: an input device 1306 including a keyboard, a mouse and the like, an output device 1307 including a display such as a Cathode Ray Tube (CRT) and a Liquid Crystal Display (LCD), a speaker and the like, the storage device 1308 including a hard disk and the like, and a communication device 1309 including a network interface card such as a LAN card, a modem and the like. The communication device 1309 performs

communication processing via a network such as the Internet. If necessary, a drive 1310 may also be connected to the input/output interface 1305. A removable medium 1311 such as a magnetic disk, an optical disk, a magneto-optical disk, a semiconductor memory and the like is mounted on the drive 1310 as necessary such that a computer program read out therefrom is installed in the storage device 1308.

[0175] If the series of processing above is implemented in software, a program constituting the software is installed from the network such as the Internet or the storage medium such as the removable medium 1311.

[0176] It is understood by those skilled in the art that the storage medium is not limited to the removable medium 1311 shown in Figure 15 in which the program is stored and which is distributed separately from the device so as to provide the program to the user. Examples of the removable medium 1311 include a magnetic disk including a Floppy Disk (registered trademark), an optical disk including a Compact Disk Read Only Memory (CD-ROM) and a Digital Versatile Disc (DVD), a magneto-optical disk including a MiniDisc (MD) (registered trademark), and a semiconductor memory. Alternatively, the storage medium may be the ROM 1302, the hard disk contained in the storage device 1308 or the like. Herein, the program is stored in the storage medium, and the storage medium is distributed to the user together with the device containing the storage medium.

[0177] As described above, physical layer control signaling for supporting D2D communication is designed in the present disclosure, physical layer channels are respectively designed based on whether control information and user data are transmitted simultaneously. In a case that the control information and the user data are transmitted separately, a physical layer uplink control channel for user-to-base-station and a physical layer uplink control channel for user-to-user are designed, control information to be transmitted and a modulation and coding format are defined based on characteristics of D2D communication, and mapping between the control information and physical transmission resource on the channel is defined. In a case that the control information and the user data are transmitted simultaneously, a mode of transmitting the control information and the user data for the D2D on a PUSCH simultaneously is designed, and a modulation and coding mode and a resource mapping mode for the D2D are defined.

[0178] The communication efficiency between D2D equipments can be improved based on the above-described design according to the present disclosure, thereby enhancing the performance of data transmission.

[0179] In the system and method of the present disclosure, it is obvious that respective components or steps can be decomposed and/or recombined. Such decomposition and/or recombination should be considered as an equivalent solution of the present disclosure. And, the steps performing a series of processing above can be performed in the describing order naturally, but this is not

necessary. Some steps can be performed concurrently or independently with one another.

[0180] Although the embodiments of the present disclosure have been described in detail in combination with the drawings above, it should be understood that, the embodiments described above are only used to explain the present disclosure and is not constructed as the limitation to the present disclosure. For those skilled in the art, various modification and alternation can be made to the above embodiments without departing from the essential and scope of the present disclosure. Therefore, the scope of the present disclosure is only defined by the appended claims and the equivalents thereof.

Claims

1. A user equipment for performing device-to-device, D2D, communication in a wireless communication system comprising at least the user equipment and another user equipment, the user equipment comprising:

a control unit; and
a transmitting unit controlled by the control unit for transmitting control information to the another user equipment via an uplink channel,

wherein the control information comprises at least one of data transmission format information and power control information.

2. The user equipment according to claim 1, wherein the control information further comprises at least one of channel status report information, Hybrid Automatic Repeat Request, HARQ, confirmation information, transmission priority information and transmission stability indication information.

3. The user equipment according to claim 2, wherein the transmitting unit transmits the control information to the another user equipment with a Physical Uplink Control Channel, PUCCH.

4. The user equipment according to claim 3, wherein the PUCCH has at least one of:

a first PUCCH format for transmitting at least one of the channel status report information and the HARQ confirmation information;
a second PUCCH format for transmitting the data transmission format information and the power control information, or for transmitting the data transmission format information, the power control information and at least one of the transmission priority information and the transmission stability indication information; and
a third PUCCH format for transmitting the data

transmission format information, the power control information, the channel status report information and the HARQ confirmation information, or for transmitting the data transmission format information, the power control information, the channel status report information, the HARQ confirmation information and at least one of the transmission priority information and the transmission stability indication information.

5. The user equipment according to claim 3 or 4, further comprising:

a modulating unit controlled by the control unit for modulating the PUCCH into an Orthogonal Frequency Division Multiplexing, OFDM, symbol; and

a mapping unit controlled by the control unit for mapping the OFDM symbol onto a time slot in a subframe,

wherein a location of a reference symbol on the time slot is determined by the mapping unit depending upon a format of the PUCCH, and
wherein different PUCCH formats have different locations of the reference symbol.

6. The user equipment according to claim 2, wherein the transmitting unit transmits the control information to the another user equipment with a Physical Uplink Shared Channel, PUSCH.

7. The user equipment according to claim 6, further comprising:

a modulating unit controlled by the control unit for modulating the data transmission format information and the power control information; and

a multiplexing unit controlled by the control unit for causing the data transmission format information and the power control information modulated by the modulating unit to participate in multiplexing with data information.

8. The user equipment according to claim 7, wherein the modulating unit further modulates at least one of the transmission priority information and the transmission stability indication information, and the control unit causes the at least one of the transmission priority information and the transmission stability indication information modulated by the modulating unit to incorporate into a bit stream multiplexed by the multiplexing unit in a slotting manner.

9. The user equipment according to claim 6, further comprising:

- a mapping unit controlled by the control unit for mapping the control information onto a sub-frame,
wherein the data transmission format information is disposed by the mapping unit on a location which is close to that of a reference symbol.
10. The user equipment according to claim 1, wherein the wireless communication system further comprises a base station, and the transmitting unit transmits a D2D Scheduling Request, SR, to the base station with a Physical Uplink Control Channel, PUCCH.
11. The user equipment according to claims 10, wherein the PUCCH has at least one of:
- a first PUCCH format for transmitting Hybrid Automatic Repeat Request, HARQ, confirmation information or a Scheduling Request, SR;
 - a second PUCCH format for transmitting channel status information; and
 - a third PUCCH format for transmitting the HARQ confirmation information, the SR, or the channel status information,
- wherein the control unit makes a representation of the D2D SR by adding a bit to the third PUCCH format, or
the control unit makes a representation of the D2D SR by redefining a bit representing the SR in the third PUCCH format, or
the control unit makes a representation of the D2D SR by redefining a bit representing the SR in the first PUCCH format and adding modulation and demodulation for the PUCCH with the first PUCCH format.
12. The user equipment according to claim 11, wherein the control unit makes a representation of the another user equipment participating in the D2D transmission by adding a Radio Network Temporary Identifier, RNTI, to the PUCCH.
13. An electronic device at a base station side, applicable to a wireless communication system comprising a first user equipment, a second user equipment and the base station, the electronic device comprising:
- a processing circuit configured to:
 - generate uplink scheduling grant information for D2D communication to be performed between the first user equipment and the second user equipment based on a D2D Scheduling Request, SR, relative to the D2D communication from the first user equipment; and
 - map the uplink scheduling grant information onto a Physical Downlink Control Channel,
- PDCCH, to indicate a resource for the first user equipment to perform the D2D communication.
14. The electronic device according to claim 13, wherein the processing circuit is further configured to associate the uplink scheduling grant information with an RNTI of the first user equipment and an RNTI of the second user equipment, to indicate that the uplink scheduling grant information is used for the D2D communication to be performed between the first user equipment and the second user equipment.
15. The electronic device according to claim 14, wherein the processing circuit is configured to scramble a Cyclic Redundancy Check, CRC, of the uplink scheduling grant information by using the RNTI of the first user equipment and the RNTI of the second user equipment, to perform the association.
16. The electronic device according to claim 13, wherein the processing circuit is further configured to determine transmission resource allocation based on current resource usage and resource configuration of the first user equipment, to generate the uplink scheduling grant information for the D2D communication.
17. The electronic device according to claim 13, wherein the resource for the D2D communication comprises a resource in a resource pool.
18. The electronic device according to any one of claims 13 to 17, wherein the electronic device is a base station, and the electronic device further comprises a transmitting unit configured to receive the D2D Scheduling Request, SR, and transmit the uplink scheduling grant information to the first user equipment via the Physical Downlink Control Channel, PDCCH.
19. An electronic device at a user equipment side, applicable to a wireless communication system comprising the user equipment, another user equipment and a base station, the electronic device comprising:
- a processing circuit configured to
 - generate a D2D Scheduling Request, SR, for requesting performing D2D communication between the user equipment and the another user equipment to the base station; and
 - map the D2D Scheduling Request, SR, onto a Physical Uplink Control Channel PUCCH, to indicate a resource for the D2D communication requested by the user equipment.

20. The electronic device according to claim 19, wherein the processing circuit is further configured to acquire a Physical Downlink Control Channel, PDCCH, from the base station; and descramble a Cyclic Redundancy Check, CRC, of uplink scheduling grant information carried on the Physical Downlink Control Channel, PDCCH, and determine the uplink scheduling grant information for the D2D communication to be performed between the user equipment and the another user equipment to acquire a resource for the D2D communication.
21. The electronic device according to claim 20, wherein the processing circuit is further configured to descramble the Cyclic Redundancy Check, CRC, by using an RNTI of the user equipment and an RNTI of the another user equipment.
22. The electronic device according to claim 20, wherein the resource for the D2D communication comprises a resource in a resource pool.
23. The electronic device according to any one of claims 19 to 22, wherein the electronic device is the user equipment, and the electronic device further comprises a transmitting unit configured to transmit the D2D Scheduling Request, SR, to the base station via the Physical Uplink Control Channel, PUCCH.
24. A communication method at a base station side, applicable to a wireless communication system comprising a first user equipment, a second user equipment and the base station, the method comprising:
- generating uplink scheduling grant information for D2D communication to be performed between the first user equipment and the second user equipment based on a D2D Scheduling Request, SR, relative to the D2D communication from the first user equipment; and mapping the uplink scheduling grant information onto a Physical Downlink Control Channel, PDCCH, to indicate a resource for the first user equipment to perform the D2D communication.
25. A communication method at a user equipment side, applicable to a wireless communication system comprising the user equipment, another user equipment and a base station, the method comprising:
- generating a D2D Scheduling Request, SR, for requesting performing D2D communication between the user equipment and the another user equipment to the base station; and mapping the D2D Scheduling Request, SR, onto a Physical Uplink Control Channel, PUCCH, to indicate a resource for the D2D communication requested by the user equipment.
26. A user equipment for performing device-to-device, D2D, communication in a wireless communication system comprising at least the user equipment and another user equipment according to any one of claims 1 to 12, the user equipment comprising:
- a control unit; and
a receiving unit controlled by the control unit for receiving control information transmitted by the another user equipment,
- wherein the control information comprises at least one of data transmission format information and power control information.
27. A method for performing device-to-device, D2D, communication in a wireless communication system comprising at least a first user equipment and a second user equipment, the method comprising:
- transmitting, by the first user equipment, control information to the second user equipment via an uplink channel,
wherein the control information comprises at least one of data transmission format information and power control information.
28. The method according to claim 27, wherein the first user equipment transmits the control information to the second user equipment with a Physical Uplink Control Channel, PUCCH.
29. The method according to claim 27, wherein the first user equipment transmits the control information to the second user equipment with a Physical Uplink Shared Channel, PUSCH.
30. The method according to claim 27, wherein the wireless communication system further comprises a base station, and the first user equipment transmits a D2D Scheduling Request, SR, to the base station with a Physical Uplink Control Channel, PUCCH.

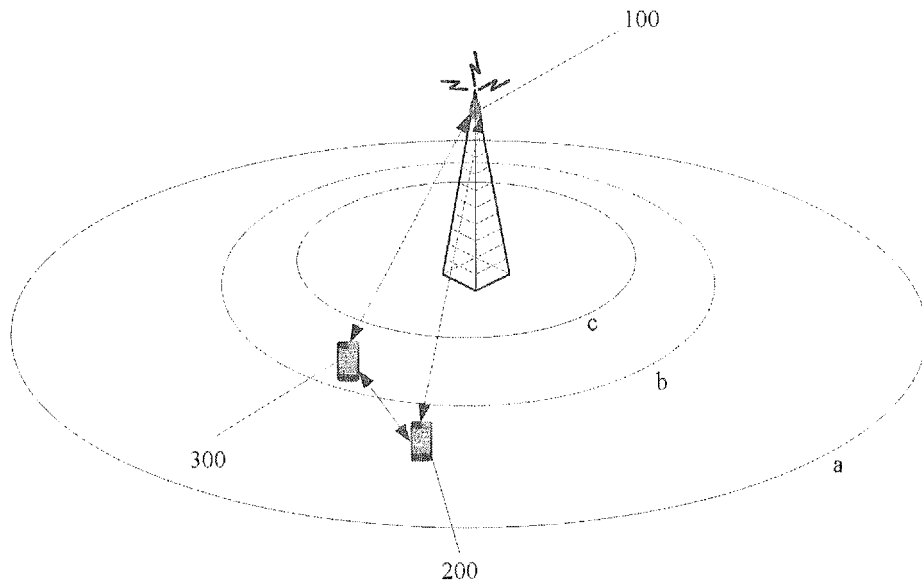


Fig.1a

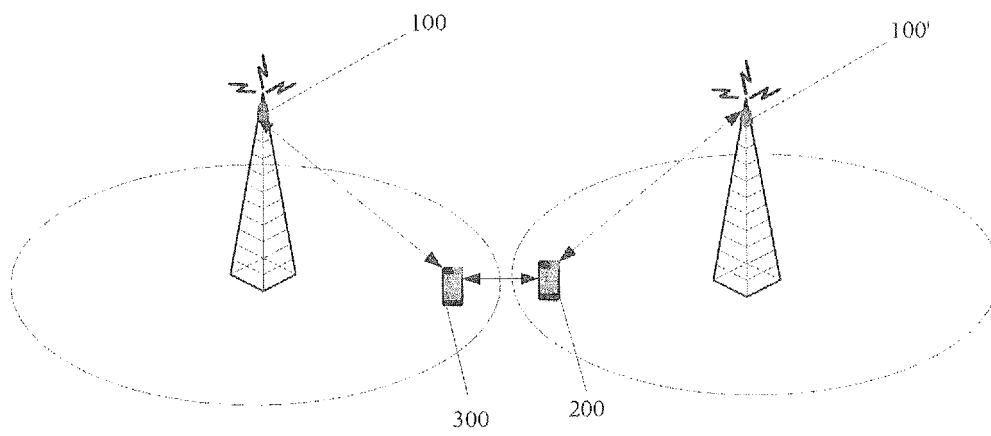


Fig.1b

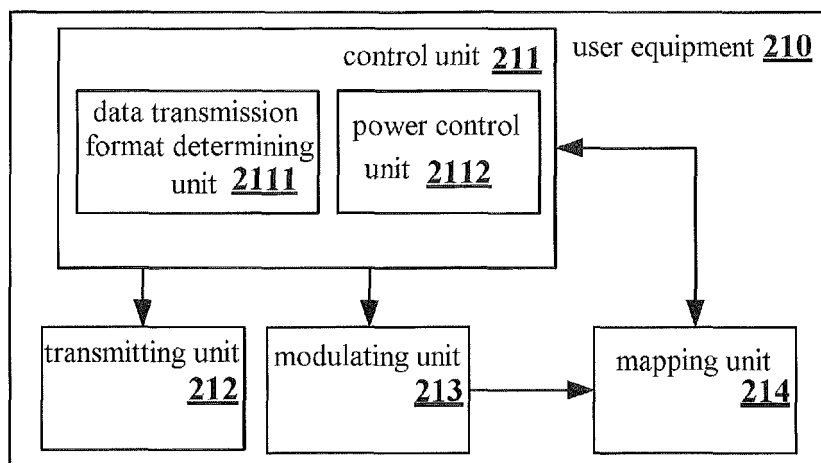


Fig.2

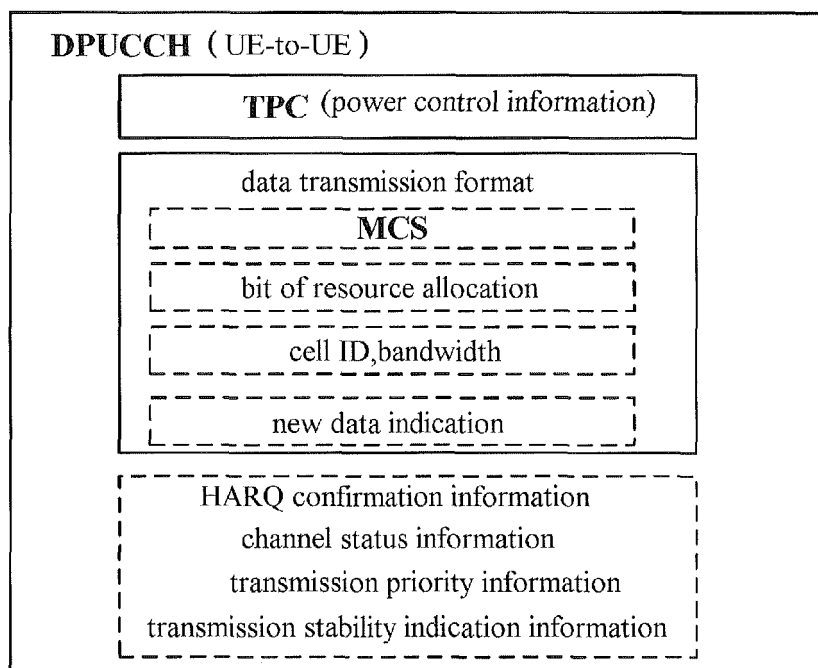


Fig.3

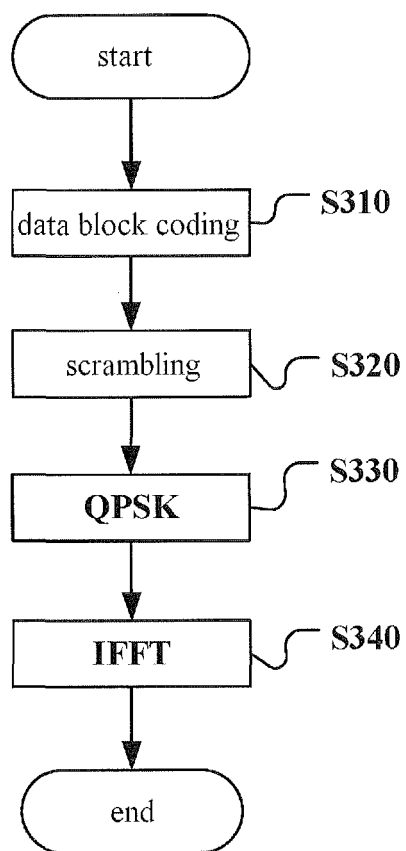


Fig.4

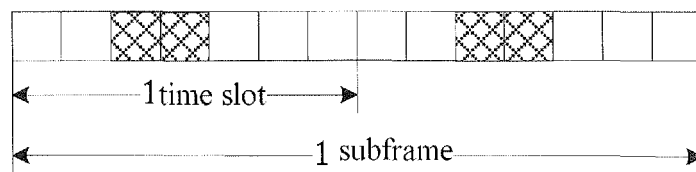


Fig.5

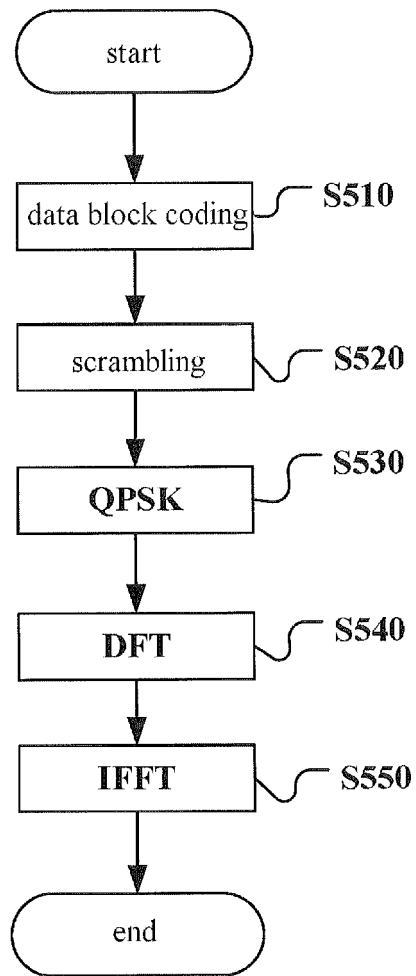


Fig.6

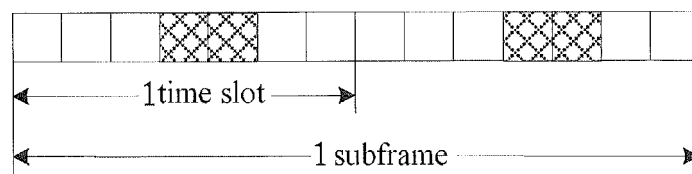


Fig.7




Fig.8

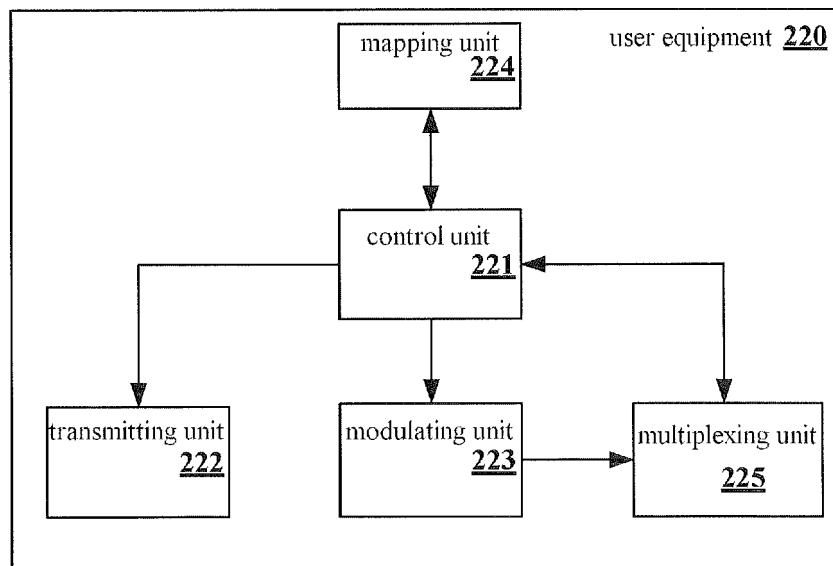


Fig.9

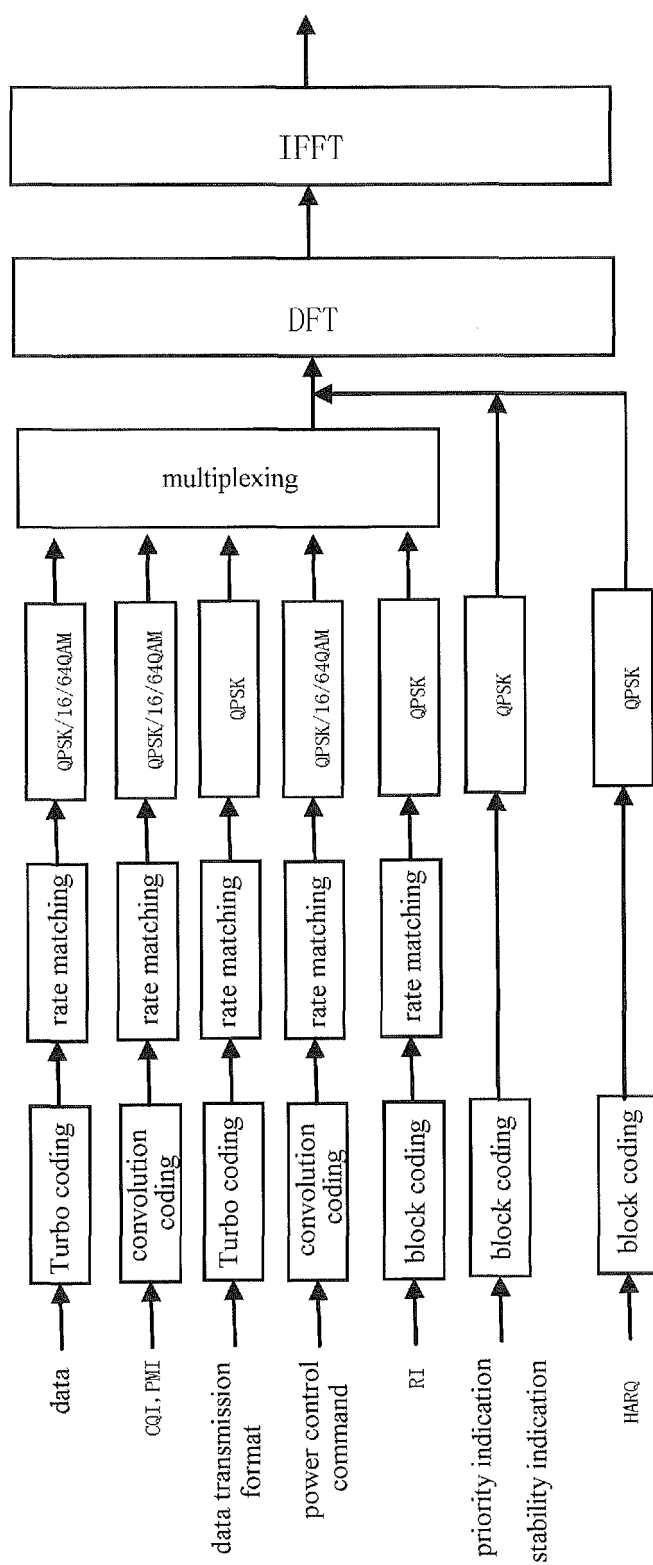


Fig.10

6	4	2	1	2					2	1	2	4	6
6	4	2	1	2					2	1	2	4	6
6	4	2	1	2					2	1	2	4	6
6	4	2	1	2					2	1	2	4	6
			1							1			
7	7	7	1	7	7	7	7	7	7	1	7	7	7
7	7	7	1	7	7	7	7	7	7	1	7	7	7
			1							1			
			1							1			
			1							1			
			1							1			
			1							1			
			1							1			
			1							1			
			1							1			
			1							1			
			1							1			
			1							1			
			1							1			
			1							1			
	5	3	1	3	5			5	3	1	3	5	
	5	3	1	3	5			5	3	1	3	5	
	5	3	1	3	5			5	3	1	3	5	
	5	3	1	3	5			5	3	1	3	5	

Fig.11

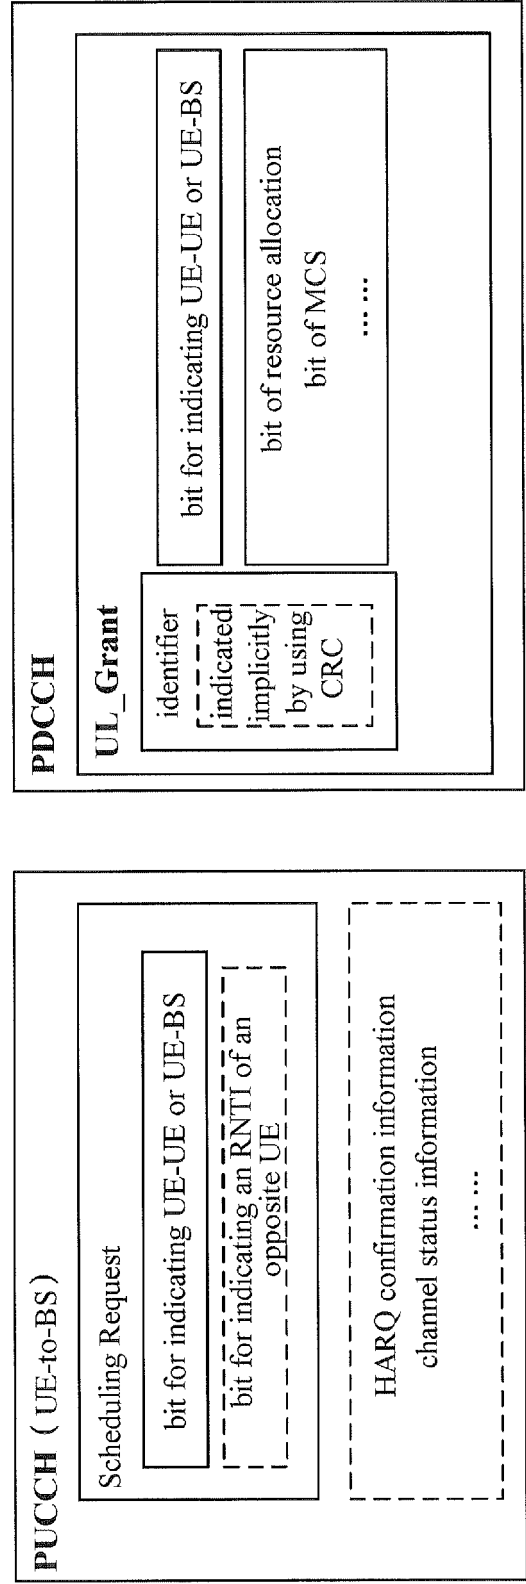


Fig.12

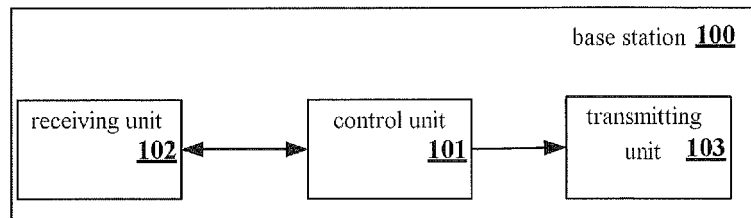


Fig.13

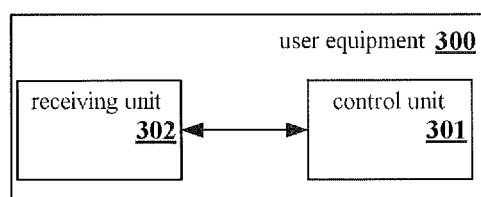


Fig.14

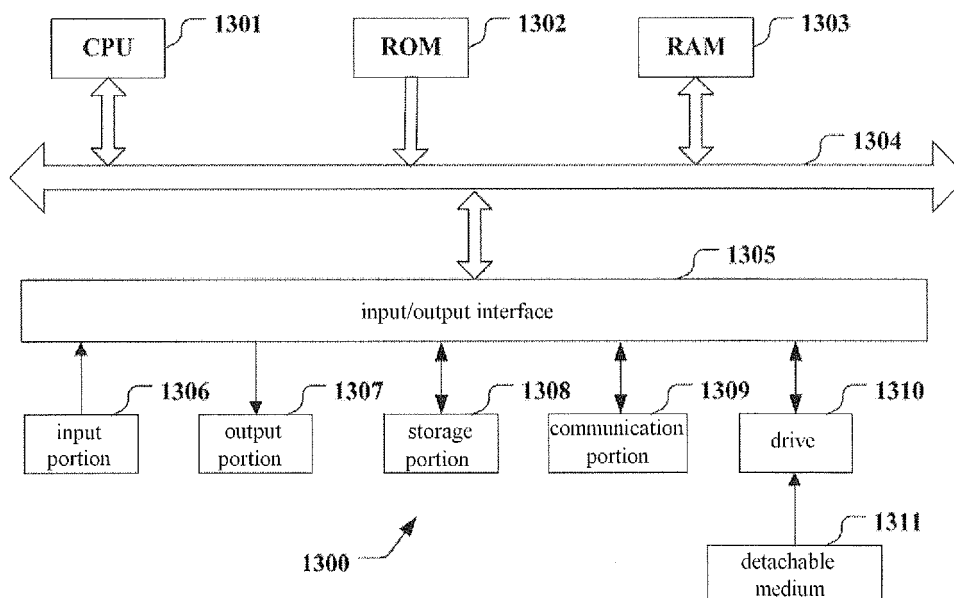


Fig.15

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/071301

A. CLASSIFICATION OF SUBJECT MATTER

H04W 76/02 (2009.01) i; H04W 52/18 (2009.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CPRSABS, CNTXT: D2D, transmission format, power control, PUCCH, PDCCH, HARQ, scheduling request, SR

VEN: D2D, PUCCH, PDCCH, HARQ, SR, power control, request, schedule

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN 103002578 A (CHINA MOBILE COMMUNICATIONS CORP.), 27 March 2013 (27.03.2013), description, paragraphs 0037-0057 and 0109-0142	19, 23, 25
Y	CN 103002578 A (CHINA MOBILE COMMUNICATIONS CORP.), 27 March 2013 (27.03.2013), description, paragraphs 0037-0057 and 0109-0142	10, 13-18, 20-22, 24, 30
Y	CN 103037359 A (HUAWEI TECHNOLOGIES CO., LTD.), 10 April 2013 (10.04.2013), description, paragraphs 0023-0055	2, 3, 6, 13-18, 20-22, 24
X	CN 103139889 A (HUAWEI TECHNOLOGIES CO., LTD.), 05 June 2013 (05.06.2013), description, paragraphs 0049-0062 and 0196-0206	1, 26-29
Y	CN 103139889 A (HUAWEI TECHNOLOGIES CO., LTD.), 05 June 2013 (05.06.2013), description, paragraphs 0049-0062 and 0196-0206	2, 3, 6, 10, 30
A	CN 103139889 A (HUAWEI TECHNOLOGIES CO., LTD.), 05 June 2013 (05.06.2013), description, paragraphs 0049-0062 and 0196-0206	4-5, 7-9, 11-12

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search
23 March 2015 (23.03.2015)Date of mailing of the international search report
27 April 2015 (27.04.2015)Name and mailing address of the ISA/CN:
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No.: (86-10) 62019451

Authorized officer

LING, LinTelephone No.: (86-10) **62089377**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/071301

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

[1] The technical solutions of a device of independent claim 1, a method of independent claim 27, and a device of independent claim 26 which refers to the device of independent claim 1 are that user equipment transfers control information to another user equipment, and that said control information comprises at least one of data transmission format information and power control information. The technical solution of a device of independent claims 13 and 19 and a method of independent claims 24 and 25 is generating a D2D scheduling request (SR) used for requiring a base station for D2D communications between user equipment and another user equipment, to indicate resources for D2D communications requested by the user equipment. Therefore, said two groups of claims do not share a same or corresponding technical feature, do not share a same or corresponding special technical feature, do not belong to a single generic inventive concept, are not technically linked to each other, and lack unity.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT
 Information on patent family members

International application No.

PCT/CN2015/071301

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 103002578 A	27 March 2013	WO 2013034107 A1	14 March 2013
CN 103037359 A	10 April 2013	EP 2741563 A4	31 December 2014
		EP 2741563 A1	11 June 2014
		JP 2014532340 A	04 December 2014
		WO 2013044718 A1	04 April 2013
		US 2014206372 A1	24 July 2014
CN 103139889 A	05 June 2013	EP 2770786 A1	27 August 2014
		US 2014274196 A1	18 September 2014
		EP 2770786 A4	27 August 2014
		WO 2013078946 A1	06 June 2013

Form PCT/ISA/210 (patent family annex) (July 2009)