

(21) Application No **9024154.8**
(22) Date of filing **07.11.1990**
(30) Priority data
(31) **549447** (32) **06.07.1990** (33) **US**

(71) Applicant
Savant Instruments Inc
(Incorporated in the USA – New York)
110-103 Bi-County Boulevard, Farmingdale,
New York 11735, United States of America
(72) Inventors
Warren Meeks
Yury Zlobinsky
(74) Agent and/or Address for Service
Eric Potter & Clarkson
St Mary's Court, St Mary's Gate, Nottingham, NG1 1LE,
United Kingdom

(51) INT CL⁵
F26B 11/18
(52) UK CL (Edition K)
F4G G1C4 G2C2 G518
(56) Documents cited
GB 2090579 A GB 0945554 A EP 0149266 A2
US 4467532 A US 3574949 A
(58) Field of search
UK CL (Edition K) **F4G G2B1A1 G2C2 G9BS G9RR**
INT CL⁵ **F26B 11/18**
Online databases: WPI

(54) **Drying biological specimens**

(57) A solvent-containing biological material specimen is dried in a vacuum chamber (112) with solvent evolving during the drying cycle being condensed in a refrigerated cold trap (128, 130). Communication of the drying chamber (112) with the vacuum pump (140) is established or interdicted in response to raising or lowering of the vacuum condition in the chamber with respect to an initially set condition. Evolving of solvent from the specimen proceeds during interdiction by way of "cryopumping" due to the differential in pressure between the chamber (112) and the refrigerated trap (128, 130). Two-way valves (126, 144) effect and maintain vacuum control and control bleeding of a gas to the chamber (112) and pump (140) at the end of the drying cycle.

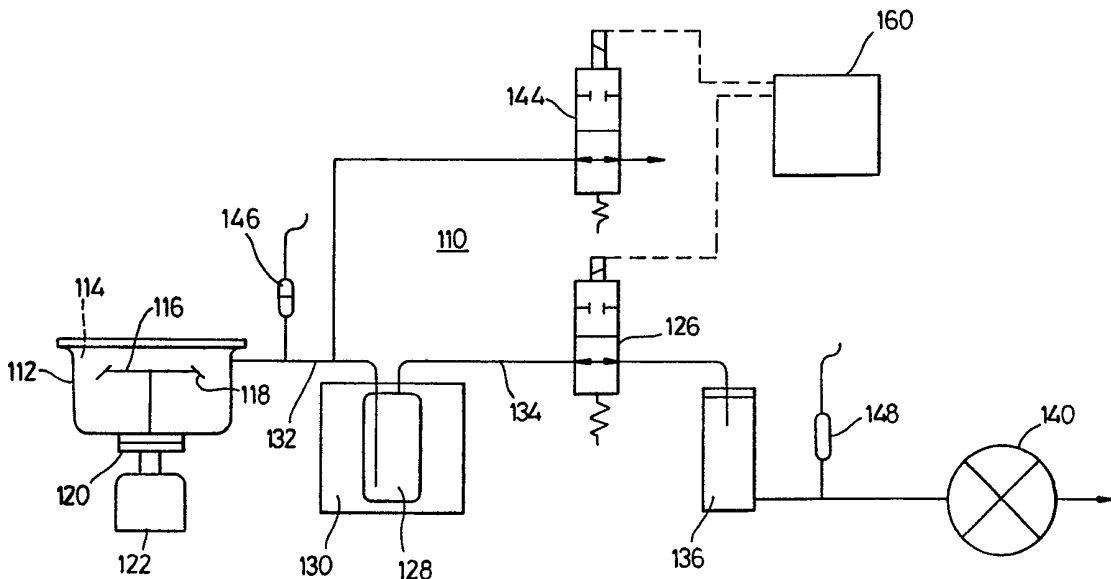


Fig. 2

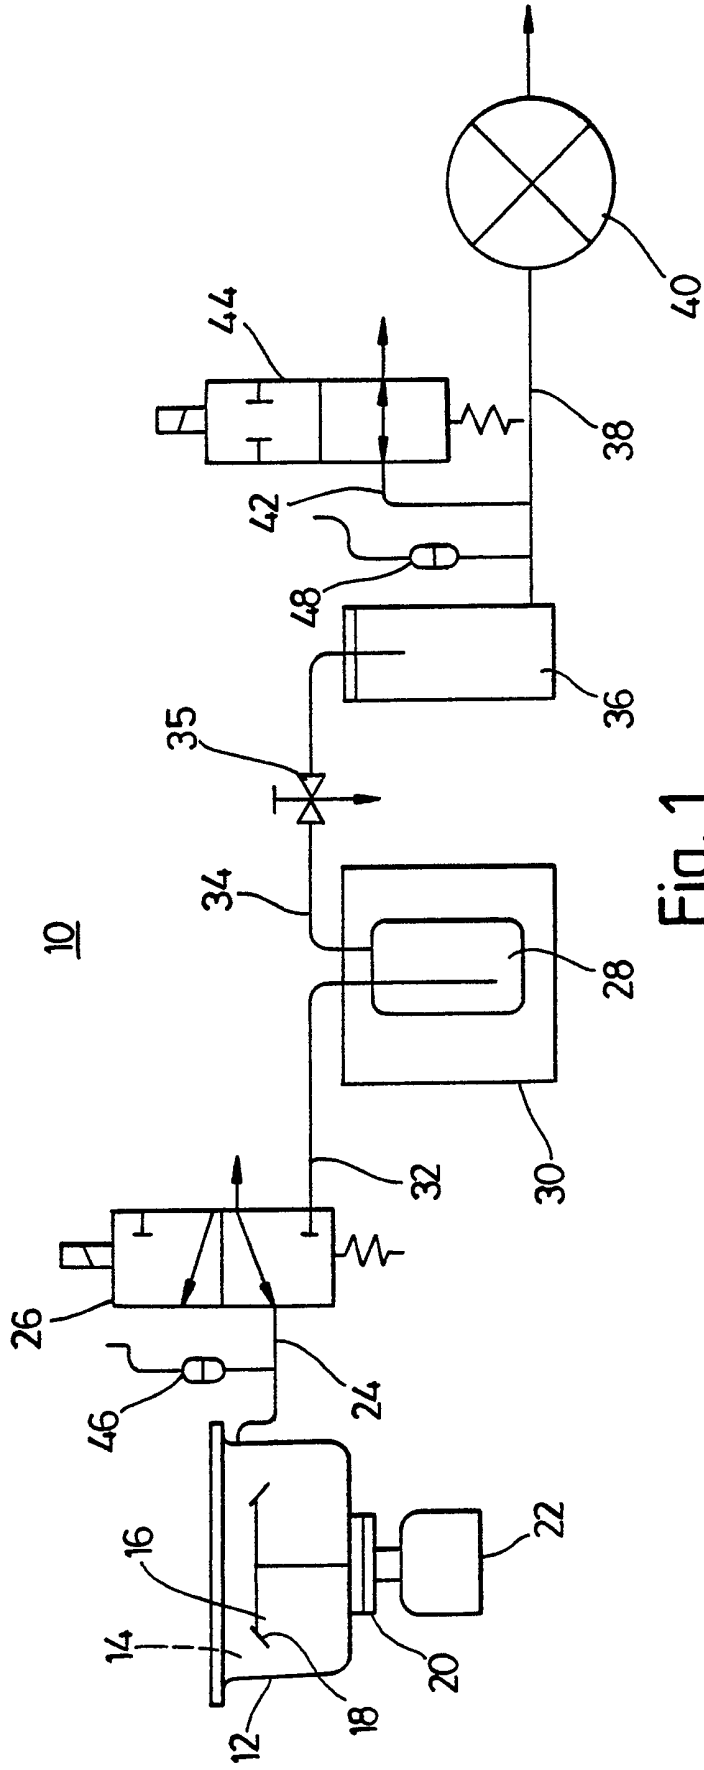


Fig. 1
PRIOR ART

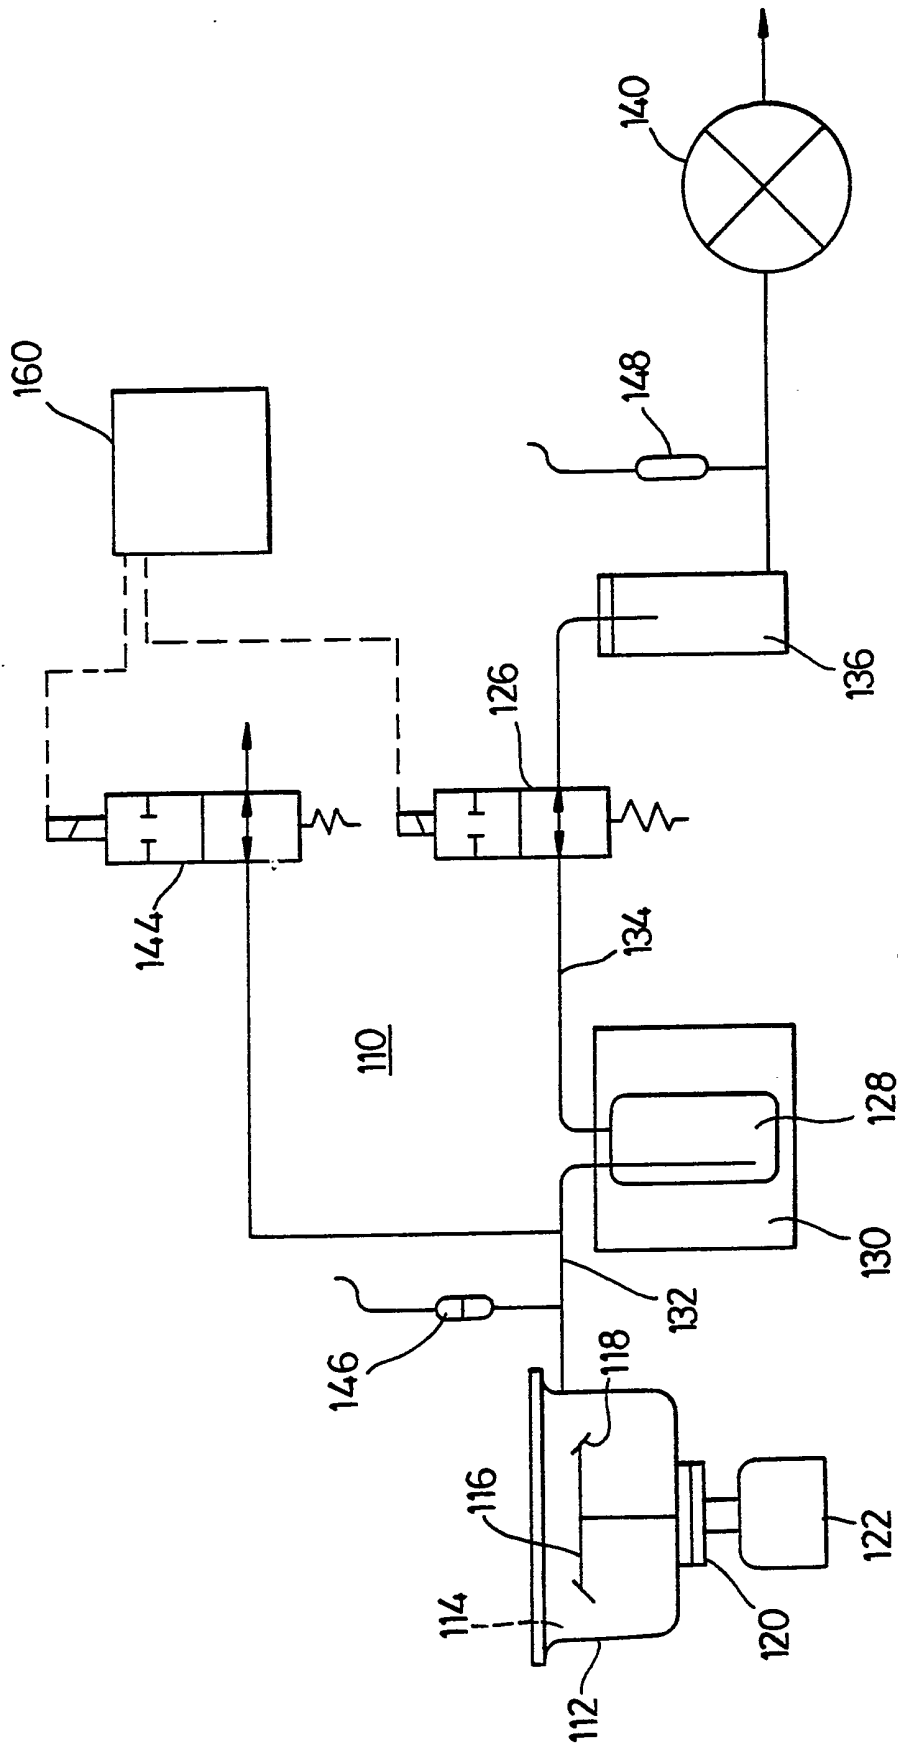


Fig. 2

DRYING BIOLOGICAL SPECIMENS

The present invention relates to drying of biological specimens and refers more particularly to improved method and apparatus by which such drying can be carried out.

In certain laboratory procedures, it is required to separate and concentrate biological material from a solvent-containing specimen, i.e., dry the specimen in preparation for study of the dried specimen material by amino acid analysis, gas chromatography, mass spectroscopy and like. This can be done, e.g., with the Savant Instruments, Inc. Automated SPEEDVAC Systems A160 or A290, which apparatus includes a vacuum centrifuge of the type disclosed in commonly owned U.S. Patent 4,226,669, a vacuum pump for imposing a vacuum on the interior of a drying chamber, i.e., the centrifuge, a refrigerated trap to which solvent vapors evolving in the drying cycle pass for condensing of the same, a microprocessor for controlling the drying apparatus, and conduit tubing as well as a pair of control valves for establishing of blocking communication or conduit flow courses in the systems for various reasons attending the drying operation and cycle.

Both these systems use a three-way drying chamber vacuum control valve disposed in the conduit connecting the drying chamber with the pump and located proximal or adjacent the drying chamber. This three-way valve is a normally open type which when open connects the chamber with ambient atmosphere or an inert gas source. When closed, the valve connects the chamber with the condensate trap

located downstream a distance of the chamber. These systems also use a two-way pump bleeder valve adjacent the vacuum pump and on the upstream side of the pump which valve also is a normally open type connected to the conduit leg leading to the pump and cold trap and, when closed, disconnecting the pump and condensation trap from the atmosphere.

With these systems, the vacuum pump during drying cycle is always connected to the drying chamber so that any solvent vapor escaping condensation in the trap can pass therefrom and eventually into the vacuum pump. The solvent contaminates the oil in the pump which necessitates frequent oil change and it also can cause corrosion of pump internal structure. Further, the vacuum pumps in these systems generally will operate at a given constant vacuum level which can be one below that at which certain highly volatile solvents can "bump" from the specimen and carry biological material away from the specimen - a result to be avoided since valuable specimen material constituents can be lost to the detriment of the eventual analysis to which the dried specimen is to be subjected.

Accordingly it is an object of the invention to provide apparatus and method for separating and concentrating biological material from solvents in which such material is contained which overcomes the drawbacks of the prior art.

Another object is to provide ^{in one embodiment} specimen separation and concentration apparatus and method that allows application of controlled levels of vacuum in a drying chamber which prevents "bumping" of highly volatile solvents from the specimen sample during drying, and which ability to dry at controlled vacuum levels not as low as inherent in the prior systems, also prevents loss of volatile specimen

material itself during drying thereby preventing carry off of biological material from the sample and loss as a discharge product from the vacuum pump.

5 Still another object is to provide ^{in another embodiment} application of controlled vacuum to a specimen drying chamber which allows isolating the drying chamber from pump vacuum draw for extended time during a drying cycle by allowing "cryopumping" of solvent from the drying chamber to a refrigerated condensate trap to proceed, thereby lessening the chance for solvent to carry forth into the vacuum pump wherein its
10 presence is detrimental to both the oil in the pump and the pump internal structure, and especially, in regard to the latter since, many solvents used in laboratory specimen analysis procedures are corrosive to the pump material. Such solvents can include organic acids, mineral acids, aqueous or volatile organic solvents etc.

The present invention is defined in the appended claims
15 and briefly stated, there ^{may be} provided method and apparatus for drying a solvent-containing biological material specimen, the specimen being dried in a vacuum chamber with solvent evolving during the drying cycle being condensed in a refrigerated cold trap. During the drying cycle, communication between the chamber and chamber evacuating
20 vacuum pump is interdicted or maintained on a selective basis and with reference to departure of the vacuum condition in the chamber from a certain value either above or below an initially set predetermined chamber condition of vacuum. During the drying cycle, evolution of solvent from the specimen proceeds even when chamber/pump
25 connection is interdicted due to "cryopumping", i.e., because a considerable differential of vapor pressure exists between that of the solvent in the specimen (which commonly will be heated to promote drying) and that present in the condensate trap. This continued and maximized solvent recovery achieved for the most part without need
30 for direct pump vacuum pull, results in practical elimination of solvent carry over to the pump and the oil in the pump. Pump oil use-life

lengthening and avoidance of corrosive solvent damage to the pump interior parts are achieved. Control of the connection between the chamber and pump as stated above, allows drying at a controlled vacuum level which in turn, prevents "bumping" or foaming of highly volatile solvents from the specimen during drying as vacuum can be controlled at the level needed to avoid such occurrence as well as loss of volatile biological material too. A specially arranged pair of two-way valves^{may be} employed to control vacuum condition during the drying cycle and to bleed the vacuum chamber with a gas at the end of the cycle.

According to a^{preferred} feature of the invention, there is further provided a method for drying a solvent-containing biological material specimen which comprises rapidly rotating a holder having an opening at one end in which the specimen is confined and with the holder being disposed in a chamber, about a fixed vertical axis to subject the specimen to a centrifugal force holding the biological material remote from the holder one end. The chamber is evacuated by connecting it to an operating vacuum pump so that vacuum pull from the pump draws solvent from the specimen and outwardly of the chamber, with the solvent withdrawn being passed through a refrigerated condensation trap to condense solvent vapors therein. The connection between the chamber and pump is interdicted at a location downstream of the refrigeration trap when the condition of vacuum in the chamber reaches a predetermined level. The vacuum condition in the chamber is continuously monitored and the chamber is reconnected to the pump whenever the condition of vacuum raises a certain amount above said predetermined condition of vacuum and again interdicted whenever the condition lowers a like certain amount below said predetermined condition. At the end of a predetermined specimen drying time, a flow of gas is admitted to said chamber, the gas flow emanating from an admission location disposed upstream of the interdiction location.

may be

According to another feature of the invention, there~~x~~ provided
apparatus for drying a solvent-containing biological material specimen,
said specimen being confined in an open top specimen holder, the
apparatus comprising a housing enclosing space defining a drying
5 chamber, a support in said chamber for receiving said specimen holder
with the support being such that during operation, the specimen holder
will incline or be held inclined relative to a horizontal at an angle of
less than 45 degrees, e. g., at about 35 degrees, means are provided for
rotating said support about a fixed vertical axis so the specimen in the
10 holder is subjected to centrifugal force whereby the biological material
is held remote from the holder open top. A vacuum pump is provided
and conduit means communicatively connects the pump and drying
chamber for evacuating the chamber to a predetermined condition of
vacuum, solvent evaporating from the specimen when said specimen is
15 subjected to a vacuum condition. A refrigerated condensation trap is
interposed in the conduit means downstream but proximal said
chamber and solvent evaporating from the chamber and outflowing
therefrom is condensed in said trap. Two-position power operated
valve means is interposed in the conduit means downstream of the trap
20 and has a conduit means non-blocking position whereby connection of
the chamber with the pump is unblocked, and a conduit blocking
position for blocking the chamber/pump connection. A branch conduit
is provided and another two-position power operated valve means. The
branch conduit extends between a connection thereof with the conduit
25 means at a location upstream of the first valve means location and the
said other valve means, with such other valve means having an open
position in which it connects said branch conduit with a gas source
such as ambient air or a source of nitrogen, and a closed position in
which branch conduit communication with the gas source is blocked.
30 A control means is connected with each valve means for controlling
positioning thereof during a specimen drying cycle. The first-mentioned

valve means can be selectively positioned in conduit non-blocking position whenever the vacuum condition in the chamber raises a certain amount above said predetermined condition, and in conduit means blocking position whenever the vacuum condition lowers a like
5 certain amount below said predetermined condition, said control means positioning said other two-position valve means in closed position during the drying cycle.

According to a still further feature of the invention, there may be further provided in apparatus for drying a solvent-containing biological
10 material specimen confined in an open top holder which apparatus comprises a housing enclosing space defining a drying chamber, a support in the chamber receiving the specimen holder with the specimen holder inclined relative to a horizontal datum such that the holder open top is positioned above a holder opposite end, means for
15 rotating said support about a fixed vertical axis so that a specimen in said holder is subjected to centrifugal force whereby the biological material of the specimen is held remote from the holder open top, a vacuum pump, conduit means communicatively connecting said pump with said chamber, said pump when operated pulling vacuum on the
20 chamber for evacuating it to a predetermined condition of vacuum, solvent evaporating from the specimen when the specimen is subjected to a vacuum condition, and a refrigerated condensation tank interposed in the conduit means downstream of but proximal said chamber, solvent evaporating from the specimen and outflowing the chamber being condensed in said trap, the combination of first and second valve
25 means disposed downstream of the trap, the first valve means connected in said conduit means and operable to pass or block communication of said pump with said trap, the second valve means connected to said conduit means at a location upstream of the first valve means and operable to admit or block flow of a gas from a gas
30 source to said chamber via said conduit means at said upstream

location.

The above, and other objects, features and advantages of the present invention will become apparent from the following description read in conjunction with the accompanying drawings, in which like
5 reference numerals designate the same elements and in which :-

FIGURE 1 is a schematic depiction of a prior art vacuum drying system; and

10 FIGURE 2 is a schematic depiction of a vacuum drying system or apparatus provided in accordance with the invention and with which the controlled vacuum drying method of the invention can be carried out.

15 Referring to the prior art system 10 shown in FIGURE 1, such system represents that designated by the Assignee herein as its Automated SPEEDVAC Systems A160 and A 290. System 10 includes a vacuum concentrator 12 of, e.g., the type disclosed in the earlier-referred to '669 patent, the concentrator enclosing a space defining a
20 drying chamber 14 and in which is carried a support 16 for reception of one or a plurality of specimen holders 18.

The holders in which a solvents-containing biological material is disposed, generally will be received in support 16 such that they are inclined to hold the open top thereof radially inwardly of the holder
25 other end and a distance above said other end so that when support 16

is rotated about a fixed vertical axis, centrifugal force will impel heavier biological material in the holder toward said other end, and that force also acting on the solvent inhibits, when vacuum is imposed on the chamber space, "bumping" or foaming in the solvent, particularly highly volatile solvents, thereby to prevent unwanted carrying off of biological material from the specimen and ultimate loss of same (as well as solvent) out of the system via pump discharge. The inclination of the holders during rotation it is understood will be at an angle of less than 45 degrees to the horizontal, the support or rotors used with the SPEEDVAC Systems being designed to thus receive and support the specimen holders.

Support 16 is rotated by motor 22 via magnetic coupling drive 20 in the manner described in the '669 patent.

Vacuum chamber 14 is connected by conduit leg 24 to a three-way poppet or spool valve 26 which valve in turn is connected to a glass insert trap 28 received in refrigerated trap housing 30, this connection being via conduit leg 32. Conduit leg 34 connects glass insert trap 28 with a chemical filter 36, a three-way, manually operated cock 35 being located in leg 34 and used when it is desired to clean out the cold trap. The chemical filter 36 is connected to vacuum pump 40 via conduit leg 38, there being a branch conduit 42 off conduit leg 38 for connecting leg 38 via two-way bleeder poppet valve 44 to atmosphere. Sensors 46,48 are provided for sensing vacuum levels in the chamber 14 and at the vacuum pump 40, respectively.

When system 10 operates during a drying cycle, normally open poppet valves 26 and 44 are energized--this will occur only some time after the support 16 is started rotating and reaches a speed of about 1000 R.P.M. In the case of valve 26, it will shift from connecting the chamber 14 to atmosphere or other gas source position to a position wherein the chamber is connected via conduit legs 24 and 32 to the vacuum pull of pump 40. In time, a condition of vacuum will build up

in the chamber to a maximum value dependent on the pump capacity. In other words, there will be no way of controlling the chamber vacuum to a particular desired predetermined level. It will simply reach a stated level and remain so during the drying.

5 The drying operation will proceed and solvent, exposed to the vacuum condition of the chamber, will evolve from the specimen and pass out of the chamber and into the cold glass trap where it will condense. Cold trap 28 remains under the vacuum pull influence of the pump so any solvent which does not condense, can be drawn right
10 through the system and into the pump where its presence shortens materially the effective use life of the oil in the pump. Also this solvent in the case of particularly corrosive type solvents, attacks and in time, corrodes pump internal structure requiring repair or discard of the pump.

15 As was noted above, system 10 does not allow for controlling vacuum in the chamber 14. There is no way to isolate the system forward of the pump and sustain vacuum in chamber 14. And since this vacuum can build up quickly to values at which highly volatile solvents flash from the specimen, and volatile biological specimen material can
20 flash as well, the solvent and/or biological material will be drawn to the pump and lost. Avoidance of pump oil contamination with solvent, avoidance of loss of solvent, avoidance of loss of volatile biological material, and ability to control vacuum in the chamber 14 to desired levels is possible though with the present invention and as shall be
25 detailed next.

 With reference to FIGURE 2, it is to be noted that parts common with those of FIGURE 1 bear the same reference numerals increased by 100. A principal difference of system 110 with that of
30 FIGURE 1 is the location and functioning of the vacuum control valve 126 and bleeder valve 144. Poppet valve 126 is located a distance downstream of the refrigerated cold trap 128. Thus, this normally open

valve when closed during the course of the drying cycle isolates, the system upstream of the valve from the vacuum draw effect of the vacuum pump 140. With normally open bleeder poppet valve 144 also closed, the system section including the glass trap 128, conduit leg 132 and the chamber 114 constitutes a "cryopumping" route for solvent evolving from the specimen to be caused to flow along and enter and condense in the cold trap.

Solvent flow occurs by reason of the difference of vapor pressure between the solvent in the specimen and that in the cold trap. The solvent in the specimen is heated as heat application to the specimen in the chamber is a common practice employed to accelerate drying, and the cold trap is maintained at about minus 40 degrees C. or lower, vapor pressures at such temperature being very low.

By isolating the system upstream of the vacuum control valve 126, solvent recovery is enhanced since it cannot flow beyond the trap 128 as vacuum draw effect of the pump is barred upstream of valve 126. Further and more importantly, any uncondensed solvent flow to the pump and hence, oil contaminating presence thereof in the pump is for all practical purpose eliminated as is any corrosive effect it could have on the pump itself. This also optimizes solvent recovery

Isolation of the upstream section of the system requires in addition to the utilization and arrangement of pumps 126, 144, maximized joint and tube tightness in the system conduit legs and the joiner thereof to the components with which used to insure no bleed-in leakage of atmospheric air to the system will take place during drying.

When a specimen is to be dried, it will be placed in chamber 114 and support 116 will be stated to rotate. During initial support speed up, valve 126 will be closed and valve 144 can be either open or closed. When the support reaches about 1000 R.P.M. and with vacuum pump 140 operating, bleeder valve 144 will be closed, and vacuum

valve 126 will be opened so that vacuum draw of the pump will start to draw vacuum on the chamber 114. The valves 126, 144, are electrical solenoid operated poppet valves and are controlled in their respective drying cycle positionings by means of control unit 160, said unit being a programmable microprocessor. On loss of electrical power, both valves will move to open position.

With regard to initial evacuation of the drying chamber, it will be understood that the present invention prescribes this be achieved in a precise and controlled manner involving modulating the opening and closing of valve 126 repeatedly during the vacuum drawdown from atmospheric pressure to an initial desired predetermined condition of vacuum. It is this smooth, initial downpressuring of the drying chamber in sequential, even stepping which mitigates the tendency of volatile solvent and biological specimen material to flash precipitously and thus be lost from the system. The control can, for example, occur by initiating open position of valve 126 for about 1.2 seconds followed by closing for 5. Then opening valve 126 for 1.1 seconds squared followed by closing for 5 and so on until the open periods approach the closed periods and until the initial predetermined vacuum is reached at which point, "cryopumping" interdiction as explained earlier will ensue.

After a stated period of time of "cryopumping" during which the negative pressure in the chamber has been lowered to a predetermined condition of vacuum, the control unit will signal the valve 126 to close, isolating the upstream part of the system. Solvent evolution from the specimen and condensation of the solvent in the cold trap as noted above will take place. In time, the vacuum condition will raise (i.e., the absolute pressure in the chamber will increase) a certain amount from the predetermined condition of vacuum and this will be sensed by sensor 146 which will signal the control unit 160 such fact and the control unit in turn will operate to open valve 126 to terminate interdiction of the connection between the chamber and the

pump. Pump operation will then cause the condition of vacuum to lower in the chamber and keep up the draw until the negative pressure lowers a like certain amount below the predetermined condition of vacuum, and when that is reached, valve 126 once again will be closed. By way of example, the predetermined condition of vacuum could be about 10000 microns and the raising and lowering range of vacuum departure therefrom in a range of about 5 % to about 20 % from that value before the valve 126 is operated in either open or closed position. In a typical drying cycle, "cryopumping" will be employed about 55 total minutes, whereas, direct pump draw will take place for about 5 minutes.

By utilizing this procedure of closing the vacuum valve to take advantage of "cryopumping" of solvent from the specimen to the cold trap instead of using a steady state draw on the chamber with the pump, the advantages enumerated before are achieved. Further vacuum in the chamber can be controlled at any ones of numbers of desired levels so as to lessen the problem of flashing volatile biological material during the drying process.

At the end of the drying cycle, valve 126 will be closed and valve 144 opened to admit a bleed gas flow into the chamber 114. After equalization of pressure in the system, valve 144 can be closed. Either air or an inert gas such as nitrogen can be used for the bleed. If a nitrogen bleed is used, it will be employed in controlled amount for only a short duration to equalize pressure in the chamber relative to that exerted on the chamber top by atmosphere and valve 144 will then close to conserve the nitrogen gas source

Having described preferred embodiments of the invention with reference to the accompanying drawings, it is to be understood that the invention is not limited to those precise embodiments, and that various changes and modifications may be effected therein by one skilled in the art without departing from the scope or spirit of the invention as

defined in the appended claims.

What is claimed is:

1 1. A method for drying a solvent-containing biological material
2 specimen which comprises,

3 rotating a holder having an opening at one end in which the
4 specimen is confined and with the holder being disposed in a chamber,
5 about a fixed vertical axis to subject the specimen to centrifugal force
6 holding the biological material remote from the holder one end,

7 evacuating the chamber by connecting the chamber to an
8 operating vacuum pump so that vacuum pull from said pump draws
9 solvent from the specimen and outwardly of the chamber,

10 passing the solvent withdrawn from the chamber through a
11 refrigerated condensation trap to condense solvent vapors therein,

12 interdicting the connection between the chamber and vacuum
13 pump at a location downstream of said refrigerated condensation trap
14 when the condition of vacuum therein reaches a predetermined level,

15 continuously monitoring the vacuum condition in said chamber
16 and reconnecting the chamber to the pump whenever the condition of
17 vacuum raises a certain amount above said predetermined condition of
18 vacuum and interdicting said connection whenever the condition of
19 vacuum in the chamber lowers a like certain amount below said
20 predetermined condition, and

21 admitting at the end of a predetermined specimen drying time,
22 a flow of gas to said chamber emanating from an admission location in
23 the conduit means disposed downstream of said chamber but upstream
24 of the interdiction location.

1 2. The method of claim 1 in which the gas admitted at the end
2 of the specimen drying time is atmospheric air.

1 3. The method of claim 1 in which the gas admitted at the end
2 of the specimen drying time is an inert gas and is admitted in a

3 controlled amount.

1 4. The method of claim 3 in which the inert gas is nitrogen.

1 5. The method ^{any of} of ^{to 3} claim ~~1~~ in which the certain amount the
2 condition of vacuum can raise above or lower below said
3 predetermined condition before respective connection and interdiction
4 of connection between said chamber and said pump occurs is in the
5 range about 5 % to about 20 % of said predetermined condition.

1 6. Apparatus for drying a solvent-containing biological material
2 specimen, said specimen being confined in an open-top specimen
3 holder, said apparatus comprising,

4 a housing enclosing space defining a drying chamber,

5 a support in said chamber for receiving said specimen holder
6 with the specimen holder inclined relative to a horizontal datum,

7 means for rotating said support about a fixed vertical axis so that
8 a specimen in the holder is subjected to centrifugal force whereby the
9 biological material of the specimen is held remote from the holder
10 open top,

11 a vacuum pump,

12 conduit means communicatively connecting said vacuum pump
13 with said drying chamber, said pump when operated pulling vacuum on
14 said drying chamber for evacuating it to a predetermined condition of
15 vacuum, solvent evaporating from the specimen when said specimen is
16 subjected to a vacuum condition,

17 a refrigerated condensation trap interposed in said conduit means
18 downstream of but proximal said chamber, solvent evaporating from
19 the specimen and outflowing the chamber being condensed in said trap,

20 two-position power operated valve means interposed in said
21 conduit means downstream of said trap, said valve means having a
22 conduit means non-blocking position whereby connection of said
23 chamber with said pump is unblocked, and a conduit means blocking
24 position whereby connection of said chamber with said pump is

25 interdicted,

26 a branch conduit,

27 another two-position power operated valve means, said branch
28 conduit extending between a connection thereof with said conduit
29 means at a location upstream of the location of said first valve means
30 and said other valve means, said other valve means having an open
31 position in which it communicates said branch conduit with a gas
32 source, and a closed position in which it blocks communication of said
33 branch conduit with said gas source, and

34 control means, said control means being connected with each
35 said valve means for controlling the positioning thereof whereby during
36 a specimen drying cycle, the first-mentioned valve means selectively
37 can be positioned in conduit non-blocking position whenever the
38 condition of vacuum in said drying chamber raises a certain amount
39 above said predetermined condition thereof and in a conduit means
40 blocking position whenever the condition of vacuum in said drying
41 chamber lowers a like certain amount below said predetermined
42 condition, said control means operable to open said other two-position
43 valve means at the end of a drying cycle.

1 7. The apparatus of claim 6 in which the respective valve means
2 position in their respective conduit means non-blocking and open
3 positions in the absence of application of operating power thereto.

1 8. The apparatus of claim 7 in which both said two-position
2 valve means are normally open valves.

1 9. The apparatus of claim 8 in which said valves are poppet
2 valves.

1 10. The apparatus of claim 9 in which said slide valves are
2 electrical solenoid operated valves.

1 11. In apparatus for drying a solvent-containing biological
2 specimen, said specimen being confined in an open-top specimen
3 holder, which apparatus comprises,

4 a housing enclosing space defining a drying chamber,
 5 a support in said chamber for receiving said specimen holder
 6 with the specimen holder inclined relative to a horizontal datum such
 7 that the holder open top is positioned above a holder opposite end,
 8 means for rotating said support about a fixed vertical axis so that
 9 a specimen in said holder is subjected to centrifugal force whereby the
 10 biological material of the specimen is held remote from the holder
 11 open top,

12 a vacuum pump,
 13 conduit means communicatively connecting said vacuum pump
 14 with said drying chamber, said pump when operated pulling vacuum on
 15 said drying chamber for evacuating it to a predetermined condition of
 16 vacuum, solvent evaporating from the specimen when said specimen is
 17 subjected to a vacuum condition, and a refrigerated condensation trap
 18 interposed in said conduit means downstream of but proximal said
 19 chamber, solvent evaporating from the specimen and outflowing the
 20 chamber being condensed in said trap, the combination of

21 first and second two-position valves disposed downstream of said
 22 trap, the first valve means connected in said conduit means and
 23 operable to pass or block communication of said pump with said trap,
 24 the second valve connected to said conduit means at a location
 25 upstream of the first valve means and operable to admit or block flow
 26 of a gas from a gas source to said drying chamber via said conduit
 27 means at said upstream location.

1 12. The apparatus of claim 11 in which each valve is a power-
 2 operated device and is normally open in absence of power application
 3 thereto.

1 13. The method of ^{any of} ~~claims 1~~ ^{to 5} in which evacuating of the drying
 2 chamber is effected at a controlled rate comprising sequentially and
 3 repeatedly interdicting and connecting the vacuum draw between said
 4 pump and said drying chamber so that absolute pressure reduction in

said chamber occurs in smooth uniform manner which inhibits absolute pressure drop incremental changes which are promotive of flashing of volatile solvent and specimen components and until the predetermined condition of vacuum is initially established in the drying chamber.

14. The method of claim 13, in which the step of evacuating the drying chamber at a controlled rate comprises interdicting the vacuum draw between the pump and the drying chamber for a first period of time and connecting the vacuum draw for a second period of time, the second period of time initially being less than the first period of time and being gradually increased so as at least to approach the first period of time.

15. The method of claim 14, in which the first period of time is 5 seconds and the second period of time is initially 1.2 seconds.

16. Apparatus according to any of claims 6 to 12 and further comprising means for evacuating the drying chamber at a controlled rate, said means being operable to interdict the vacuum draw between the pump and the drying chamber for a first period of time and connecting the vacuum draw for a second period of time, the second period of time initially being less than the first period of time and being gradually increased so as at least to approach the first period of time.

17. Apparatus according to claim 16, wherein the first period of time is 5 seconds and the second period of time is initially 1.2 seconds.

18. A method of drying a solvent-containing biological specimen substantially as herein particularly described with reference to Figure 2 of the accompanying drawings.

19. Apparatus for drying a solvent-containing biological specimen substantially as herein particularly described with reference to Figure 2 of the accompanying drawings.