(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
11 December 2003 (11.12.2003)

PCT

(10) International Publication Number
WO 03/102406 A1

(51) International Patent Classification[7]: F02M 29/00

(21) International Application Number: PCT/US03/16971

(22) International Filing Date: 30 May 2003 (30.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/383,808	30 May 2002 (30.05.2002)	US
Not furnished	29 May 2003 (29.05.2003)	US

(71) Applicant and
(72) Inventor: **KELEMENCKY, Monroe, R.** [US/US]; P.O. Box 5008, Woodbury, CT 06798 (US).

(74) Agents: **LITMAN, Richard, C.** et al.; Litman Law Offices, Ltd., P.O. Box 15035, Crystal City Station, Arlington, VA 22215 (US).

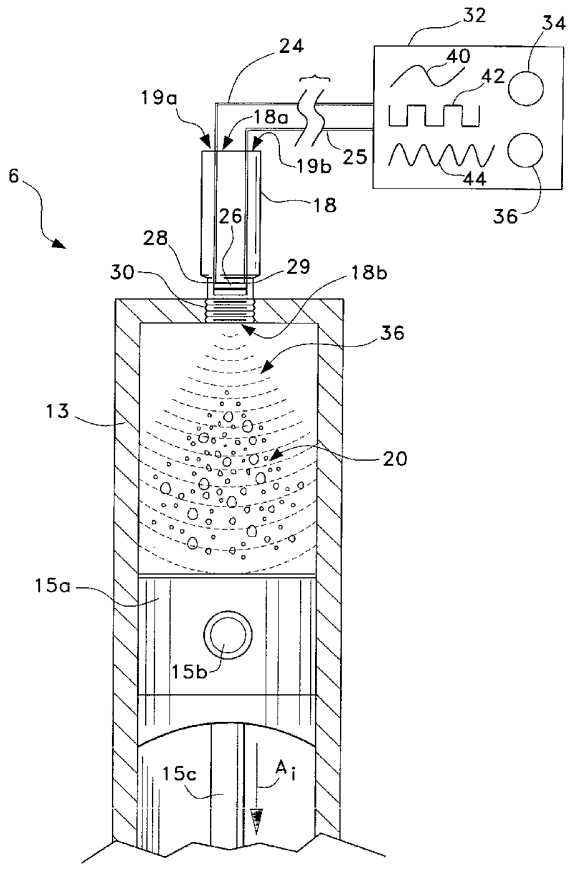
(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ULTRASONIC LIQUID FUEL INTRODUCTION SYSTEM



(57) Abstract: An ultrasonic device (6) for a liquid fuel introduction system that propagates ultrasonic waves (36) through liquid fuel (20), improving the combustion efficiency of the liquid fuel (20). The propagated waves (36) cause a reduction or unification of fuel droplet size by breaking apart larger fuel droplets into a distribution of uniform sized fuel droplets, thereby producing a smoother combustion wavefront in an internal combustion engine. The end result is greater fuel efficiency of the I.C.E. The ultrasonic wave (36) is produced via at least one piezoelectric transducer (26) having first and second electrodes (28, 29) adapted to receive an input signal of predetermined frequency and voltage which produces vibrations within a piezoelectric element (26) for generating ultrasonic waves, respectively. The frequency of the ultrasonic wave is varied and tailored so that the most efficient frequency is matched to the specification of a particular fuel (e.g., gasoline, diesel, etc.).

WO 03/102406 A1

ULTRASONIC LIQUID FUEL INTRODUCTION SYSTEM

TECHNICAL FIELD

The present invention relates generally to liquid fuel introduction systems. More specifically, the invention is an ultrasonic liquid fuel introduction system which produces ultrasonic waves at select or variable frequencies and voltages for reducing the droplet size of fuel molecules and to minimize gas consumption by improving the air-to-fuel ratio for combustion.

BACKGROUND ART

Numerous liquid fuel introduction system systems have been devised with the application of ultrasonic vibration for intensifying atomization of fuel mixtures. The underlying problem in the conventional ultrasonic liquid fuel introduction systems is the necessity for disposing mechanical elements (i.e. heat exchangers or heating elements, vibrating elements, impact surfaces, etc.) directly within the fluid flow path to effect the intended result. Flow inhibiting mechanical elements have been the major cause for liquid fuel introduction system failure, and/or the limiting factor of effective and efficient performance over the life of the liquid fuel introduction system. Further, access to these elements for repair is nearly impossible and usually requires complete replacement in lieu of rebuilding the respective part. The other limiting factors resulting from disposing the respective elements within the flow path are the effects of flow adhesion (in the form of carbon deposits), dispersion and/or dissolution that directly affect a proper air-to-fuel ratio within a combustion or similar chamber.

Ultrasonic liquid fuel introduction systems suffering these particular problems are described in U.S. and Foreign Patents respectively issued and granted to Fruengel (US 2,908,443), Thatcher (US 3,533,606), Jackson (US 3,857,375), Sata (US 3,860,173), Priegel (US 3,955,545), Asai et al. (US 4,106,459), Csaszar et al. (US 4,401,089), Wong (US 5,140,966), Tsurutani et al. (US 5,179,923), Durr et al. (GB 508,582), Moss (GB 1,138,536), Burkhard et al. (EP 58,343) and Yuuichi (JP 57-153,964).

Other attempts to reduce fuel particle size have included separating and recirculating oversize fuel particles, particularly in spark-ignition engines as described in the U.S. Patent issued to Giannotti (4,524,748). As described therein, the device utilizes a nested set of

venturi channels which separate oversize fuel particles in an air-fuel mixture by recirculating them to the fuel supply system for reinjection and atomization. An array of low loss venturi nozzles with central traps is utilized to inertially separate the oversize particles.

U.S. Patent No. 4,570,597 issued to Snaper discloses a fluid controlled fuel system that includes a plurality of fluid controls each of which is responsive to a particular engine condition. The fluid controls are disposed in fluid branches to meter fuel flow and are configured in four branches to respond to choke (start), idle, acceleration, and cruise conditions to meter fuel to an ultrasonic atomizing spray. The atomizer includes a transducer coil that wraps around an exterior portion of the fuel injector nozzle along its length to deliver ultrasonic waves at the point of fuel discharge.

U.S. Patent No. 5,330,100 issued to Malinowski discloses an ultrasonic fuel injector energized by a solenoid coil that causes a sealing shaft to be pulled away from a valve seat, resulting in the release of fuel. A hollow ultrasonic horn actuator assembly has a tapered part and an interior transducer assembly embedded therein. This particular arrangement makes it virtually impossible for a skilled mechanic to access the embedded transducer, in the event of failure.

The utilization of embedded piezoelectric transducers with vibration characteristics can be seen in the U.S. Patents issued to Oomen (3,646,413) and Besocke (4,100,442), respectively. Other applications include those with disclosures wherein piezoelectric transducers have been used to obtain pressure measurements without ultrasonic signal generation at a select transmission frequency for fuel atomization. These particular features are described in U.S. Patents issued to Wesley (4,266,427), Strobel (4,767,960), Dooley et al. (4,227,402), Paganelli (4,645,965), Takeuchi (4,898,024), Takeuchi (5,101,659) and Schäperkötter (5,380,014).

Japanese Patent No. 58-200,068 discloses an ultrasonic liquid fuel introduction system comprising a uniform air-fuel mixture between two oscillators, and having formed therein a valve with expandable slits for dispersing fuel. That is, a fuel pipe is formed between an inner and outer piezoelectric ceramic oscillator for fuel traversal. A second set of inner and outer piezoelectric oscillators is adjoined by an intermediate air pipe for introducing air. The outer oscillator is activated by rectangular pulses that compress fuel towards and through the valve with expandable slits.

Japanese Patent No. 56-75,949 discloses a pedal activated ultrasonic liquid fuel introduction system with simultaneous activation of a mixing element disposed within the fluid flow path of a venturi. An ultrasonic generator is disposed at the base of a gas tank

comprising a substantially stagnant fuel in liquid form. Ultrasonic waves are promulgated through the base of the tank to a surface portion open to a venturi. One of the problems with this system is the magnitude of transmitted frequencies require to atomize the stagnant fuel in pure liquid form.

None of the above inventions and patents, taken either singly or in combination, is seen to describe the instant invention as claimed.

DISCLOSURE OF THE INVENTION

The present invention is a device for converting non-uniformly sized droplets of liquid fuel into substantially uniform droplets of liquid fuel for improving the combustion characteristics in an internal combustion engine. The device includes a sealed housing. An electrical excitation source provides at least one electrical excitation signal having at least one frequency and amplitude. A transducer is disposed in the housing and electrically coupled to the electrical excitation source. The transducer receives the excitation signal and produces a series of ultrasonic wavefronts. The ultrasonic wavefronts are propagated through the non-uniformly sized droplets of liquid fuel, causing the droplets to break apart, thus resulting in substantially uniform sized droplets.

Also part of the invention is a device for use with an internal combustion engine type. The device is adapted to convert droplets of liquid fuel having non-uniformed sizes into droplets of liquid fuel having substantially uniform size. The device includes at least one sealed housing. An electrical excitation source provides at least one electrical excitation signal having at least one frequency and amplitude. At least one transducer is disposed in each housing. Each transducer is electrically coupled to the electrical excitation source for receiving the excitation signal and produces a series of ultrasonic wavefronts. The ultrasonic wavefronts propagate through the liquid fuel, causing the non-uniform size droplets to break apart into droplets of substantially uniform size. An improvement of the combustion of the liquid fuel results.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagrammatic view of a conventional combustion chamber according to the prior art.

Fig. 2A is a diagrammatic sectional view of a single cylinder combustion chamber for gasoline-based systems according to the present invention.

Fig. 2B is a diagrammatic sectional view of a single cylinder combustion chamber for diesel-based systems according to the present invention.

Fig. 3 is a diagrammatic view of an ultrasonic liquid fuel introduction system according to a second embodiment of the invention.

Fig. 4 is a diagrammatic view of an ultrasonic liquid fuel introduction system according to a third embodiment of the invention.

Fig. 5 is a diagrammatic view of an ultrasonic liquid fuel introduction system according to a fourth embodiment of the invention.

Similar reference characters denote corresponding features consistently throughout the attached drawings.

BEST MODES FOR CARRYING OUT THE INVENTION

The present invention is an ultrasonic liquid fuel introduction system that generates an ultrasonic wave in injected fuel to reduce fuel droplet size. The ultrasonic system is for liquid fuel introduction systems or fuel injectors used in internal combustion engines (I.C.E.' s). The I.C.E. uses a plurality of parts in order to ignite and "burn" fuel to produce mechanical power. The ultrasonic system breaks down larger fuel droplets into a distribution of uniformly sized fuel droplets to produce a smoother ignition wavefront in an engine of a vehicle that results in greater fuel efficiency. The resulting combustion of the air-to-fuel mixture within the chamber enables piston movement by a uniformly compressive wavefront.

The ultrasonic wave is produced via at least one piezoelectric transducer. The transducer has first and second electrodes adapted to receive an input signal of a frequency (predetermined or variable) and voltage that produces vibrations within a combustion chamber, or fuel injection channel, or other fuel distribution channel, respectively. The frequency or range of frequencies of the ultrasonic wave is typically varied and tailored so that the most efficient frequency is matched to the specification of a particular fuel (e.g., gasoline, diesel, etc.).

The ignition features (spark plug, etc.) are not shown in the drawings in order to facilitate the clear depiction of the essential features of the present invention, conventional ignition elements being well known to one having ordinary skill in the art. In addition, the present invention is applicable to a host of other application areas, such as power plants,

treatment facilities and/or fuel furnaces or the like, which require combustible fuel for power generation.

However, to appreciate the uniqueness and understand the effectiveness of the present invention, some basic facts about I.C.E.'s are discussed with respect to **Fig. 1**. As illustrated in **Fig. 1**, a conventional internal combustion system **11** is shown. The system includes a combustion chamber **13** configured with a piston **15a**, rod pin **15b** and rod **15c** arrangement. As shown, the fuel mixture **16** has non-uniformly sized fuel droplets. These droplets, varying in size, and substance or composition, are randomly labeled **A-I**. Droplets **A-I** are introduced into the chamber **13** (for example, via fuel injector **17** or via a carburetor, not shown) during an intake stroke depicted by arrow A_i. Upon ignition of the fuel, due to the non-uniform size distribution of the droplets **A-I**, a noisy combustion wavefront with variable "noisy" amplitudes or peaks is produced. This phenomenon generally referred to as "cold cranking," produces fuel combustion wavefronts down the chamber **13** as each droplet **A-I** is ignited throughout the chamber **13**.

In this regard, there is associated with each respective droplet **A-I** a distinct release of energy, which is proportional to the discrete volume of each ignited fuel droplet **A-I**. The production of the "noisy" or jagged wavefronts is often related to an imbalance in the fuel-to-air ratio, wherein the fuel droplet size is significantly large in volume compared with the volume of air sufficient for effective combustion. Hence, fuel consumption is increased and a "clean" combustion of fuel products is subsequently hindered. The result is the development of residual particles or carbon deposits in the form of surface adhesions within the combustion chamber **13**. Such adhesions will generally cause accelerated wear and tear on respective component parts and lead to mechanical failure.

In order to effectively operate an engine with combustible products **A-I** of a fuel mixture **16** without undue wavefront vibrations or idling during the combustion process in motor vehicles, a uniform consistency of fuel droplets must be achieved having a predetermined magnitude of energy per unit volume, respectively. Upon combustion, the shape of the traveling combustion wavefront produced from the ignited fuel mixture **16** is jagged, thereby representing the different amounts of energy of each droplet **A-I**. For example, if there is 100% variation in the fuel droplet size or volume of fuel for droplet **F** having a magnitude of energy of 2.0E (where E represents units of energy) in comparison with fuel droplet **D** having a magnitude of energy of 1.0E, and wherein the droplet size **D** represents the optimize size that the piston **15a** can mechanically react to at an energy

magnitude of 1.0E, then the reaction energy between droplet **D** and droplet **F** would provide a resultant energy magnitude of 1.0E transmitted as an energy loss.

In other words, the introduction of a fuel mixture **16** comprising 50% of fuel droplets having energies of 1.0E and 50% of the droplets have energies of 2.0E, then 1.0E of the droplet size having an energy of 2.0E is lost in the form of heat or a non-adiabatic combustion process. Thus, it has been found that if all the fuel droplets are of a uniform size having similar energy magnitudes to optimize combustion at the exemplary energy magnitude of 1.0E, then fuel consumption is reduced in volume per introduction 33% and serves to achieve the mechanical advantages for piston motion without jagged or "noisy" combustion wavefronts or vibrations down the chamber **13**.

The preferred embodiments of the present invention are depicted in **Figs. 2A-5**, and are generally referenced by numerals **6**, **6**, **7**, **8** and **9**, respectively.

Accordingly, the ultrasonic liquid fuel introduction system according to the invention is depicted in **Figs. 2A-5**. As diagrammatically illustrated in **Figs. 2A** and **2B**, the ultrasonic liquid fuel introduction system **6** is shown. The system **6** is tuned for two separate fuel mixtures **20** and **22**, respectively. As shown **Fig. 2A**, the system includes a conventional piston arrangement as an exemplary depiction only, wherein a combustion chamber **13** having a fuel of predetermined composition **20** introduced therein is a typical four stroke I.C.E. The chamber **13** is adapted with at least one transducer housing **18** having a first end **18a** and a second end **18b**. The first end **18a** of the housing includes at least first and second apertures **19a,19b** for conveying a plurality of electrical lines **24,25** therethrough. The electrical lines **24,25** are attached to at least one piezoelectric device **26** via first and second electrodes **28** and **29** mounted at the second end **18b** of the housing **18**. The second end **18b** further comprises external threads for threaded and sealed attachment with a recessed threaded portion **30** formed within an interior portion of the chamber **13**.

The piezoelectric devices **26** are fixedly mounted within the housing and receive select signals via electrical lines **24,25** from a function generator **32** which is selectively tuned to a characteristic frequency (or range of frequencies) via control knob **34** and a corresponding voltage via control knob **36** to induce vibrations through the piezoelectric discs **26** with simultaneous production of ultrasonic waves **36** for reducing the non-uniform fuel droplet size from a predetermined fuel mixture (e.g., gasoline fuel **20, Fig. 2A**; diesel fuel **22, Fig. 2B;** etc.) to a uniform droplet size with a distinct energy magnitude. Accordingly, the fuel mixtures **20,22** may contain fuel conditioning and optimizing agents for enhancing the fuel-to-air ratio or the fuel combustion processes, respectively.

The function generator **32** preferably produces selective multiple input signals in the form of a plurality of different waveforms such as a sinusoidal wave **40**, a step wave **42** or saw-tooth wave **44**. While these particular waves have been illustrated as exemplary waves used, the function generator is not limited to these particular configurations, but can include input signal waveforms (including superimposed waveforms) of various combinations at select characteristic voltages and frequencies (including resonant frequencies) for reducing fuel droplet size having distinct energy magnitudes. The selective signals **40**, **42**, **44** respectively transmit vibrations to at least one of the piezoelectric discs **26** via electrodes **28,29** for inducing a characteristic series of ultrasonic wavefronts **36**, such that the waves **36** are transmitted within a predetermined path made substantially transverse with a central axis formed along the length of at least one piezoelectric housing **18**, thereby reducing the fuel **20** to a stream of regulated uniformed sized fuel droplets.

Also, it should be noted that the size of each piezoelectric device **26** is formed having a critical surface area and thickness to affect a specific wavefront having a fuel specific frequency for reducing fuel droplet size. The vibrations produced by a distinct sized piezoelectric element will have a goal specific effect on reducing the various droplet sizes of each type of fuel to substantially uniform droplet sizes with substantially uniform energy magnitudes. The relationship of vibration frequency is in proportion to the size and thickness of each piezoelectric disc **26** (i.e., the greater dimensioned device **26** the lesser produced vibration, and likewise smaller dimensioned device **26**, the larger produced vibration).

Similarly, a two-stroke I.C.E. is illustrated as alternate embodiment **6** to **Fig. 2A** is shown in **Fig. 2B**, except a diesel fuel mixture **22** is shown differing in droplet size. Thus, the excitation frequency of the input signal or subsequent wavefront has been indicated as **36'** to denote a different characteristic frequency and voltage required to produce a uniform volume of fuel droplets respectively. In essence, the invention provides the same improvement to a two-stroke I.C.E. of **Fig. 2B**, as it does to the four-stroke I.C.E. of **Fig. 2A**.

As diagrammatically illustrated in **Figs. 3** and **4**, the ultrasonic liquid fuel introduction system **6** is shown according to respective second and third embodiments **7** and **8**. As shown in **Fig. 3**, the ultrasonic liquid fuel introduction system **7** is adapted to a threaded sidewall portion **48** of a single channel **50** before fuel mixture entry **51** within a combustion chamber system **60**. The channel **50** is shown having a fuel mixture **51** which flows into a multiple series of sub-channels **50a**, **50b**, **50c**, and **50d** which are in fluid communication or attachment with chambers **60a**, **60b**, **60c**, and **60d**, for receiving ultrasonically reduced fuel droplets **52** therein for subsequent ignition and/or combustion. The function generator or input signal

source **32** is further illustrated having a power line **62** which can be electrically configured to turn on/off via the ignition switch of a vehicle or to be selectively activated via an auxiliary on/off switch (not shown) having a direct connection to an automobile's on-board Direct Current (DC) or battery source. The subsequent induced ultrasonic wave **37** is similarly tuned to a selective frequency or resonant frequency and voltage corresponding to the specific fuel mixture **51** for reducing its size to uniform droplets of specific energy magnitudes for a "clean" combustion process (i.e., no residual particle accumulation within the chamber).

As diagrammatically illustrated in **Fig. 4**, the ultrasonic liquid fuel introduction system **8** is shown from a top view according to the third embodiment, wherein the sub-channels **50a**, **50b**, **50c**, and **50d** of the channel **50** identified in **Fig. 3** are configured with a respective series of ultrasonic housings **18c**, **18d**, **18e** and **18f**, for selectively inducing ultrasonic waves to a fuel mixture **53** at the same or different characteristic voltages and frequencies (in various combinations per respective housing **18c**, **18d**, **18e** and **18f**) of multiple inputs **70** to reduce the fuel droplet size respectively. In this configuration, multiple signal input signals are generated to perform a specific outcome. Power for the function generator **32** is provided as similarly noted above.

According to the fourth embodiment **9**, as seen in **Fig. 5**, a series of ultrasonic housings **18** is shown, each having at least one piezoelectric transducer **26** disposed in a linear arrangement at a spaced interval distance to effect multiple ultrasonic wavefront excitations **72** and **74**, respectively to a fuel mixture **55**. As shown therein, a fuel mixture **55** enters an introduction nozzle or channel **80** via its influent end **82** and exits via its effluent end **84**. Adjacent to the effluent end **82** is disposed a first ultrasonic housing **18** for ultrasonically exciting the fluid mixture according to predetermined voltage and frequency level for reducing fuel droplet size for the fuel mixture **55**. Between a point **P1** indicating a first ultrasonic excitation and a point P2 measured downstream at least one other ultrasonic hosing **18** is linearly disposed in spaced relation a distance **D** for refining ultrasonic excitation of the fuel prior to leaving as ultrasonically refined effluent droplet fuel **57** via the effluent end **84** of the introduction nozzle. In a similar fashion, the induced ultrasonic wavefronts **72**, **74** can comprise the same or different characteristic frequency and voltage for delivering ultrasonic waves to the respective fuel to reduce fuel droplet size to uniform fuel droplets of similar energy magnitudes for subsequent "clean" combustion. To reduce fluid flow losses and surface roughness within the flow path of a particular chamber used, at least one transducer housing **18** is disposed within the chamber **13**, such that the threaded surface end **18b** of the housing **18** is made perfectly flush with an inner most wall surface portion **13a** of the

respective chamber or fuel flow channel **13**. This particular fitting of the housing **18** effects a substantially constant flow of fuel **20,22** from a point **P1** of ultrasonic excitation of every fuel droplet to a fuel flow point **P2** downstream of the chamber **13** or respective channel (See **Fig. 5**).

In sum, ultrasonic liquid fuel introduction system according to the instant invention has the primary advantage that it does not require the utilization of intermediate elements such as heat exchangers or heating elements to reduce fuel droplet size as a catalyst which hinder direct in-line fluid flow and contributes to various types of fluid flow losses therein (in the form of obstructions and the source of residual particle adhesions just to name a few). The resultant peaks of the wavefront, after ultrasonic excitation within or before entry of the fuel within a combustion chamber reduces vibrations, thus reducing mechanical wear within the respective chamber.

Also, an important feature, the substantially uniform sized droplets reduce fuel consumption and air pollution due to decreased unburned particles and improperly combusted exhaust gases. In addition, residual particle accumulation is reduced by way of an improved air-to-fuel volume ratio. As such, the excess energy loss from a non-adiabatic process is virtually eliminated. The piezoelectric transducer is preferably of, but not limited to, the ceramic material, or the like type, primarily because it is impervious to high temperatures related to combustion processes. Similarly, construction of the housing may be of, but not limited to, ceramic materials, so long as the material is impervious to failure from high combustion temperatures. Further, certain spark ignition features and fuel injection details have not been shown in any great detail, particularly in Figs. **2A-4** for the purpose of illuminating the ultrasonic features of the invention. It is expected that one having ordinary skill in the relevant art would know how to make and use the invention and/or to eliminate any other effects related to high combustion processes and the respective elemental parts of the invention to provide combustion chamber temperatures. In this regard, detail features of certain mechanical elements (i.e. spark ignition elements, fuel injection elements, and the like) have not been discussed or shown for sake of clarity in describing the essential features of the invention.

The preferred embodiments of the invention provide an ultrasonic liquid fuel introduction system that directly reduces fuel droplet size as a virtually non-invasive system. The system minimizes fuel flow disturbances within a fuel chamber. The air-to-fuel ratio is improved for effecting a smooth ignition of fuel introduced to the system. Overall fuel consumption is significantly reduced. The system decreases air pollution by reducing the

amount of unburned fuel, reducing incomplete combustion by-products released into the atmosphere, and increasing the fuel efficiency of an internal combustion engine.

It is to be understood that the present invention is not limited to the sole embodiments described above, but encompasses any and all embodiments within the scope of the following claims.

CLAIMS

I claim:

1. A device for converting non-uniformly sized droplets of liquid fuel into substantially uniform droplets of liquid fuel for improving the combustion characteristics in an internal combustion engine, the device comprising:

a sealed housing;

an electrical excitation source providing at least one electrical excitation signal having at least one frequency and amplitude;

a transducer disposed in the housing and electrically coupled to the electrical excitation source, the transducer receiving the excitation signal and producing a series of ultrasonic wavefronts;

wherein the ultrasonic wavefronts are propagated through the non-uniformly sized droplets of liquid fuel, causing the droplets to break apart, thus resulting in substantially uniform sized droplets.

2. A device according to claim 1, wherein the sealed housing has a threaded end, the threaded end being adapted for seating into a threaded aperture of a structure enclosing fuel such that the threaded end of the housing is proximate to the liquid fuel.

3. A device according to claim 1, wherein the transducer includes at least one piezoelectric device, each piezoelectric device being sized and configured to provide characteristic ultrasonic wavefronts for a respective specified liquid fuel type.

4. A device according to claim 1, wherein the electrical excitation source is a function generator for producing the at least one electrical excitation signal having at least one frequency and amplitude, and wherein the excitation signal has a cyclical characteristic.

5. A device according to claim 4, further including means for electrically connecting the transducer to the electrical excitation source, wherein the means extends through the housing from the transducer to the source.

6. A device for use with an internal combustion engine type, the device adapted to convert droplets of liquid fuel having non-uniformed sizes into droplets of liquid fuel having substantially uniform size, the device comprising:

at least one sealed housing;

an electrical excitation source to provide at least one electrical excitation signal having at least one frequency and amplitude;

at least one transducer disposed in each of the at least one housing, each at least one transducer being electrically coupled to the electrical excitation source for receiving the excitation signal and producing a series of ultrasonic wavefronts;

wherein the ultrasonic wavefronts propagate through the liquid fuel, causing the non-uniform size droplets to break apart into droplets of substantially uniform size;

whereby an improvement of the combustion of the liquid fuel results.

7. A device according to claim 6, wherein the sealed housing has a threaded end, the threaded end cooperatively seats into a threaded aperture such that the threaded end of the housing is proximate to the liquid fuel.

8. A device according to claim 6, wherein the transducer includes at least one piezoelectric device, each piezoelectric device is sized and configured to provide characteristic ultrasonic wavefronts for a respective specified liquid fuel type.

9. A device according to claim 6, wherein the electrical excitation source is a function generator for producing the at least one electrical excitation signal having at least one frequency and amplitude; whereby the excitation signal has cyclical characteristic.

10. A device according to claim 9, further including means for electrically connecting the transducer to the electrical excitation source, wherein the means extends through the housing from the transducer to the source.

11. A device according to claim 9, further including at least two transducers in each housing, wherein each transducer receives an excitation signal having a respective frequency and amplitude, whereby each the wavefront, generated by each respective transducer, has a characteristic independent of the other generated wavefronts, for breaking apart specific droplets of specific liquid fuel types so as to produce droplets of uniform size irrespective of the fuel types.

12. A device according to claim 6, wherein each housing is made of material impervious to the temperatures of combustion.

13. A device according to claim 12, wherein each sealed housing has a threaded end, the threaded end cooperatively seating into a threaded aperture of an internal combustion engine such that the threaded end of the housing is proximate to the liquid fuel and each of the at least one transducers is secured in the threaded end of the housing.

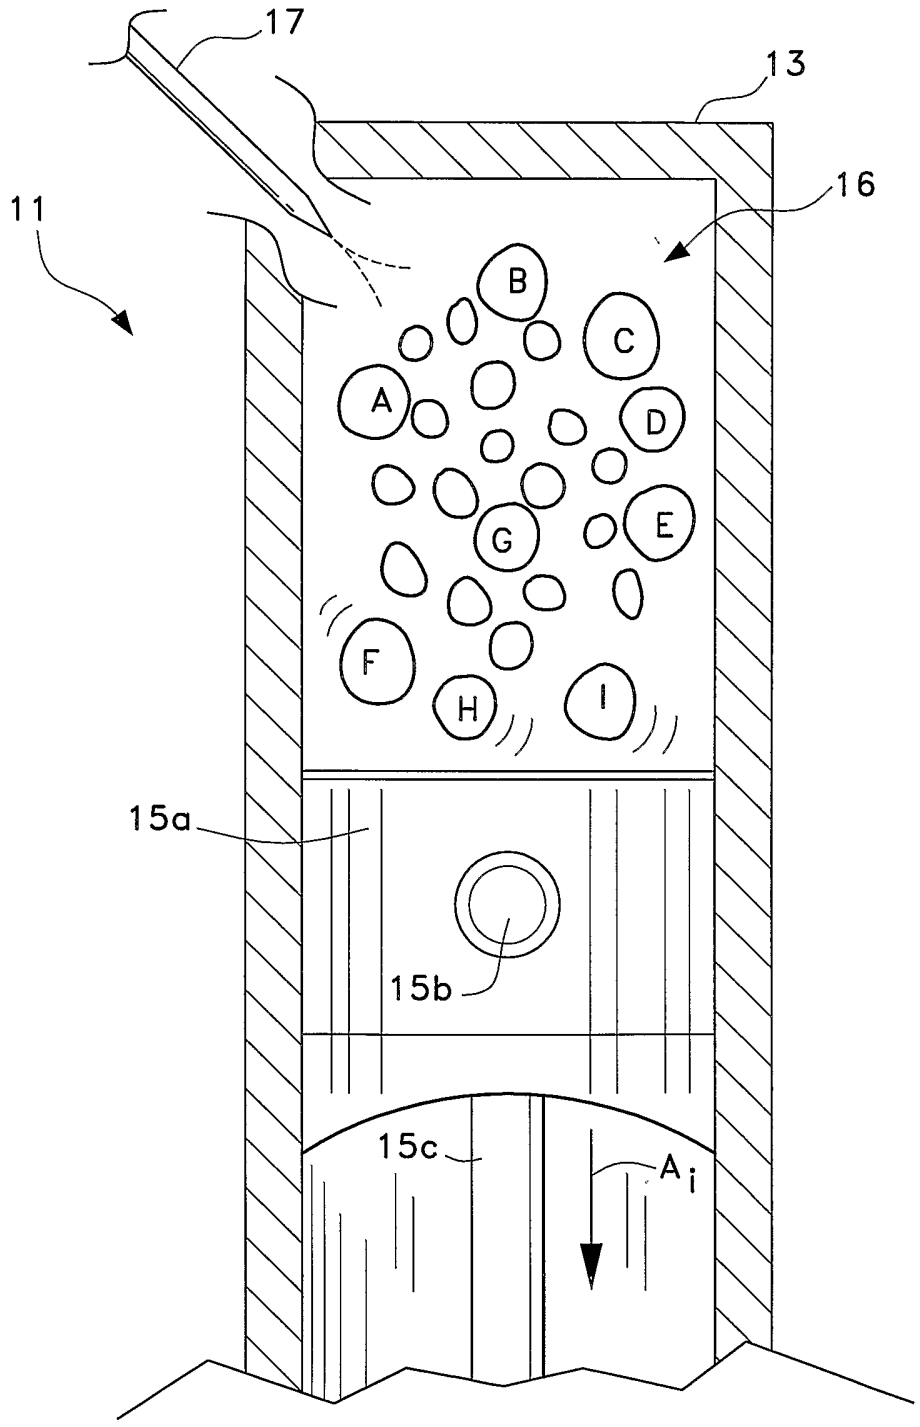


Fig. 1
(Prior Art)

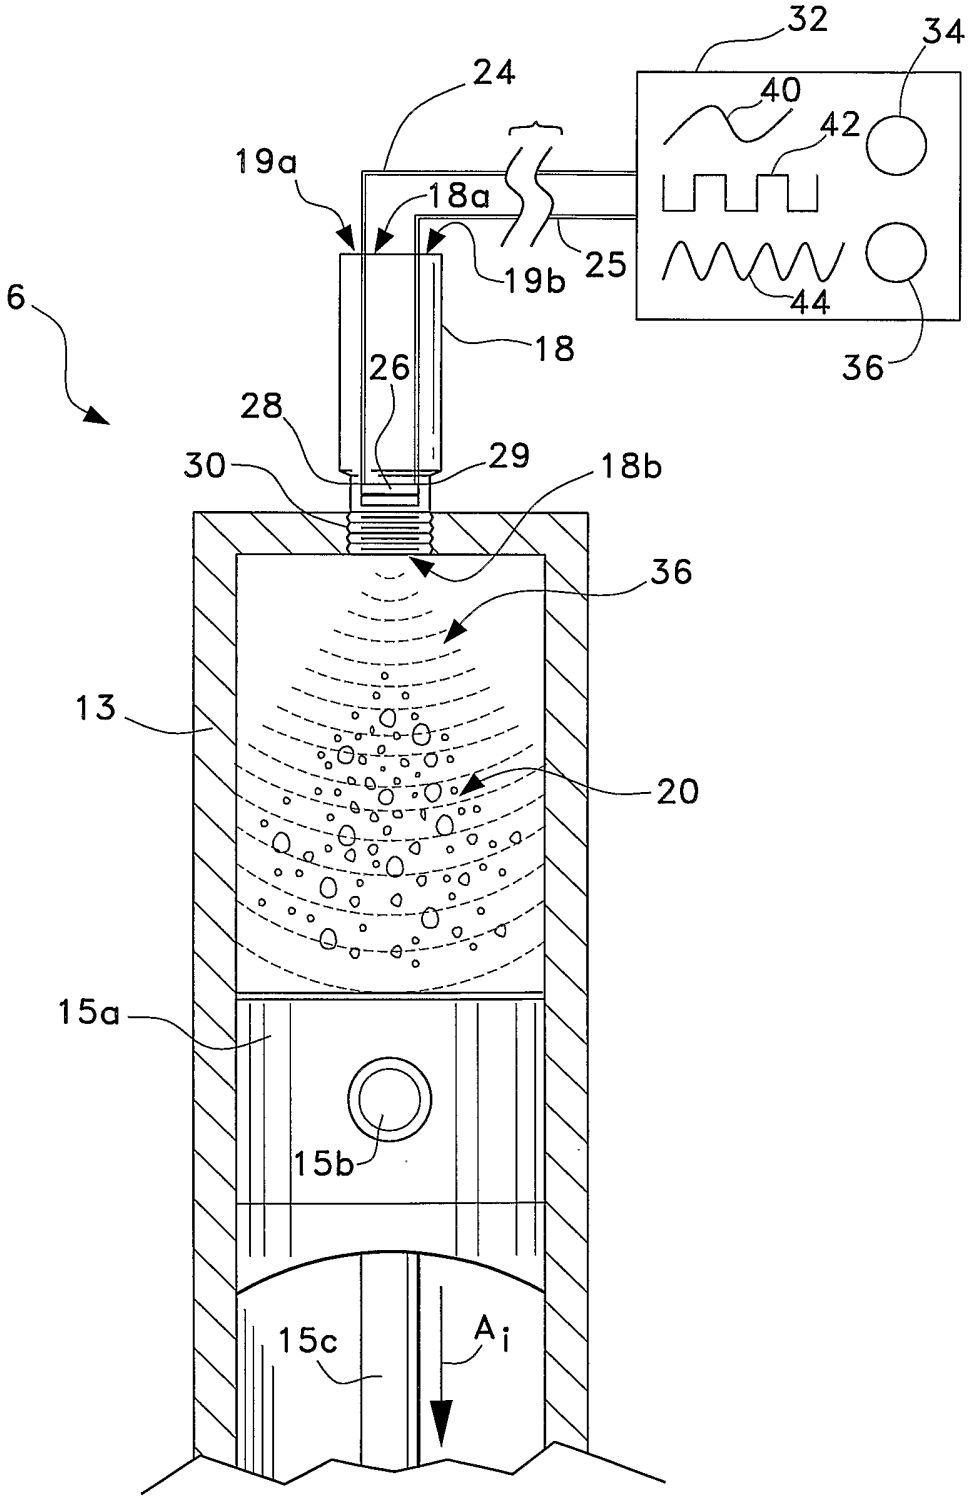

32
34
24
40
42
19a
18a
25
19b
44
6
18
36
26
28
30
29
18b
36
13
20
15a
15b
15c
Ai

Fig. 2A

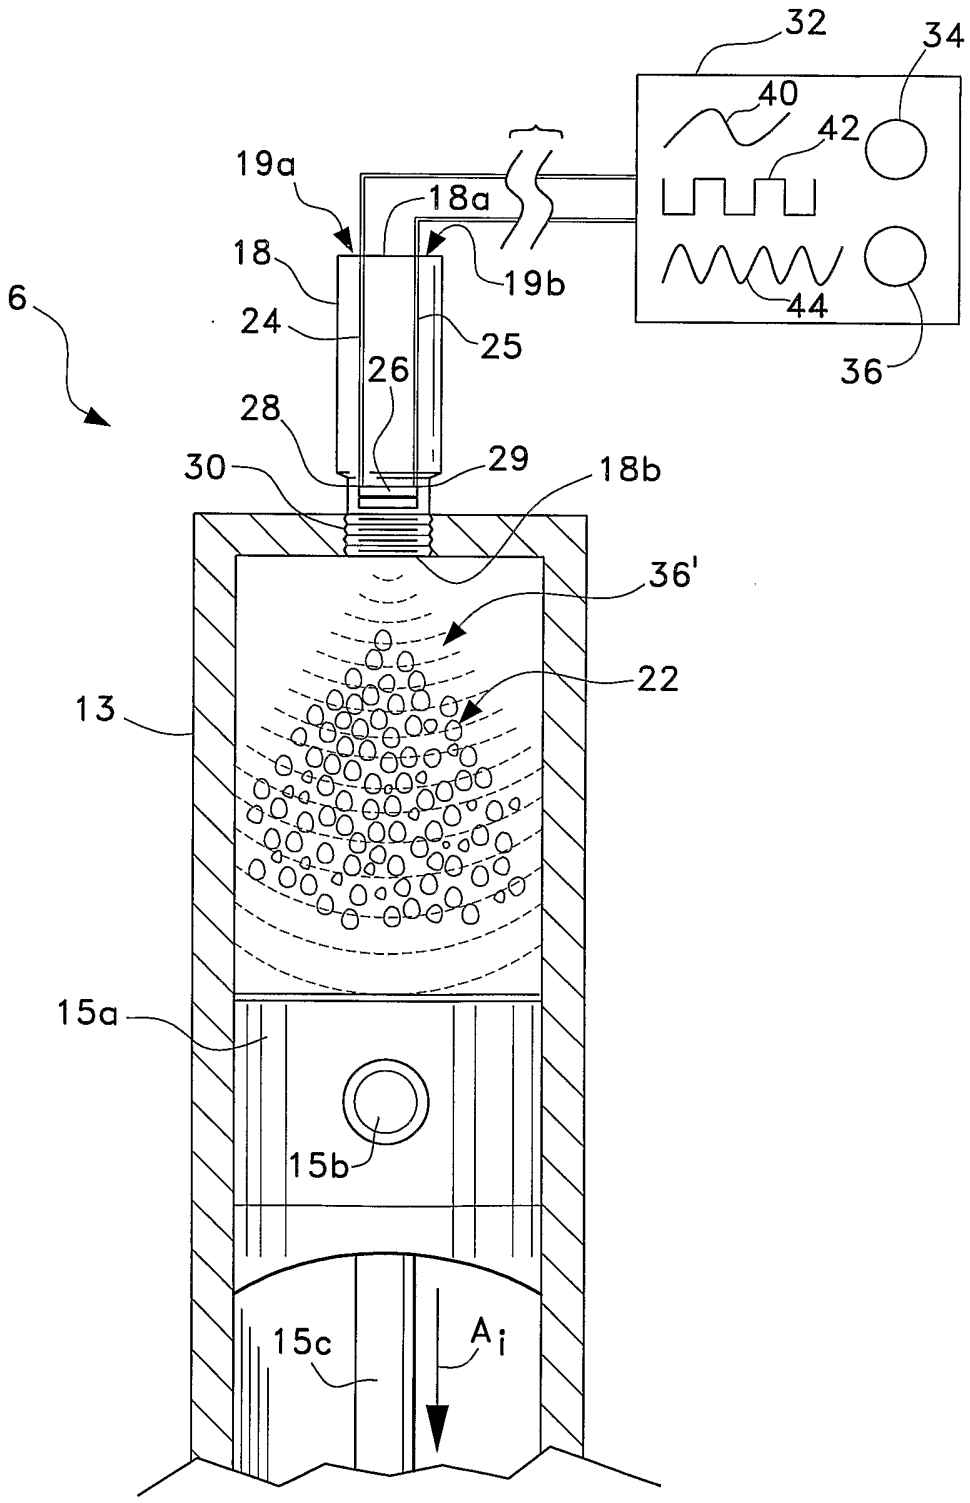

32
34
40
42
19a
18a
18
19b
6
24
25
26
44
36
28
30
29
18b
36'
22
13
15a
15b
15c
Ai

Fig. 2B

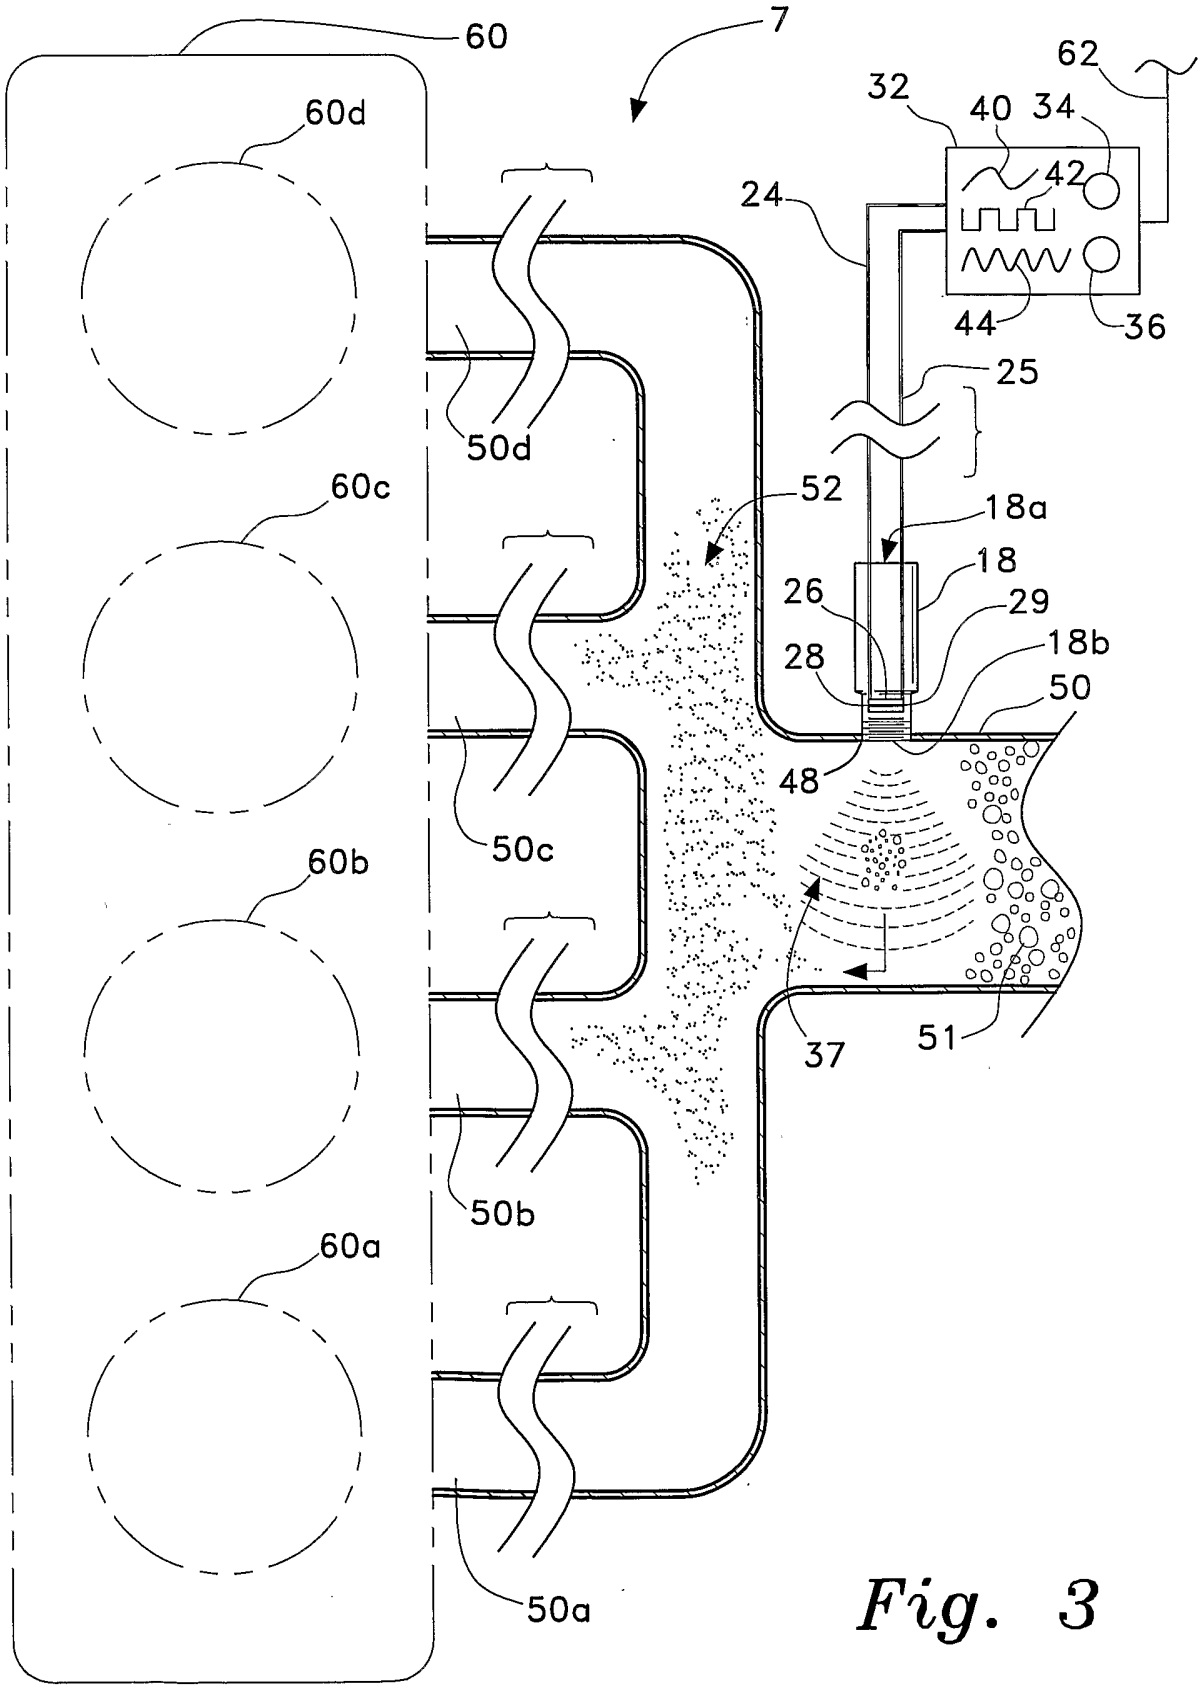

60
7
62
32
40
34
42
24
44
36
25
60d
50d
52
18a
18
26
29
28
18b
50
48
60c
50c
60b
37
51
50b
60a
50a

Fig. 3

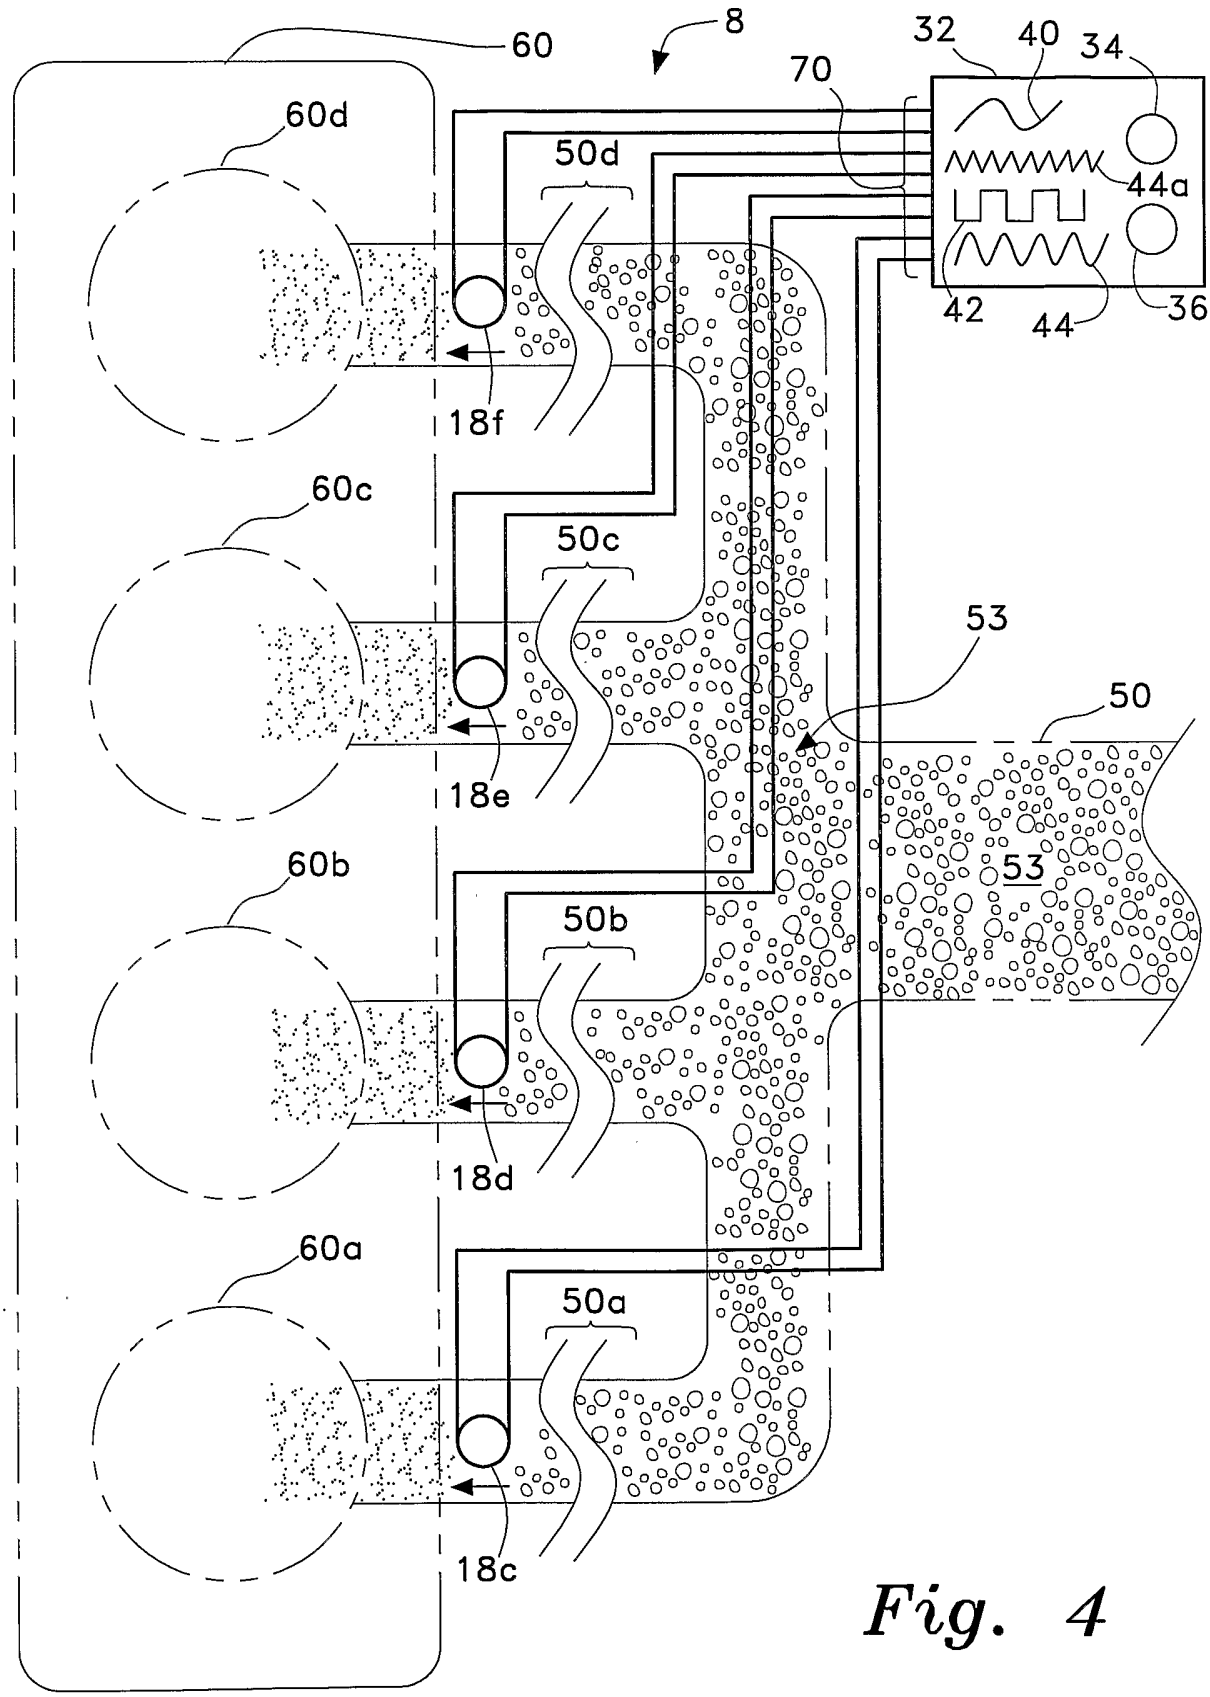

8
60
32
40
34
70
60d
50d
44a
42
44
36
18f
60c
50c
53
50
18e
60b
50b
53
18d
60a
50a
18c

Fig. 4

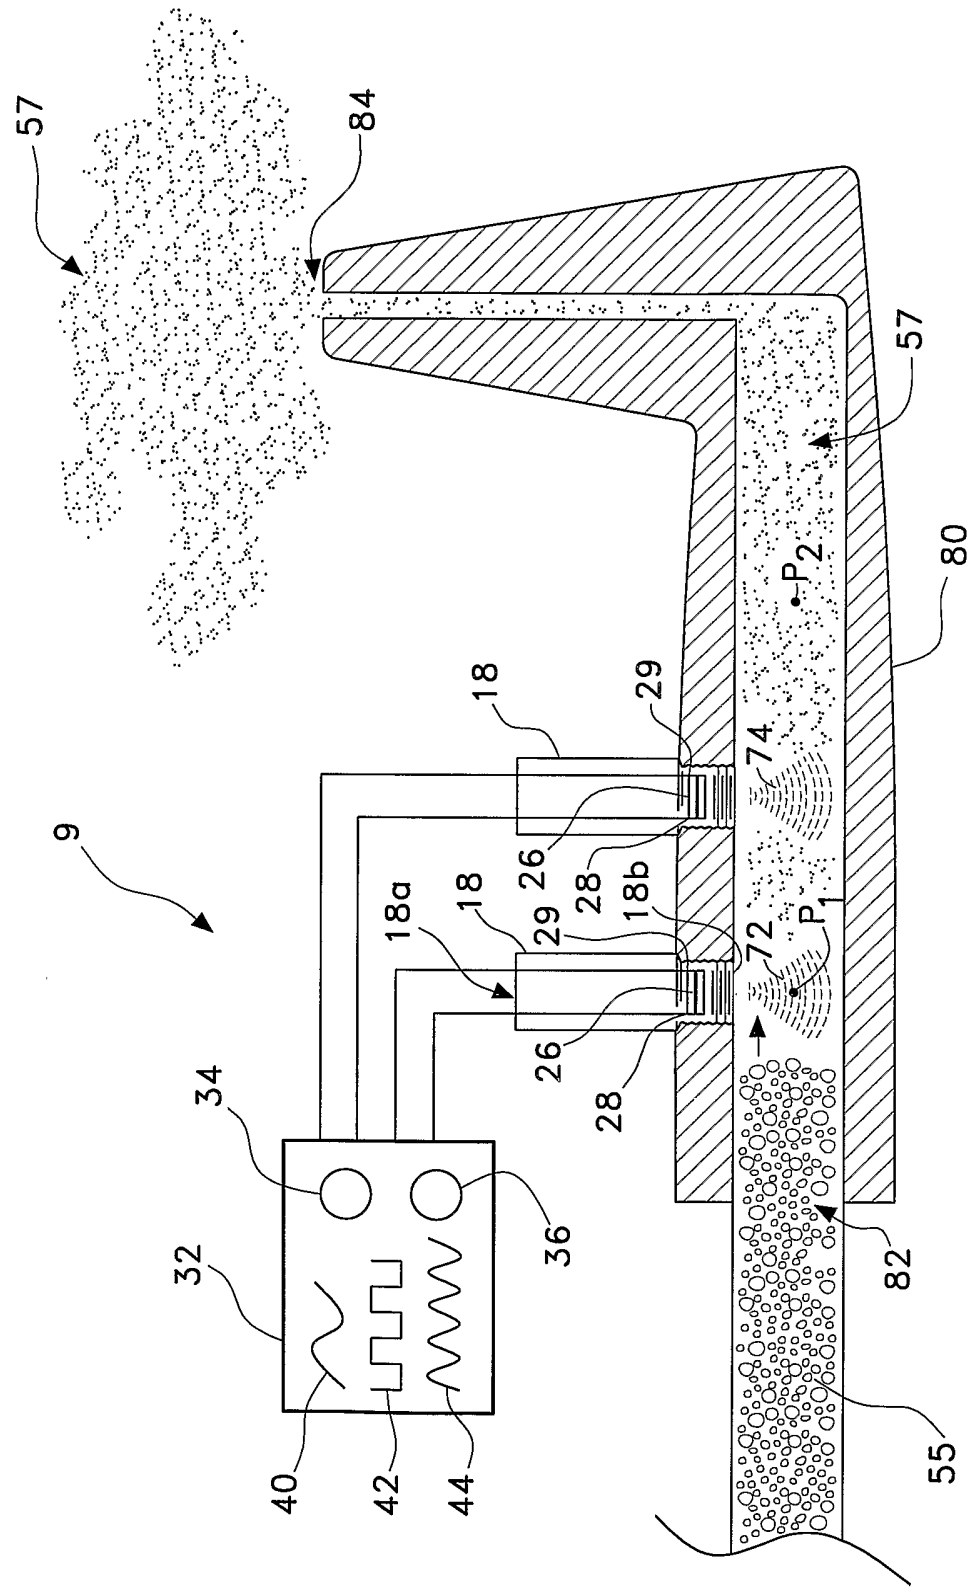

57
84
57
80
P_2
18
29
74
9
26
28
18b
18a
18
29
72
P_1
26
28
34
36
32
40
42
44
82
55

Fig. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US03/16971

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) :F02M 29/00
US CL :123/536

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 123/536, 537, 538

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4,401,089 A (CSASZAR et al) 30 AUGUST 1983 (30.08.1983), see column 4.	1, 3-6, 8-10, and 12
A	US 4,338,905 A (URICH) 13 JULY 1982 (13.07.1982), see entire document.	1-13
A	US 4,344,404 A (CHILD et al) 17 AUGUST 1982 (17.08.1982), see entire document.	1-13
A	US 4,594,969 A (PRZYBYLSKI) 17 JUNE 1986 (17.06.1986), see entire document.	1-13

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

*	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E"	earlier document published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&"	document member of the same patent family
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search 26 AUGUST 2003	Date of mailing of the international search report 22 SEP 2003
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer MCMAHON, MARGUERITE Telephone No. (703)308-1956

Form PCT/ISA/210 (second sheet) (July 1998)★