

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
9 July 2009 (09.07.2009)

PCT

(10) International Publication Number  
WO 2009/083952 A1

- (51) International Patent Classification:  
B23B 27/16 (2006.01) B23C 5/20 (2006.01)
- (21) International Application Number:  
PCT/IL2008/001610
- (22) International Filing Date:  
11 December 2008 (11.12.2008)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
188502 30 December 2007 (30.12.2007) IL
- (71) Applicant (for all designated States except US): ISCAR LTD. [IL/IL]; P.O. Box 11, 24959 Tefen (IL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): SATRAN, Amir [IL/IL]; 6 Moran Street, 25147 Kfar Vradim (IL).
- (74) Agent: ISCAR LTD., PATENT DEPARTMENT; P.O. Box 11, 24959 Tefen (IL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

- AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

[Continued on next page]

(54) Title: CUTTING INSERT AND CUTTING TOOL THEREFOR

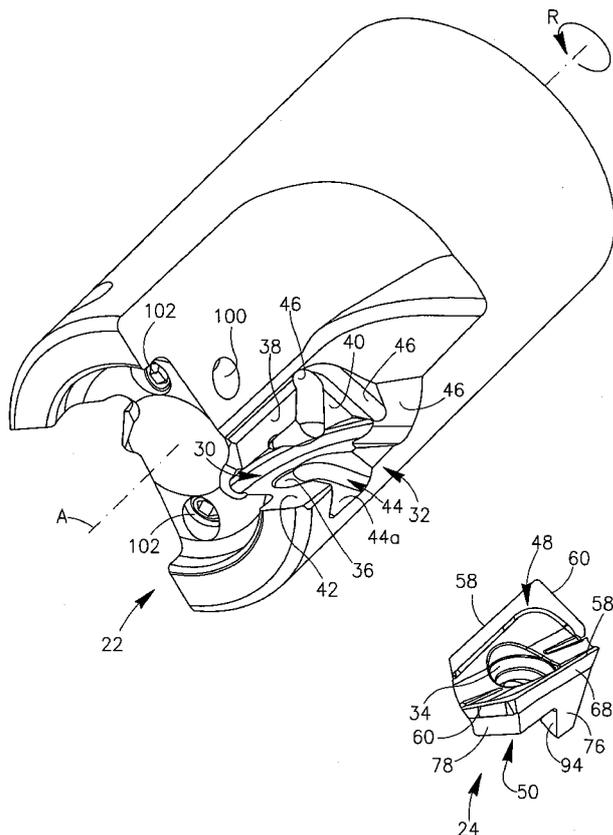


FIG. 2

(57) Abstract: A cutting tool has at least one cutting insert seated therein. The cutting insert has a longitudinal axis, an upper surface, a lower surface and a peripheral surface that extends between the upper surface and the lower surface. At least a portion of an intersection between the upper surface and the peripheral surface constitutes a cutting edge. The lower surface has at least one set of base abutment surfaces, each set including at least one major base abutment surface and at least one minor base abutment surface. The major and minor base abutment surfaces of the first set lie on a first base abutment plane while the major and minor base abutment surfaces of the second set lie on a second base abutment plane. The first and second base abutment planes forming a first non-zero angle therebetween.

WO 2009/083952 A1



- 
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

## CUTTING INSERT AND CUTTING TOOL THEREFOR

5

### FIELD OF THE INVENTION

10           The present invention relates to an indexable cutting insert and to a holder for such a cutting insert.

### BACKGROUND OF THE INVENTION

Rotary cutting tools having holders and replaceable cutting inserts clamped therein  
15 by a clamping screw are known. When using such a rotary cutting tool at high speeds, however, stability problems arise due to a great magnitude of centrifugal forces created by the high rotational speed at which the rotary cutting tool operates. Moreover, the centrifugal force can cause shearing of the clamping screw. Due to these problems, use of conventional clamping methods is limited and it is unsatisfactory to rely exclusively upon a clamping  
20 screw to releasably secure the cutting insert to the holder or to a cassette. Employing external clamps only aggravates the problem, since the added mass of the clamps creates even greater centrifugal forces, making the stability problems even worse. Consequently, tools for high-speed machining require creation of an interlocking connection in order to absorb the greater part of the centrifugal force and decrease the level of stress on the  
25 mounting means.

Known interlocking connections are, for example, tongue and groove connections in which the supporting surface of the cutting insert features a rectangular tongue which is engaged with a corresponding groove of the receiving surface of the main body of the tool.

Such a clamping arrangement is shown in US 5,944,456; US 6,203,251; US 5,924,826 or WO 95/29026.

However, this type of construction leads to very high levels of stress on the main body of the tool, especially, in the base region of the groove due to the notch effect.

5 Mating serrated surfaces are another known clamping arrangement. DE Patent Application No. 35 33 125 A; US 6,244,790; US 6,102,630 or US 2004/0101371 disclose mating supporting surfaces of an indexable insert and a receiving surface of a tool featuring serrations in mutual engagement.

10 However, such a clamping arrangement may create over-constrained clamping, which may cause equivocal positioning of the indexable insert in the tool body.

US Patent No. 6,196,769 discloses a rotary cutting tool for high-speed machining having a cutting insert interchangeably mounted in a tool body. At least parts of a supporting surface of the cutting insert and of a receiving surface of the tool body are of a V-shaped configuration and are engaged with each other, when viewed in a cross section  
15 perpendicular to an axis of rotation of the rotary cutting tool. In order to radially support the cutting insert, a bearing surface on the tool body is arranged in such a way that a mounted cutting insert is tilted such that the supporting surface of the tool body and the receiving surface of the cutting insert come into mutual contact at only two points.

It is the object of the present invention to provide a cutting insert and a cutting tool  
20 therefor that may significantly reduce or overcome the aforementioned disadvantages.

It is a further object of the present invention to provide a cutting insert and a cutting tool therefor that may be used in very high machining speeds.

## **SUMMARY OF THE INVENTION**

25 In accordance with the present invention there is provided a cutting insert having a longitudinal axis and comprising an upper surface, a lower surface, and a peripheral surface extending between the upper surface and the lower surface, at least a portion of an intersection between the upper surface and the peripheral surface constituting a cutting edge; wherein

the lower surface comprises at least two base abutment surfaces longitudinally displaced from each other and defining a first non-zero angle therebetween.

Advantageously, the base abutment surfaces are ground.

According to a preferred embodiment of the present invention, the cutting insert is  
5 indexable.

Typically, the first non-zero angle is in the range of about  $70^\circ$  to  $150^\circ$ , preferably in the range of about  $115^\circ$  to  $145^\circ$ , more preferably in the range of about  $125^\circ$  to  $135^\circ$  and most preferably about  $130^\circ$ .

At least one of the base abutment surfaces constitutes a major base abutment  
10 surface, the peripheral surface comprises at least a side abutment surface that forms a second non-zero angle with the major base abutment surface, the second non-zero angle is in the range of about  $40^\circ$  to  $80^\circ$ , preferably in the range of about  $60^\circ$  to  $80^\circ$ , more preferably in the range of about  $65^\circ$  to  $75^\circ$  and most preferably about  $70^\circ$ .

Advantageously, the side abutment surface is ground.

Typically, the cutting insert has a through bore that extends between the upper  
15 surface and the lower surface.

Further typically, the peripheral surface further comprises an end abutment surface, the end abutment surface is generally perpendicular to the side abutment surface.

Advantageously, the end abutment surface is ground.

Further advantageously, the major base abutment surface is associated with a  
20 minor base abutment surface, and wherein the major base abutment surface and the associated minor base abutment surface lie on a same base abutment plane.

Preferably, the cutting insert has a  $180^\circ$  rotational symmetry around an axis of  
symmetry of the cutting insert, the axis of symmetry extends between the upper surface  
25 and the lower surface of the cutting insert and perpendicularly to a reference plane that passes through lowermost extreme points of the lower surface, as seen in an end view of the cutting insert.

Typically, a first major base abutment surface is separated from its associated first  
minor base abutment surface by a second major base abutment surface.

Further in accordance with the present invention there is provided a cutting tool comprising a tool holder and at least one cutting insert mounted therein and clamped by a clamping screw;

the cutting insert having a longitudinal axis and comprising an upper surface, a lower surface, and a peripheral surface extending between the upper surface and the peripheral surface, at least a portion of an intersection between the upper surface and the peripheral surface constitutes a cutting edge, a through bore extends between the upper surface and the lower surface,

the lower surface comprises a first and a second major base abutment surfaces longitudinally displaced from each other and defining a first non-zero angle therebetween,

each of the major base abutment surfaces is associated with a pair of side surfaces that join each other at a remote end from the associated major base abutment surface. Each pair of side surfaces comprises a side abutment surface and an end abutment surface, the side abutment surface is located adjacent a lower portion of the associated major base abutment surface, and the end abutment surface is located remote from the associated major base abutment surface;

the tool holder has a longitudinal axis and comprises at least one pocket, having a threaded pocket bore, for retaining the cutting insert, the at least one pocket comprises:

a generally radially directed side support surface, a generally axially directed end support surface, and an inclined base support surface transversely directed to the side support surface and to the end support surface, the inclined base support surface is provided with a base recess located generally in a radially outermost center region of the inclined base support surface;

when the cutting insert is mounted in the pocket and retained by the clamping screw that passes through the through bore and threadingly engages the threaded pocket bore, operative abutment surfaces of the cutting insert abut the pocket in the following manner:

a given major base abutment surface of the cutting insert abuts the inclined base support surface of the pocket, a given side abutment surface of the cutting insert abuts the side support surface of the pocket, a given end abutment surface of the cutting insert abuts the end support surface of the pocket, and a given non-operative major base  
5 abutment surface of the cutting insert is located within the base recess of the pocket in a non-abutted manner.

Still further in accordance with the present invention there is provided a cutting insert having a longitudinal axis and comprising an upper surface, a lower surface and a peripheral surface extending between the upper surface and the lower surface, at least a  
10 portion of an intersection between the upper surface and the peripheral surface constitutes a cutting edge; wherein

the peripheral surface has a side abutment surface that extends generally parallel to the longitudinal axis, and an end abutment surface that extends generally perpendicular to the longitudinal axis and joins the side abutment surface,

15 the lower surface has a major base abutment surface, the side abutment surface is located adjacent a lower portion of the major base abutment surface, the end abutment surface is located remote from the major base abutment surface, and

the major base abutment surface forms a second non-zero angle with the side abutment surface.

20 Typically, the second non-zero angle is in the range of about  $40^\circ$  to  $80^\circ$ , preferably in the range of about  $60^\circ$  to  $80^\circ$ , more preferably in the range of about  $65^\circ$  to  $75^\circ$  and most preferably about  $70^\circ$ .

Further typically, the cutting insert further comprises a through bore that extends from the upper surface to the lower surface.

25 Advantageously, the major base abutment surface is associated with a minor base abutment surface located remote from the major base abutment surface, and wherein the major base abutment surface and the associated minor base abutment surface lie on a base abutment plane.

Still yet further in accordance with the present invention there is provided a cutting tool comprising a tool holder and at least one cutting insert mounted therein and clamped by a clamping screw;

the cutting insert having a longitudinal axis and comprising an upper surface, a lower surface and a peripheral surface extending between the upper surface and the lower surface, at least a portion of an intersection between the upper surface and the peripheral surface constituting a cutting edge, a through bore extends between the upper surface and the lower surface,

the peripheral surface has a side abutment surface that extends generally parallel to the longitudinal axis, and an end abutment surface that extends generally perpendicular to the longitudinal axis and joins the side abutment surface,

the lower surface has a major base abutment surface, the side abutment surface is located adjacent a lower portion of the major base abutment surface, and the end abutment surface is located remote from the major base abutment surface;

the tool holder has a longitudinal axis and comprises at least one pocket, having a threaded pocket bore, for retaining the cutting insert, the pocket comprising:

a generally radially directed side support surface, a generally axially directed end support surface, and an inclined base support surface transversely directed to the side support surface and to the end support surface, the inclined base support surface is provided with a base recess located generally in a radially outermost center region of the inclined base support surface;

when the cutting insert is mounted in the pocket and retained by the clamping screw that passes through the through bore and threadingly engages the threaded pocket bore, operative abutment surfaces of the cutting insert abut the pocket in the following manner:

the major base abutment surface of the cutting insert abuts the inclined base support surface of the pocket, the side abutment surface of the cutting insert abuts the side support surface of the pocket, and the end abutment surface of the cutting insert abuts the end support surface of the pocket.

Advantageously, the cutting insert further comprises a minor base abutment surface located remote from the major base abutment surface, the minor base abutment surface and the major base abutment surface lie on a base abutment plane, and wherein when the cutting insert is mounted in the pocket and retained by the clamping screw, the major base abutment surface and the minor base abutment surface lie on opposite ends of the base recess of the pocket and abut the inclined base support surface of the pocket.

Further advantageously, the minor base abutment surface is ground.

### BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention and to show how the same may be carried out in practice, reference will now be made to the accompanying drawings, in which:

**Fig. 1** is a side view of a cutting tool comprising a cutting insert and a tool holder in accordance with a first embodiment of the present invention;

**Fig. 2** is an exploded perspective view of the cutting insert and a pocket of the tool holder shown in Fig. 1;

**Fig. 3** is a top perspective view of the cutting insert shown in Fig. 2;

**Fig. 4** is a bottom perspective view of the cutting insert shown in Fig. 2;

**Fig. 5** is a top view of the cutting insert shown in Fig. 2;

**Fig. 6** is a side view of the cutting insert shown in Fig. 2;

**Fig. 7** is a bottom view of the cutting insert shown in Fig. 2;

**Fig. 8** is an end view of the cutting insert shown in Fig. 2;

**Fig. 9** is a cross-sectional view of the cutting insert taken along line IX-IX in Fig. 5;

**Fig. 10** is a perspective view of the pocket shown in Fig. 2;

**Fig. 11** is a cross-sectional view of the cutting tool taken along line XI-XI in Fig. 1;

**Fig. 12** is a cross-sectional view of the cutting tool taken along line XII-XII in Fig. 1;

and

**Fig. 13** is an end view of a cutting insert in accordance with a second embodiment of the present invention.

## DETAILED DESCRIPTION OF THE INVENTION

Attention is first drawn to Figs. 1 to 12 showing a cutting tool **20** with a longitudinal axis **A** defining a front-to-rear direction and a direction of rotation **R**. The cutting tool **20** comprises a tool holder **22**, two cutting inserts **24** and two clamping screws **26** in accordance with a first embodiment of the present invention. The tool holder **22** has a front cutting portion **28**. The front cutting portion **28** of the tool holder **22** has two pockets **30** formed at a perimeter **32** of the tool holder **22**. However, other embodiments of the invention may have one, three or more pockets **30**. Each of the pockets **30** opens tangentially forwardly and radially outwardly toward the perimeter **32**. Since the two pockets **30** are identical, only one of them will be described.

A given cutting insert **24** is removably secured in the pocket **30** of the tool holder **22** by means of a clamping screw **26**. The cutting insert **24** has a general shape of a hexagonal prism as seen in a top view and a bottom view of the cutting insert **24**. In other embodiments, the cutting insert may have other configurations such as, for example, a parallelogram prism. Furthermore, in other embodiments of the present invention, the cutting insert may be replaced by a cartridge or cassette fitted, releasably or non-releasably, with a blade or an insert. The clamping screw **26** may be any screw known in the art. In a clamping position, the clamping screw **26** passes through a through bore **34** of the cutting insert **24**, and threadingly engages a threaded pocket bore **36** in the pocket **30** of the tool holder **22**.

It will be understood by a person skilled in the art that the cutting insert **24** may be clamped by other methods known in the art, for example, by a clamp, in which case the cutting insert will not be provided with a through bore **34**, and accordingly, the pocket **30** of the tool holder **22** will not be provided with a threaded pocket bore **36**.

The cutting tool **20** is optionally a rotary cutting tool particularly for milling, preferably for high-speed milling and further preferably for very high speed milling with rotational speeds in the range of about 50,000 to 60,000 rpm.

Fig. 2 shows a perspective disassembled view of the tool holder **22** with the pocket **30** for the cutting insert **24** and for the clamping screw **26**. The pocket **30** has a generally radially directed side support surface **38**, a generally axially directed end support surface **40**, and an inclined base support surface **42** for abutting respective surfaces of the cutting insert **24** as will be described below. The base support surface **42** is inclined in the sense that it does not form a right angle with respect to the side support surface **38**, as seen in an end view of the tool holder **22**. Furthermore, the pocket **30** has a base recess **44** and other pocket recesses **46** to eliminate unwanted areas of contact between the tool holder **22** and the cutting insert **24**.

The cutting insert **24** comprises three pairs of surfaces, the surfaces of each pair being located on opposite sides of the cutting insert **24**. A first pair comprises an upper surface **48** and a lower surface **50**. The cutting insert **24** is single-sided, or non-reversible, in the sense that the upper surface and the lower surface are dissimilar. A second pair comprises two identical end surfaces **52**, and a third pair comprises two identical side surfaces **54**. The end surfaces **52** and the side surfaces **54** constitute a peripheral surface **56** of the cutting insert **24**, and they extend between the upper surface **48** and the lower surface **50**. A longitudinal axis **L** bisects the cutting insert **24** between the two side surfaces **54**. According to a first embodiment of the invention, the cutting insert **24** is indexable.

Identical main cutting edges **58** are formed at the intersection of the upper surface **48** with each of the side surfaces **54**. Identical auxiliary cutting edges **60** are formed at the intersection of the upper surface **48** with each of the end surfaces **52**. Each of the main cutting edges **58** joins an adjacent auxiliary cutting edge **60** through a corner cutting edge **62**. Each of the main cutting edges **58**, auxiliary cutting edges **60** and corner cutting edges **62** may further comprise a land surface, as it is known in the art. Each of the main cutting edges **58**, adjacent auxiliary cutting edge **60** and corner cutting edge **62** therebetween form a cutting portion **64**.

Each of the main cutting edges **58** has a rake surface **66** associated therewith in the upper surface **48** and a relief surface **68** associated therewith in the side surface **54**.

Similarly, each of the auxiliary cutting edges **60** has a rake surface **70** associated therewith in the upper surface **48** and a relief surface **72** associated therewith in the end surface **52**.

The cutting insert **24** has an axis of symmetry **S** that extends between the upper surface **48** and the lower surface **50** of the cutting insert **24** perpendicularly to the longitudinal axis **L**, and perpendicularly to a reference plane **P** that passes through lowermost extreme points **E1**, **E2** of the lower surface **50**, as seen in Fig. 8. The cutting insert **24** preferably has 180° rotational symmetry around the axis of symmetry **S**. As best seen in Figs. 5 and 7, a cut-out **74** is formed at opposite corners of the cutting insert **24** that are distal the corner cutting edges **62**.

The cutting insert **24** has a side abutment surface **76** located on each side surface **54**. The side abutment surface **76** extends generally parallel to the longitudinal axis **L** of the cutting insert **24**. The side abutment surface **76** is intended to abut the side support surface **38** of the pocket **30** shown in Figs. 2 and 10. Preferably, the side abutment surface **76** is ground.

The cutting insert **24** has an end abutment surface **78** that is located on each end surface **52**. The end abutment surface **78** is crossed by the longitudinal axis **L**, and is adjacent and transversely directed to the side abutment surface **76**. The end abutment surface **78** is intended to abut the end support surface **40** of the pocket **30**. The end abutment surface **78** is preferably ground, and optionally extends generally perpendicular to the longitudinal axis **L** of the cutting insert **24**.

At a given indexing position, only one side abutment surface **76** abuts the side support surface **38** of the pocket **30** and only one end abutment surface **78** abuts the end support surface **40** of the pocket **30** when the cutting insert **24** is retained in the pocket **30**.

The lower surface **50** of the cutting insert **24** is provided with a first set of spaced apart base abutment surfaces. The first set includes a first major base abutment surface **80** and at least one associated first minor base abutment surface **82**. Both the first major base abutment surface **80** and the first minor base abutment surface **82** lie in a common first base abutment plane **84** and thus are co-planar. Moreover, co-planar base abutment surfaces **80**,

**82** are configured and dimensioned to abut the inclined base support surface **42** of the pocket **30**, when the cutting insert **24** is seated in the pocket **30**.

The design of the first major base abutment surface **80** and the associated first minor base abutment surface **82** is such that it ensures firm and stable abutment of the lower surface **50** of the cutting insert **24** against the inclined base support surface **42** of the pocket **30**. This is achieved by selecting three spaced apart abutment points (not shown) that are located either on the first major base abutment surface **80** or on the first minor base abutment surface **82**. The three abutment points are the vertexes of an imaginary triangle. The axis **S** of  $180^\circ$  rotational symmetry of the cutting insert **24**, which is also the axis of the through bore **34**, passes through the imaginary triangle.

The lower surface **50** of cutting insert **24**, is also provided with a second set of spaced apart base abutment surfaces. This second set includes a second major base abutment surface **86** and an associated second minor base abutment surface **88** which are co-planar and lie in a common second base abutment plane **90**. As best seen in Fig. 7, the first major base abutment surface **80** and the second major base abutment surface **86** are longitudinally displaced relative to one another in the sense that the first major base abutment surface **80** is principally found on a first side of a plane **P1** of  $180^\circ$  rotational symmetry which is perpendicular to the longitudinal axis **L** and contains the axis of symmetry **S**, while the second major base abutment surface **86** is principally found on a second, opposite side of plane **P1**.

In one embodiment, the first major base abutment surface **80**, the first minor base abutment surface **82**, the second major base abutment surface **86**, and the second minor base abutment surface **88** are ground.

The base recess **44** of the pocket **30** prevents the first base abutment plane **84** and the second base abutment plane **90** from concurrently abutting the pocket **30** of the tool holder **22**. Thus, when the cutting insert **24** is seated in the pocket **30** with the first set of base abutment surfaces **80**, **82** (lying on first base abutment plane **84**) abutting the inclined base support surface **42**, at least a portion of the second major base abutment surface **86** (lying on second base abutment plane **90**) is received into the base recess **44** in a non-abutted manner,

i.e., without abutting the base **44a** or any other portion of the base recess **44**. The first base abutment plane **84**, or the second base abutment plane **90**, and the side abutment surface **76** which concurrently abut the pocket **30** when the cutting insert is removably secured in the tool holder **22** will hereinafter be referred to as "associated".

5           In accordance with a second embodiment of the present invention as shown in Fig. 13, the cutting insert **124** has only one base abutment plane **184** and thus, only one set of base abutment surfaces. As seen in Fig. 13, the base abutment plane **184** contains a major base abutment surface **180**, it being understood that the base abutment plane **184** also contains a minor abutment surface (not shown in Fig. 13) not unlike minor abutment surface **82**.

10           The lower surface **50** of the cutting insert **24** is further provided with a pair of intermediate surfaces **92** and a pair of transition surfaces **94** that join between the differently inclined first and second major base abutment surfaces **80**, **86**. As best seen in Figs. 3 and 4, the transition surfaces **94** are directed transversely to the side abutment surfaces **76**, and transversely to the first and second major base abutment surfaces **80**, **86**.

15           The upper surface **48** of the cutting insert **24** is provided with an optional arrangement of chip guiding means **96**. Since the upper surface **48** of the cutting insert **24** does not constitute the subject matter of the present invention, it may have other configurations in other optional embodiments of the invention and will not be further discussed herein.

          As seen in an end view of the cutting insert **24**, the first base abutment plane **84** and  
20 the second base abutment plane **90** are slanted at a first non-zero angle  $\alpha$  between each other. Typically, the first non-zero angle  $\alpha$  is in the range of about 70° to 150°. According to a specific embodiment of the present invention, the first non-zero angle  $\alpha$  is about 130°. In the present disclosure, when applied to angles, the term "about" means within a degree or so of the stated value.

25           As shown in Fig. 9, each of the side abutment surfaces **76** of the cutting insert **24** is slanted at a second non-zero angle  $\beta$  with respect to the associated major base abutment surface **80**, **86** that lie on respective first and second base abutment planes **84**, **90**. Typically, the second non-zero angle  $\beta$  is acute and in the range of 40° to 80°. According to a specific embodiment of the present invention, the angle  $\beta$  is about 70°. The side support

surface **38** and the inclined base support surface **42** of the tool holder **22** have corresponding respective orientations.

Fig. 10 particularly visualizes the side support surface **38**, the end support surface **40** and the inclined base support surface **42** that support the cutting insert **24** and the recesses **44, 46** provided in the pocket **30**.

Figs. 11 and 12 show cross sections of the cutting tool **20** showing one pocket **30** without a cutting insert mounted therein and the cutting insert **24** releasably secured in another pocket **30**. In Fig. 12 it can be seen that the side support surface **38** of the pocket **30** and the inclined base support surface **42** of the pocket **30** are slanted at the second non-zero angle  $\beta$  with respect to each other, in order to mate with the cutting insert **24** that has the same angle  $\beta$  between the side abutment surface **76** and the associated major base abutment surface **80, 86**.

In view of the described above, the cutting tool **20** according to the present invention may have advantage when incorporating the following features:

First, the second non-zero angle  $\beta$  that is formed between the side support surface **38** of the pocket **30** and the inclined base support surface **42** of the pocket **30** creates a radially inwardly directed force component **98** (see Fig. 11) that acts on the cutting insert **24** during machining, thus decreasing the shear force acting on the clamping screw **26**, especially, at very high machining speeds. Thus, the clamping screw **26** firmly clamps the cutting insert **24** and more stable operation of the cutting tool **20** is obtained.

Second, the side abutment surface **76** of the cutting insert **24** may be ground thus ensuring accurate radial positioning of the cutting insert in a relatively inexpensive and simple manner.

Third, the end abutment surface **78** of the cutting insert **24** may be ground thus ensuring accurate axial positioning of the cutting insert **24**.

Fourth, the major base abutment surfaces **80, 86** and the minor base abutment surfaces **82, 88** may be ground. Since each of the major base abutment surfaces **80, 86** is coplanar with its associated minor base abutment surface **82, 88**, an accurate positioning of the lower surface **50** of the cutting insert **24** is obtained.

Fifth, the location of the major base abutment surfaces **80, 86** spaced apart relative to their associated minor base abutment surfaces **82, 88** ensures firm and stable abutment of the cutting insert **24**.

Thus, in view of the above, a stable and accurate positioning of the cutting insert **24** is  
5 obtained, enabling use of the cutting tool **20** for accurate machining at very high machining speeds.

If desired, the tool holder **22** may be provided with a given coolant bore **100** for supplying cooling agent directly to the operative cutting portion **64** of a given cutting insert **24**. For practical production reasons, each of the coolant bores **100** is associated with a  
10 minor blind bore **102**.

Although the present invention has been described to a certain degree of particularity, it should be understood that various alterations and modifications could be made without departing from the spirit or scope of the invention as hereinafter claimed.

**CLAIMS:**

1. A cutting insert (24) having a longitudinal axis (L) and comprising an upper surface (48), a lower surface (50) and a peripheral surface (56) extending between the upper surface (48) and the lower surface (50), at least a portion of an intersection between the upper surface (48) and the peripheral surface (56) constituting a cutting edge (58, 60, 62); wherein:
  - the lower surface (50) comprises at least two base abutment surfaces (80, 86) longitudinally displaced from each other and defining a first non-zero angle ( $\alpha$ ) therebetween.
2. The cutting insert (24) according to claim 1, wherein the cutting insert (24) has a through bore (34) that extends between the upper surface (48) and the lower surface (50).
3. The cutting insert (24) according to claim 1, wherein the base abutment surfaces (80, 86) are ground.
4. The cutting insert (24) according to claim 1, wherein the cutting insert (24) is indexable.
5. The cutting insert (24) according to claim 1, wherein the first non-zero angle ( $\alpha$ ) is in the range of about 70° to 150°.
6. The cutting insert (24) according to claim 1, wherein:
  - the peripheral surface (56) comprises at least a side abutment surface (76) that forms a second non-zero angle ( $\beta$ ) with the major base abutment surface (80, 86); and
  - the second non-zero angle ( $\beta$ ) is in the range of about 40° to 80°.

7. The cutting insert (24) according to claim 6, wherein the side abutment surface (76) is ground.

8. The cutting insert (24) according to claim 6, wherein the peripheral surface (56) further comprises an end abutment surface (78), the end abutment surface (78) is generally perpendicular to the side abutment surface (76).

9. The cutting insert (24) according to claim 8, wherein the end abutment surface (78) is ground.

10

10. The cutting insert (24) according to claim 6, wherein the major base abutment surface (80, 86) is associated with a minor base abutment surface (82, 88), and wherein the major base abutment surface (80, 86) and the associated minor base abutment surface (82, 88) lie on a same base abutment plane (84, 90).

15

11. The cutting insert (24) according to claim 10, wherein the minor base abutment surface (82, 88) is ground.

12. The cutting insert (24) according to claim 10, wherein:

20 the cutting insert (24) has a 180° rotational symmetry around an axis of symmetry (S) of the cutting insert (24); and

the axis of symmetry (S) extends between the upper surface (48) and the lower surface (50) of the cutting insert (24) and perpendicularly to a reference plane (P) that passes through lowermost extreme points (E1, E2) of the lower surface (50), as seen in an end view of the cutting insert (24).

25

13. The cutting insert (24) according to claim 12, wherein a first major base abutment surface (80) is separated from its associated first minor base abutment surface (82) by at least a second major base abutment surface (86).

14. A cutting tool (20) comprising a tool holder (22) and at least one cutting insert (24) mounted therein and clamped by a clamping screw (26);

the cutting insert (24) having a longitudinal axis (L) and comprising an upper surface (48), a lower surface (50), and a peripheral surface (56) extending between the upper surface (48) and the lower surface (50), at least a portion of an intersection between the upper surface (48) and the peripheral surface (56) constitutes a cutting edge (58, 60, 62), a through bore (34) extends between the upper surface (48) and the lower surface (50),

10 the lower surface (50) comprises first and second major base abutment surfaces (80, 86) longitudinally displaced from each other and defining a first non-zero angle ( $\alpha$ ) therebetween,

each of the major base abutment surfaces (80, 86) is associated with a pair of side surfaces (76, 78) that join at a remote end from the associated major base abutment surface (80, 86), each pair of side surfaces comprises a side abutment surface (76) and an end abutment surface (78), the side abutment surface (76) is located adjacent a lower portion of the associated major base abutment surface (80, 86), and the end abutment surface (78) is located remote from the associated major base abutment surface (80, 86);

the tool holder (22) has a longitudinal axis (A) and comprises at least one pocket (30), having a threaded pocket bore (36), for retaining the cutting insert (24), the at least one pocket (30) comprises:

a generally radially directed side support surface (38), a generally axially directed end support surface (40), and an inclined base support surface (42) transversely directed to the side support surface (38) and to the end support surface (40), the inclined base support surface (42) is provided with a base recess (44) located generally in a radially outermost center region of the inclined base support surface (42);

when the cutting insert (24) is mounted in the pocket (30) and retained by the clamping screw (26) that passes through the through bore (34) and threadingly engages

the threaded pocket bore (36), operative abutment surfaces of the cutting insert (24) abut the pocket (30) in the following manner:

a given major base abutment surface (80) of the cutting insert abuts the inclined base support surface (42) of the pocket, a given side abutment surface (76) of the cutting insert abuts the side support surface (38) of the pocket, a given end abutment surface (78) of the cutting insert abuts the end support surface (40) of the pocket, and a given non-operative major base abutment surface (86) of the cutting insert is located within the base recess (44) of the pocket in a non-abutted manner.

10 **15.** A cutting insert (124) having a longitudinal axis (L) and comprising an upper surface (48), a lower surface (50) and a peripheral surface (56) extending between the upper surface (48) and the lower surface (50), at least a portion of an intersection between the upper surface (48) and the peripheral surface (56) constitutes a cutting edge (58, 60, 62); wherein

15 the peripheral surface (56) has a side abutment surface (76) that extends generally parallel to the longitudinal axis (L), and an end abutment surface (78) that extends generally perpendicular to the longitudinal axis (L) and joins the side abutment surface (76),

the lower surface (50) has a major base abutment surface (180), the side abutment surface (76) is located adjacent a lower portion of the major base abutment surface (180), the end abutment surface (78) is located remote from the major base abutment surface (180), and

the major base abutment surface (180) forms a second non-zero angle ( $\beta$ ) with the side abutment surface (76).

25

**16.** The cutting insert (124) according to claim 15, wherein the second non-zero angle ( $\beta$ ) is in the range of about 40° to 80°.

17. The cutting insert (124) according to claim 15, wherein the cutting insert (124) further comprises a through bore (34) that extends from the upper surface (48) to the lower surface (50).

5 18. The cutting insert (124) according to claim 15, wherein the major base abutment surface (180) is associated with a minor base abutment surface (82) located remote from the major base abutment surface (180), and wherein the major base abutment surface (180) and the associated minor base abutment surface (82) lie on a base abutment plane (84).

10

19. A cutting tool (20) comprising a tool holder (22) and at least one cutting insert (124) mounted therein and clamped by a clamping screw (26);

the cutting insert (124) having a longitudinal axis (L) and comprising an upper surface (48), a lower surface (50) and a peripheral surface (56) extending between the upper surface (48) and the lower surface (50), at least a portion of an intersection between the upper surface (48) and the peripheral surface (56) constituting a cutting edge (58, 60, 62), a through bore (34) extends between the upper surface (48) and the lower surface (50),

the peripheral surface (56) has a side abutment surface (76) that extends generally parallel to the longitudinal axis (L), and an end abutment surface (78) that extends generally perpendicular to the longitudinal axis (L) and joins the side abutment surface (76),

the lower surface (50) has a major base abutment surface (180), the side abutment surface (76) is located adjacent a lower portion of the major base abutment surface (180), and the end abutment surface (78) is located remote from the major base abutment surface (180);

the tool holder (22) has a longitudinal axis (A) and comprises at least one pocket (30), having a threaded pocket bore (36), for retaining the cutting insert (124), the pocket (30) comprising:

a generally radially directed side support surface (38), a generally axially directed end support surface (40), and an inclined base support surface (42) transversely directed to the side support surface (38) and to the end support surface (40), the inclined base support surface (42) is provided with a base recess (44) located generally in a radially  
5 outermost center region of the inclined base support surface (42);

when the cutting insert (124) is mounted in the pocket (30) and retained by the clamping screw (26) that passes through the through bore (34) and threadingly engages the threaded pocket bore (36), operative abutment surfaces of the cutting insert (124) abut the pocket (30) in the following manner:

10 the major base abutment surface (180) of the cutting insert abuts the inclined base support surface (42) of the pocket, the side abutment surface (76) of the cutting insert abuts the side support surface (38) of the pocket, and the end abutment surface (78) of the cutting insert abuts the end support surface (40) of the pocket.

15 **20.** The cutting tool (20) according to claim 19, wherein the cutting insert (124) further comprises a minor base abutment surface (82) located remote from the major base abutment surface (180), the minor base abutment surface (82) and the major base abutment surface (180) lie on a base abutment plane (84), and wherein when the cutting  
20 insert (124) is mounted in the pocket (30) and retained by the clamping screw (26), the major base abutment surface (180) and the minor base abutment surface (82) lie on opposite ends of the base recess (44) of the pocket (30) and abut the inclined base support surface (42) of the pocket (30).

**21.** A cutting insert having a longitudinal axis (L) and comprising:

25 an upper surface (48);

a lower surface (50); and

a peripheral surface (56) extending between the upper surface (48) and the lower surface (50), with at least a portion of an intersection between the upper surface (48) and the peripheral surface (56) constituting a cutting edge; wherein:

the lower surface (50) comprises at least two sets of abutment surfaces, each set including at least one major base abutment surface (80, 86) and at least one minor base abutment surface (82, 88);

the major and minor base abutment surfaces of each set are spaced apart from one another by at least the major base abutment surface of the other set;

the major and minor base abutment surfaces of the first set lie on a first base abutment plane (84);

the major and minor base abutment surfaces of the second set lie on a second base abutment plane (90); and

the first and second base abutment planes form a first non-zero angle ( $\alpha$ ) therebetween.

**22.** The cutting insert according to claim 21, wherein:

the cutting insert (24) has a through bore (34) that extends between the upper surface (48) and the lower surface (50).

**23.** The cutting insert according to claim 21, wherein the peripheral surface (56) comprises:

at least one side abutment surface (76) which forms a second non-zero angle ( $\beta$ ) with an associated base abutment plane; and

at least one end abutment surface (78) which is generally perpendicular to the at least one side abutment surface (76).

**24.** The cutting insert according to claim 23, wherein:

the first non-zero angle ( $\alpha$ ) is in the range of about 70° to 150°.

the second non-zero angle ( $\beta$ ) is in the range of about 40° to 80°.

**25.** The cutting insert according to claim 23, wherein:

the major base abutment surfaces (80, 86) are ground;

the side abutment surface (76) is ground; and  
the end abutment surface (78) is ground.

26. The cutting insert (24) according to claim 21, wherein:

5 the cutting insert (24) has a 180° rotational symmetry around an axis of symmetry (S) of the cutting insert (24); and

the axis of symmetry (S) extends between the upper surface (48) and the lower surface (50) of the cutting insert (24) and perpendicularly to a reference plane (P) that passes through lowermost extreme points (E1, E2) of the lower surface (50), as seen in an  
10 end view of the cutting insert (24).

27. A rotary cutting tool (20) comprising:

a tool holder (22) having a longitudinal axis (A) and at least one pocket (30), the at least one pocket comprising:

15 a generally radially directed side support surface (38);

a generally axially directed end support surface (40); and

an inclined base support surface (42) transversely directed to the side support surface (38) and to the end support surface (40), the inclined base support surface (42) being provided with a base recess (44) located generally in a radially  
20 outermost center region of the inclined base support surface (42); and

a threaded pocket bore (36); and

a cutting insert (24) having a longitudinal axis (L) and comprising:

an upper surface (48);

a lower surface (50); and

25 a peripheral surface (56) extending between the upper surface (48) and the lower surface (50), with at least a portion of an intersection between the upper surface (48) and the peripheral surface (56) constituting a cutting edge; wherein:

the lower surface (50) comprises at least two sets of abutment surfaces, each set including at least one major base abutment surface (80, 86) and at least one minor base abutment surface (82, 88);

5 the major and minor base abutment surfaces of each set are spaced apart from one another by at least the major base abutment surface of the other set;

the major and minor base abutment surfaces of the first set lie on a first base abutment plane (84);

the major and minor base abutment surfaces of the second set lie on a second base abutment plane (90); and

10 the first and second base abutment planes form a first non-zero angle ( $\alpha$ ) therebetween;

wherein:

the cutting insert is mounted in the tool holder pocket (30) and retained by a clamping screw (26) passing through the insert and threadingly engaging the threaded  
15 pocket bore (36);

the major and minor base abutment surfaces of a first set of abutment surfaces abut the inclined base support surface (42);

at least a portion of the major base abutment surface of the second set of abutment surfaces is located within the base recess (44) of the pocket in a non-abutted manner; and

20 one of the side abutment surfaces (76) abuts the side support surface (38) of the pocket.

1/8

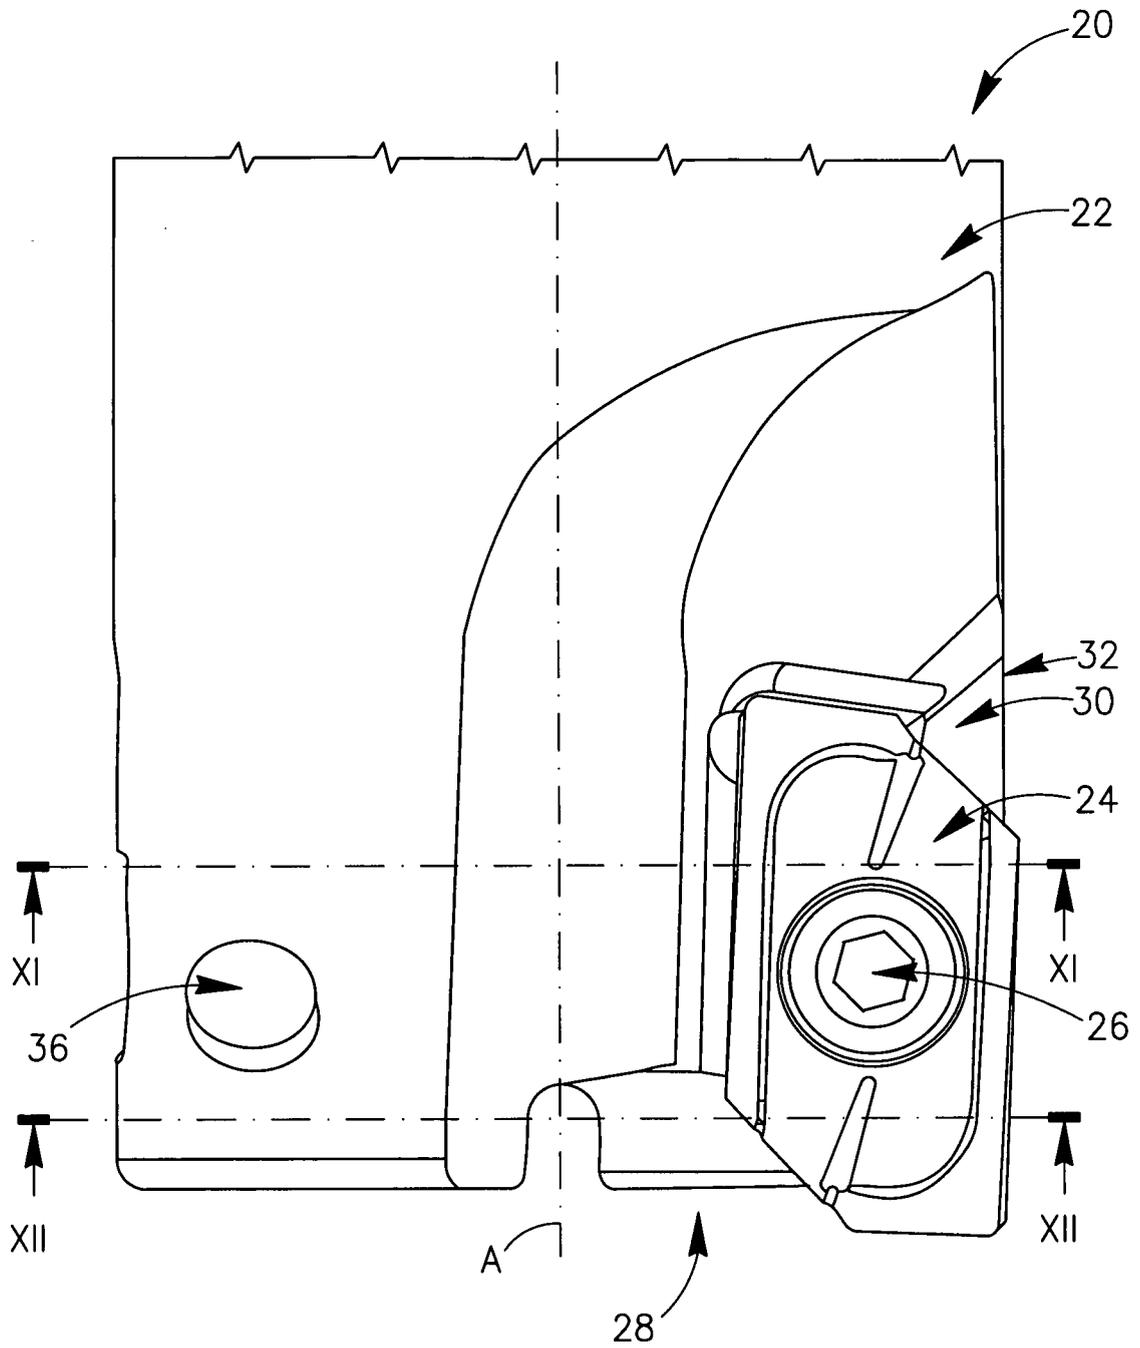


FIG.1

2/8

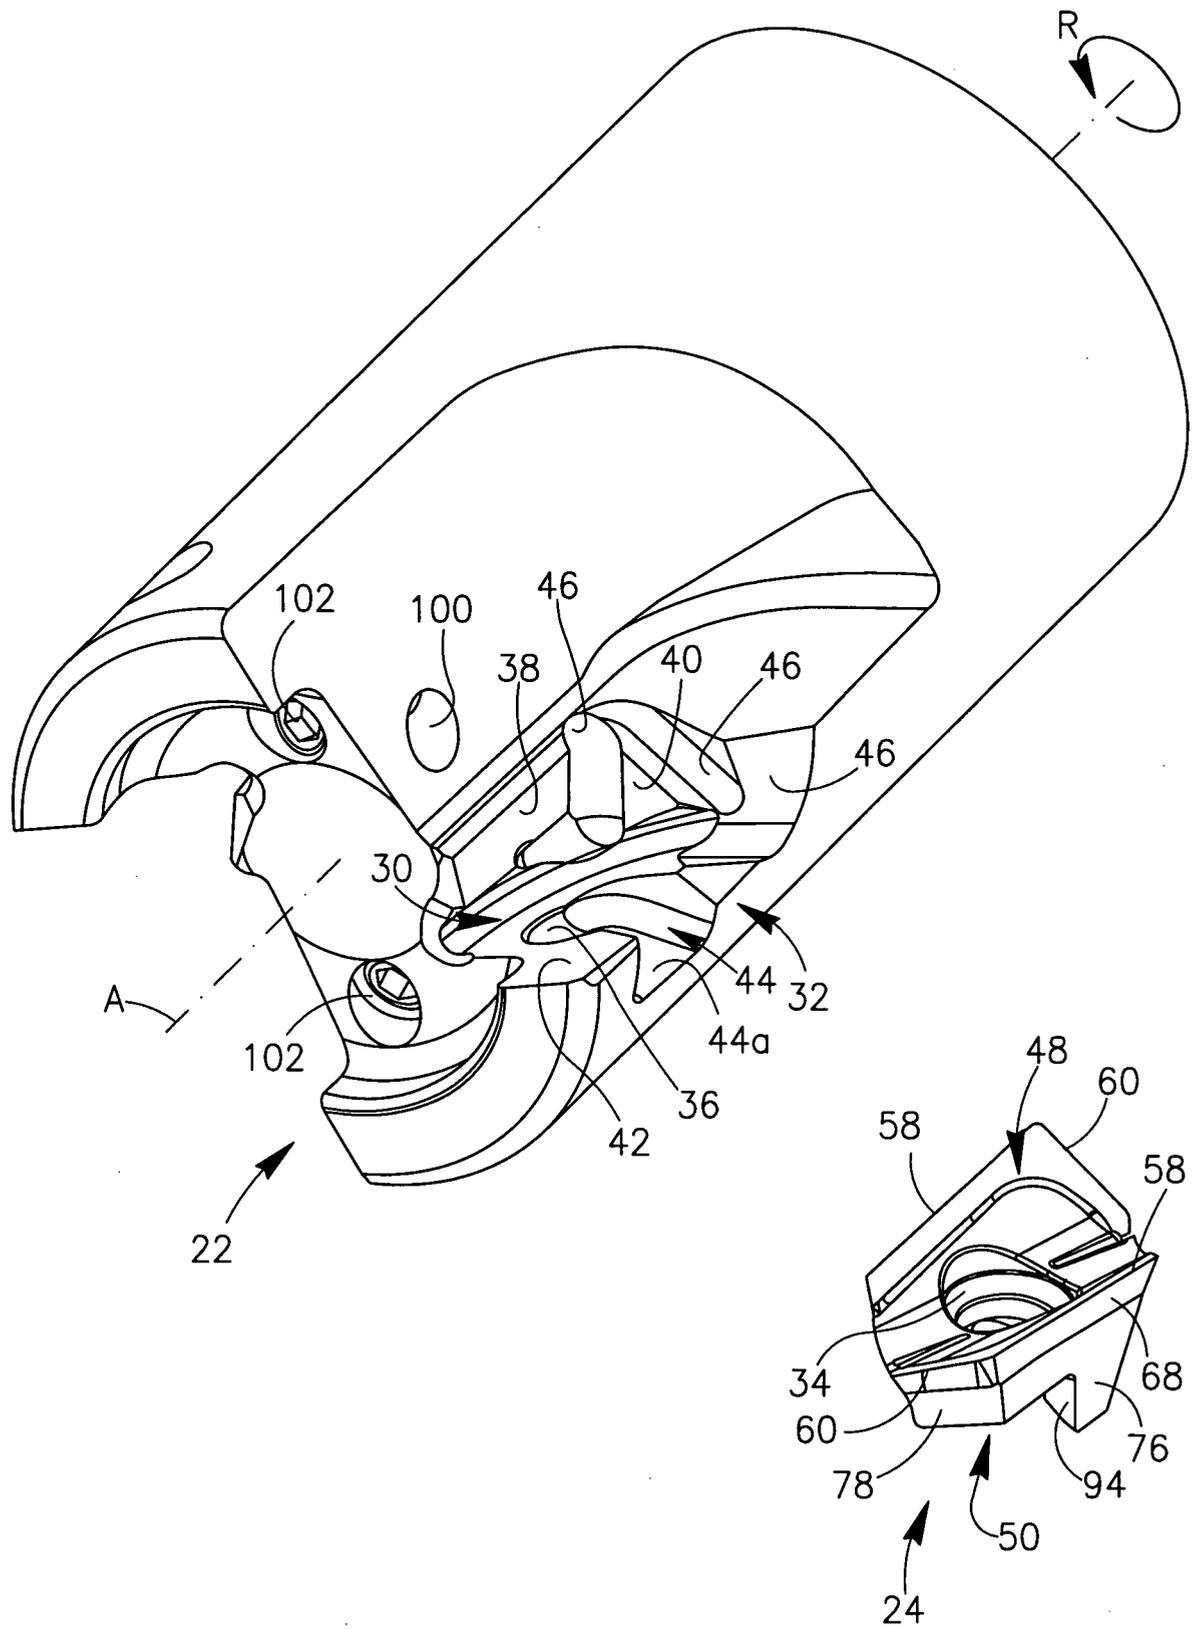


FIG. 2

3/8

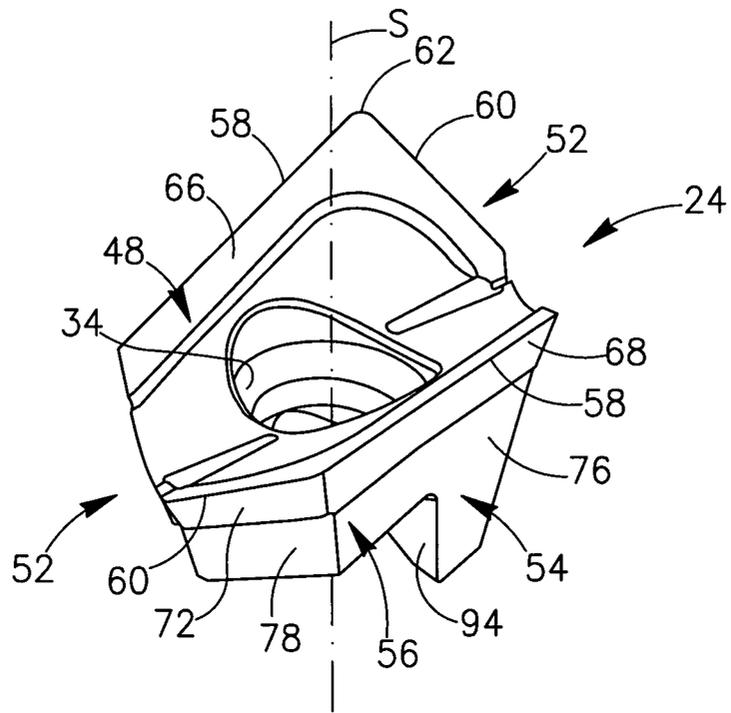


FIG. 3

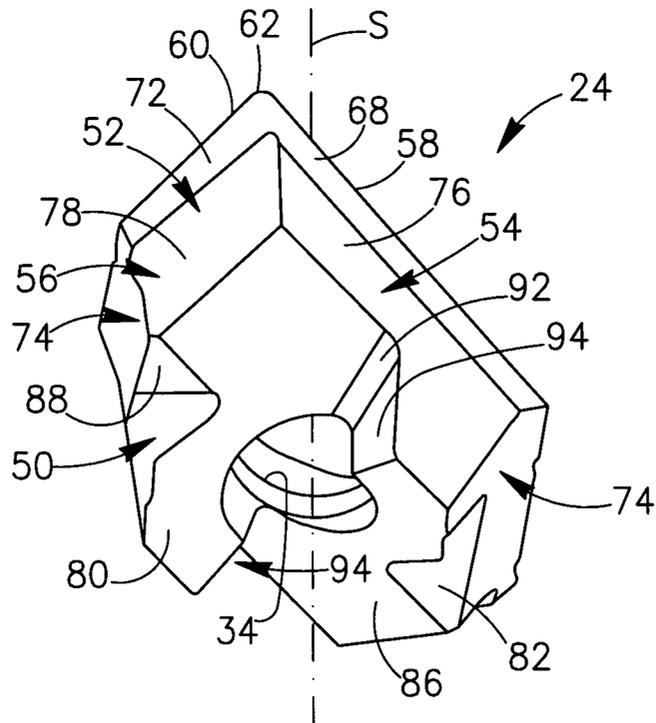


FIG. 4

4/8

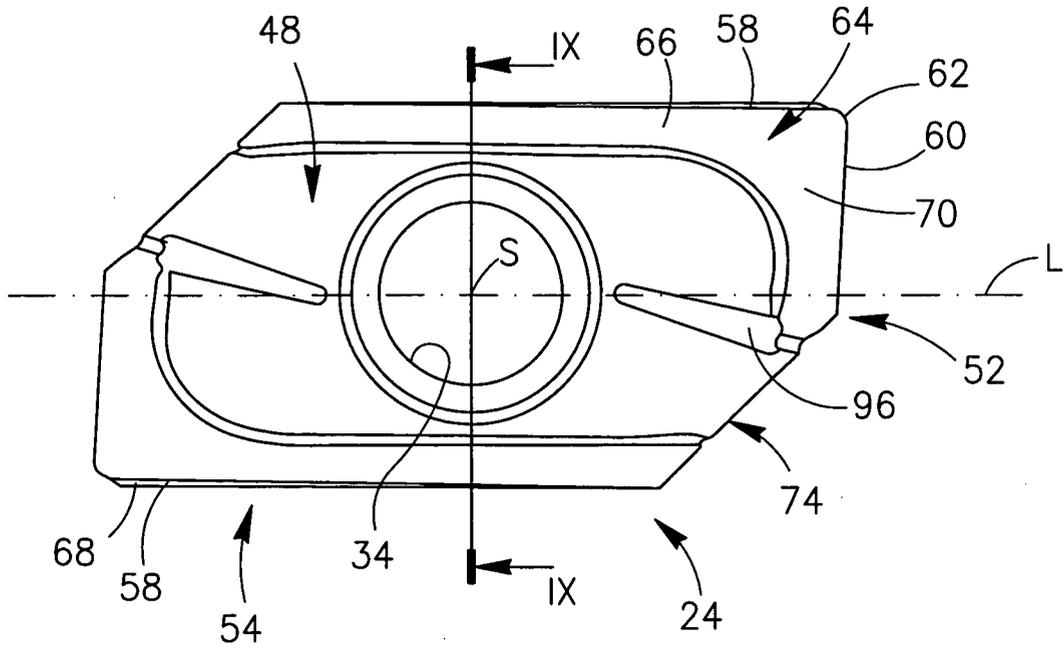


FIG. 5

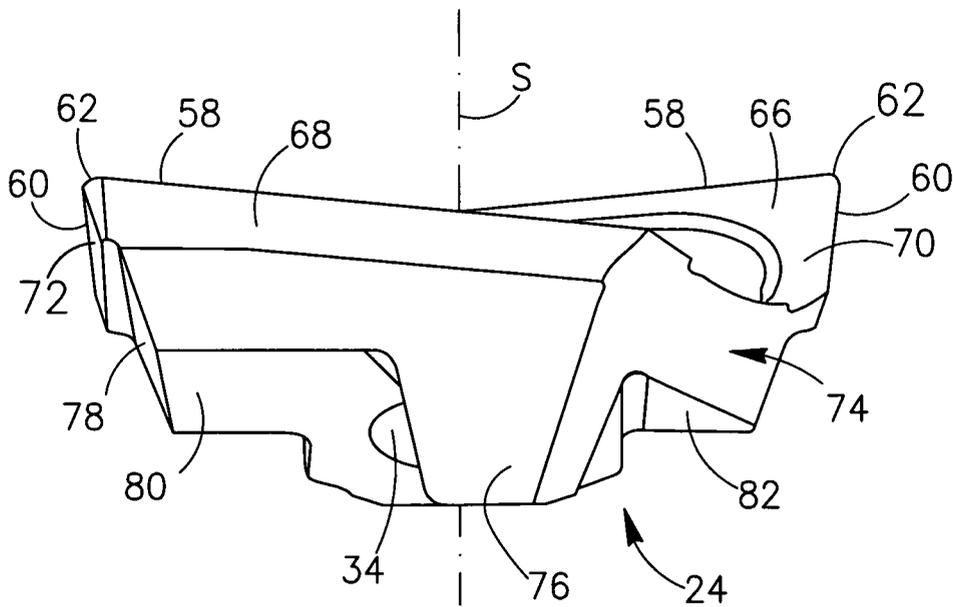


FIG. 6

5/8

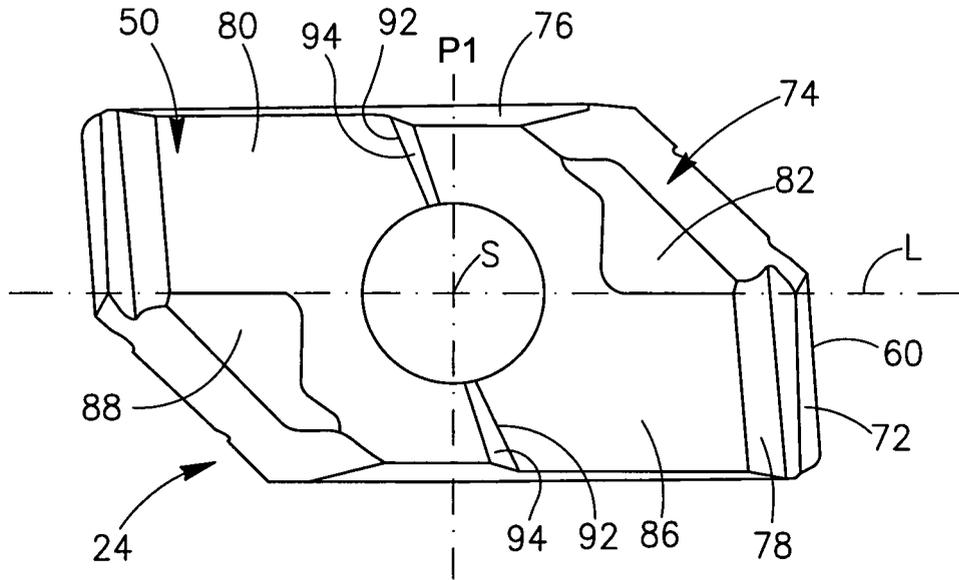


FIG. 7

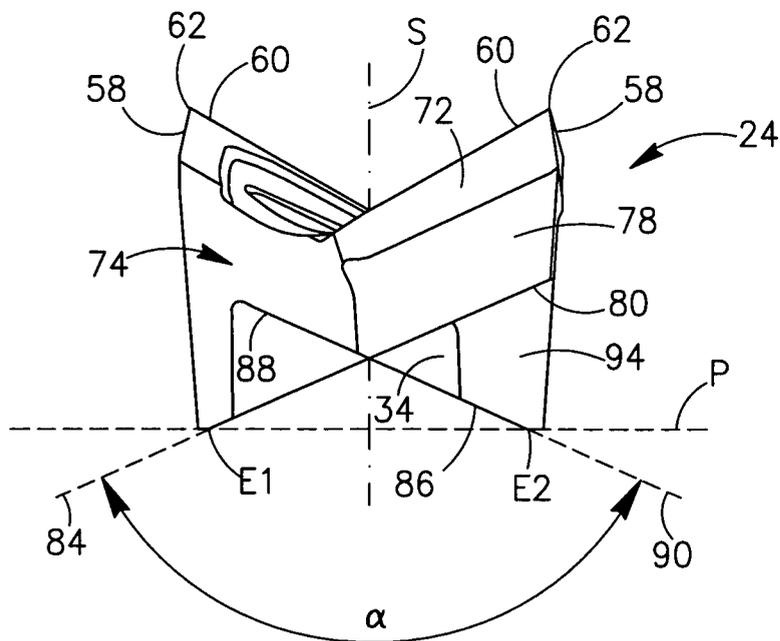


FIG. 8

6/8

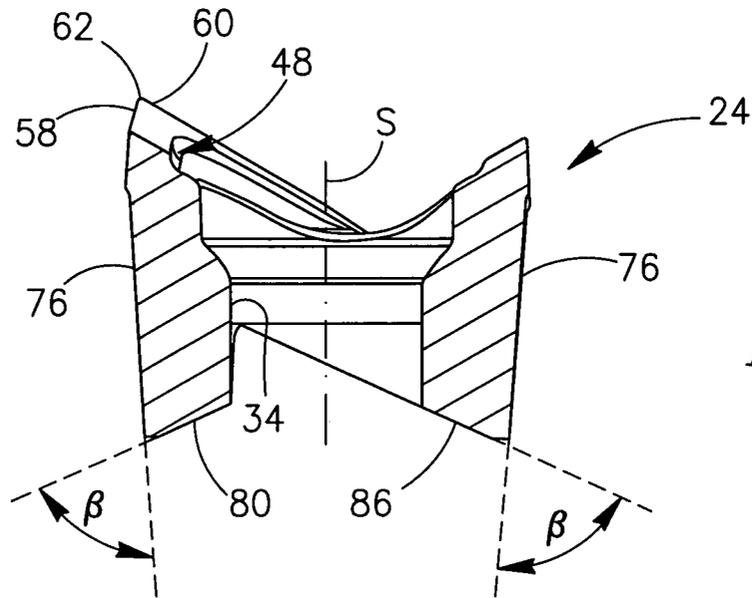


FIG. 9

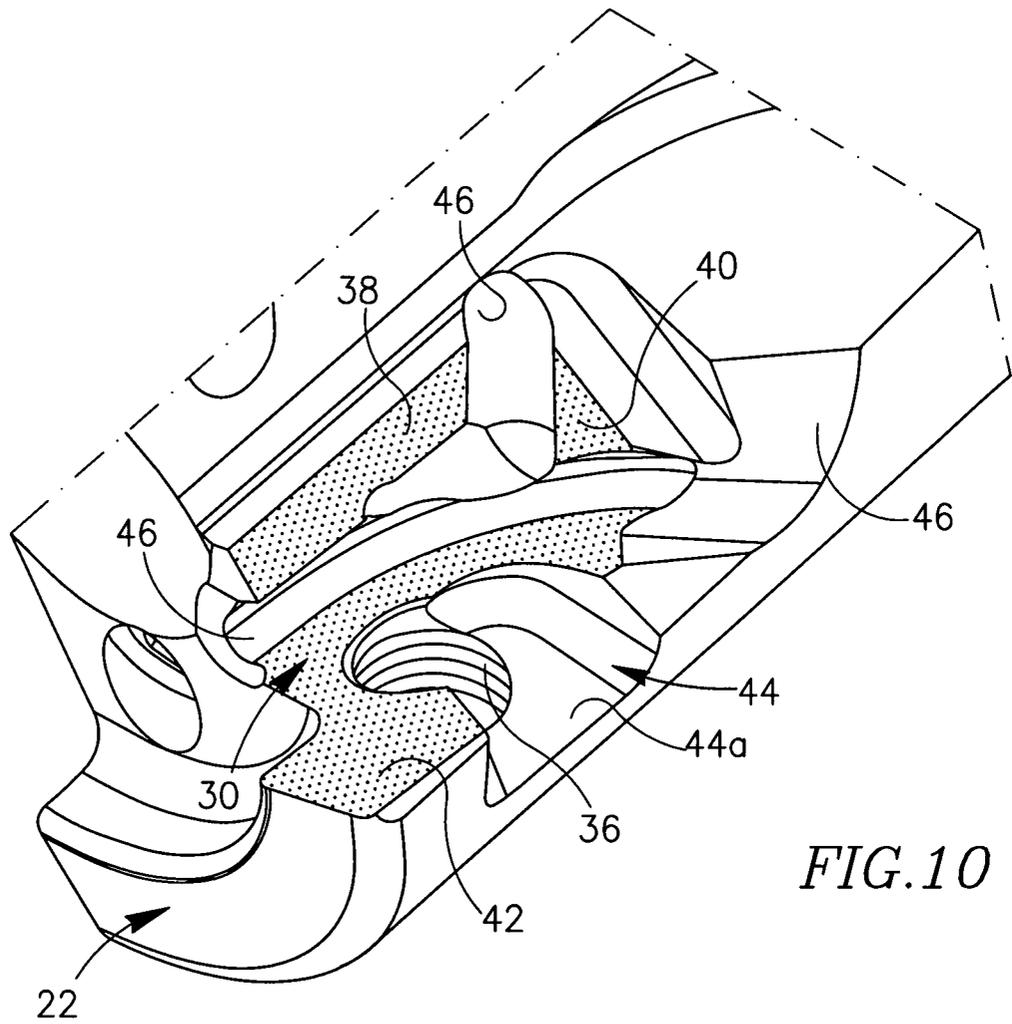


FIG. 10

7/8

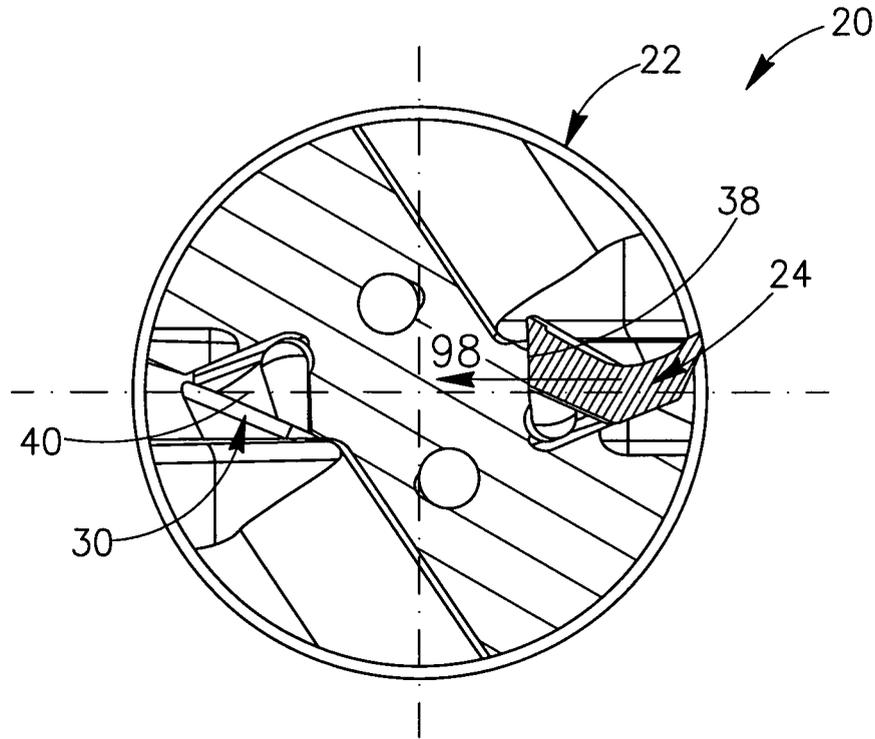


FIG. 11

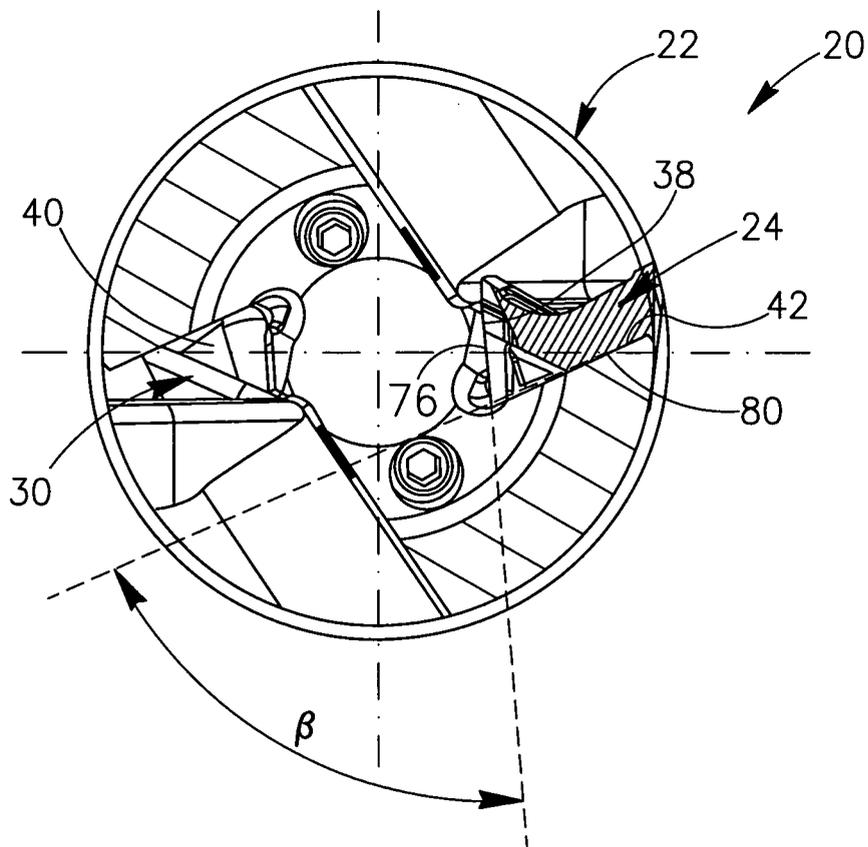
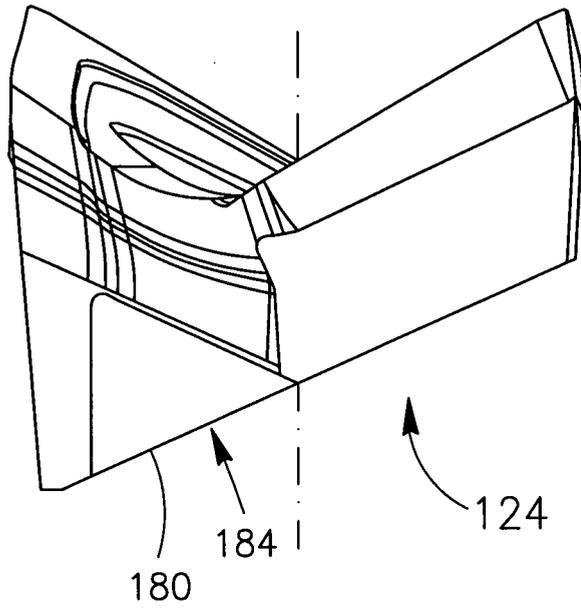


FIG. 12



*FIG.13*

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/IL2008/001610

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. B23B27/16 B23C5/20

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
B23C B23B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 03/004204 A (ISCAR LTD [IL]; MORGULIS RAFAEL [IL]; BABUSHKIN ANTON [IL]) 16 January 2003 (2003-01-16) page 8, line 23 - page 14, line 9; figures 7,8	1-27
A	WO 98/39122 A (SANDVIK AB [SE]) 11 September 1998 (1998-09-11) page 3, line 18 - page 6, line 10; figures 1-5	1-27
A	US 2005/117981 A1 (SATRAN AMIR [IL] ET AL) 2 June 2005 (2005-06-02) paragraphs [0013] - [0038]; figures 2-5,10	1-27

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

15 May 2009

Date of mailing of the international search report

05/06/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Wendl, Helen

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IL2008/001610

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 03004204	A	16-01-2003	AT 327069 T	15-06-2006
			BR 0210815 A	22-06-2004
			CN 1522183 A	18-08-2004
			DE 60211693 T2	21-09-2006
			EP 1401602 A1	31-03-2004
			ES 2260447 T3	01-11-2006
			JP 2004521767 T	22-07-2004
			RU 2293627 C2	20-02-2007
			US 2003017014 A1	23-01-2003
WO 9839122	A	11-09-1998	CN 1251547 A	26-04-2000
			DE 69807192 D1	19-09-2002
			DE 69807192 T2	27-03-2003
			EP 0964761 A1	22-12-1999
			JP 2000512917 T	03-10-2000
			SE 511390 C2	20-09-1999
			SE 9700779 A	06-09-1998
			US 5931613 A	03-08-1999
US 2005117981	A1	02-06-2005	BR PI0417044 A	06-02-2007
			CN 1890043 A	03-01-2007
			EP 1725360 A1	29-11-2006
			WO 2005053888 A1	16-06-2005
			JP 2007534504 T	29-11-2007
			KR 20060123229 A	01-12-2006