



Office de la Propriété

Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2578213 A1 2006/04/06

(21) **2 578 213**

(12) **DEMANDE DE BREVET CANADIEN**  
**CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2005/09/22  
(87) Date publication PCT/PCT Publication Date: 2006/04/06  
(85) Entrée phase nationale/National Entry: 2007/02/26  
(86) N° demande PCT/PCT Application No.: US 2005/034327  
(87) N° publication PCT/PCT Publication No.: 2006/036855  
(30) Priorité/Priority: 2004/09/24 (US10/948,307)


(51) Cl.Int./Int.Cl. *H01Q 1/36* (2006.01)

(71) **Demandeur/Applicant:**  
AVOCENT CALIFORNIA CORPORATION, US

(72) **Inventeur/Inventor:**  
CARBONARI, DAVID, US

(74) **Agent:** HICKS & ASSOCIATES

(54) Titre : ANTENNE POUR KVM SANS FIL, ET LOGEMENT UTILISE AVEC CELLE-CI  
(54) Title: ANTENNA FOR WIRELESS KVM, AND HOUSING THEREFOR

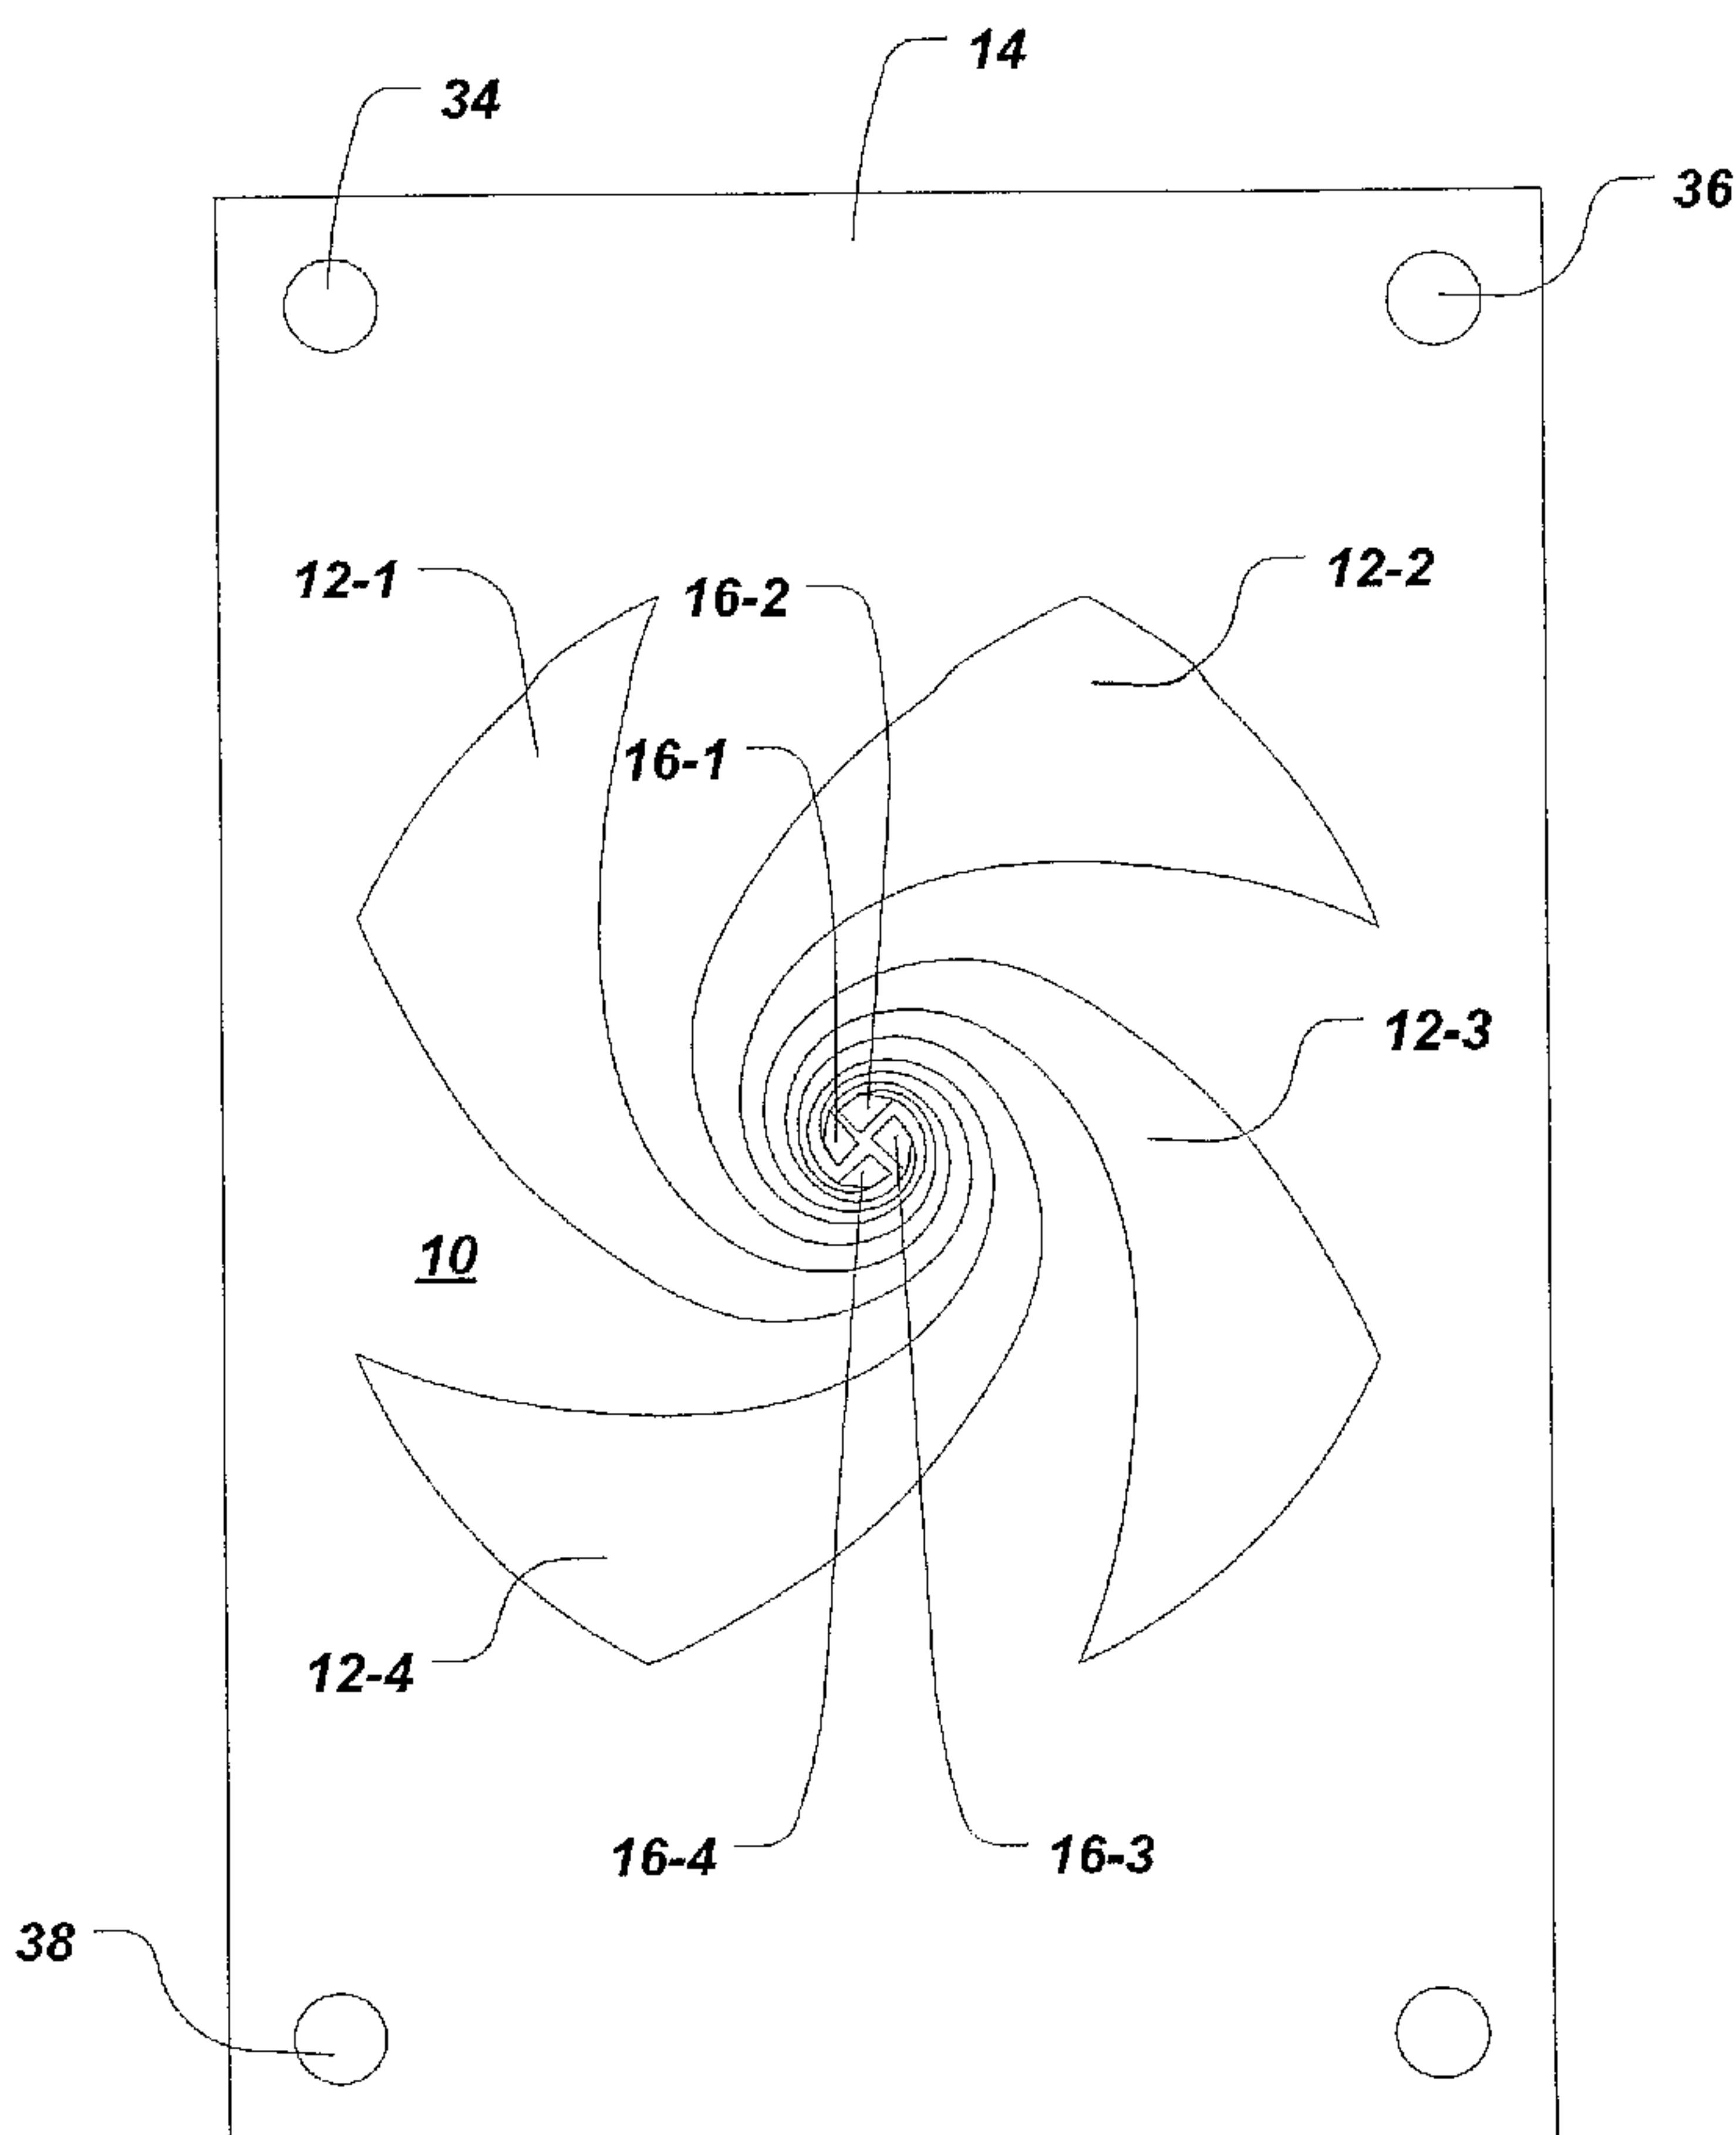

(57) Abrégé/Abstract:

An antenna apparatus includes a spiral metallic pattern formed on a portion of a circuit board on a first side thereof, the spiral pattern being formed of four arms, each arm having a contact location near the center of the spiral; a plurality of pin and ground

**(57) Abrégé(suite)/Abstract(continued):**

connectors attached to a second side of said circuit board and electrically connected to the ones of the spiral arms at the contact locations thereof, said pins being connected to said arms via holes in said circuit board.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
6 April 2006 (06.04.2006)

PCT

(10) International Publication Number  
WO 2006/036855 A1

## (51) International Patent Classification:

*H01Q 1/36* (2006.01)

## (21) International Application Number:

PCT/US2005/034327

## (22) International Filing Date:

22 September 2005 (22.09.2005)

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

10/948,307 24 September 2004 (24.09.2004) US

(71) Applicant (for all designated States except US): AVO-CENT CALIFORNIA CORPORATION [US/US]; 316 State Place, Escondido, CA 92029 (US).

(72) Inventor: CARBONARI, David; 29459 Pebble Beach Drive, Murrieta, CA 92563-6767 (US).

(74) Agents: SIRITZKY, Brian et al.; Davidson Berquist Jackson &amp; Gowdey LLP, 4300 Wilson Boulevard, 7th Floor, Arlington, VA 22203 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

— with international search report

[Continued on next page]

## (54) Title: ANTENNA FOR WIRELESS KVM, AND HOUSING THEREFOR

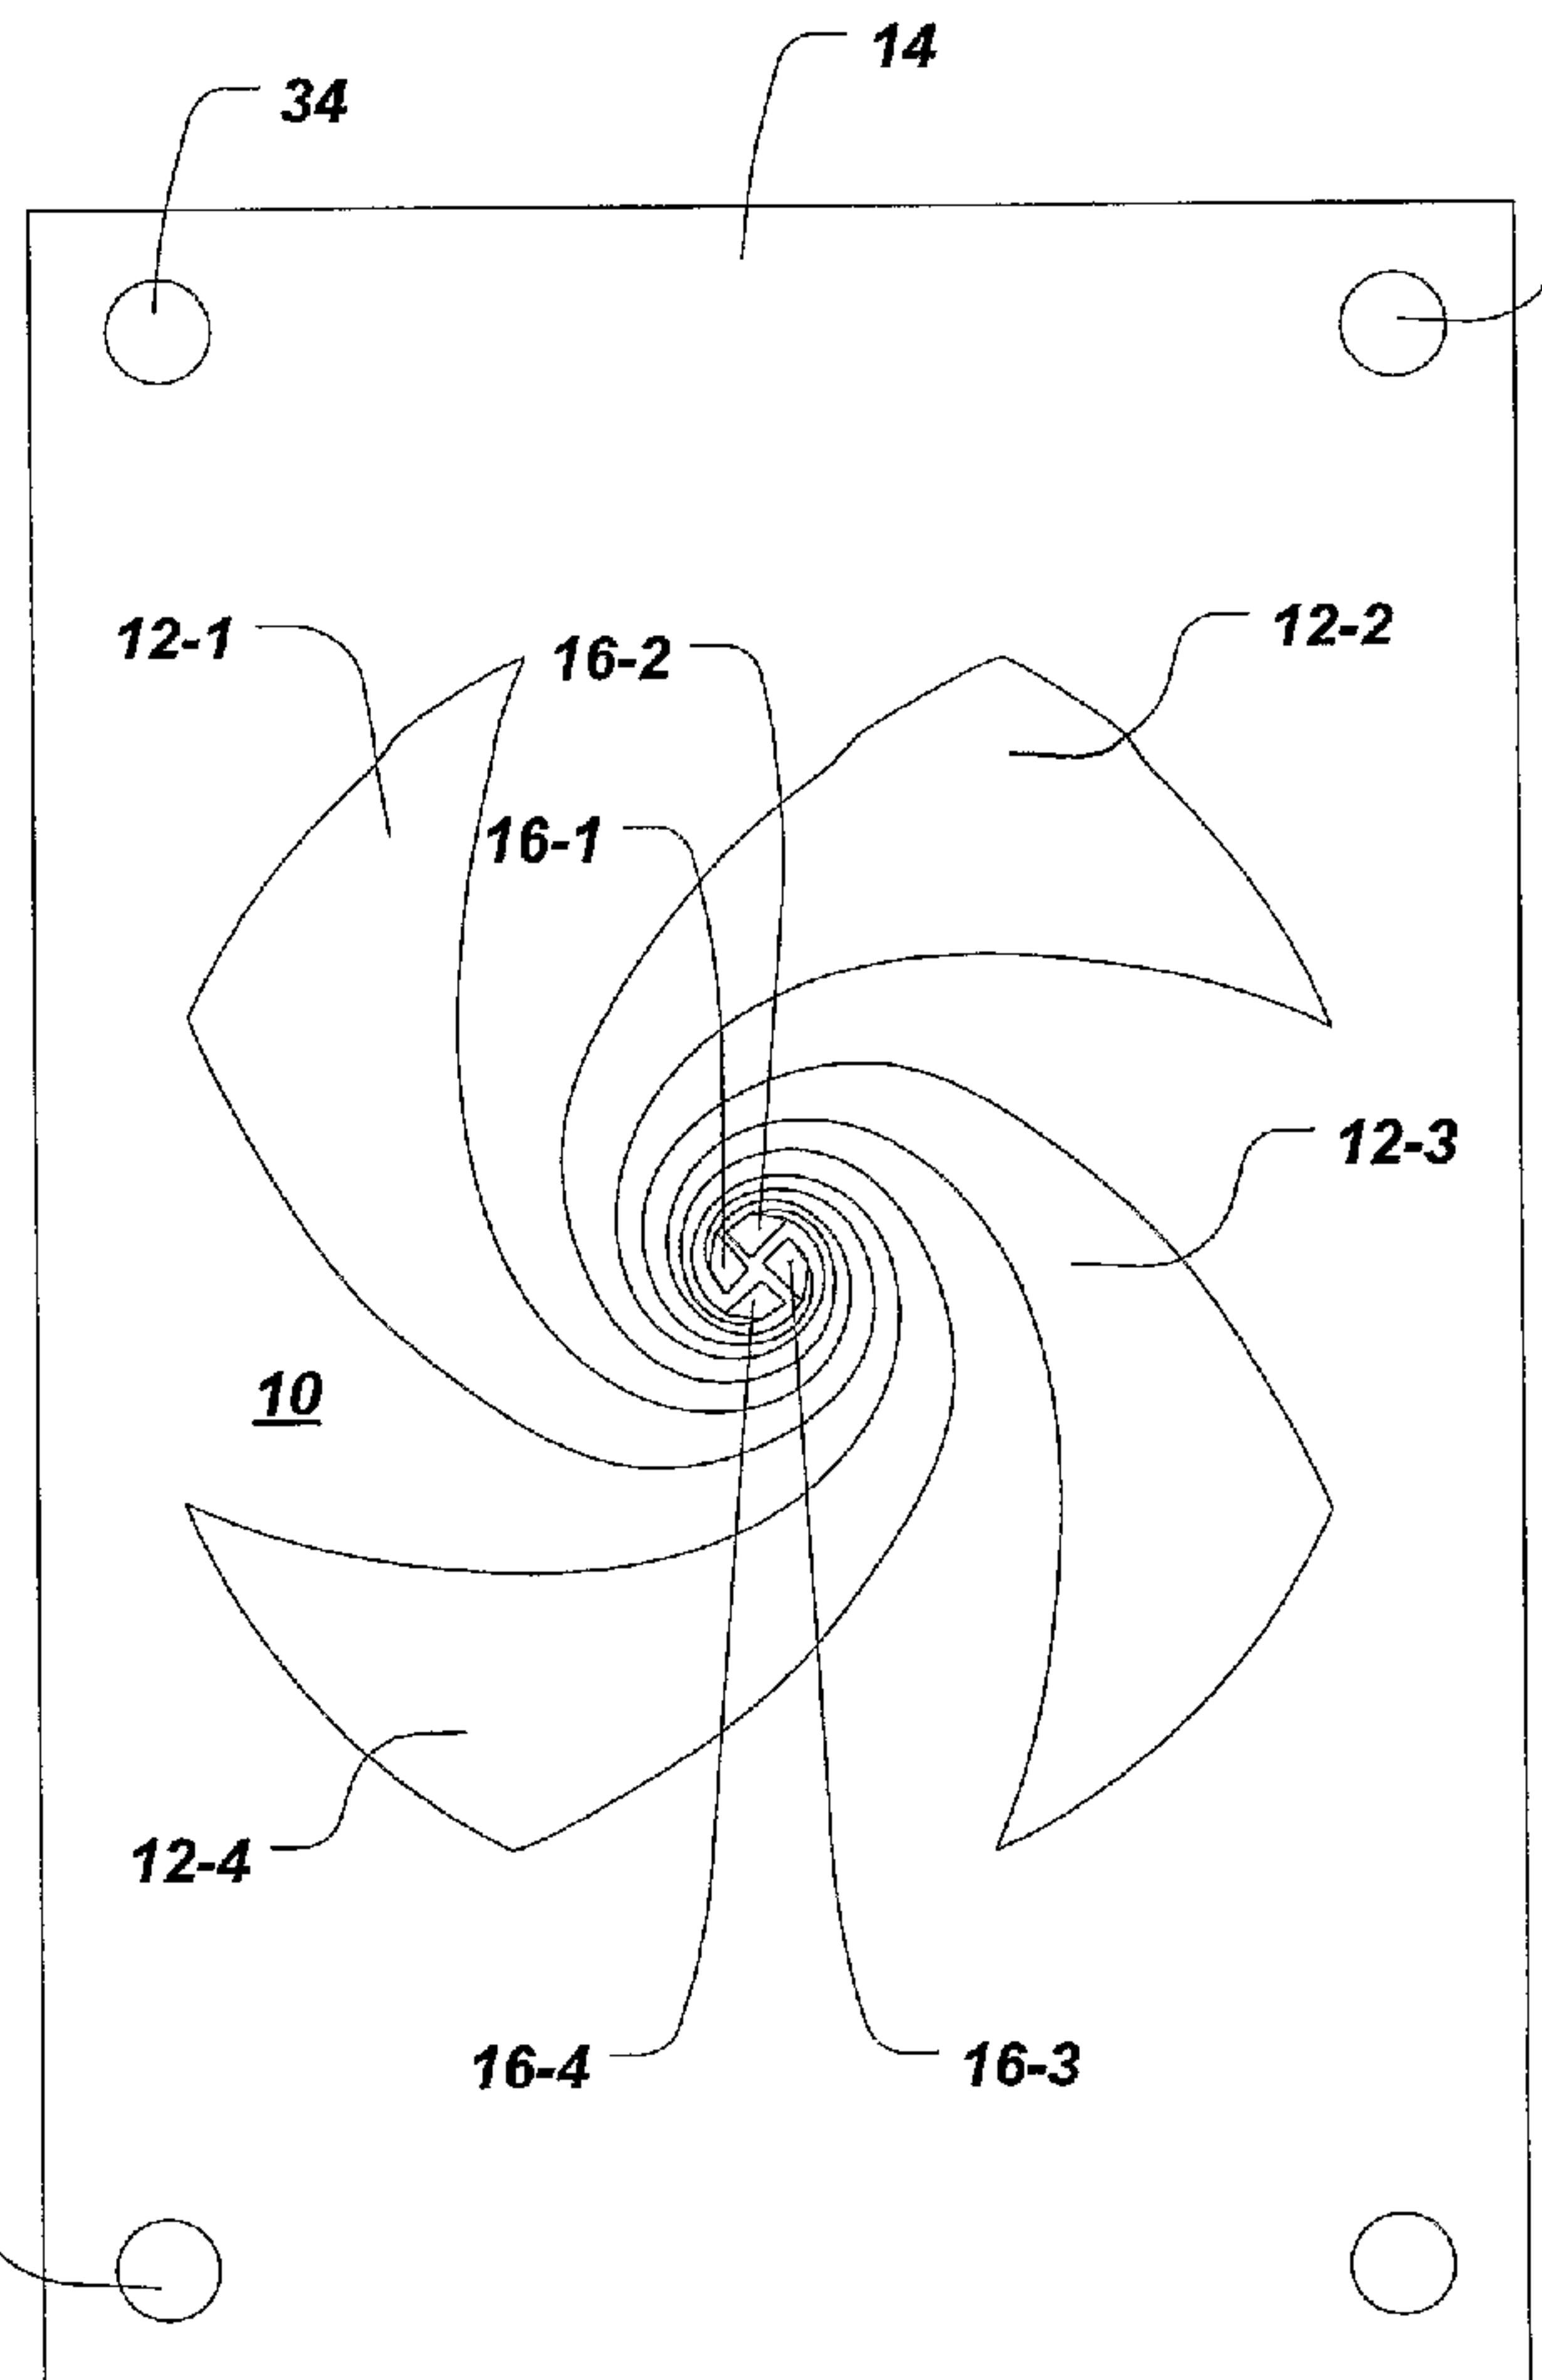

(57) Abstract: An antenna apparatus includes a spiral metallic pattern formed on a portion of a circuit board on a first side thereof, the spiral pattern being formed of four arms, each arm having a contact location near the center of the spiral; a plurality of pin and ground connectors attached to a second side of said circuit board and electrically connected to the ones of the spiral arms at the contact locations thereof, said pins being connected to said arms via holes in said circuit board.

WO 2006/036855 A1

**WO 2006/036855 A1**



— *with amended claims*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**TITLE OF THE INVENTION****ANTENNA FOR WIRELESS KVM, AND HOUSING THEREFOR****FIELD OF THE INVENTION**

[0001] This relates to antennas, and, more specifically, to antennas for use in with KVM (Keyboard, Video, Mouse) systems.

**BACKGROUND & SUMMARY**

[0002] KVM systems enable one or more remote computers to access and/or control one or more target computers. The term computer as used herein is non-limiting and refers to any processor or collection of processors, including servers (and groups or racks thereof), processors in appliances such as ATM machines, kiosks, cash registers, set-top boxes, PCs and the like. Early KVM systems used wired connections between the remote and target computers. However, more recently, wireless KVM systems have become available, e.g., from Avocent Corporation, the assignee of the present application.

[0003] A typical wireless KVM system connecting a target computer to a remote computer uses two radios, one at the target computer (or at a switch connected thereto) and the other at the remote computer. These systems preferably operate using the 802.11a standard. Prior wireless KVM systems used two omnidirectional antennas. However, using this type of antenna limited the range of transmission between the two radios (the wireless transmitter and the wireless receiver) to about 100 feet through three walls and up to 300 feet line-of-sight. Notably, the distance range was limited by the antennas used, and not by issues relating to the 802.11a standard. It is desirable and an object of the present invention to extend the distance between the wireless radios (the Transmitter and the Receiver) in a KVM system, especially 802.11a-based wireless systems.

[0004] This invention provides 802.11a radios an efficient, circularly polarized directional antenna.

[0005] It is a further object of the present invention that the transmitted and received signal modulation should not be distorted or sacrificed in group delay. Accordingly, a type of frequency independent structure that includes a match of 50 ohms across the operating bandwidth was developed and optimized.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0006] **Fig. 1** shows an antenna according to embodiments of the present invention, positioned on a printed circuit board;

[0007] **Figs. 2-3** show aspects of the electrical connectivity of the antenna of **Fig. 1**;

[0008] **Figs. 4(a)-4(b)** are graphs showing the performance of the antenna of **Fig. 1** at various frequencies;

[0009] **Figs. 5(a)-5(j)** and **6(a) – 6(n)** depict various packaging structures for the antenna of the present invention;

[0010] **Fig. 7** depicts the operation of the present invention in a wireless KVM system.

#### DESCRIPTION OF PRESENTLY PREFERRED EXEMPLARY EMBODIMENTS

[0011] With reference to **Fig. 1**, an antenna according to embodiments of the present invention, comprises a circularly polarized spiral antenna **10** formed by a metallic spiral pattern, e.g., on a substrate such as a printed circuit board (“PCB”) **12** or the like. The spiral antenna **10** preferably has four arms **14-1**, **14-2**, **14-3** and **14-4**, each of which has a corresponding metallic contact area **16-1**, **16-2**, **16-3**, **16-4** near the center of the spiral. The arms are preferable formed of a conductor (e.g., a metal) on the substrate **12**.

[0012] In order to form electrical connections with the antenna **10**, when formed on a substrate **12**, as shown in **Figs. 2-3**, the substrate has four holes **18-1**, **18-2**, **18-3**, **18-4** therein, corresponding in location to be under the contact areas **16-1**, **16-2**, **16-3**, **16-4**. Using wires passed through these holes, appropriate electrical contact may be made with each of the four antenna arms, through the substrate **12**, to contact pins on the other side of the substrate. The contact pins are either signal or ground pins. In preferred embodiments the holes are about 0.015 inches in diameter and are completely covered by their respective contact areas.

[0013] **Fig. 3** provides an enlarged view (for explanation purposes) of the contact pins and their connection to the various spiral arms. In particular, in the embodiment shown, spiral arm **12-1** is electrically connected to signal pin **20**, spiral arm **12-2** is electrically connected to ground pins **22** and **24**; spiral arm **12-3** is electrically connected to ground pins **26** and **28**; and spiral arm **12-4** is electrically connected to signal pin **30**.

[0014] The gain of the antenna is preferably at least 6dBi and cover all the uni-bands of 802.11a, approximately 5.1GHz to 5.9GHz. **Figs. 4(a)** and **4(b)** show results of operating the antenna at 5.1 GHz and 5.9 GHz frequencies, respectively.

[0015] In presently preferred embodiments of the invention, the circularly polarized directional antenna has an average beam width of about 70 degrees making it fairly practical to use for long distance transmission. The antenna's bandwidth covers more than the bandwidth actually used, keeping a very linear plane rotation. The antenna achieves high radiant efficiency due to its low-loss compensating network designed as part of the antenna elements to have a frequency dependant linear rotation function.

[0016] The four-arm spiral uses two low cost, independent, wideband matched power dividers for vertical and horizontal polarization directivity balancing. The two power dividers provide a choice of polarizations for a non-symmetric

preformed beam width permitting the radios to select the best-fit polarization for transmitting and receiving data.

[0017] The conductor physical length of each arm of the antenna planer structure is preferably two wavelengths (of the desired bandwidth). The wavelength center is optimized for best impedance match in the desired bandwidth.

[0018] In preferred embodiments, a finite ground plane is used to keep backward reflections and side lobes at minimum for best antenna efficiency and desired beam width angle. **Figs. 4(a)-4(b)** show plots of desired beam width for lower and upper uni-band frequencies. The height of the ground plane to the bottom surface of the dielectric material under the conducting arms surfaces, and the center of the wavelength yield high antenna gain, beam angle, and antenna efficiency. In presently preferred embodiments the distance between the antenna and the ground plane is about 0.25 inches. Other embodiments used spacing of up to about 0.5 inches. This particular structure configuration also allows control of the beam angle by changing the height distance of the ground plane to the bottom surface of the dielectric material under the conducting arms surfaces with small effects on antenna efficiency and antenna matching due to its ultra broad band natural design topology. In other words, the spacing between the board and ground plane can be used to adjust the beam width (i.e., gain) and efficiency.

## PACKAGING

[0019] One skilled in the art will realize that the spiral antenna of the present invention may be packaged in many ways. However, one packaging of the antenna is described herein with reference to **Figs. 5(a)-5(j)**.

[0020] **Fig. 5(a)** shows the back view of an antenna mount **32**, preferably formed of a light-weight molded plastic. **Fig. 5(b)** shows a front view of the antenna mount **32**. With reference to **Fig. 1**, in this embodiment the PCB (substrate) **12** has four holes **34, 36, 38, 40** in the four corners thereof. These holes allow the

board to be positioned over four corresponding pins **42, 44, 46, 48** formed on a portion of the antenna mount **32**. The PCB board **12** is mounted with the pins **42, 44, 46, 48** in the corresponding holes **34, 36, 38, 40** of the board such that the spiral antenna faces the front of the mount **32**, and the connector and ground pins **20, 22, 24, 26, 28, 30**, face the rear so that they may be connected with cables and or other circuitry.

[0021] The back side of mount **32** has four pins **50, 52, 54, 56**, one in each of the outer four corners thereof. These pins hold in place a rear cover **58** which may be secured to the mount **32** by four screws. The rear cover **58** may house circuitry and provides connectors **60, 62** to the antenna **10** housed on the mount **32**.

[0022] The rear cover **58** has two holes **64, 66** therein. Preferably these holes are threaded to enable connection of a ball joint **68** thereto, as shown in **Fig. 5(d)**. The ball joint **68** may be connected to an arm **70**, itself having a ball joint **72** connected to another end thereof (as shown in **Figs. 5(e)-5(g)**). The entire construct housing the antenna may then be mounted on a wall, ceiling or other appropriate surface, as shown, e.g., in **Figs. 5(h)-5(j)**. One skilled in the art will realize that in this manner the antenna may be positioned and aimed in a particular direction.

[0023] In some preferred embodiments of the present invention, the PCB **12** has dimensions 2.25 inches by 3.25 inches, and the holes **34, 36, 38, 40** are 0.156 inches in diameter, centered 0.200 inches from the edges of the board.

[0024] This structure, with its circular polarization for linear propagation used with an 802.11a communication link, allows minimal distortion, high efficiency and yields longer transmission distances.

[0025] The structure uses two coax cables. Each coax cable is used for two functions: independent vertical and horizontal feeds; and as a 180 degree phase shifted broad band transformer to feed each arm of the antenna.

[0026] Another packaging embodiment is shown in **Figs. 6(a)-6(k)**, where **Figs. 6(a)-6(g)** show the packaging of a remote-side unit, and **Figs. 6(h)-6(n)** show the packaging of a local-side unit.

### OPERATION IN A WIRELESS KVM SYSTEM

[0027] **Fig. 7** depicts the use and operation of an antenna according to the present invention in a wireless KVM system. A target processor **74** is connected to a KVM wireless device **76** which is connected to a radio **78**. The radio has an antenna **10-1** connected thereto. A remote computer **82** is connected to a radio **80** which has an antenna **10-2** connected thereto. Either or both of the antennas **10-1**, **10-2** may be antennas according to embodiments of the present invention. As noted earlier, the target processor **74** may be any type processor or collection of processors, including servers, processors in appliances such as ATM machines, kiosks and the like. In operation, the remote computer **82** connects via radio link **84** to the target processor **74**. The remote computer **82** may then access and / or control the target processor **74**, providing keyboard and mouse signals thereto and receiving keyboard, video and mouse signals therefrom. In some cases the target processor may not have a keyboard, mouse or display attached thereto (e.g., in the case of an embedded processor or a server or a processor in a device such as an ATM). In such cases, the processor would provide video signals to the remote computer **82** and receive KVM signals therefrom.

[0028] While the invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not to be limited to the disclosed embodiment, but on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

**AMENDED CLAIMS**

[received by the International Bureau on 06 February 2006 (06.02.2006);  
original claims 1-6 replaced by amended claims 1-21 (3 pages)]

**CLAIMS**

What is claimed:

1. An antenna apparatus comprising:  
a circuit board;  
a spiral metallic pattern formed on a portion of the circuit board on a first side thereof, the spiral pattern being formed of at least four arms, each arm having a contact location; and  
at least two signal connectors and at least four ground connectors attached to a second side of said circuit board, wherein at least two of the arms are each electrically connected to a respective signal connector and wherein a different two or more of the arms are each electrically connected to at least two of the ground connectors,  
wherein the circuit board is mounted in a housing constructed and adapted to direct the antenna in a specific direction.
2. An antenna apparatus comprising:  
a spiral metallic pattern formed on a portion of a circuit board on a first side thereof, the spiral pattern being formed of at least four arms, each arm having a contact location ; and  
at least two signal connectors and at least four ground connectors, wherein at least two of the arms are each electrically connected to a respective signal connector and wherein a different two or more of the arms are each electrically connected to at least two of the ground connectors.
4. An apparatus as in claim 2 wherein the circuit board is mounted in a housing constructed and adapted to direct the antenna in a specific direction.
5. An apparatus as in claim 2 further comprising a finite ground plane.
6. An antenna comprising:

a spiral metallic pattern formed on a portion of a circuit board on a first side thereof, the spiral pattern being formed of a plurality of arms, each arm having a contact location; and

a plurality of signal connectors and a plurality of ground connectors, wherein at least two of the arms are electrically connected to a respective signal connector and wherein a different two of the arms are each electrically connected to two of the ground connectors,

wherein the circuit board is mounted in a housing constructed and adapted to direct the antenna in a specific direction.

7. An antenna apparatus as in claim 1 wherein each arm has a contact location near a center of the spiral.

8. An antenna as in claim 6 wherein each arm has a contact location near the center of the spiral.

9. An apparatus as in claim 5 wherein said finite ground plane is constructed and adapted to minimize backward reflections and side lobes.

10. An antenna as in claim 1 further comprising a finite ground plane.

11. An apparatus as in claim 10 wherein said finite ground plane is constructed and adapted to minimize backward reflections and side lobes.

12. An antenna as in claim 6 further comprising a finite ground plane.

13. An apparatus as in claim 12 wherein said finite ground plane is constructed and adapted to minimize backward reflections and side lobes.

14. An apparatus as in claim 1 wherein:

said at least two signal connectors are electrically connected to the ones of the spiral arms at the contact locations thereof, said signal connectors being connected to said arms via holes in said circuit board.

15. An apparatus as in claim 2 wherein said at least two signal connectors and said at least four ground connectors are attached to a second side of said circuit board, and are electrically connected to the ones of the spiral arms at the contact locations thereof, said electrical connections to said arms being via holes in said circuit board.

16. An apparatus as in claim 6, wherein:

    said plurality of signal connectors and said plurality of ground connectors are on a second side of said circuit board and are electrically connected to said arms via holes in said circuit board.


17. An apparatus as in claim 14 wherein each of said holes is substantially covered on said first side of said circuit board by the contact location of one of said at least four arms.

18. An apparatus as in claim 1 wherein the gain of the antenna is preferably at least 6dBi and covers the uni-bands of 802.11a.

19. An apparatus as in claim 1 wherein the apparatus forms a circularly polarized directional antenna with an average beam width of about 70 degrees.

20. The apparatus of claim 1 wherein a conductor physical length of each arm is preferably two wavelengths of a desired bandwidth.

21. The apparatus of claim 2 wherein a conductor physical length of each arm is preferably two wavelengths of a desired bandwidth.

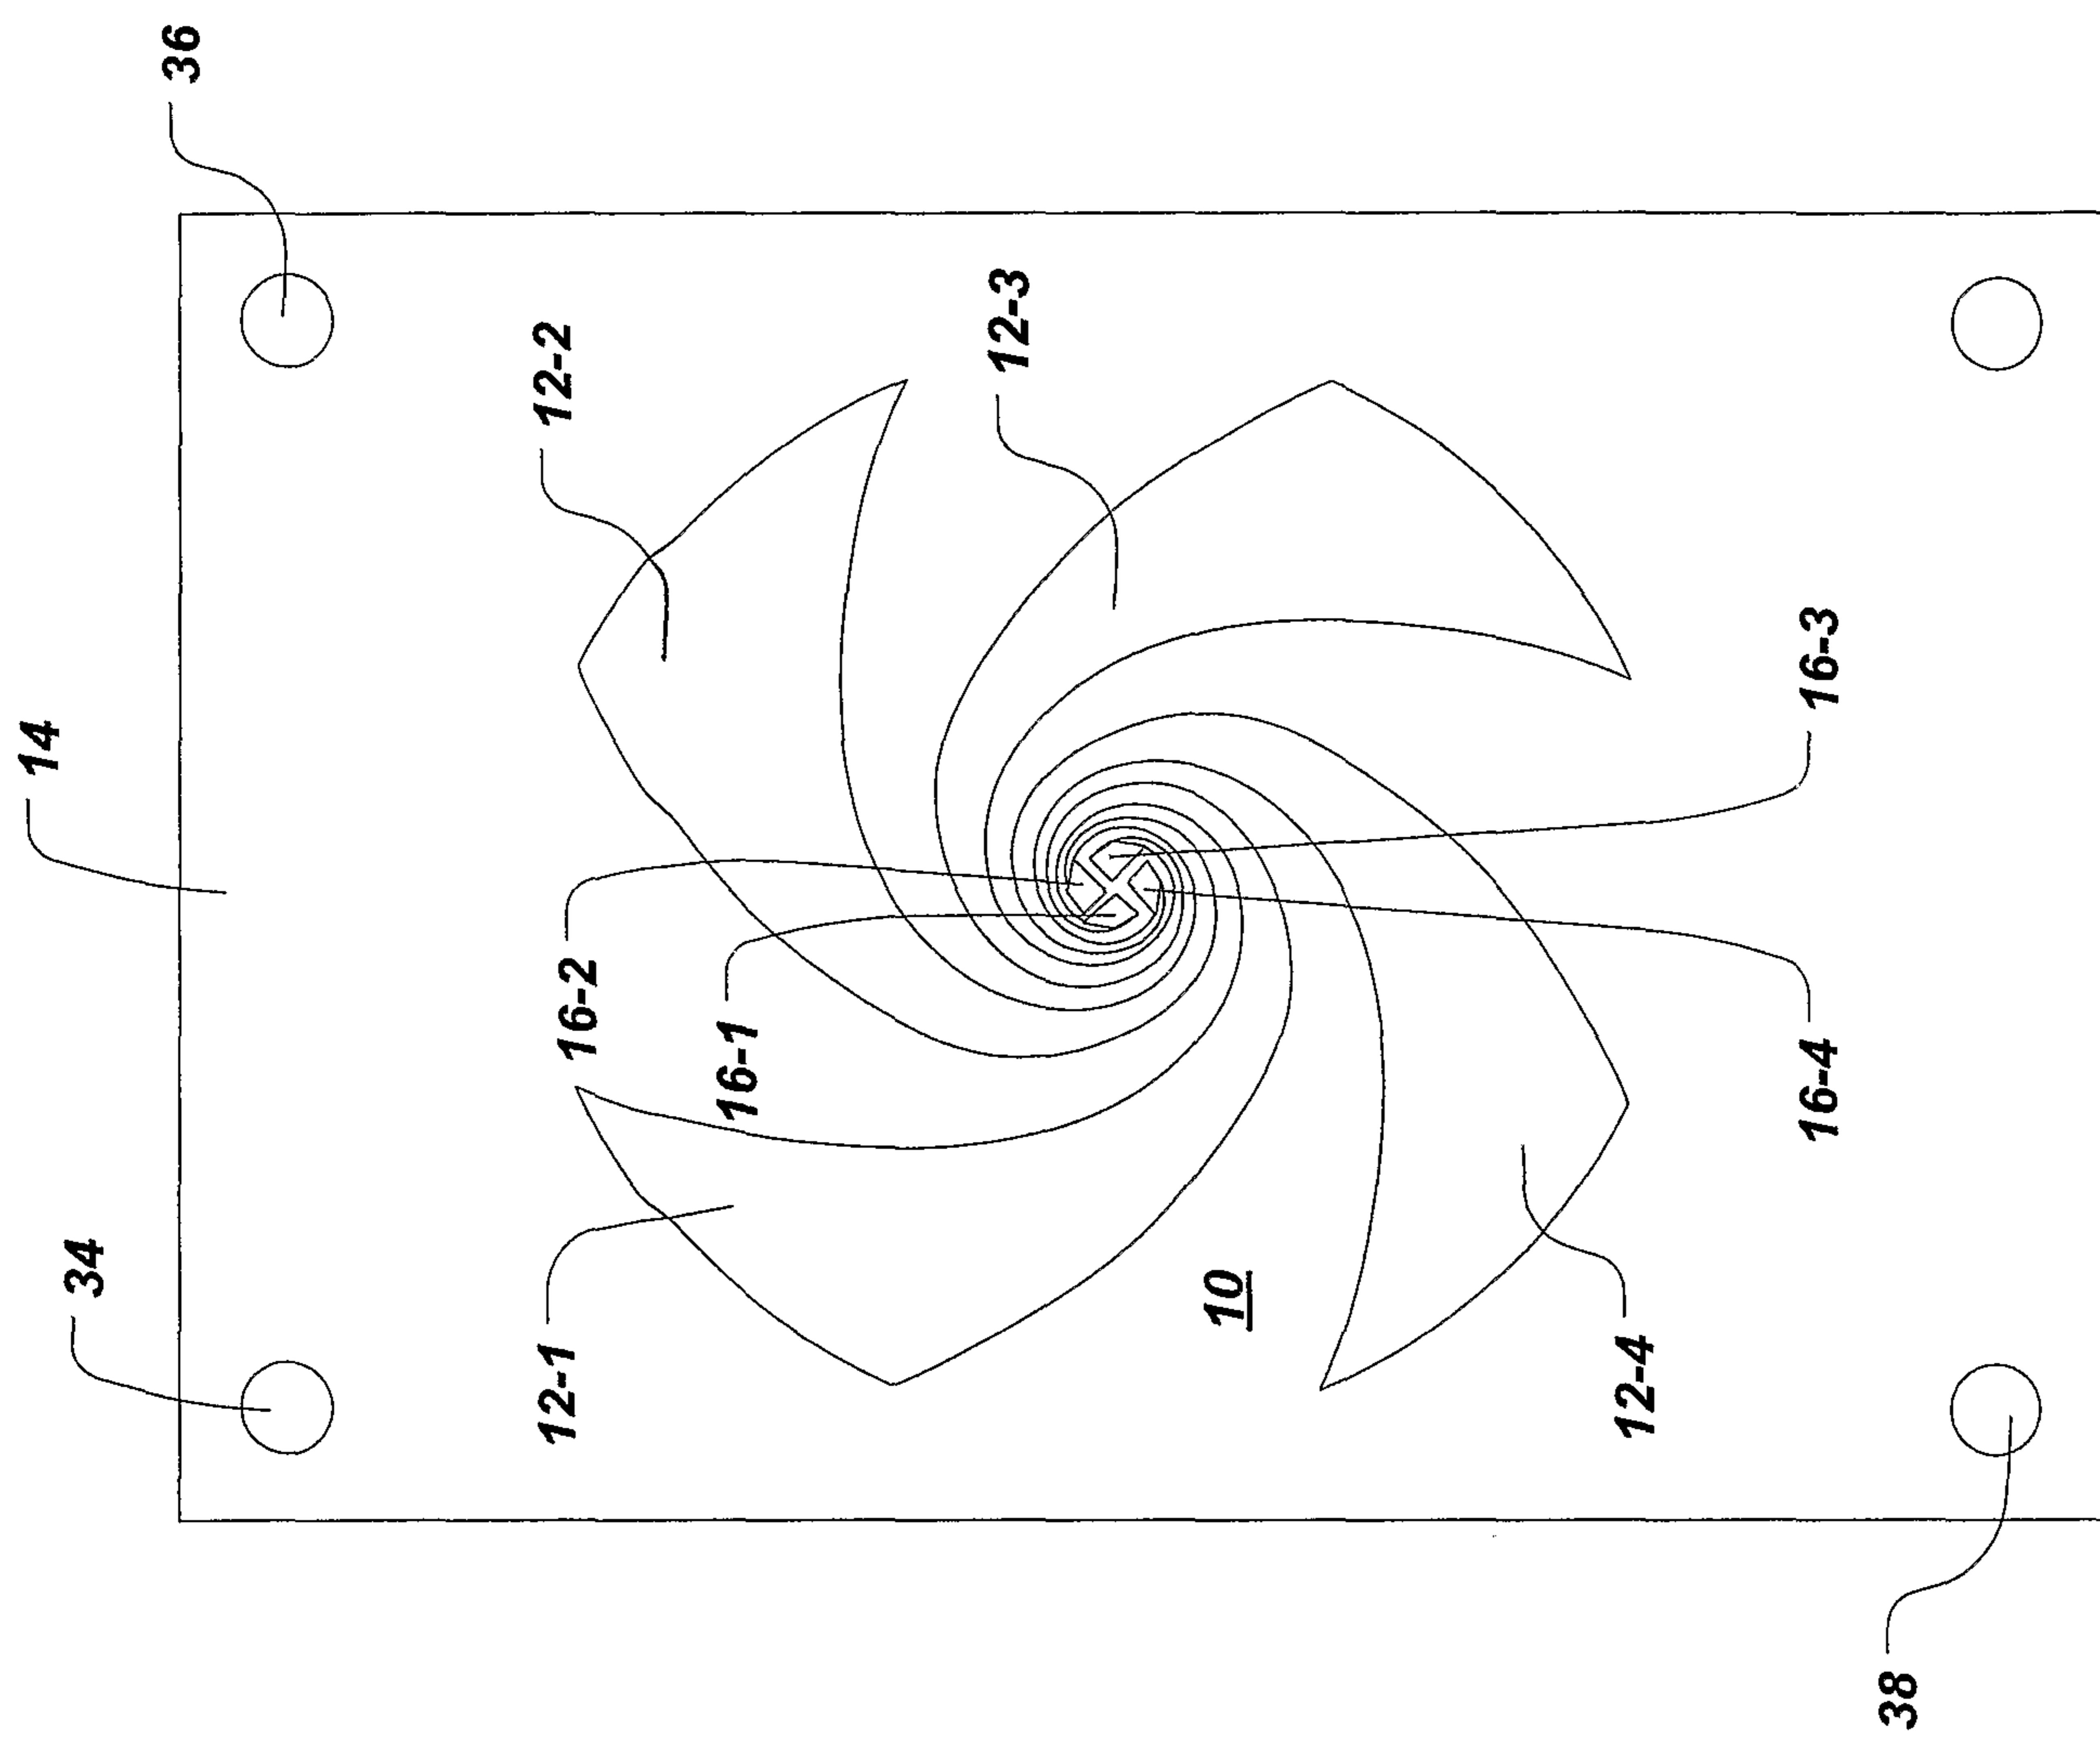

*Fig. 1*


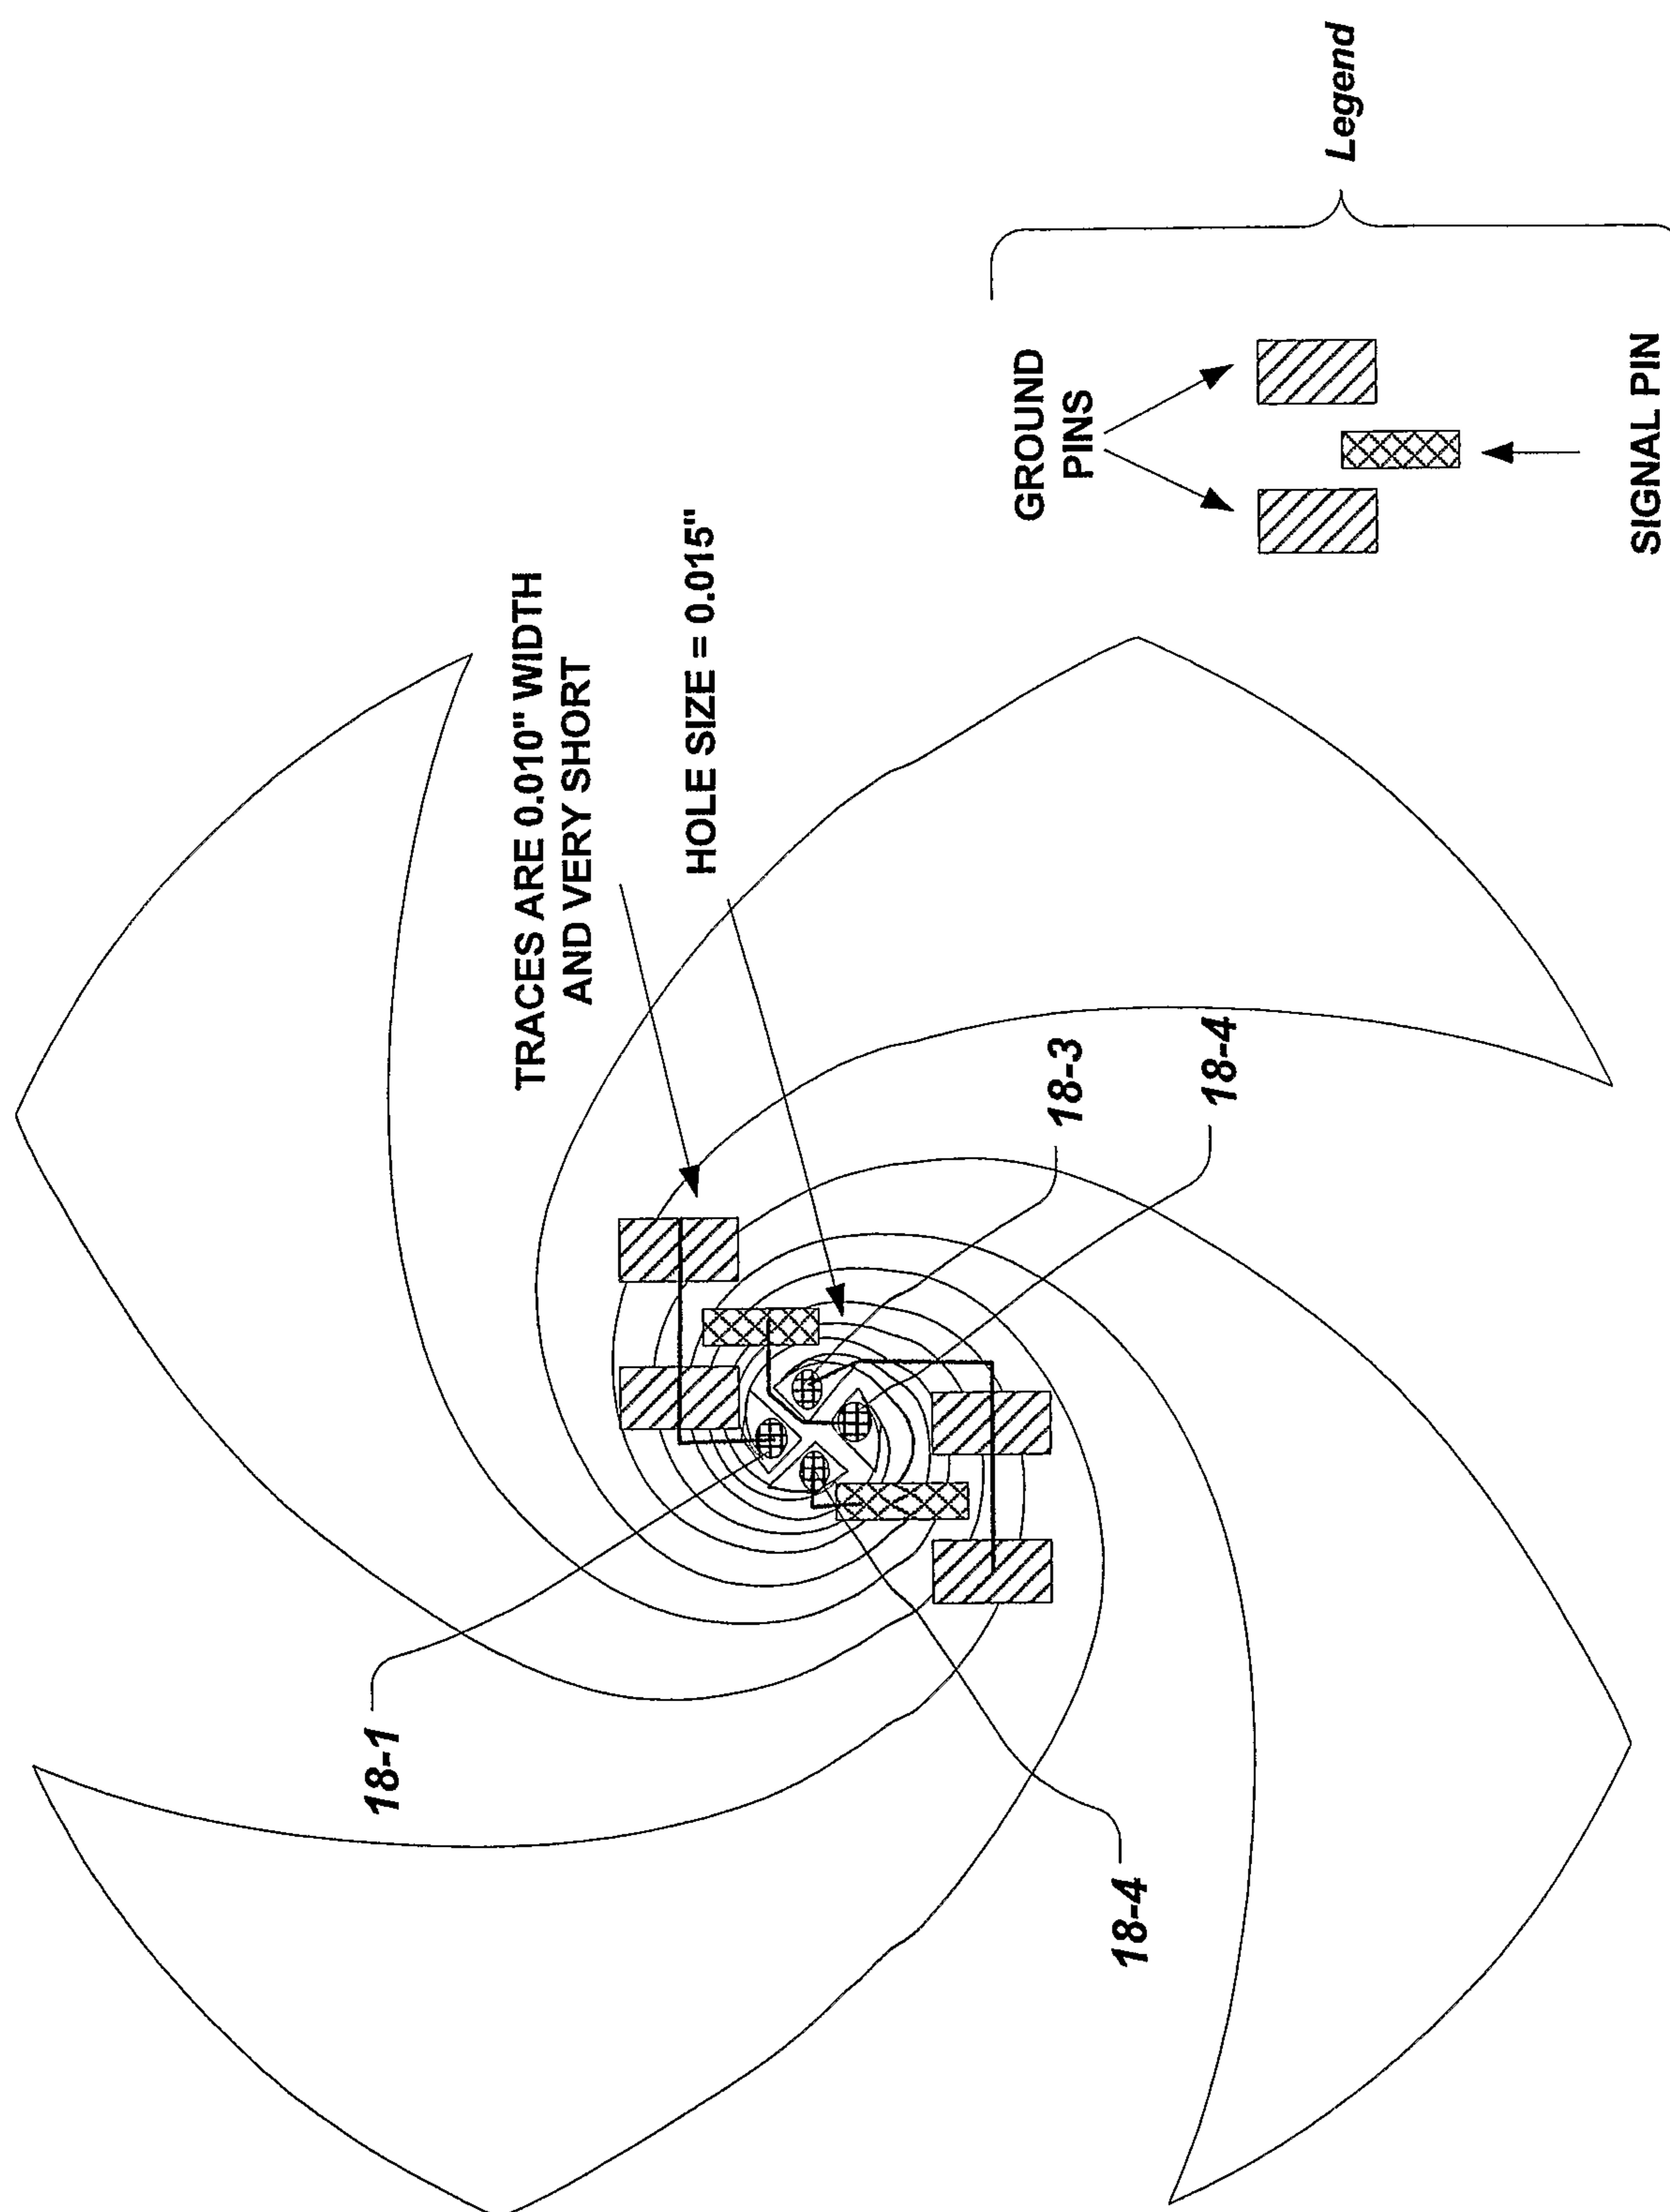


Fig. 2

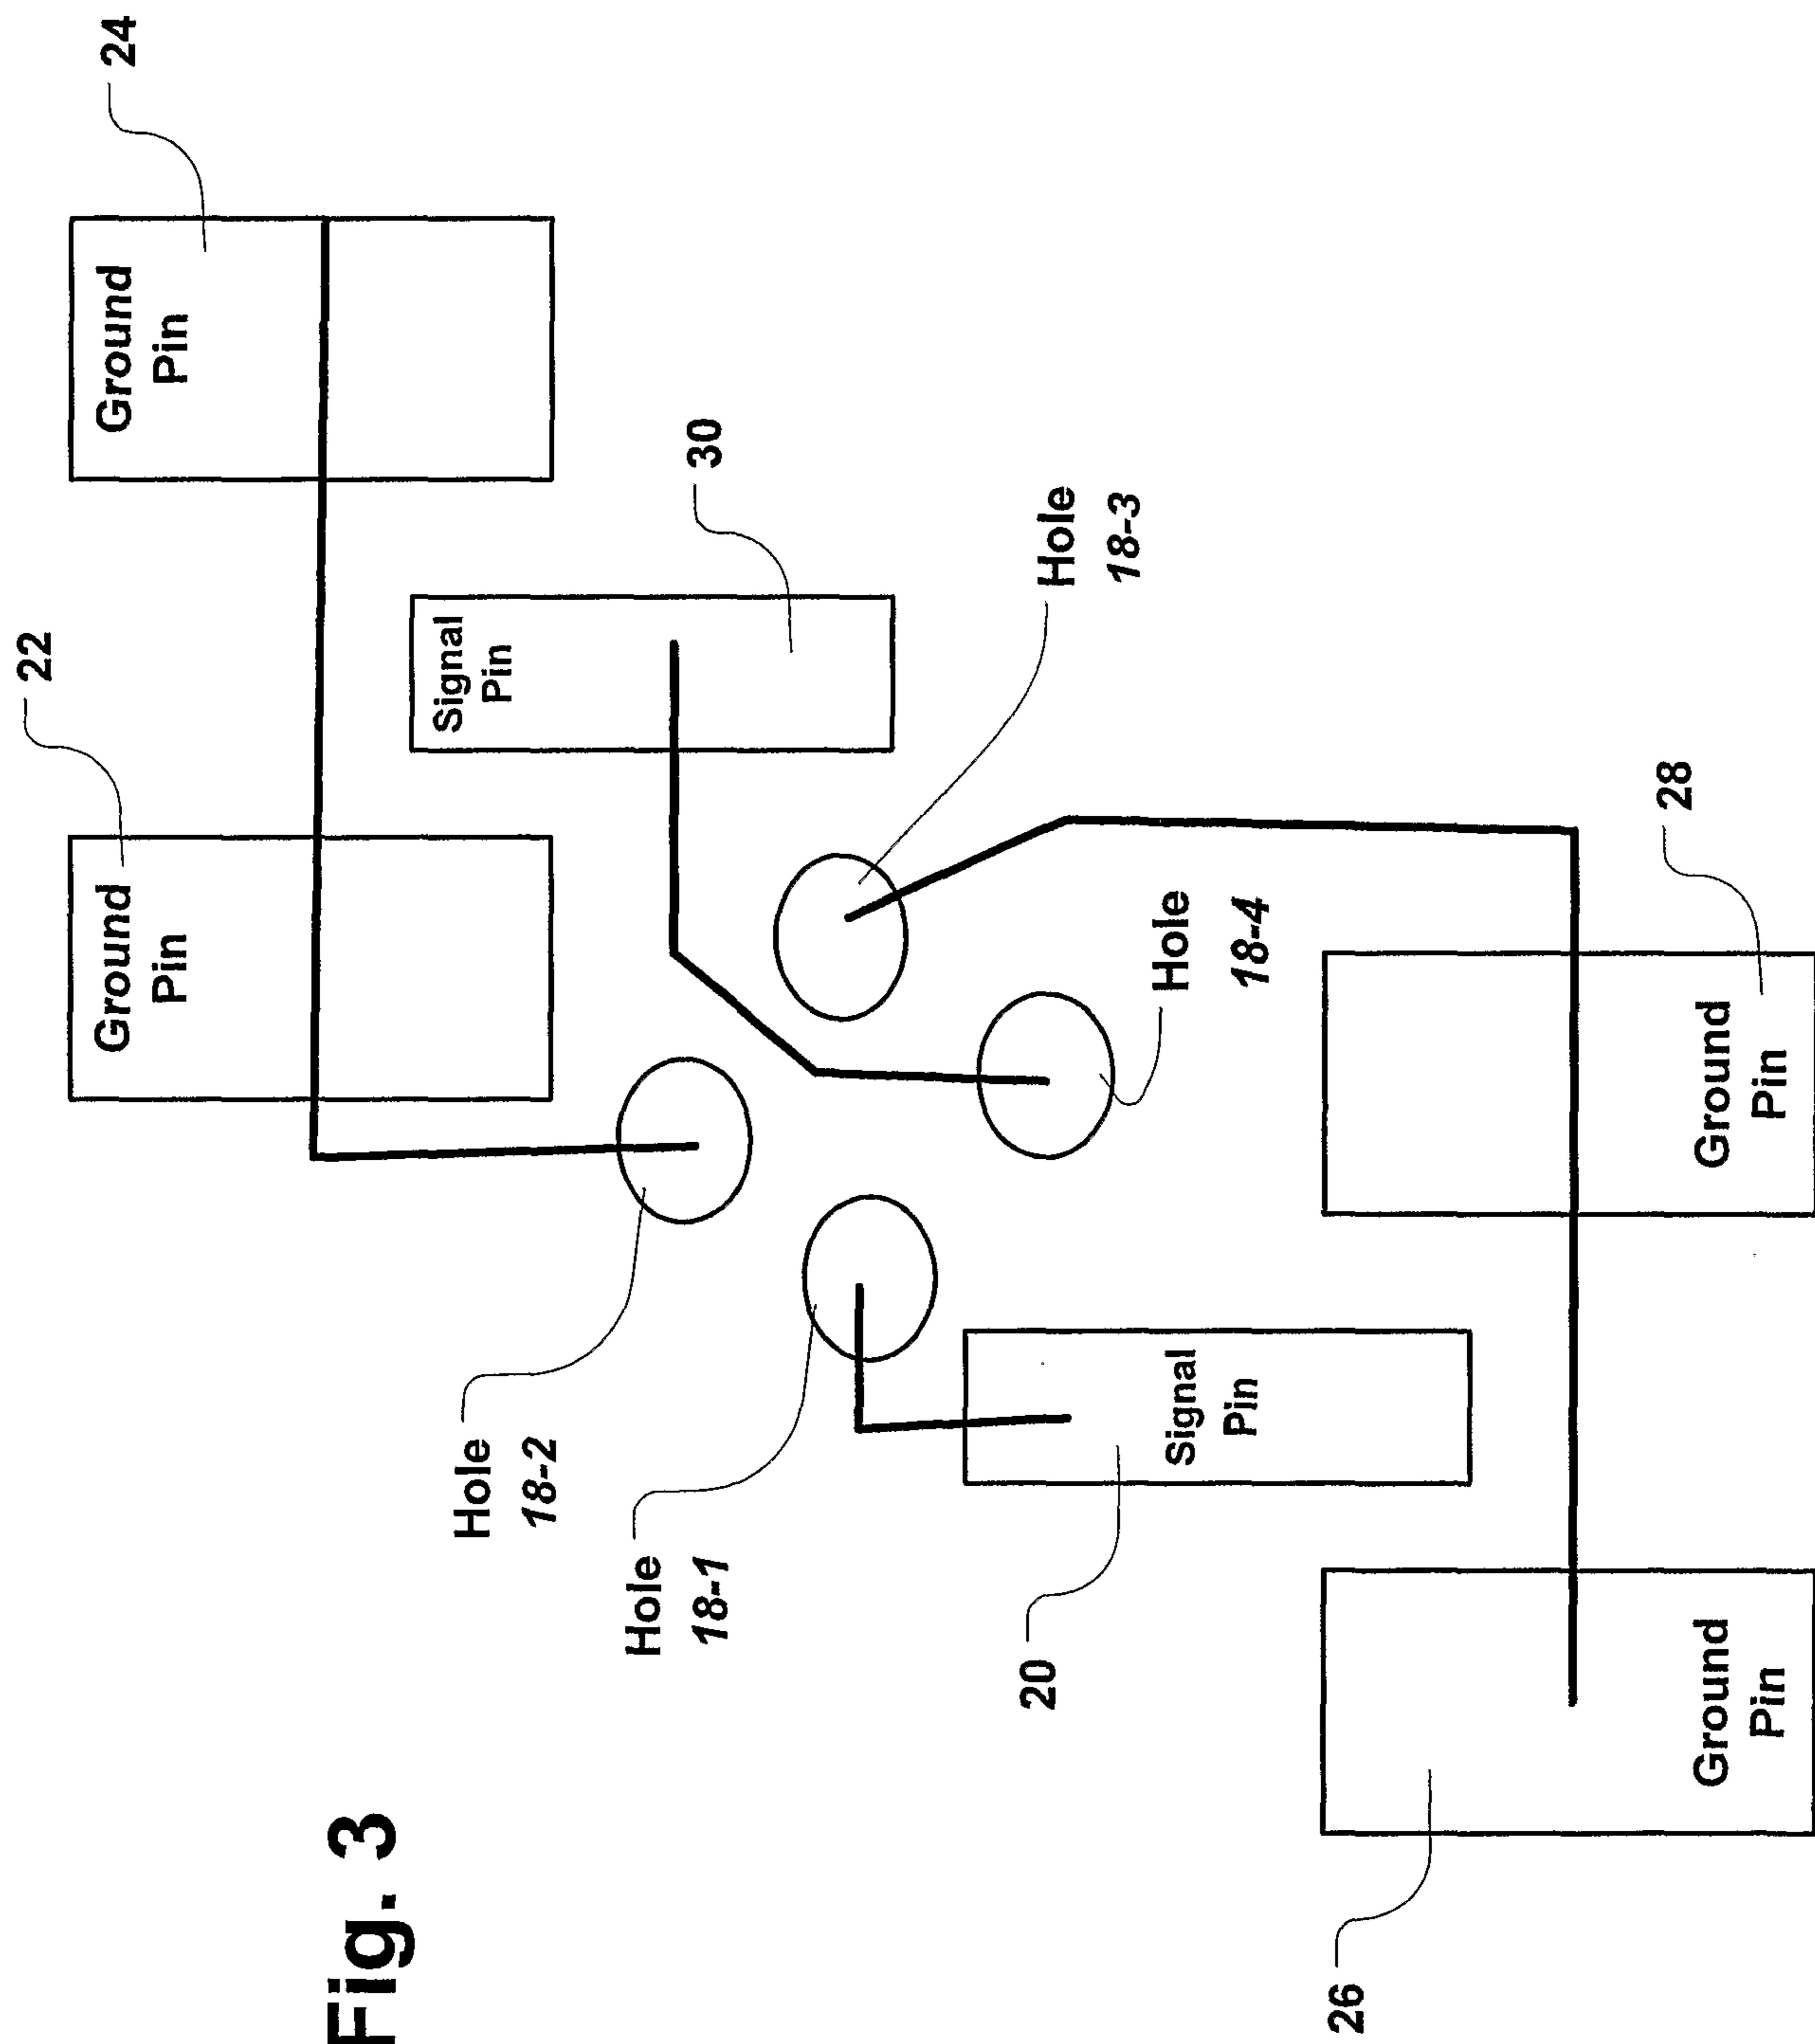

**Fig. 3**

SPIRAL @5.1GHz

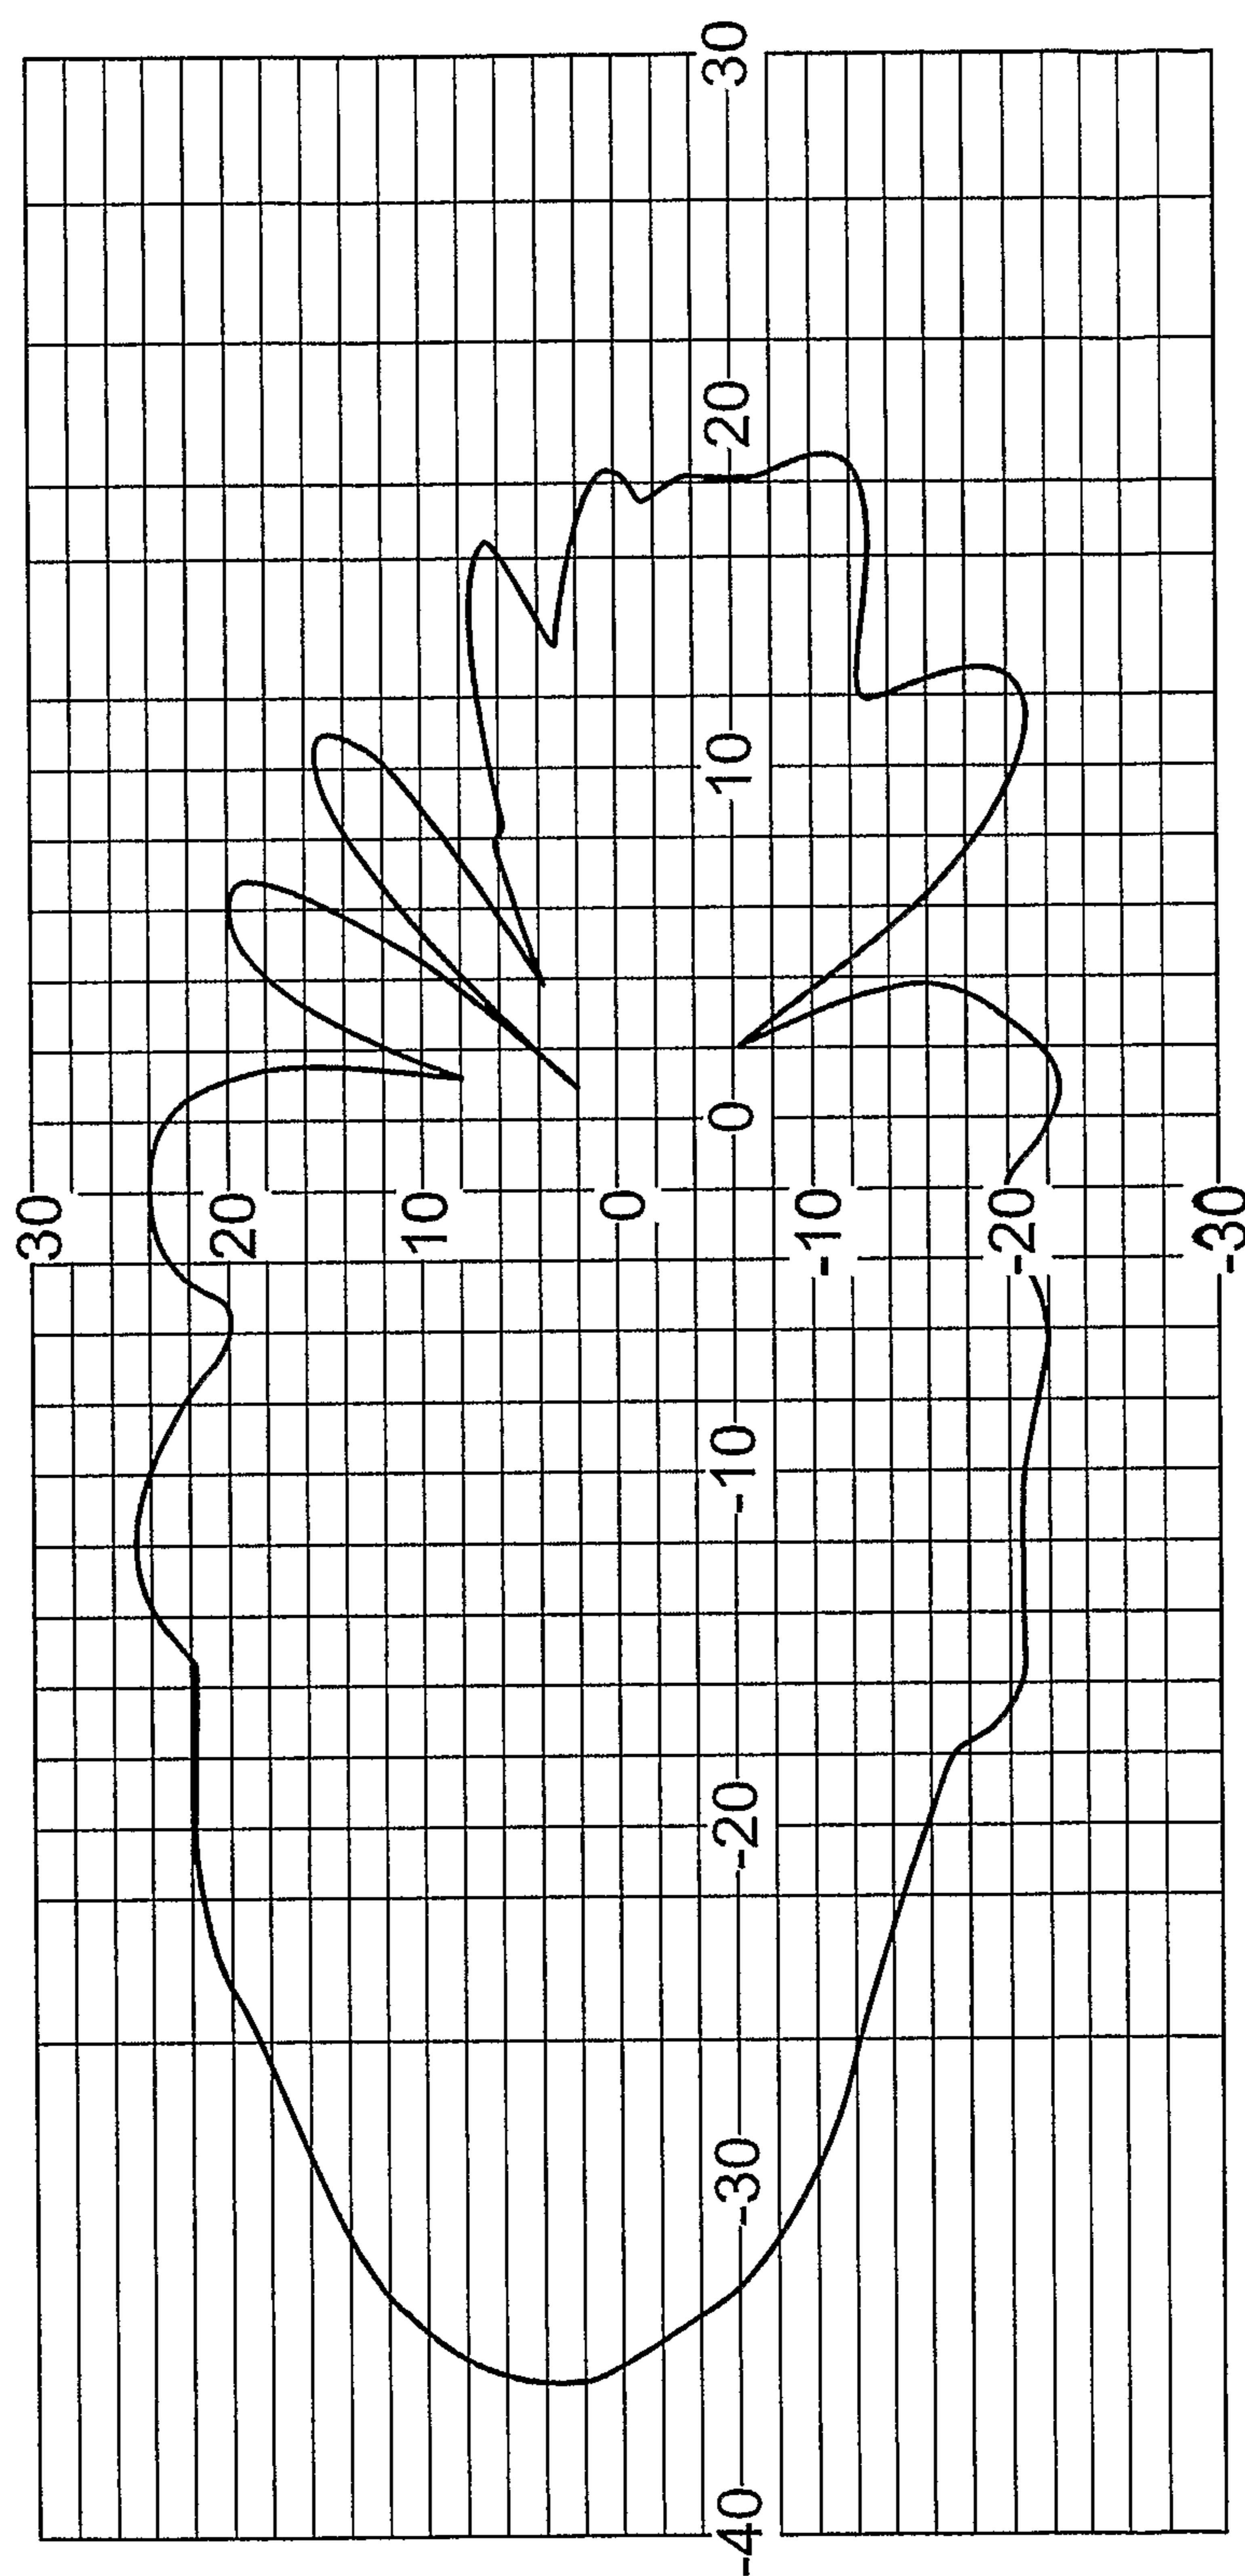


FIG. 4(a)

SPIRAL ANTENNA 5.9GHz



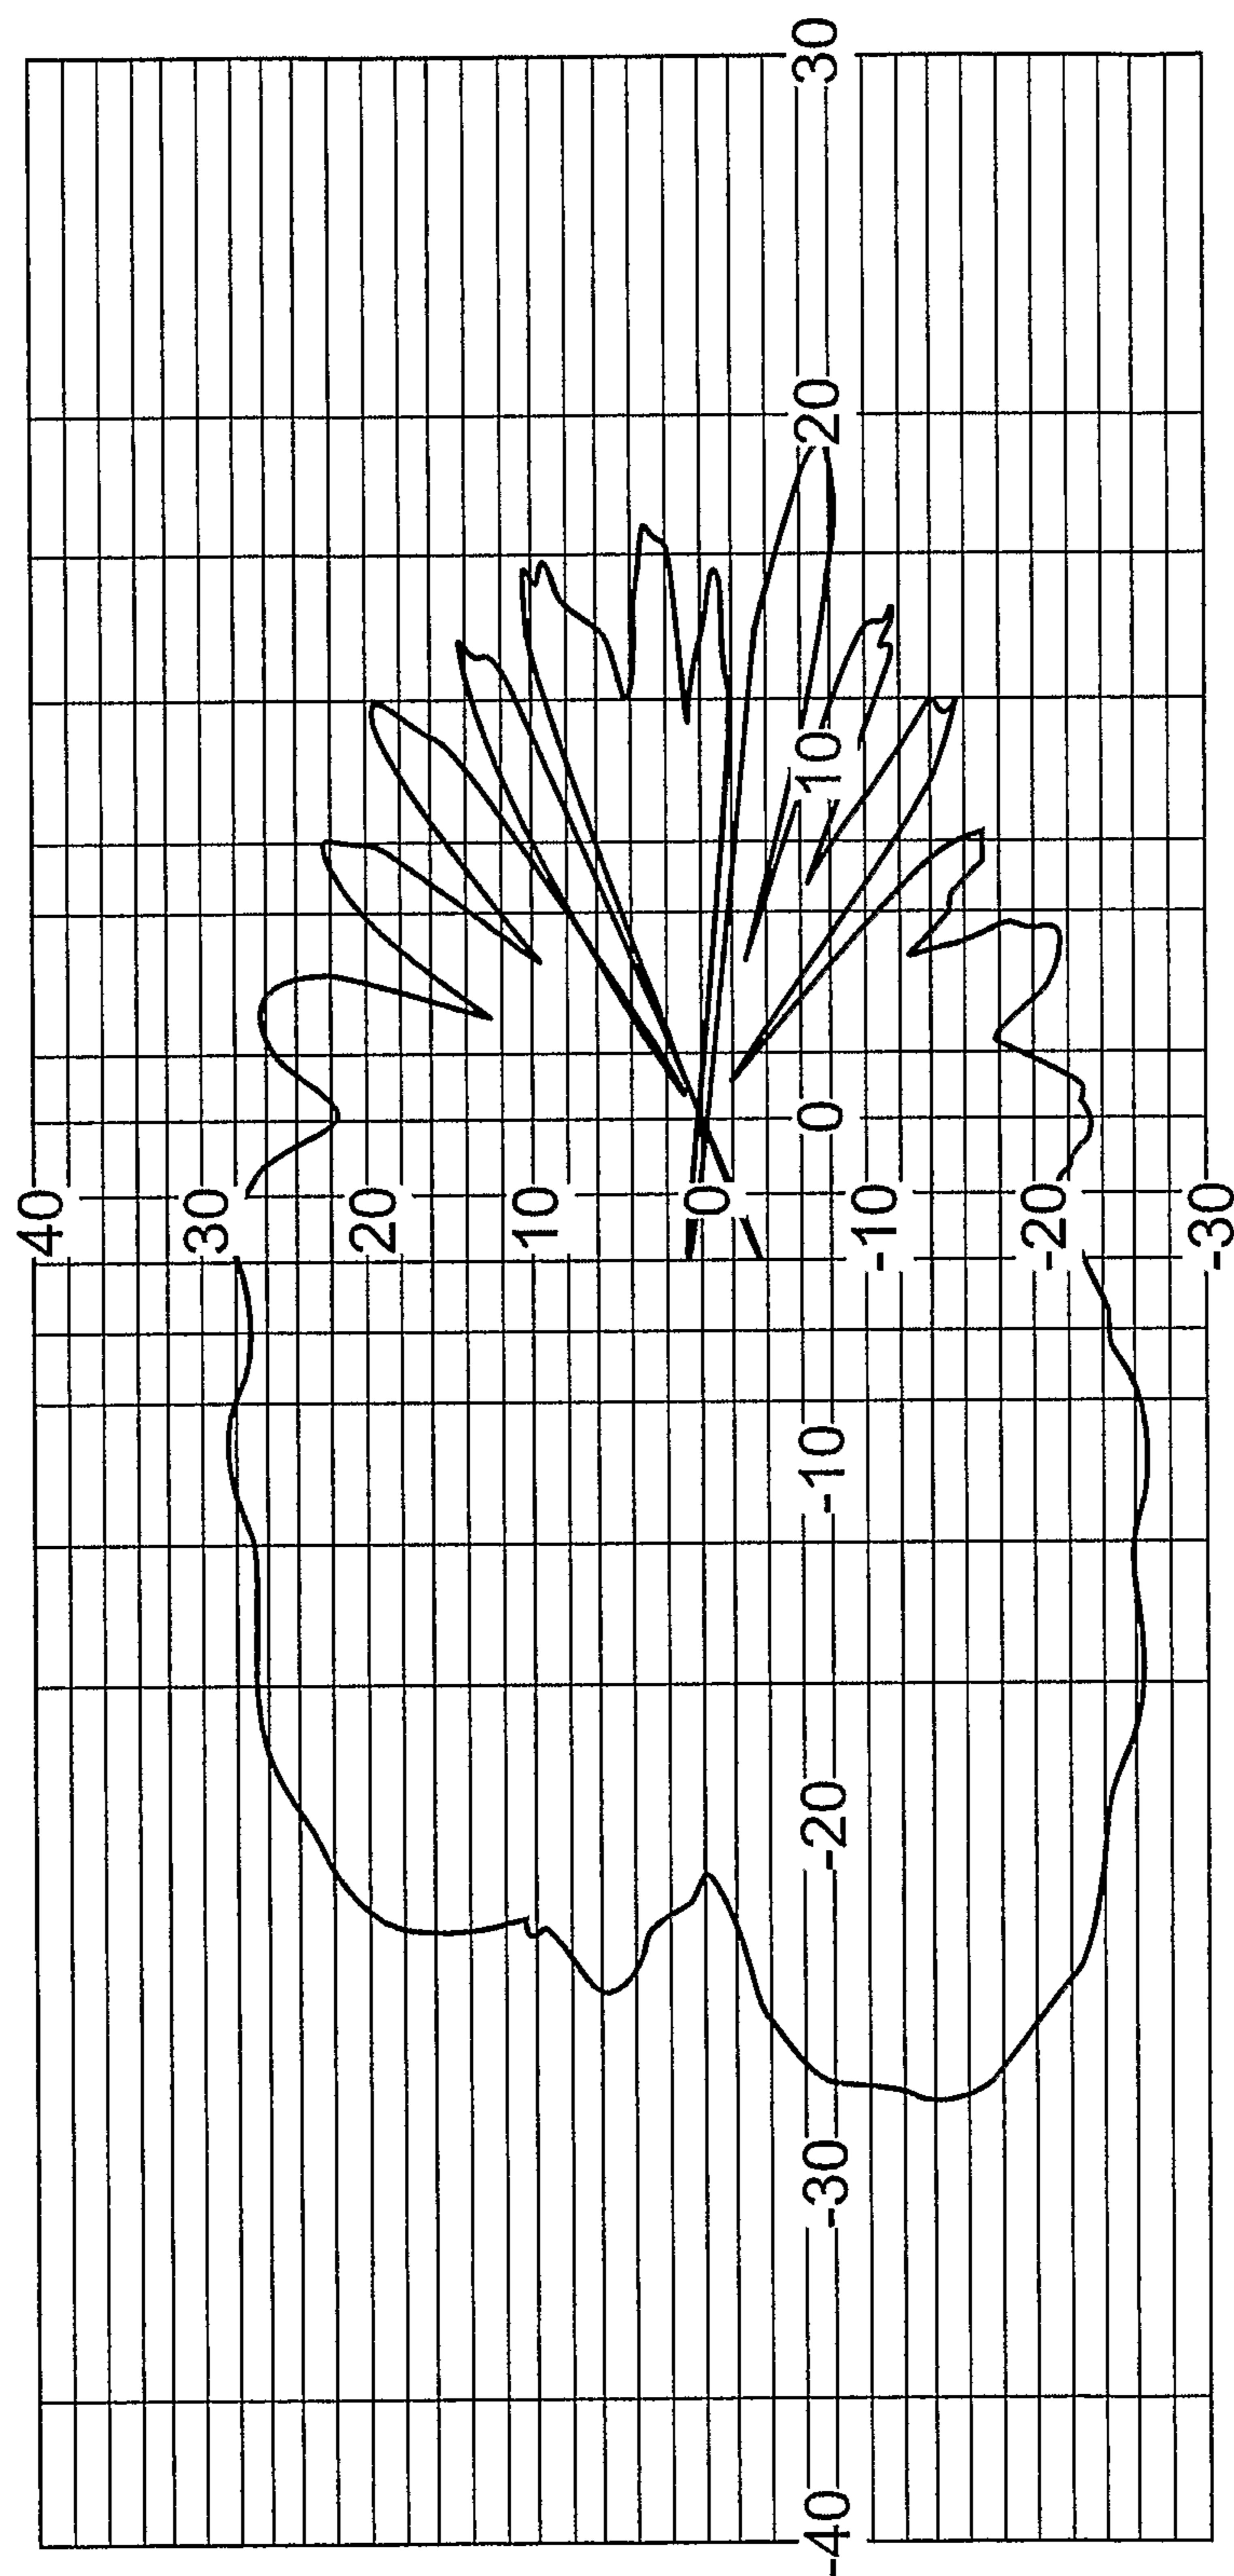



FIG. 4(b)

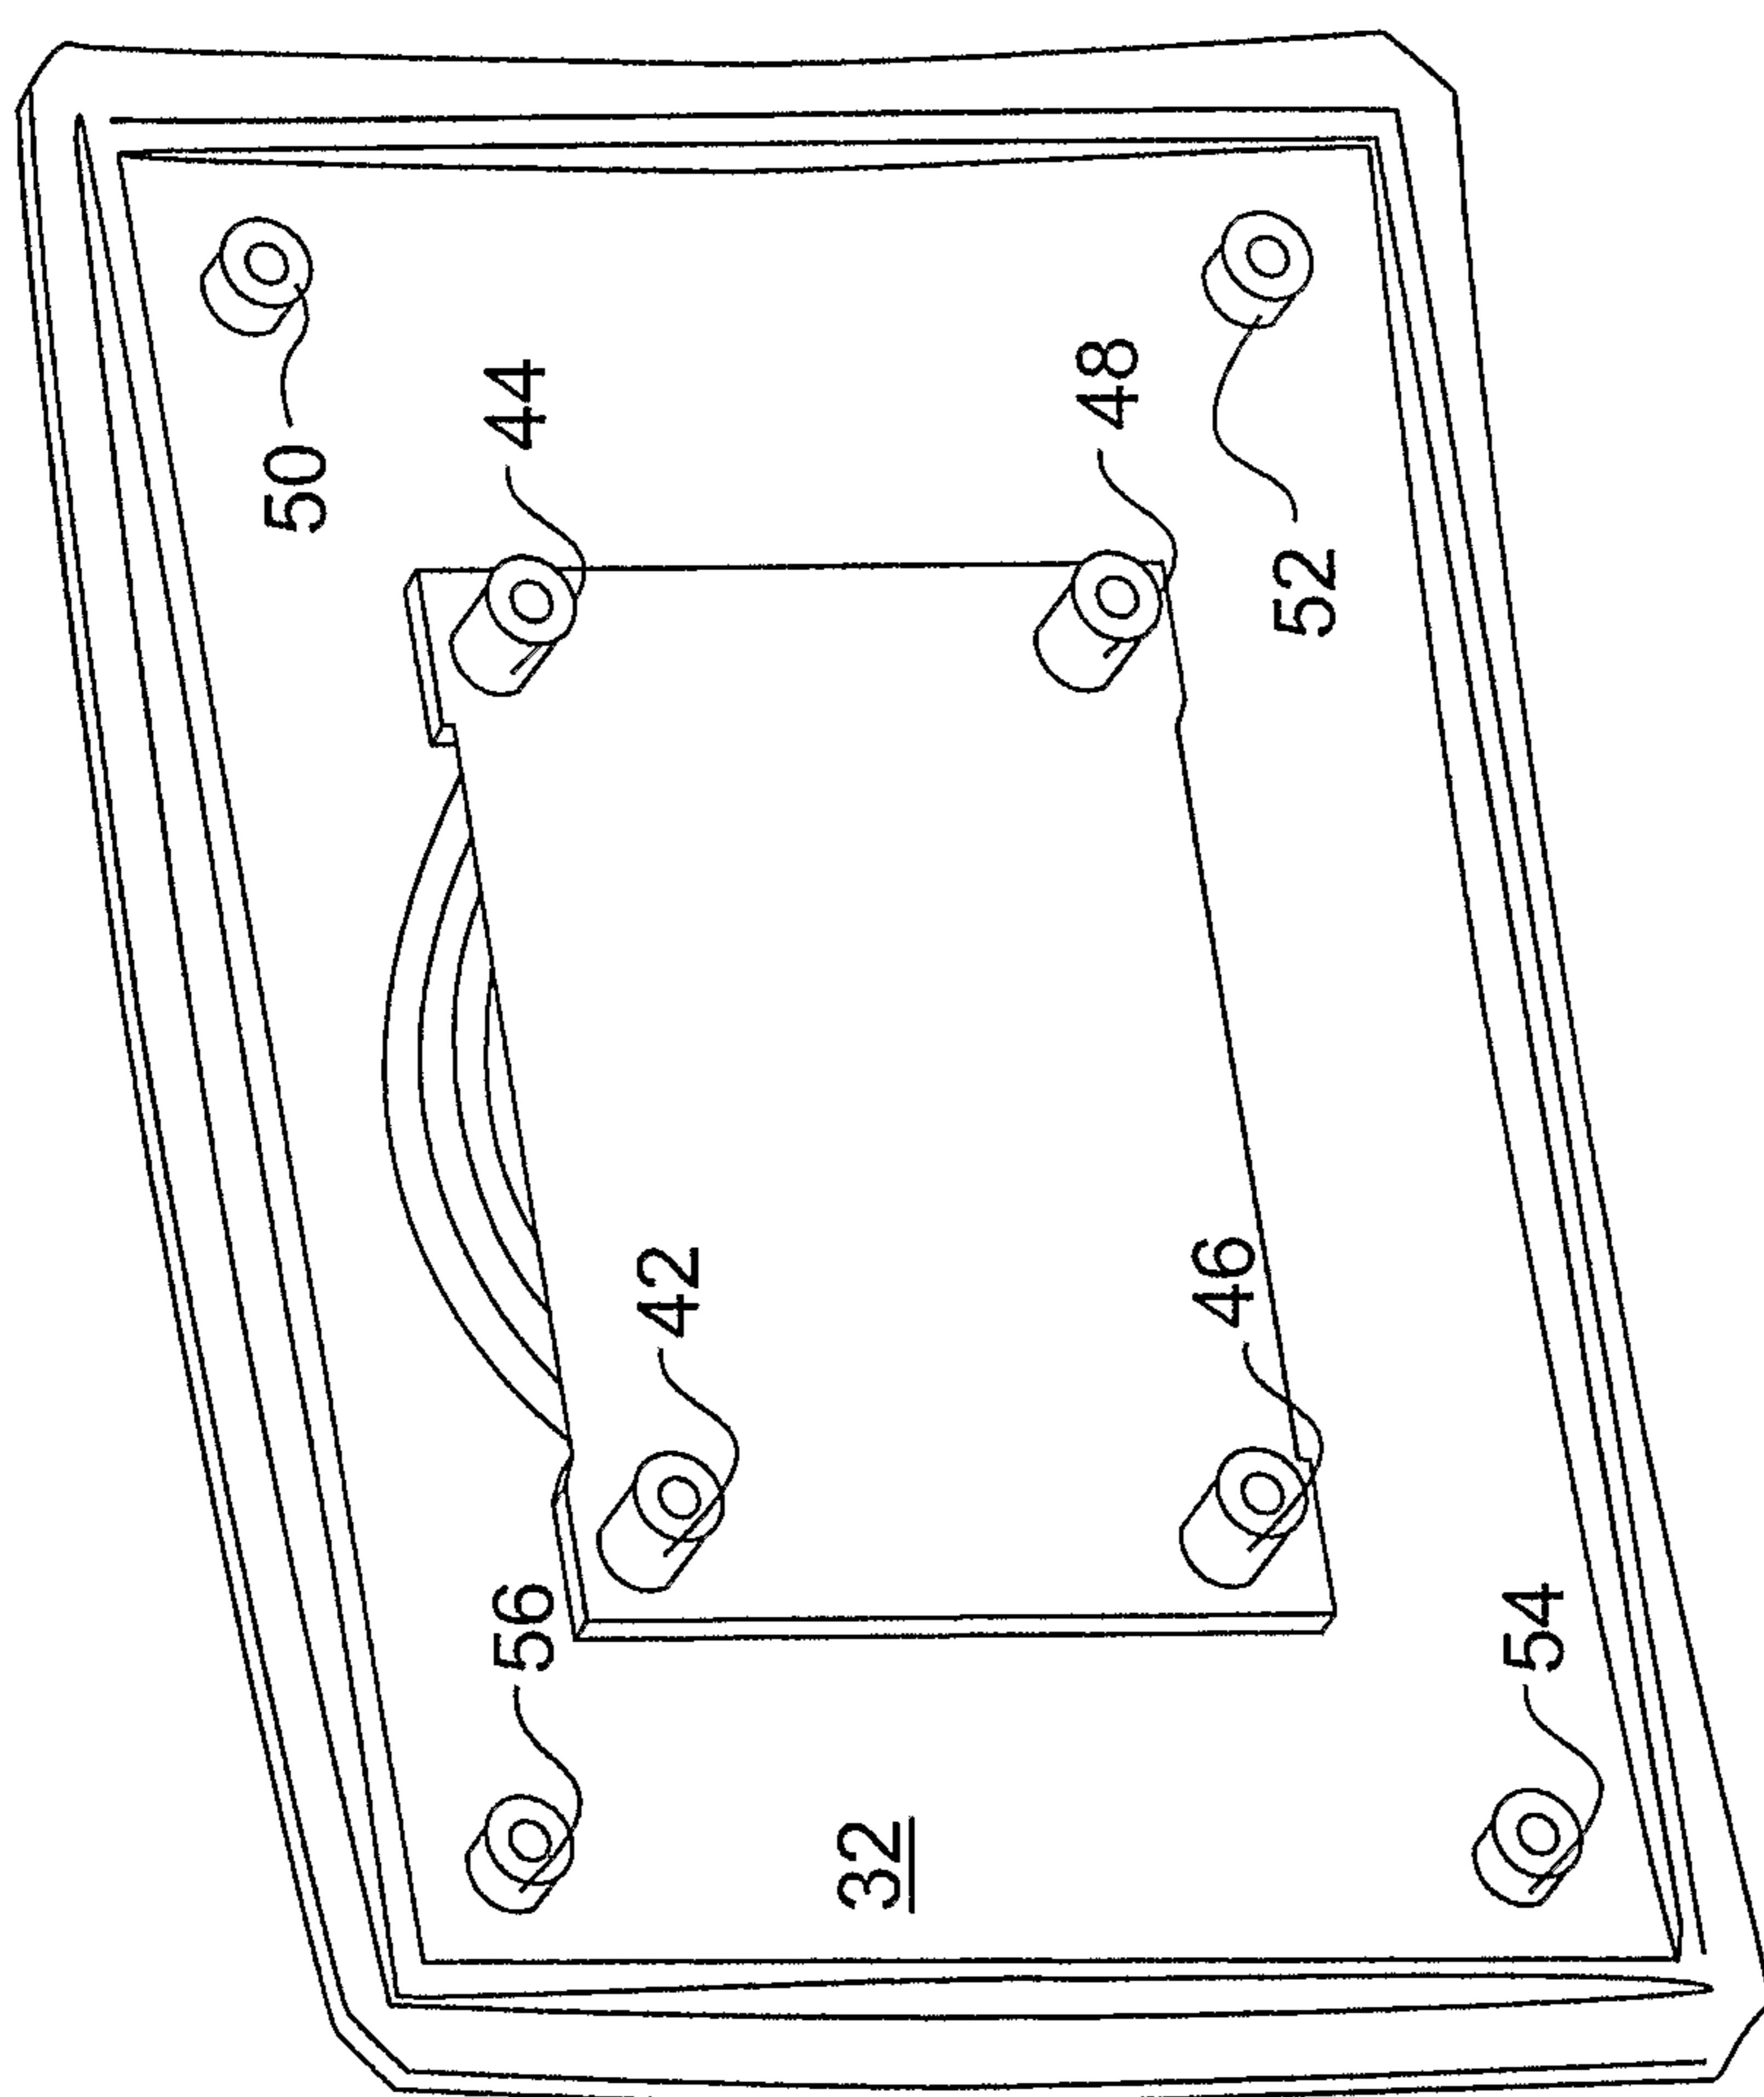


**FIG. 5(a)**

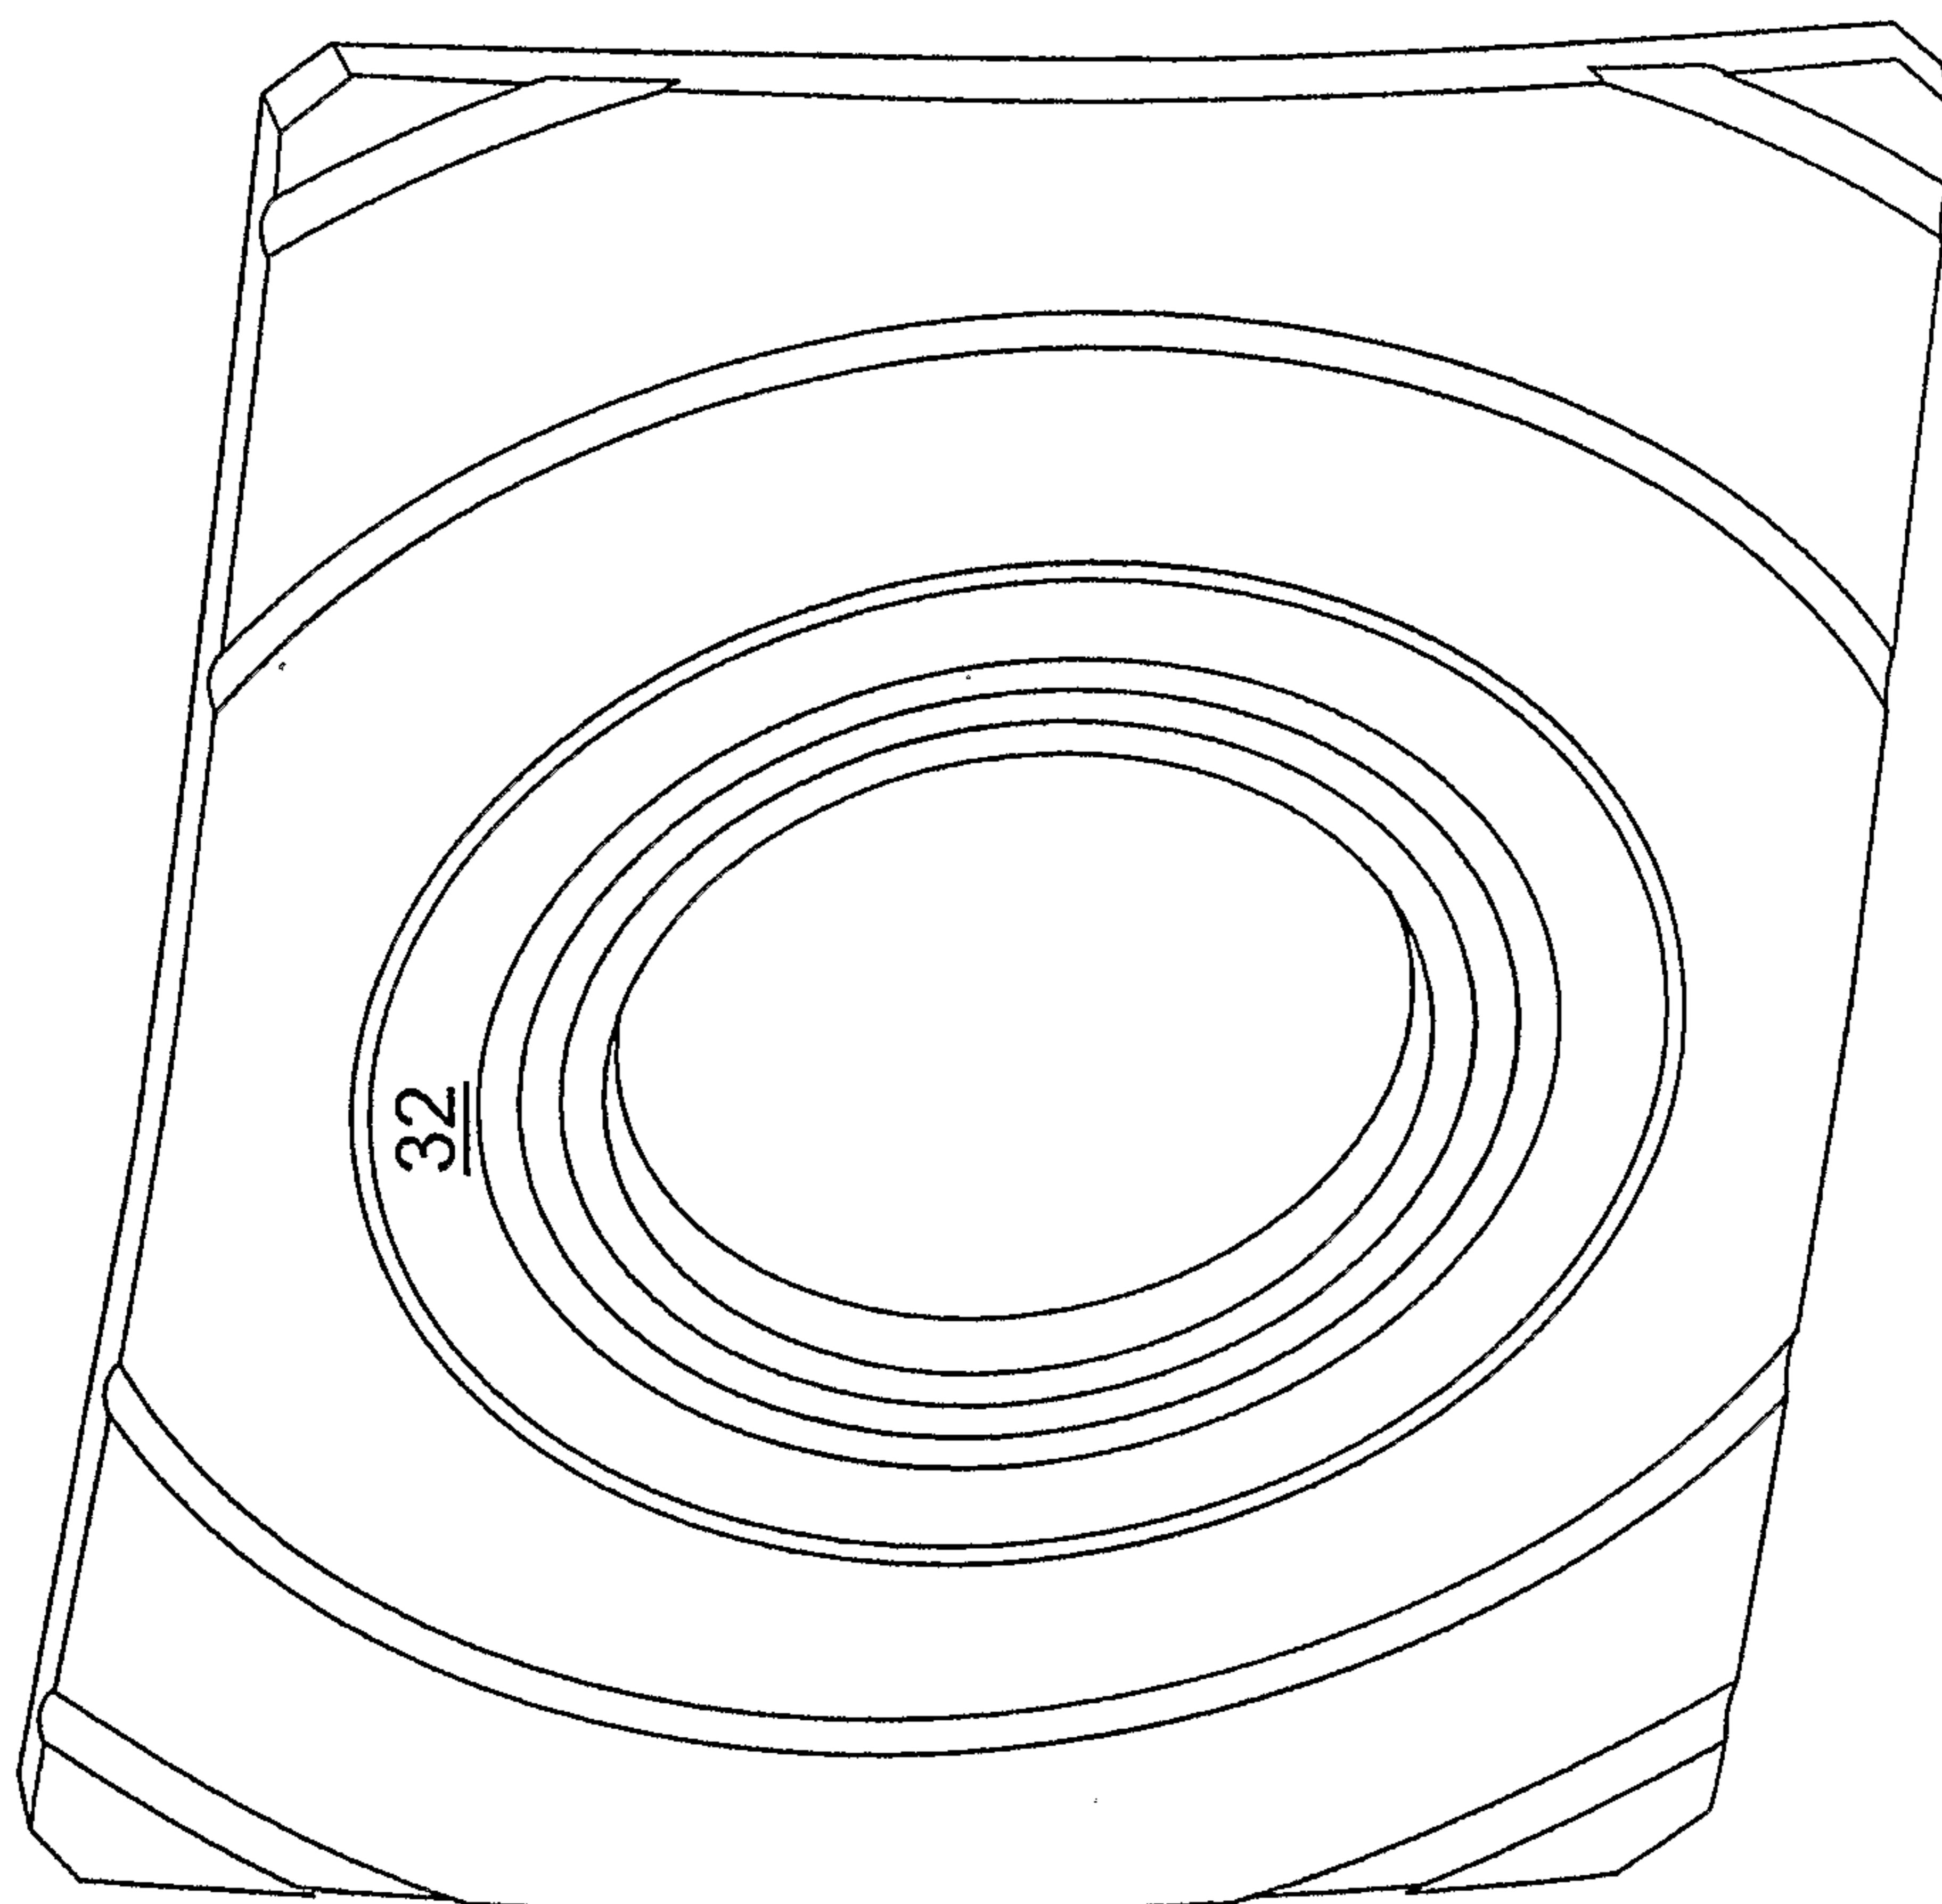


**FIG. 5(b)**

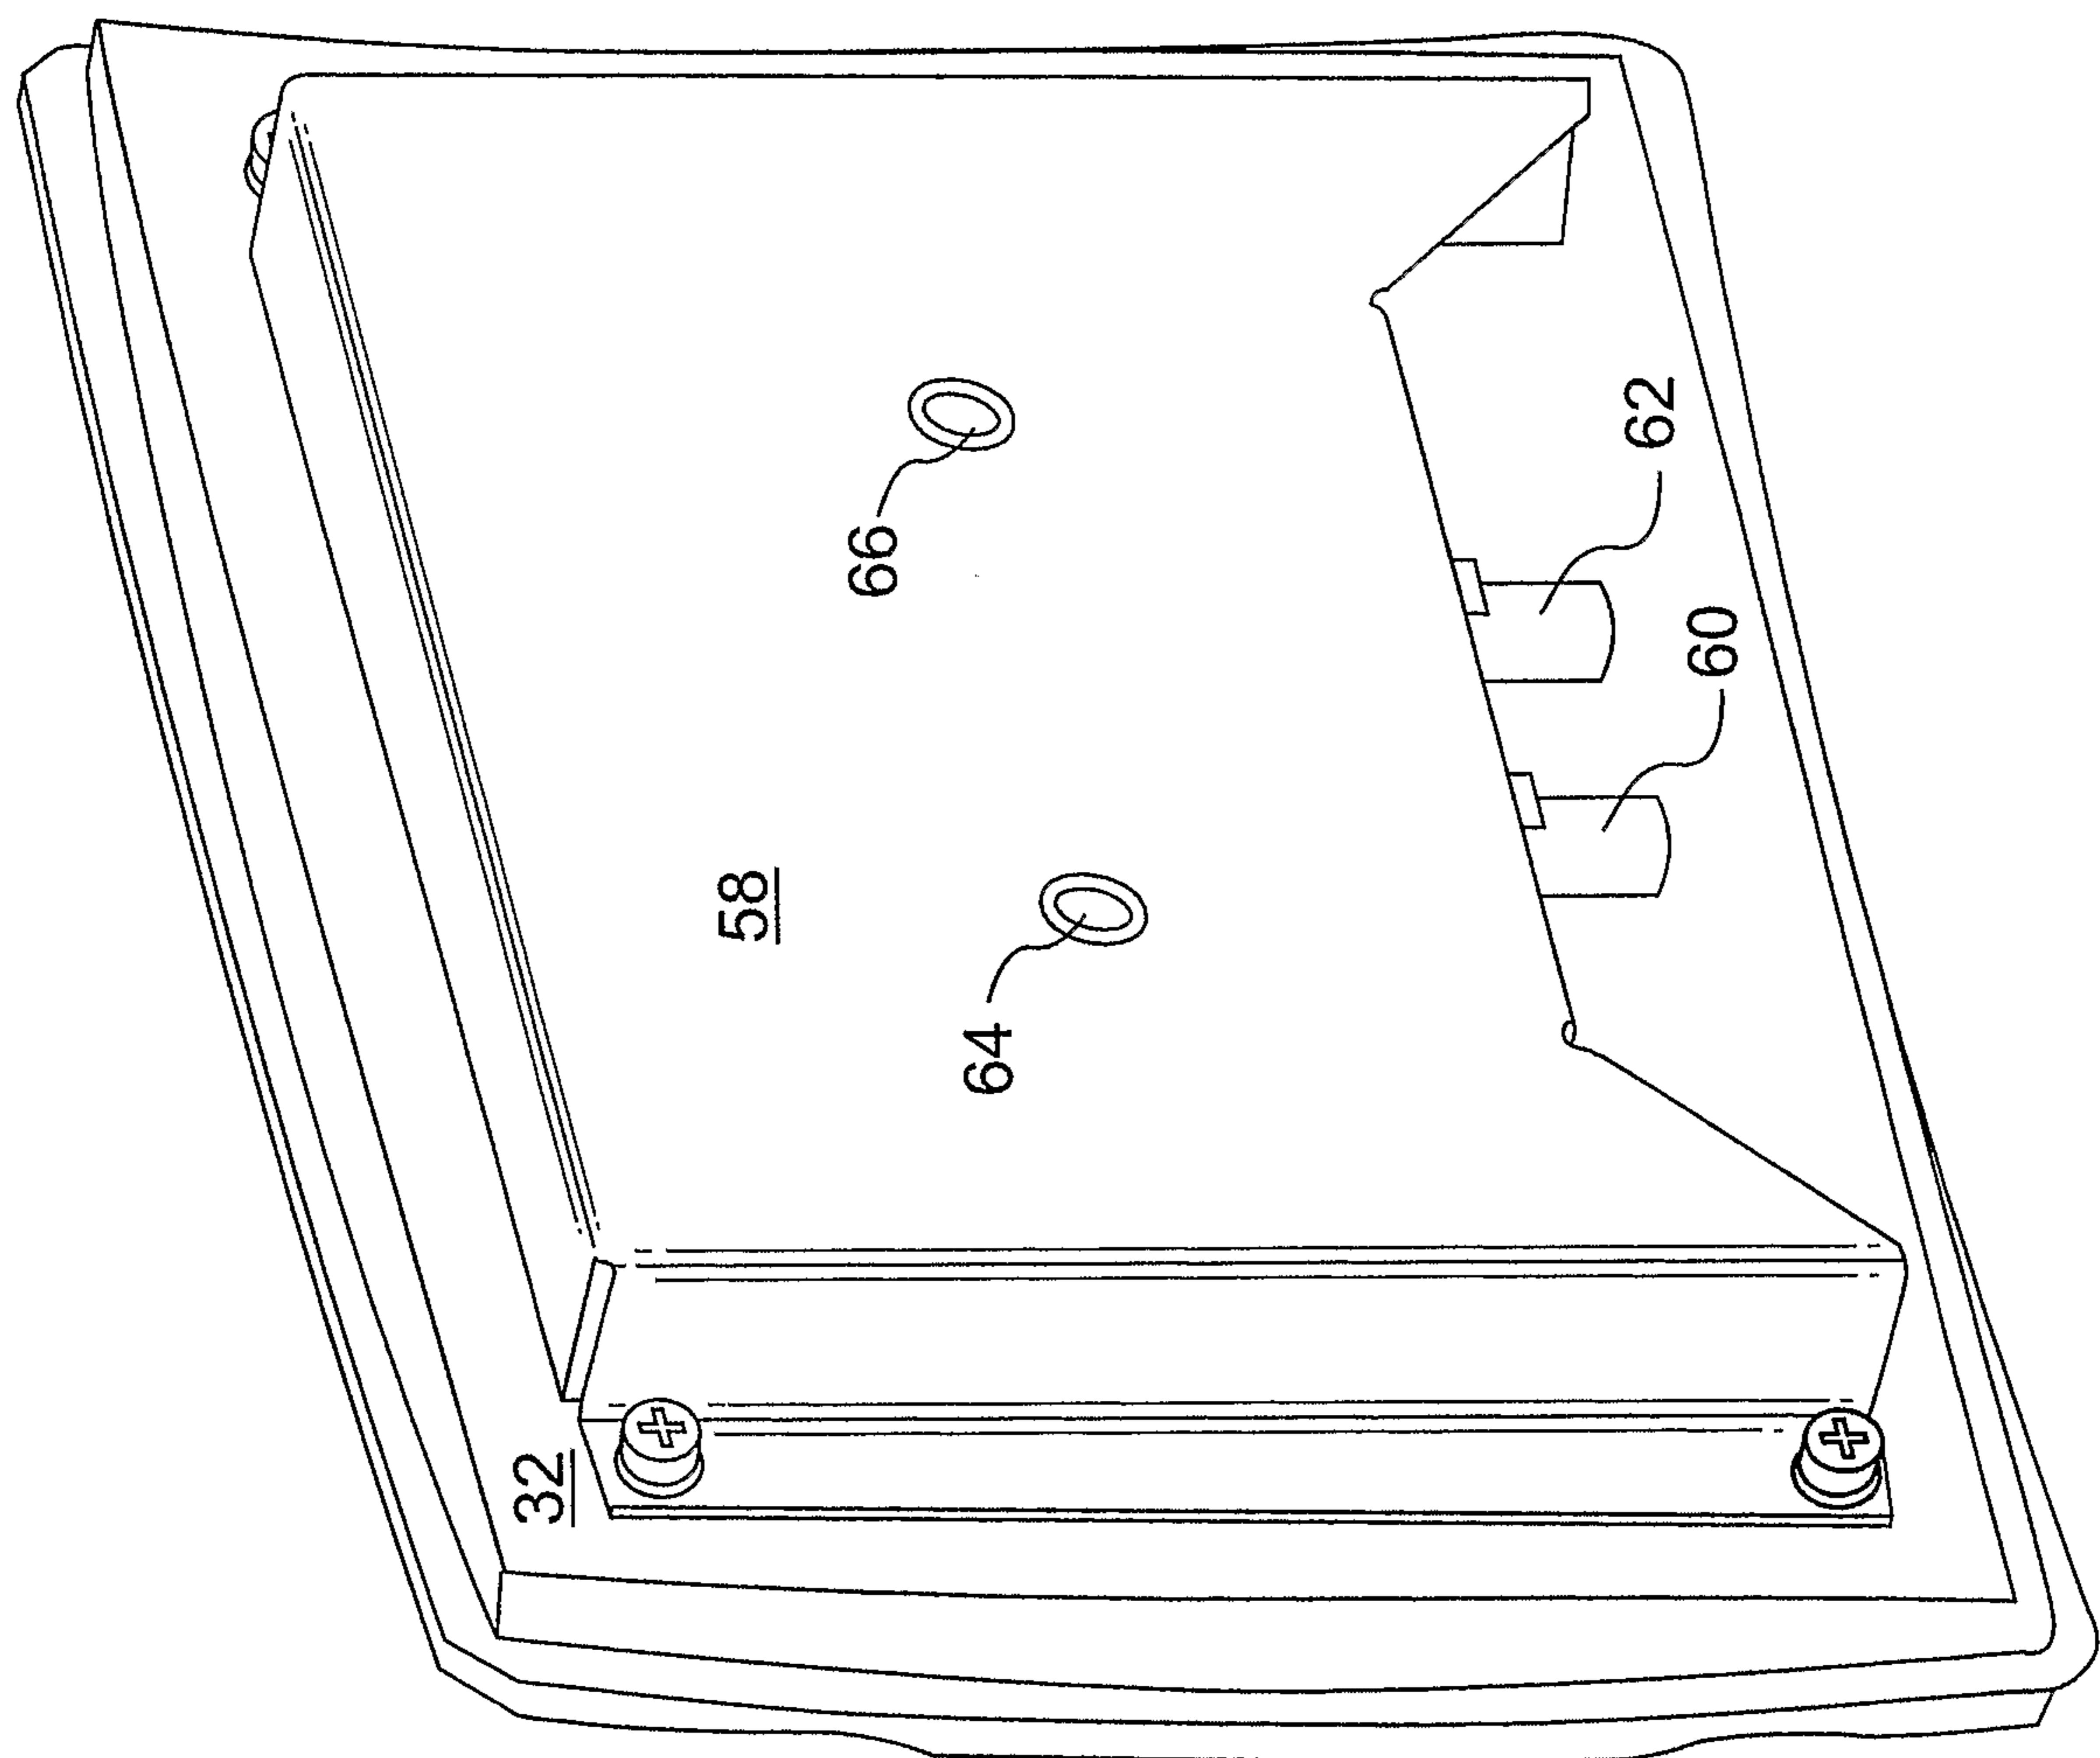


**FIG. 5(c)**

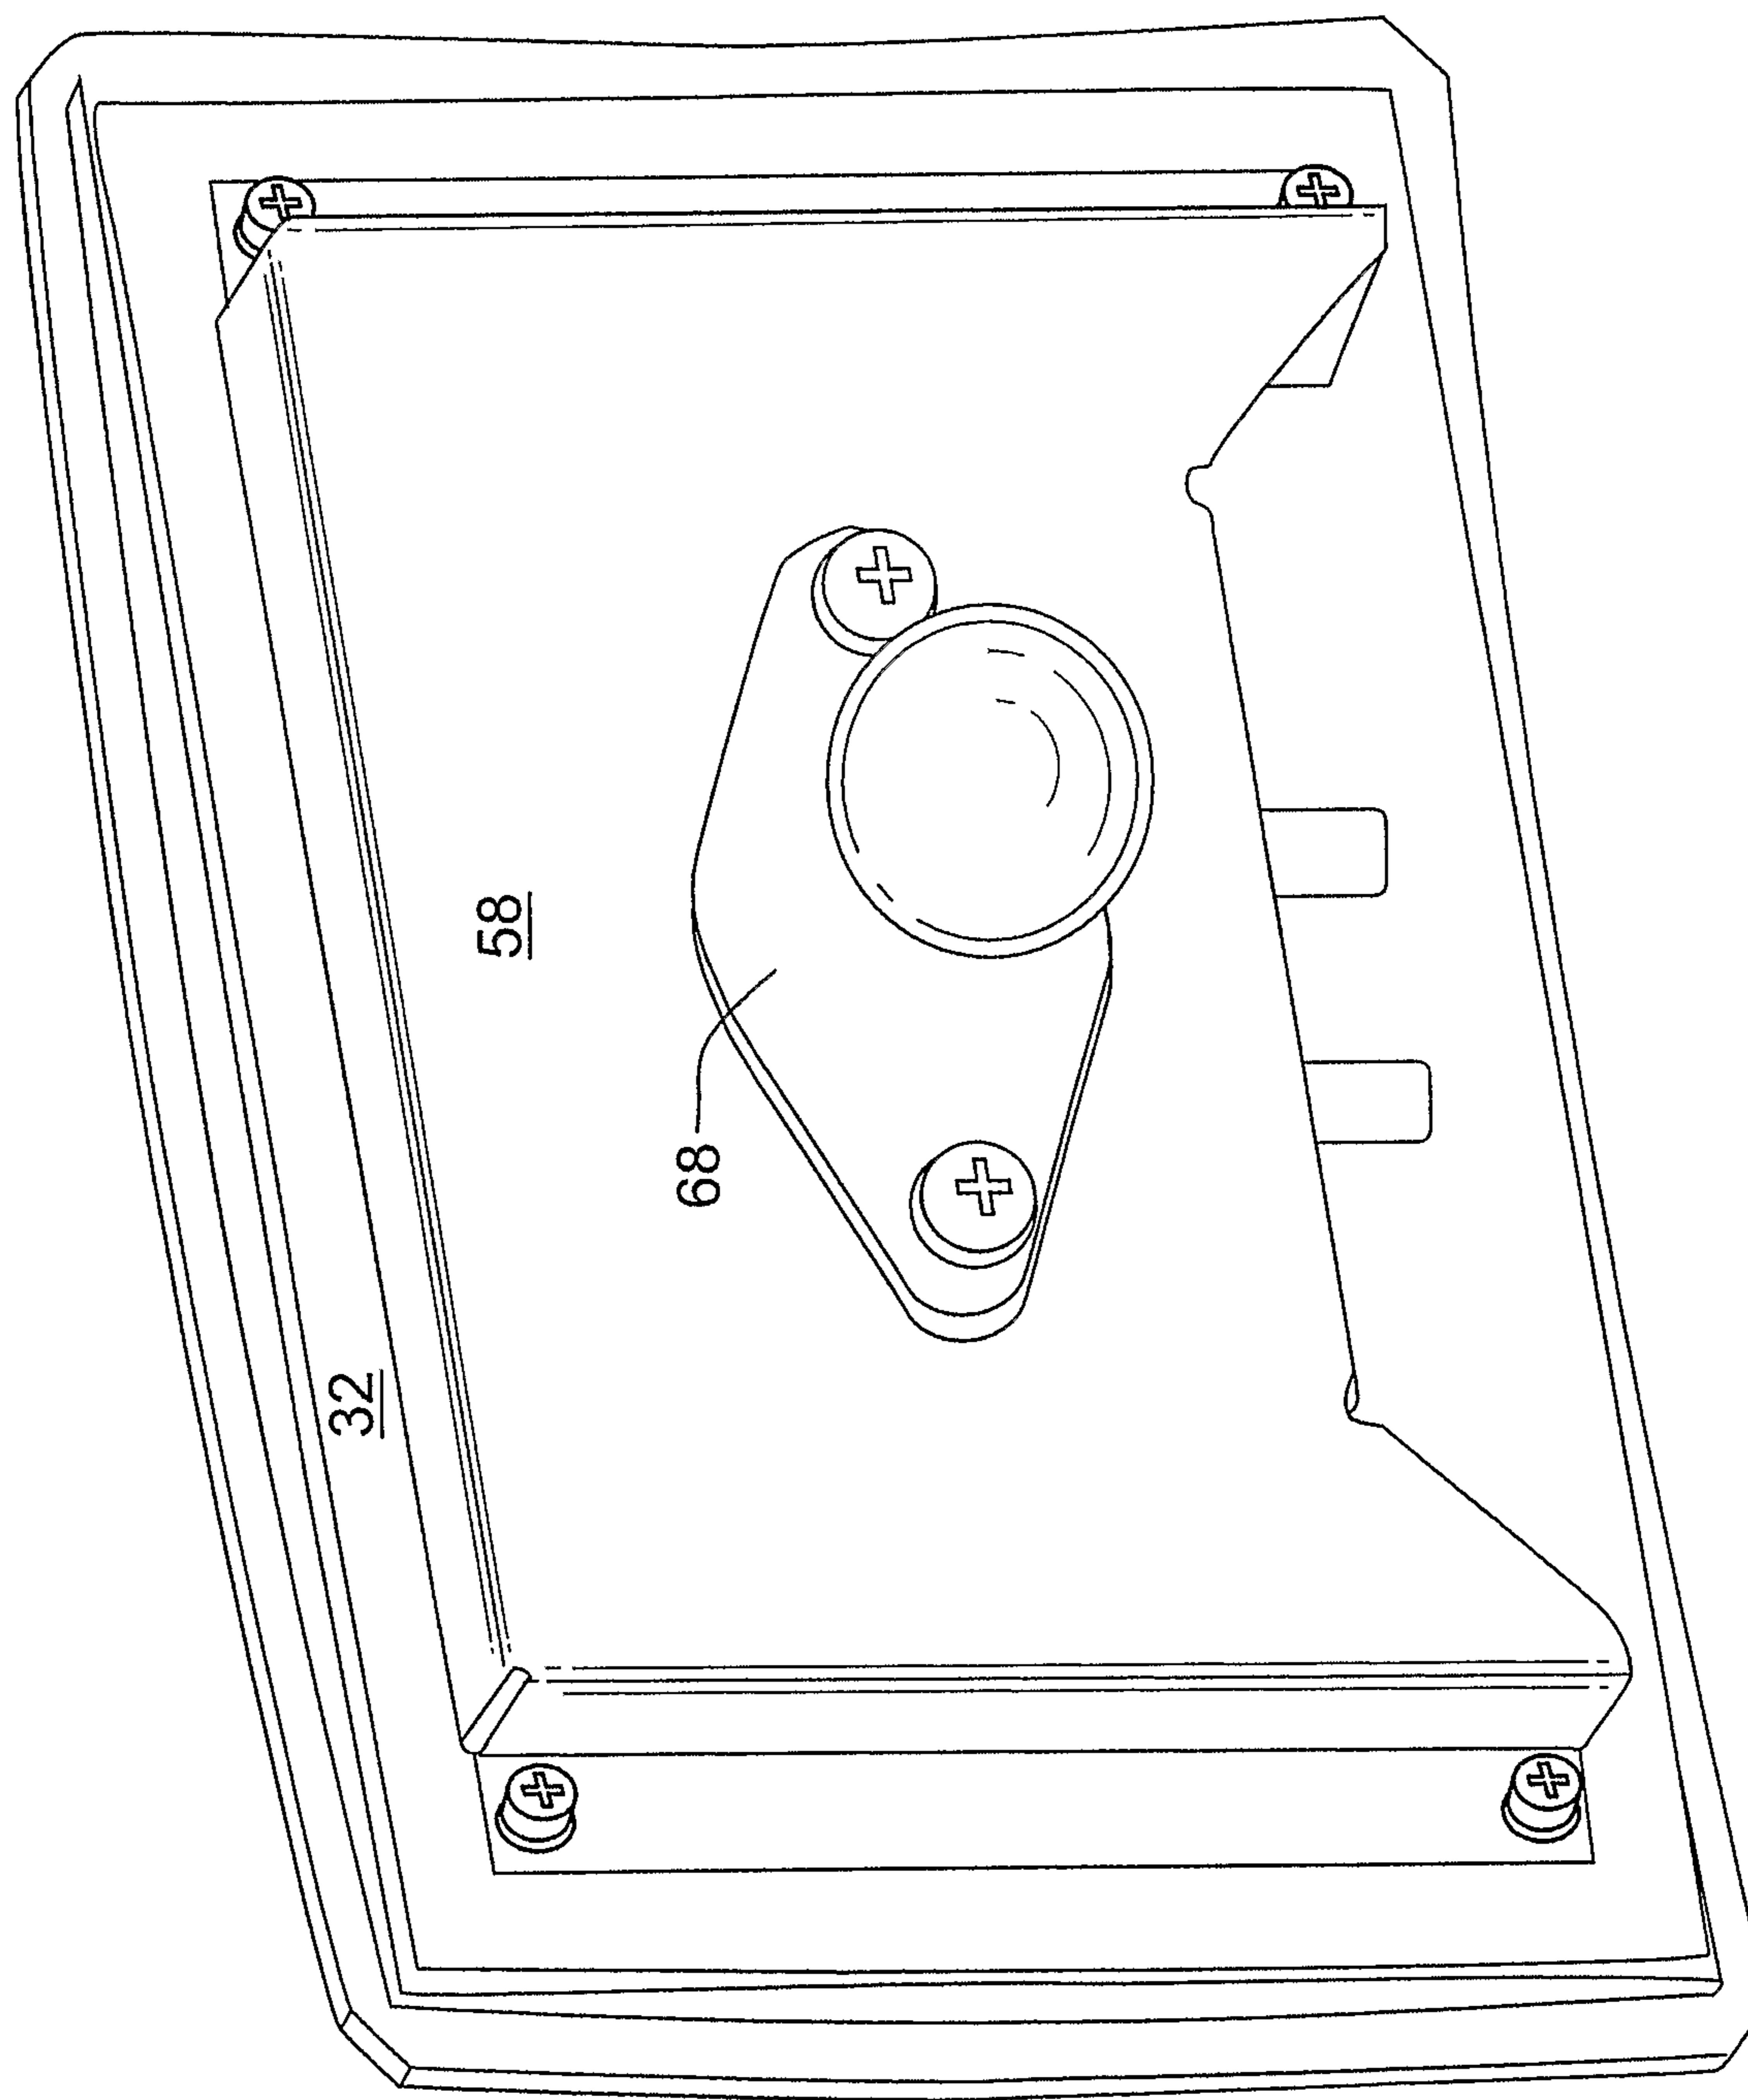


**FIG. 5(d)**

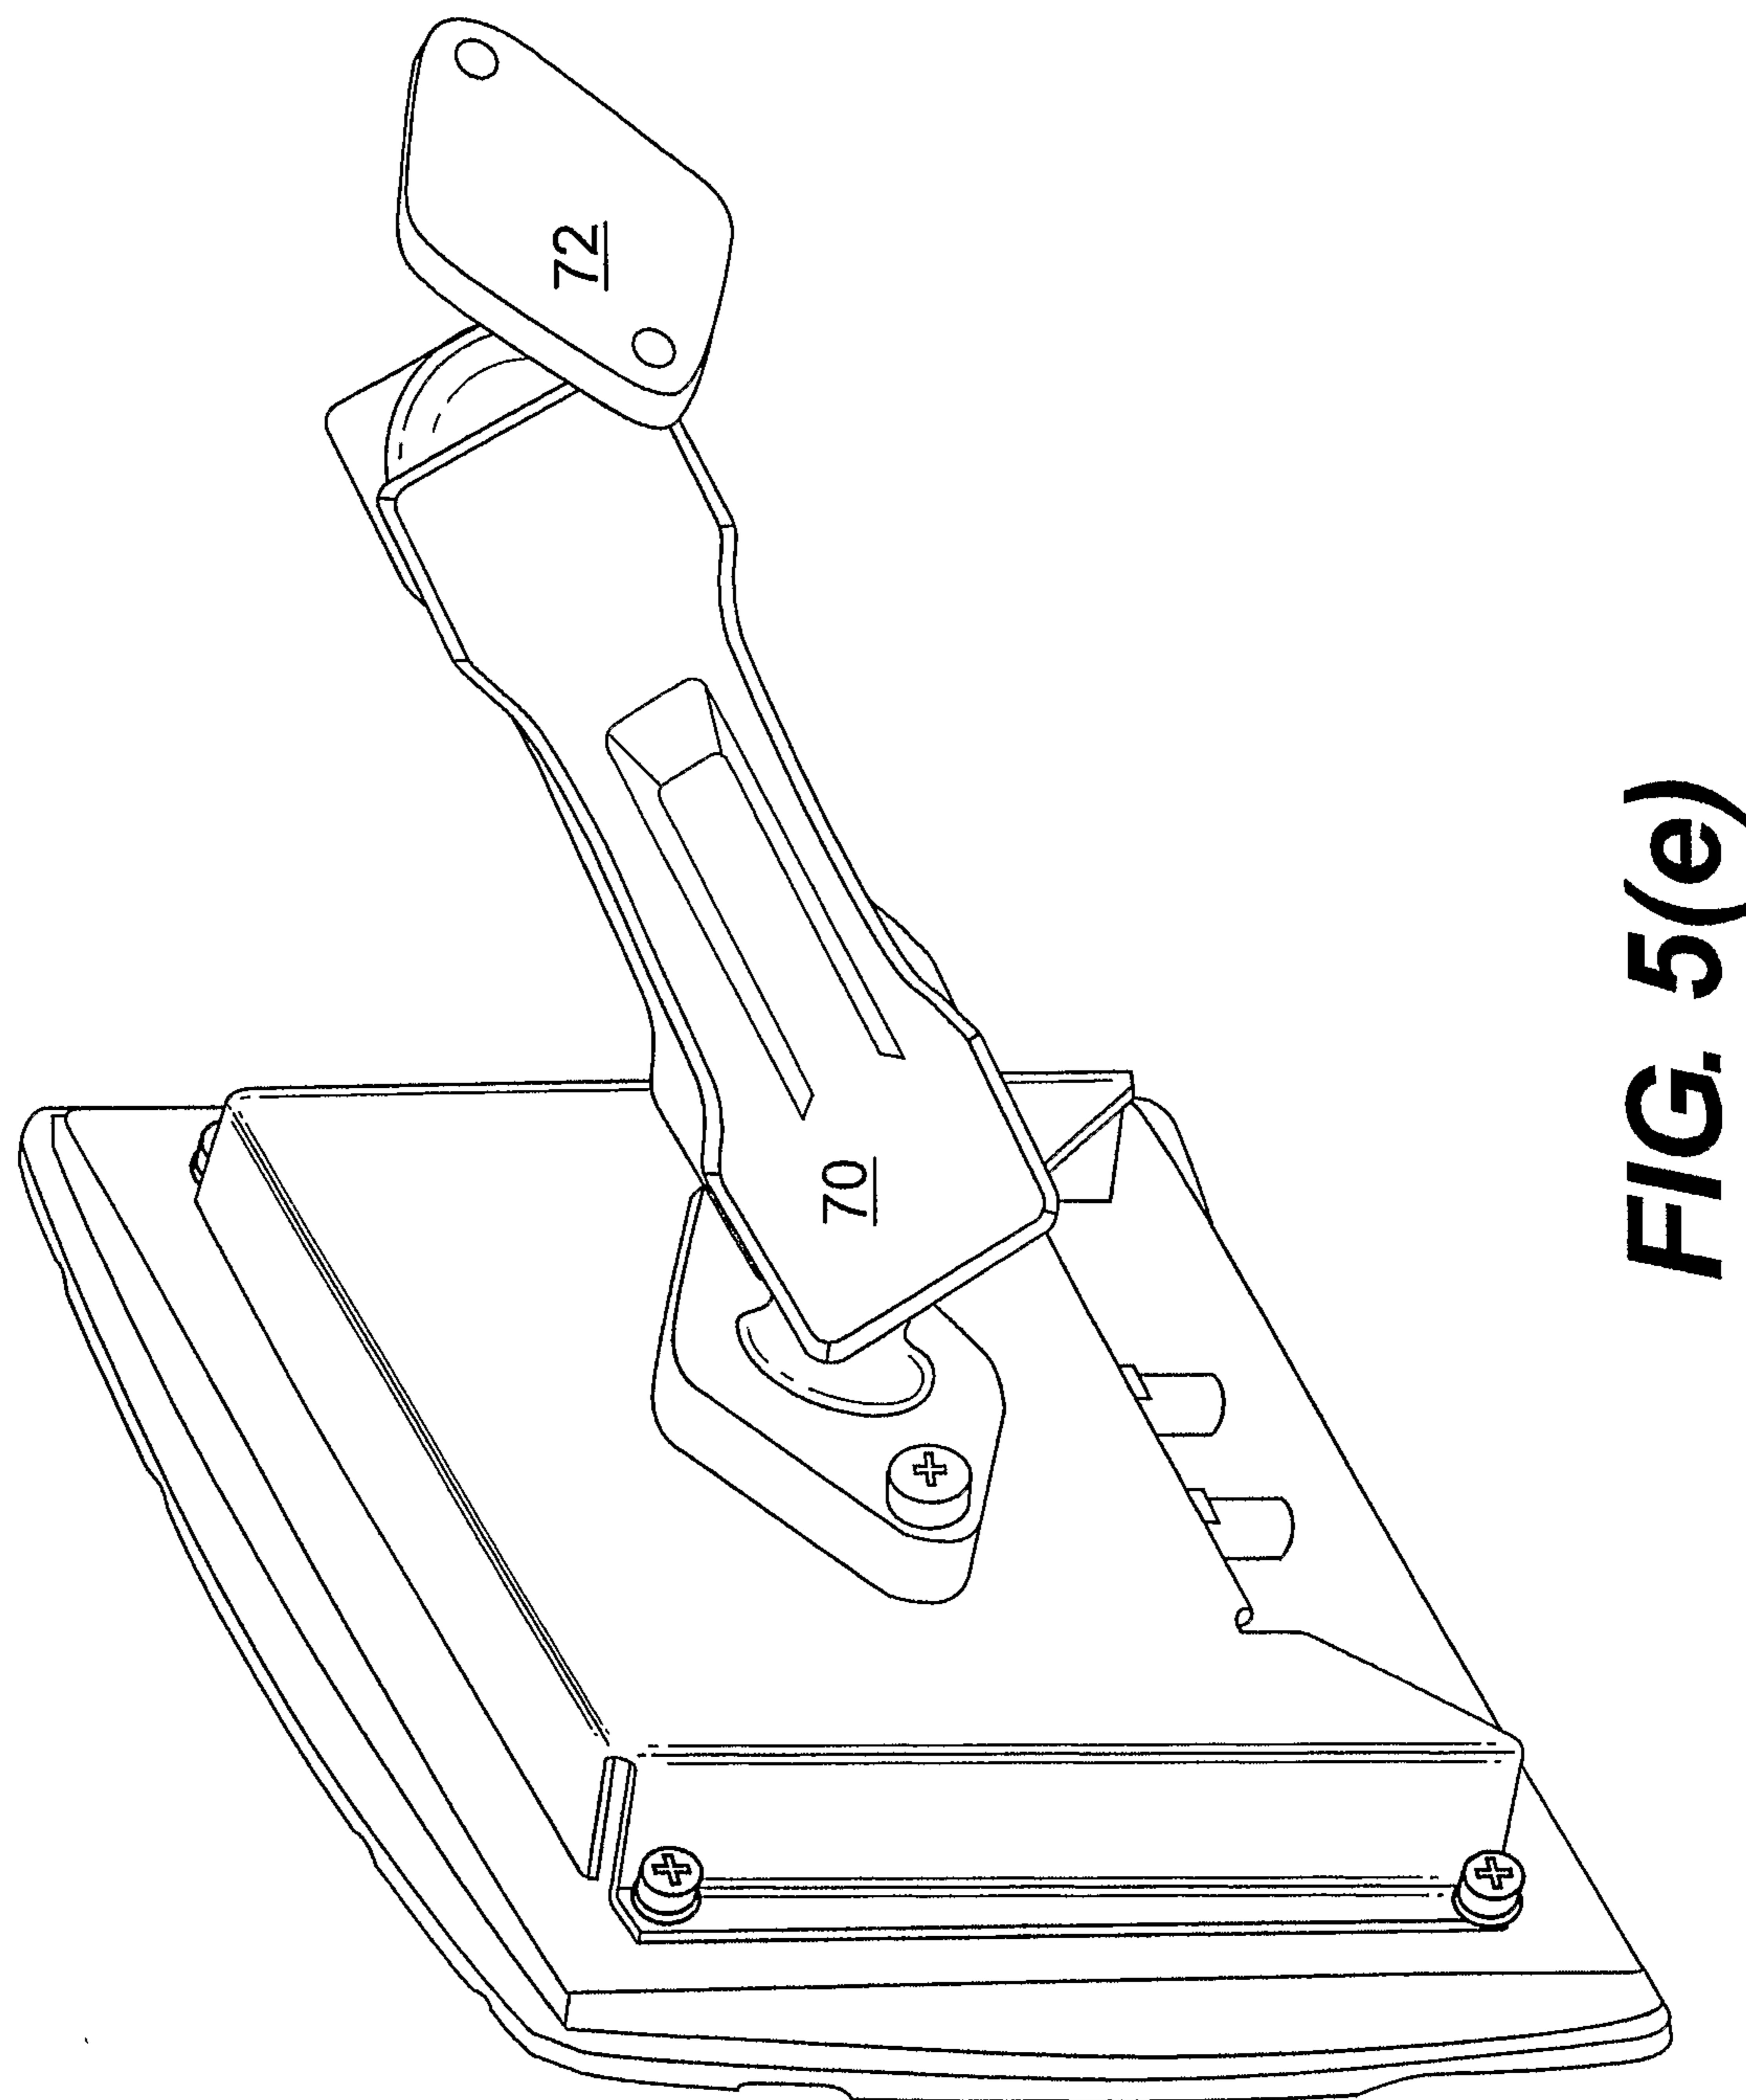


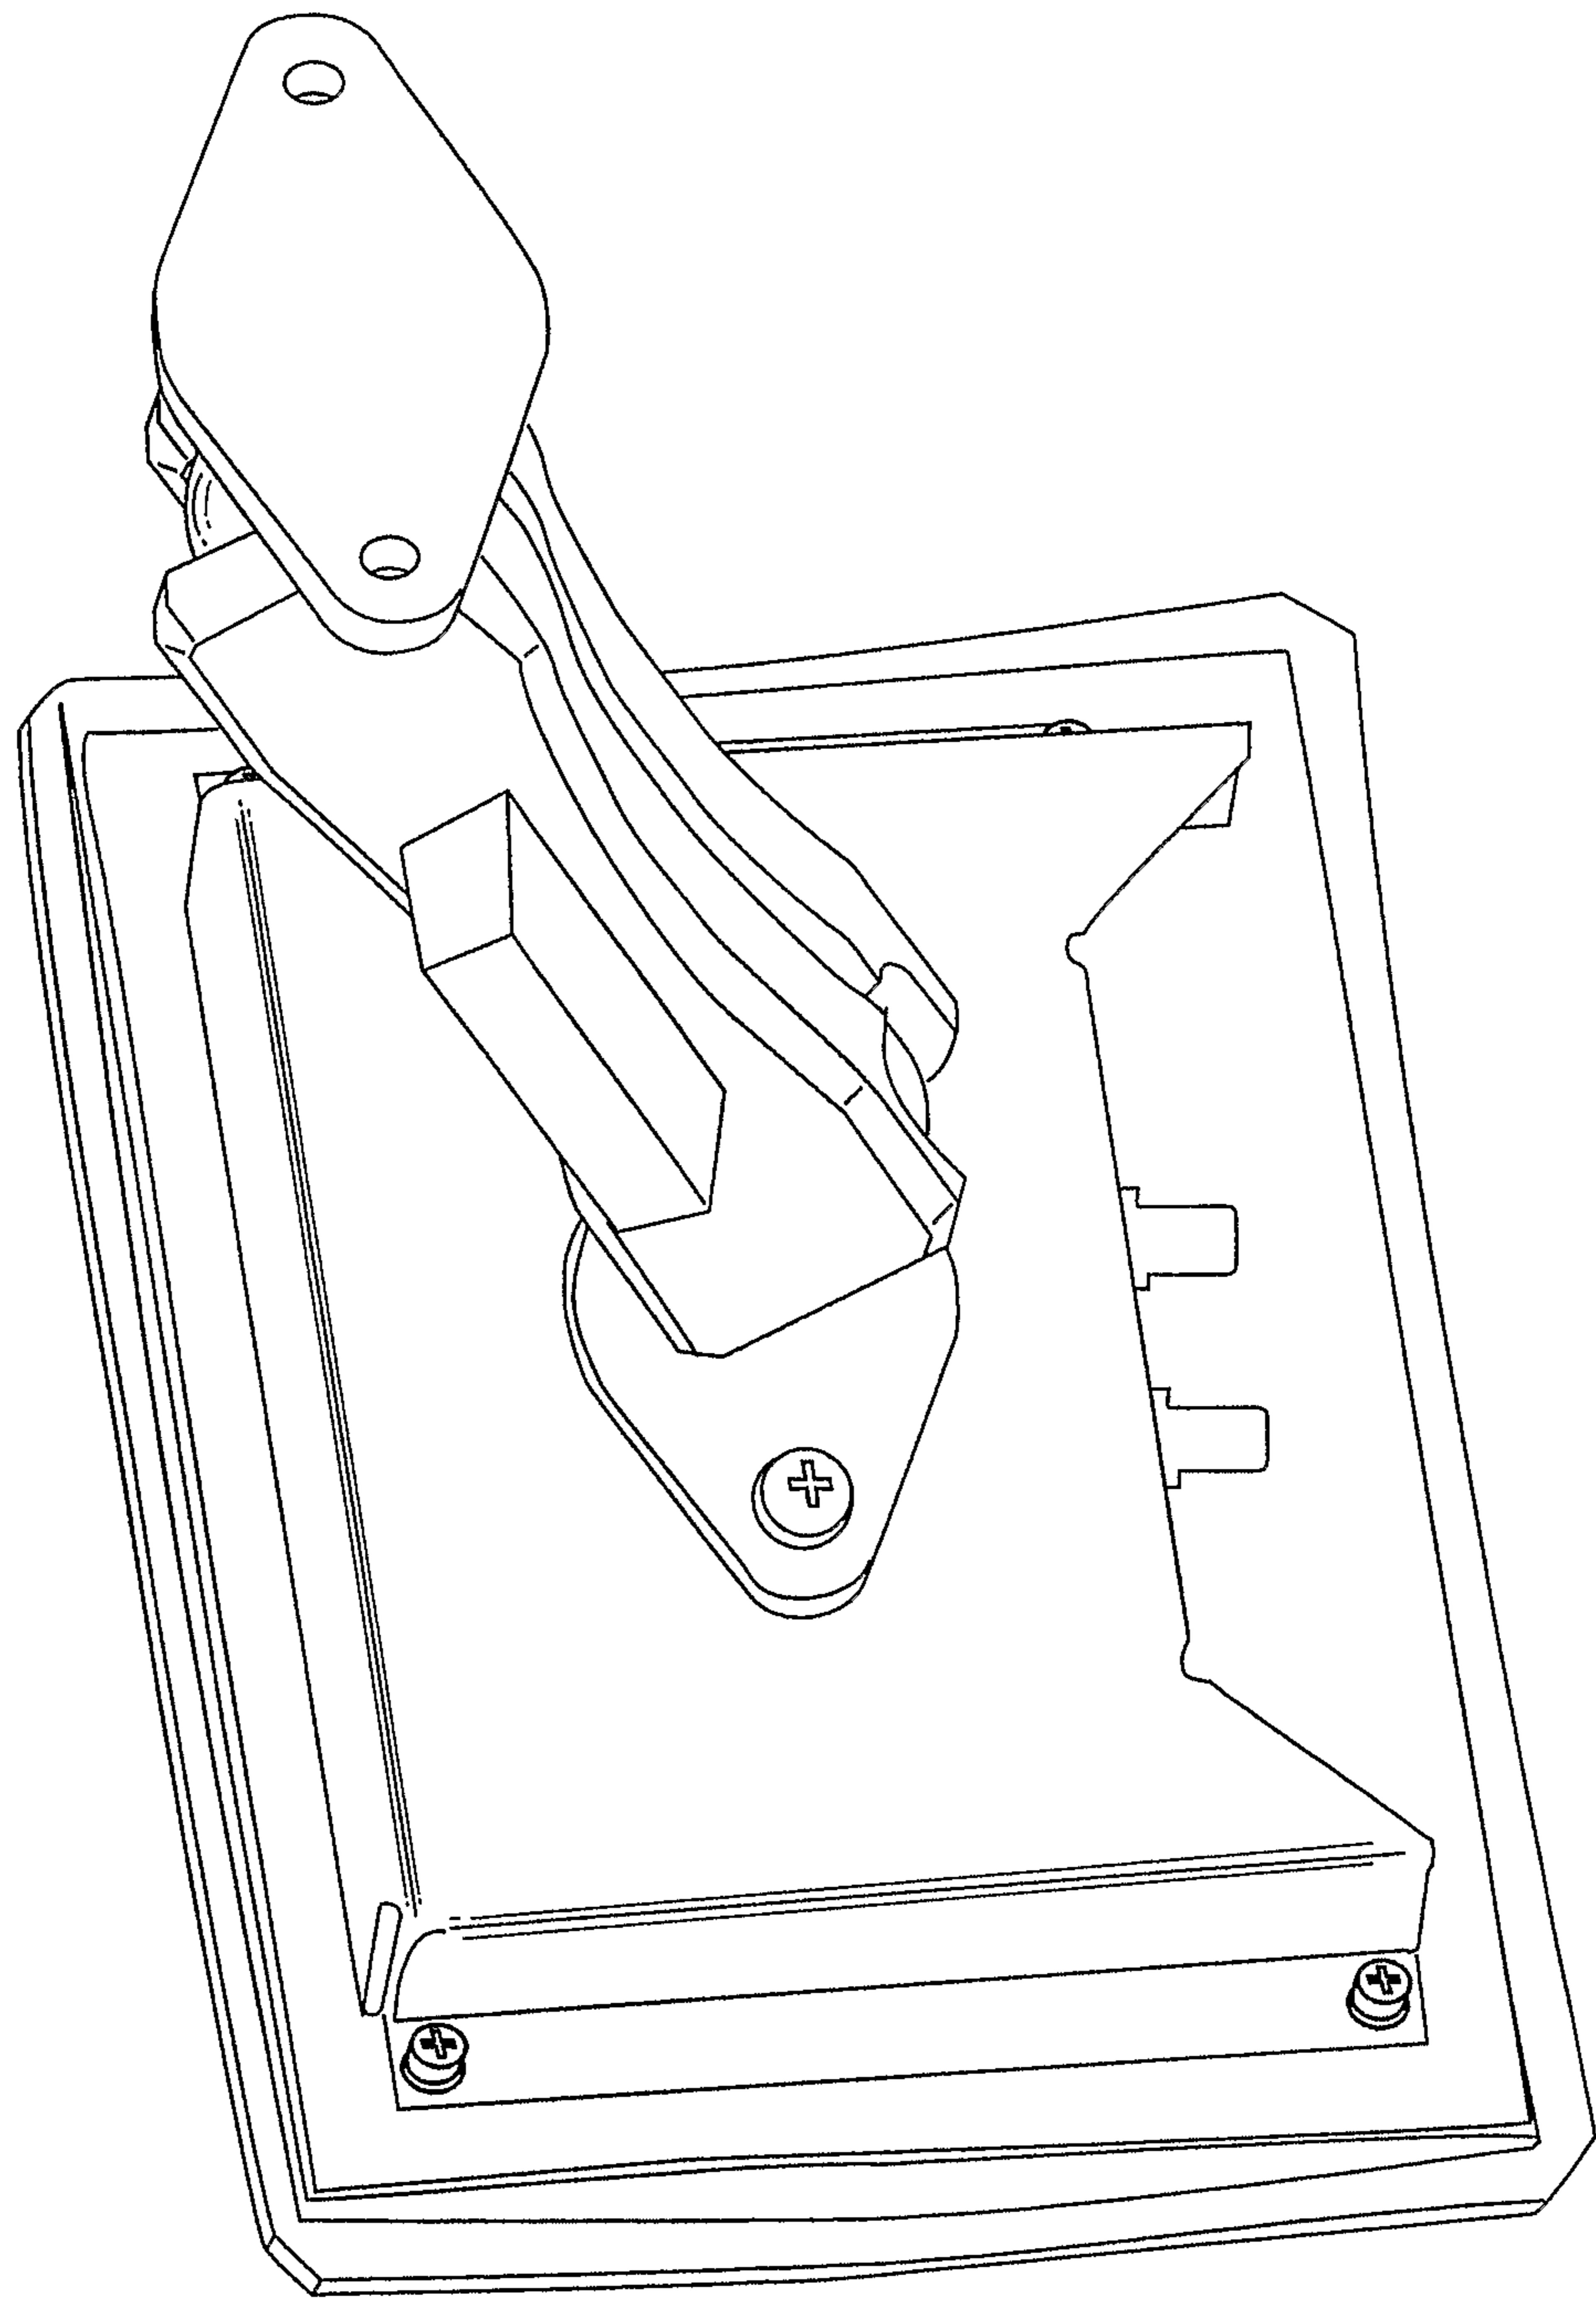


**FIG. 5(f)**

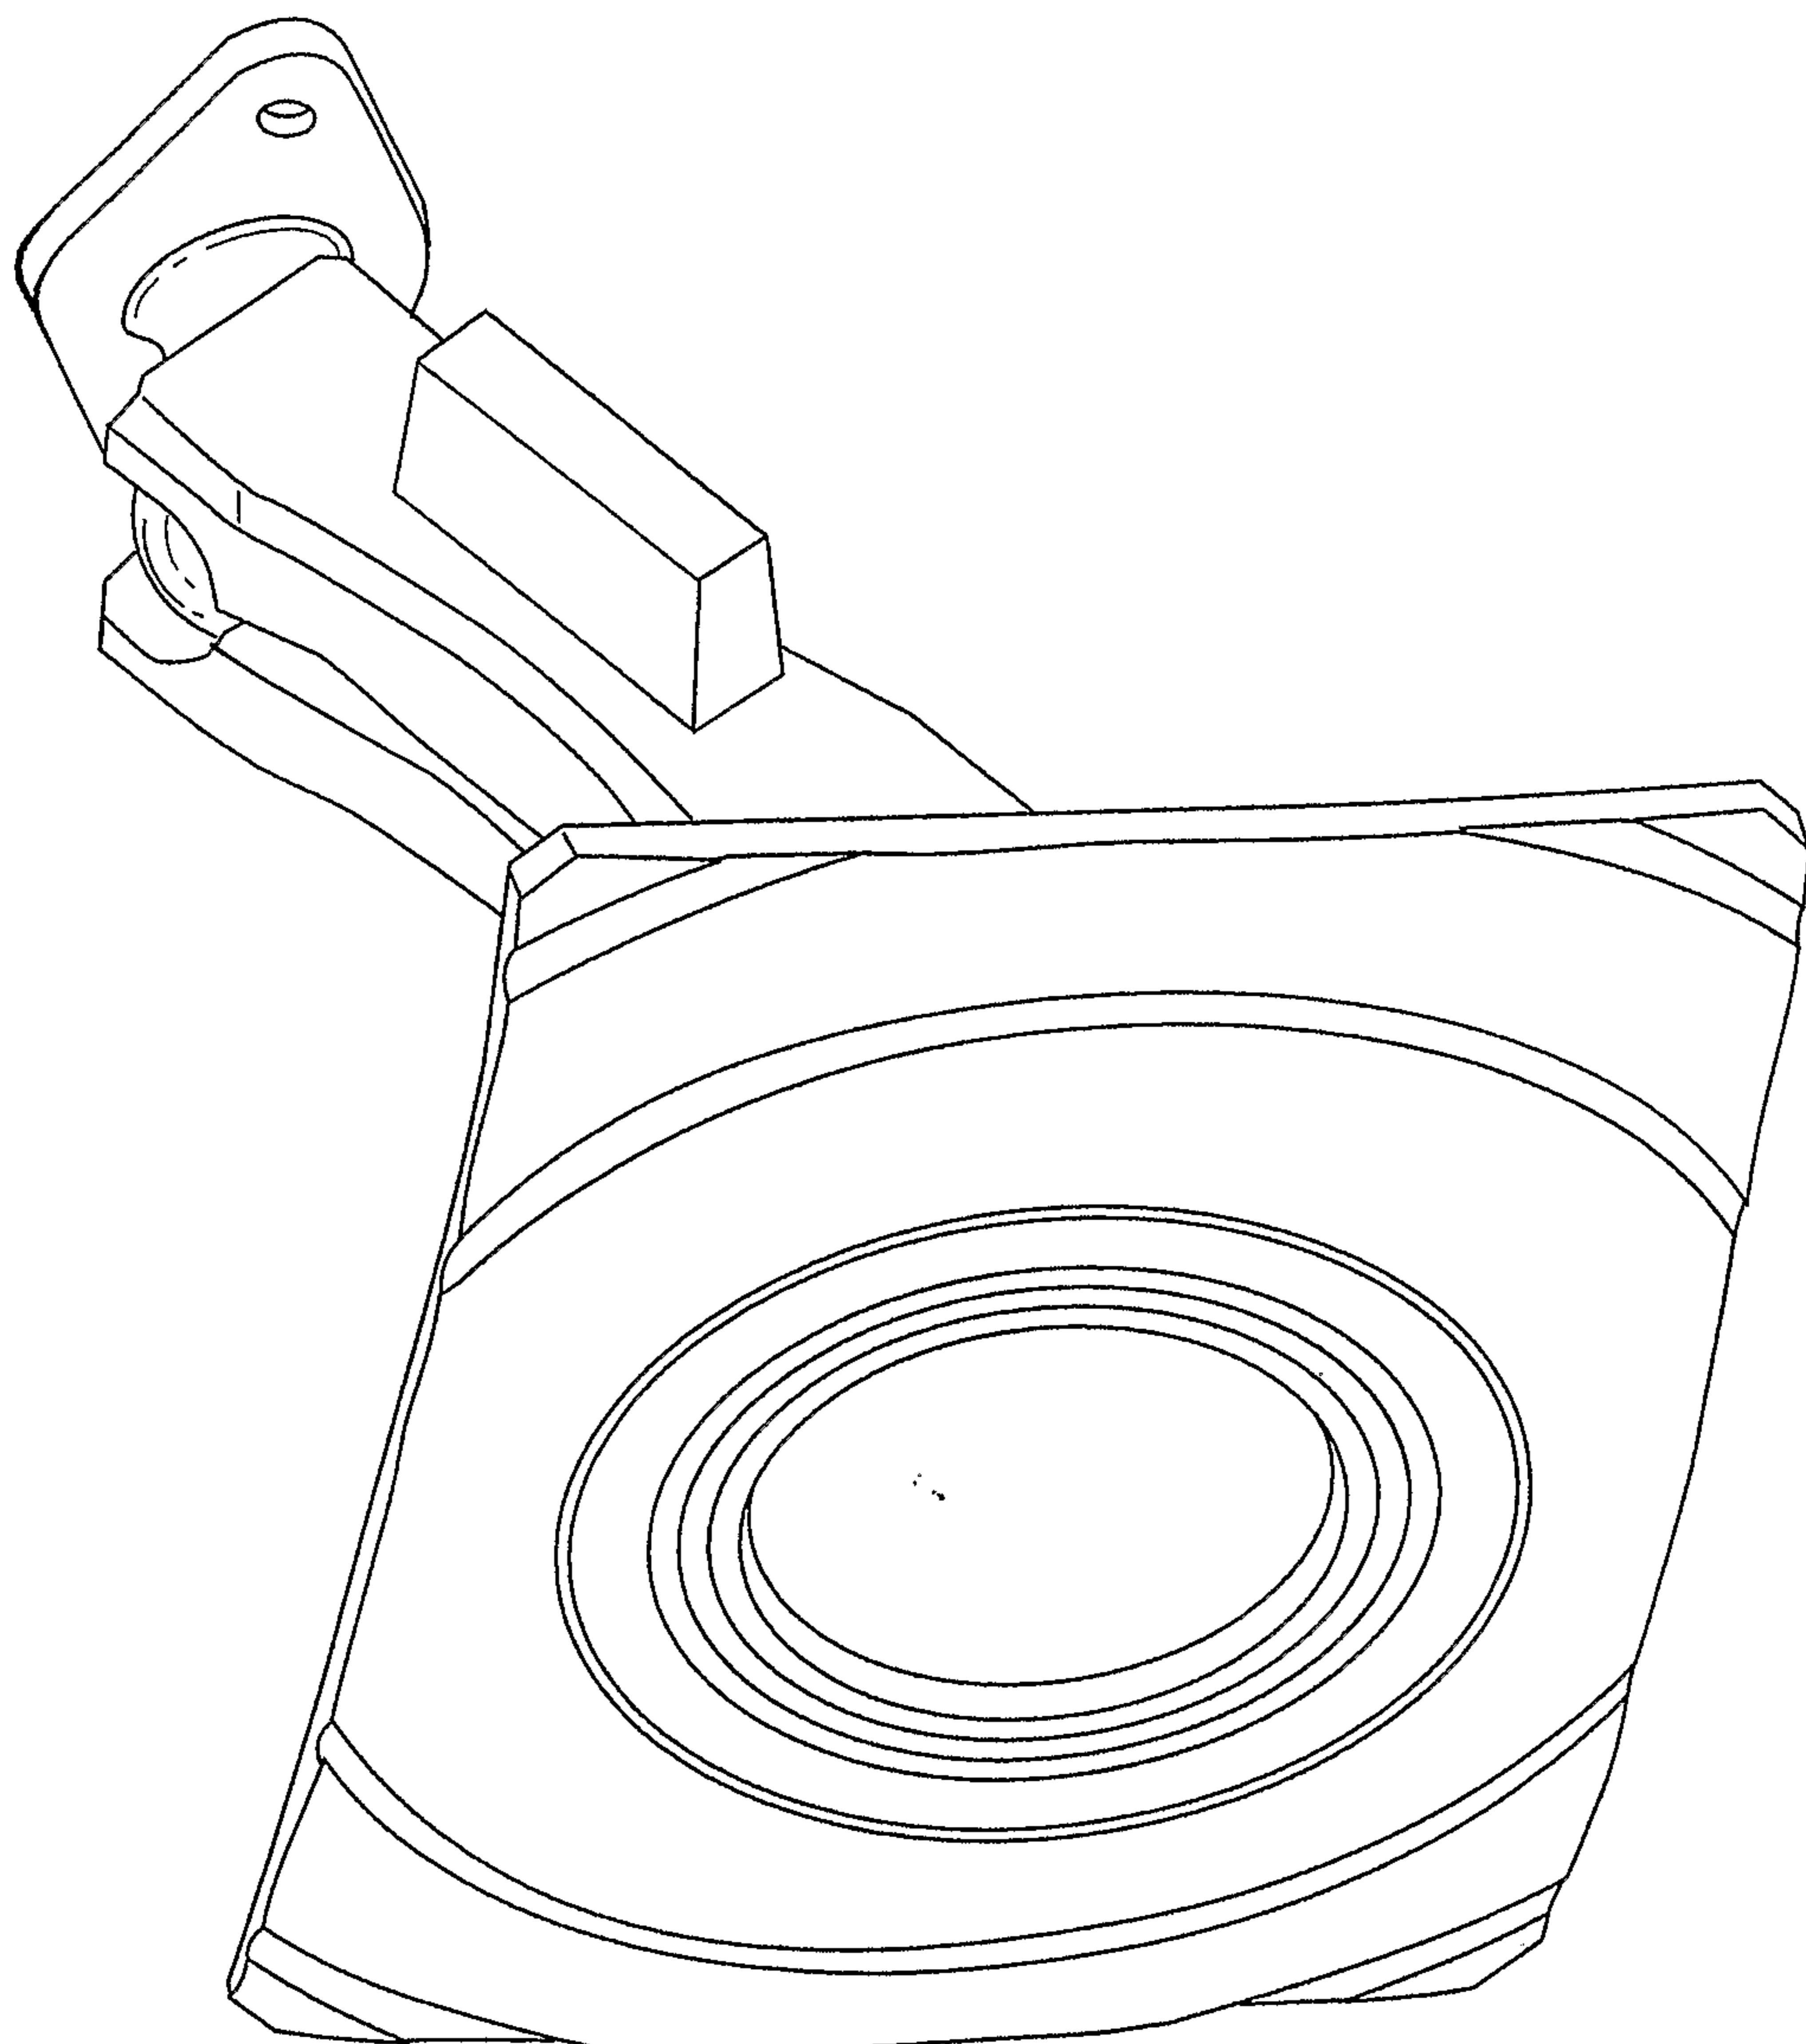


**FIG. 5(g)**

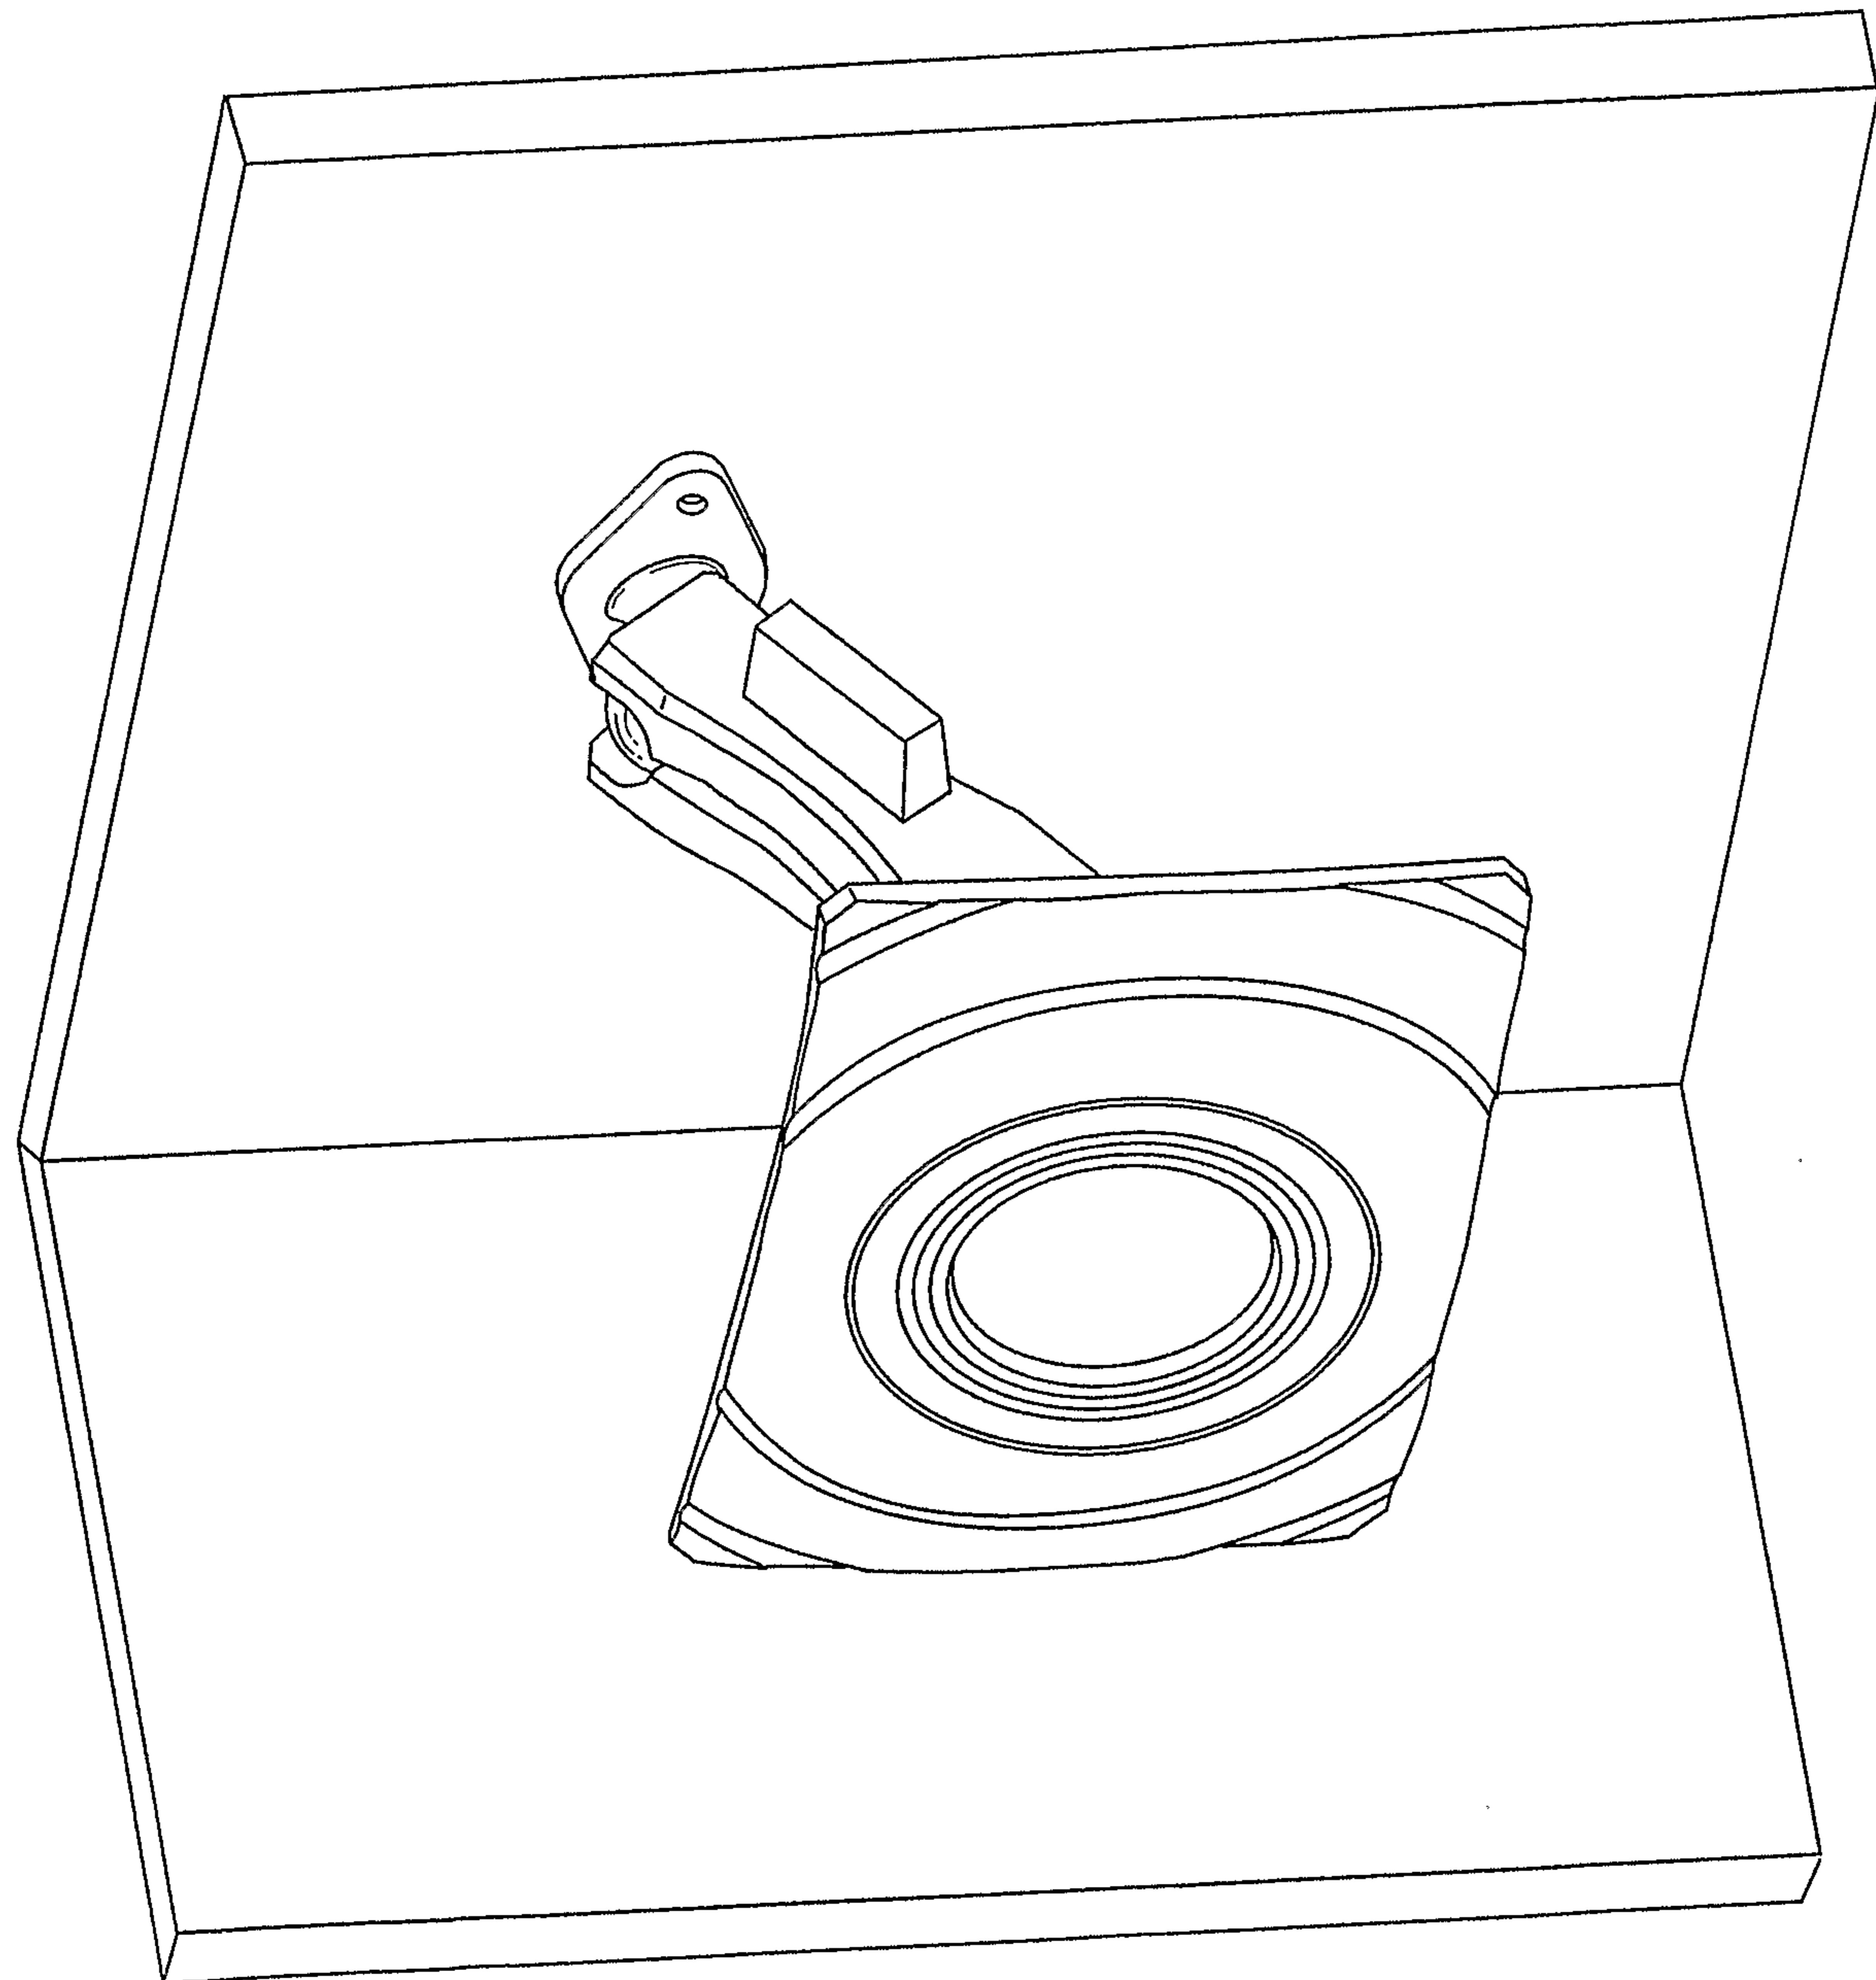

**FIG. 5(h)**

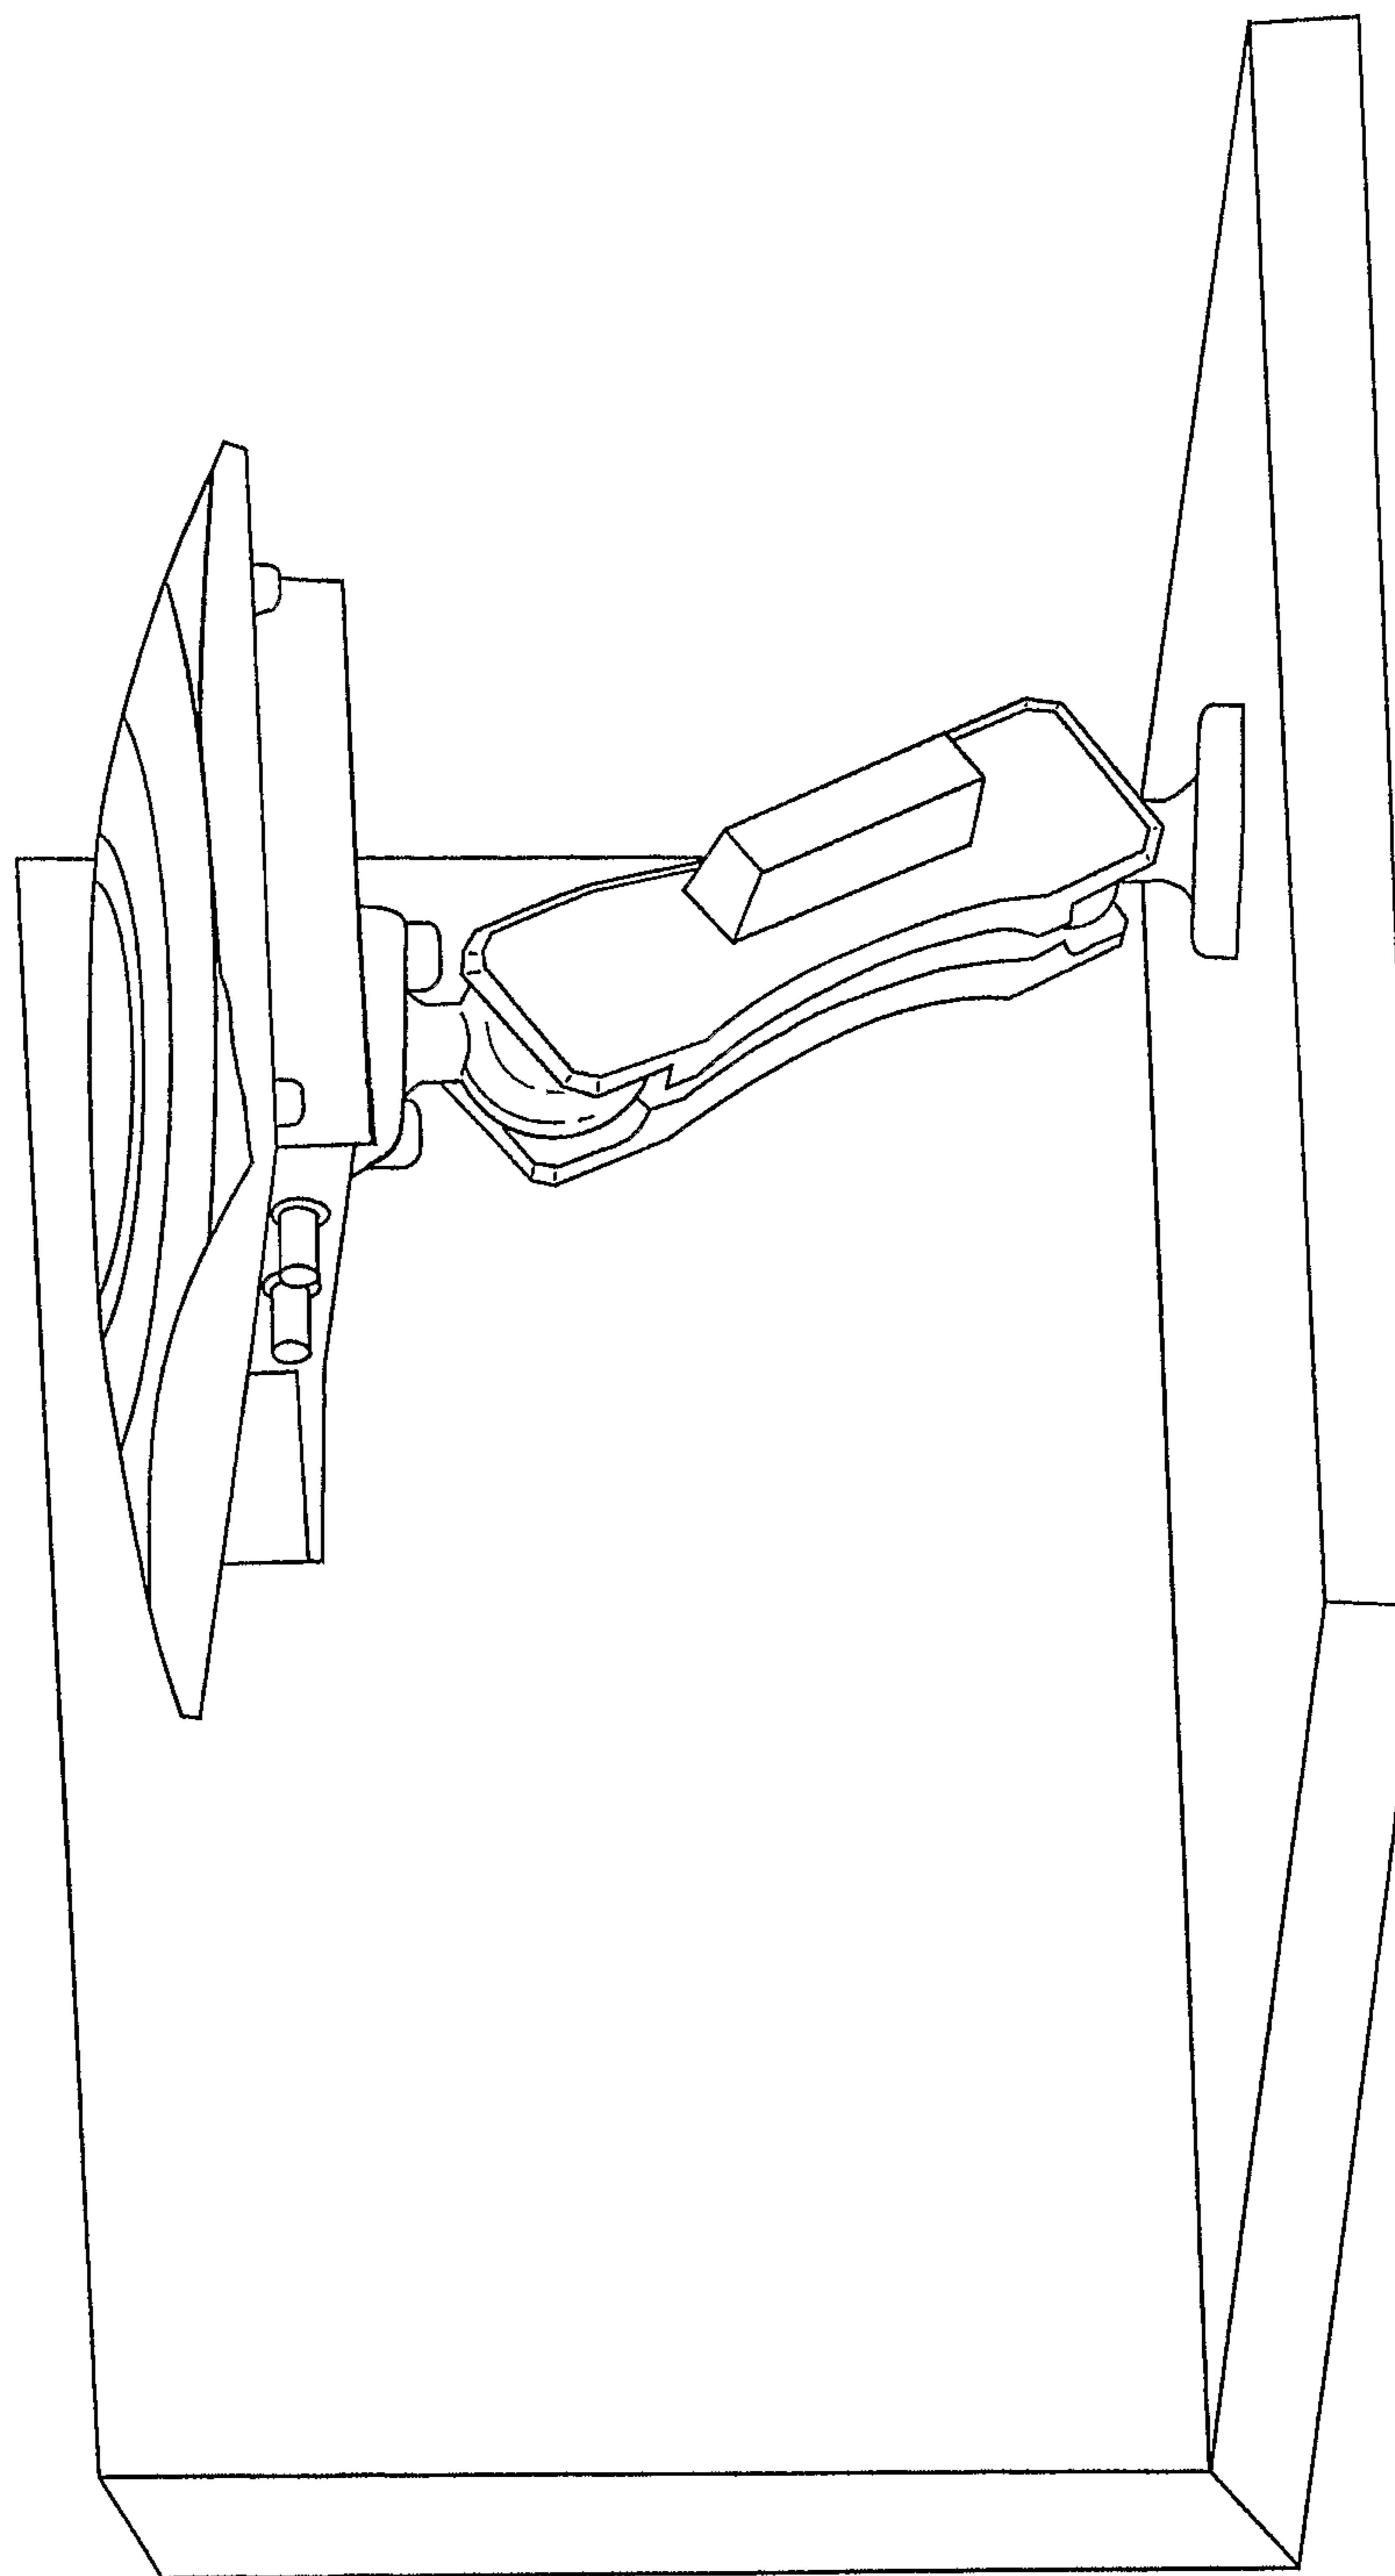

**FIG. 5(i)**

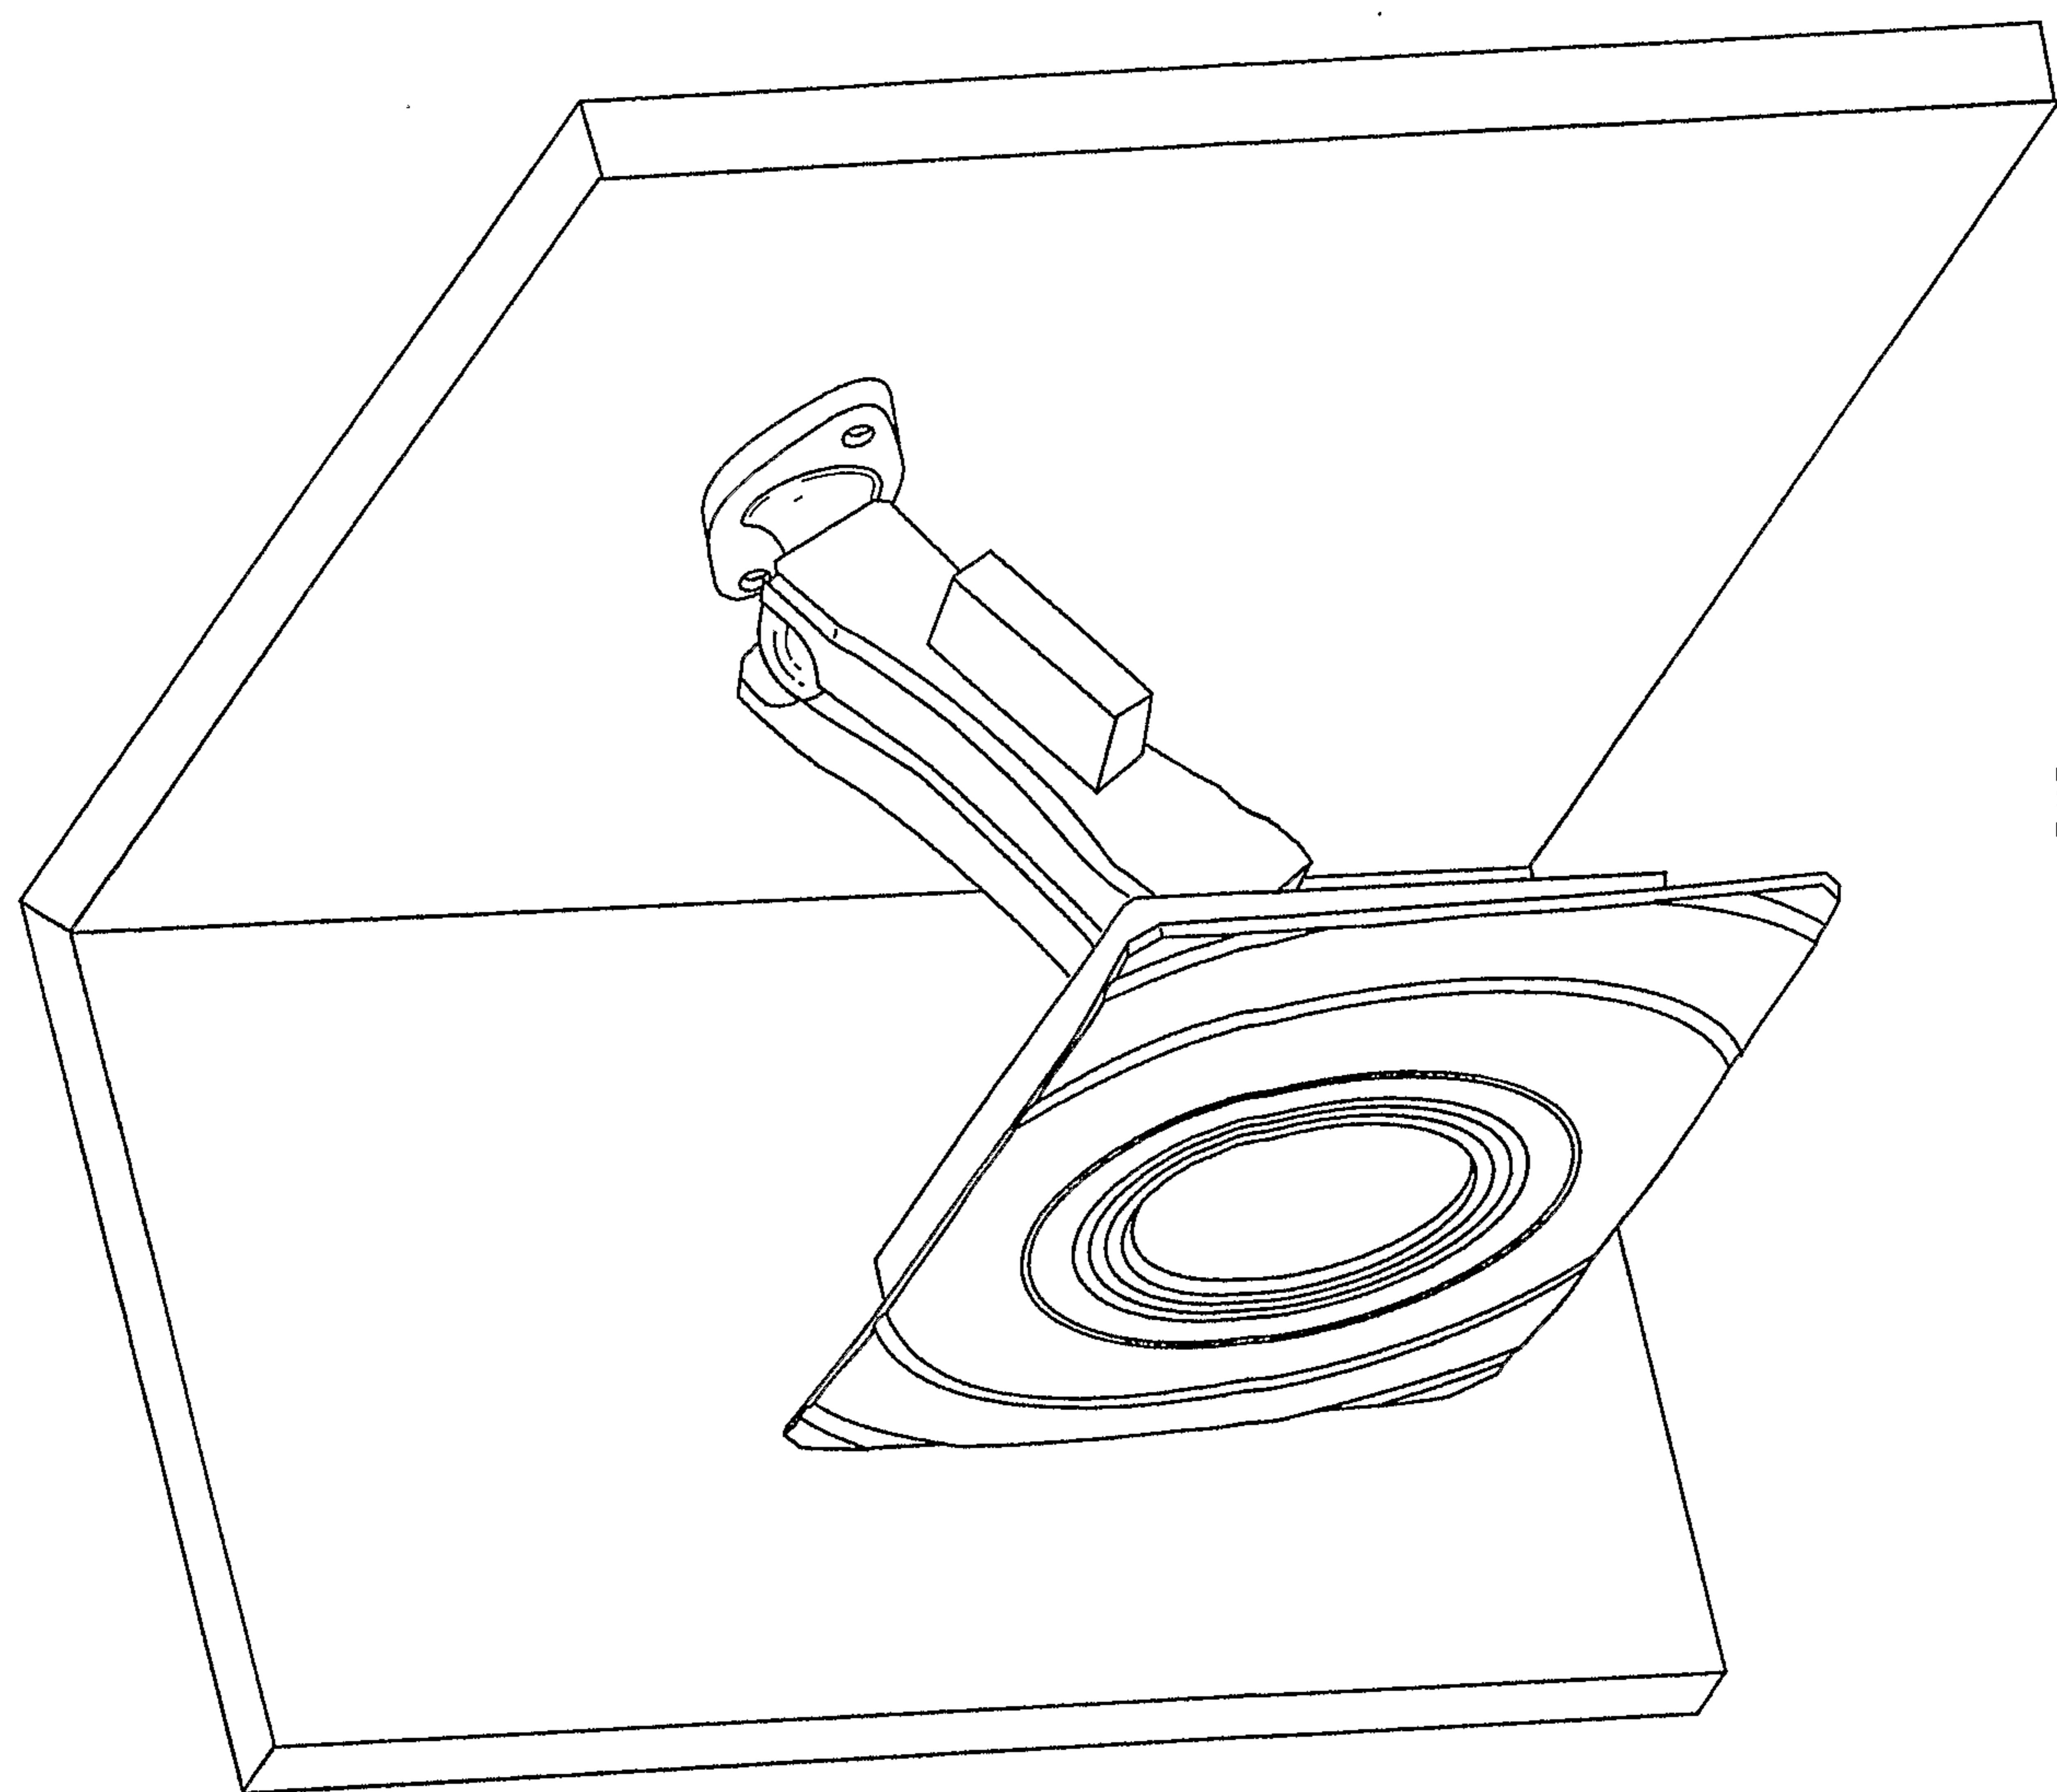

**FIG. 5(j)**

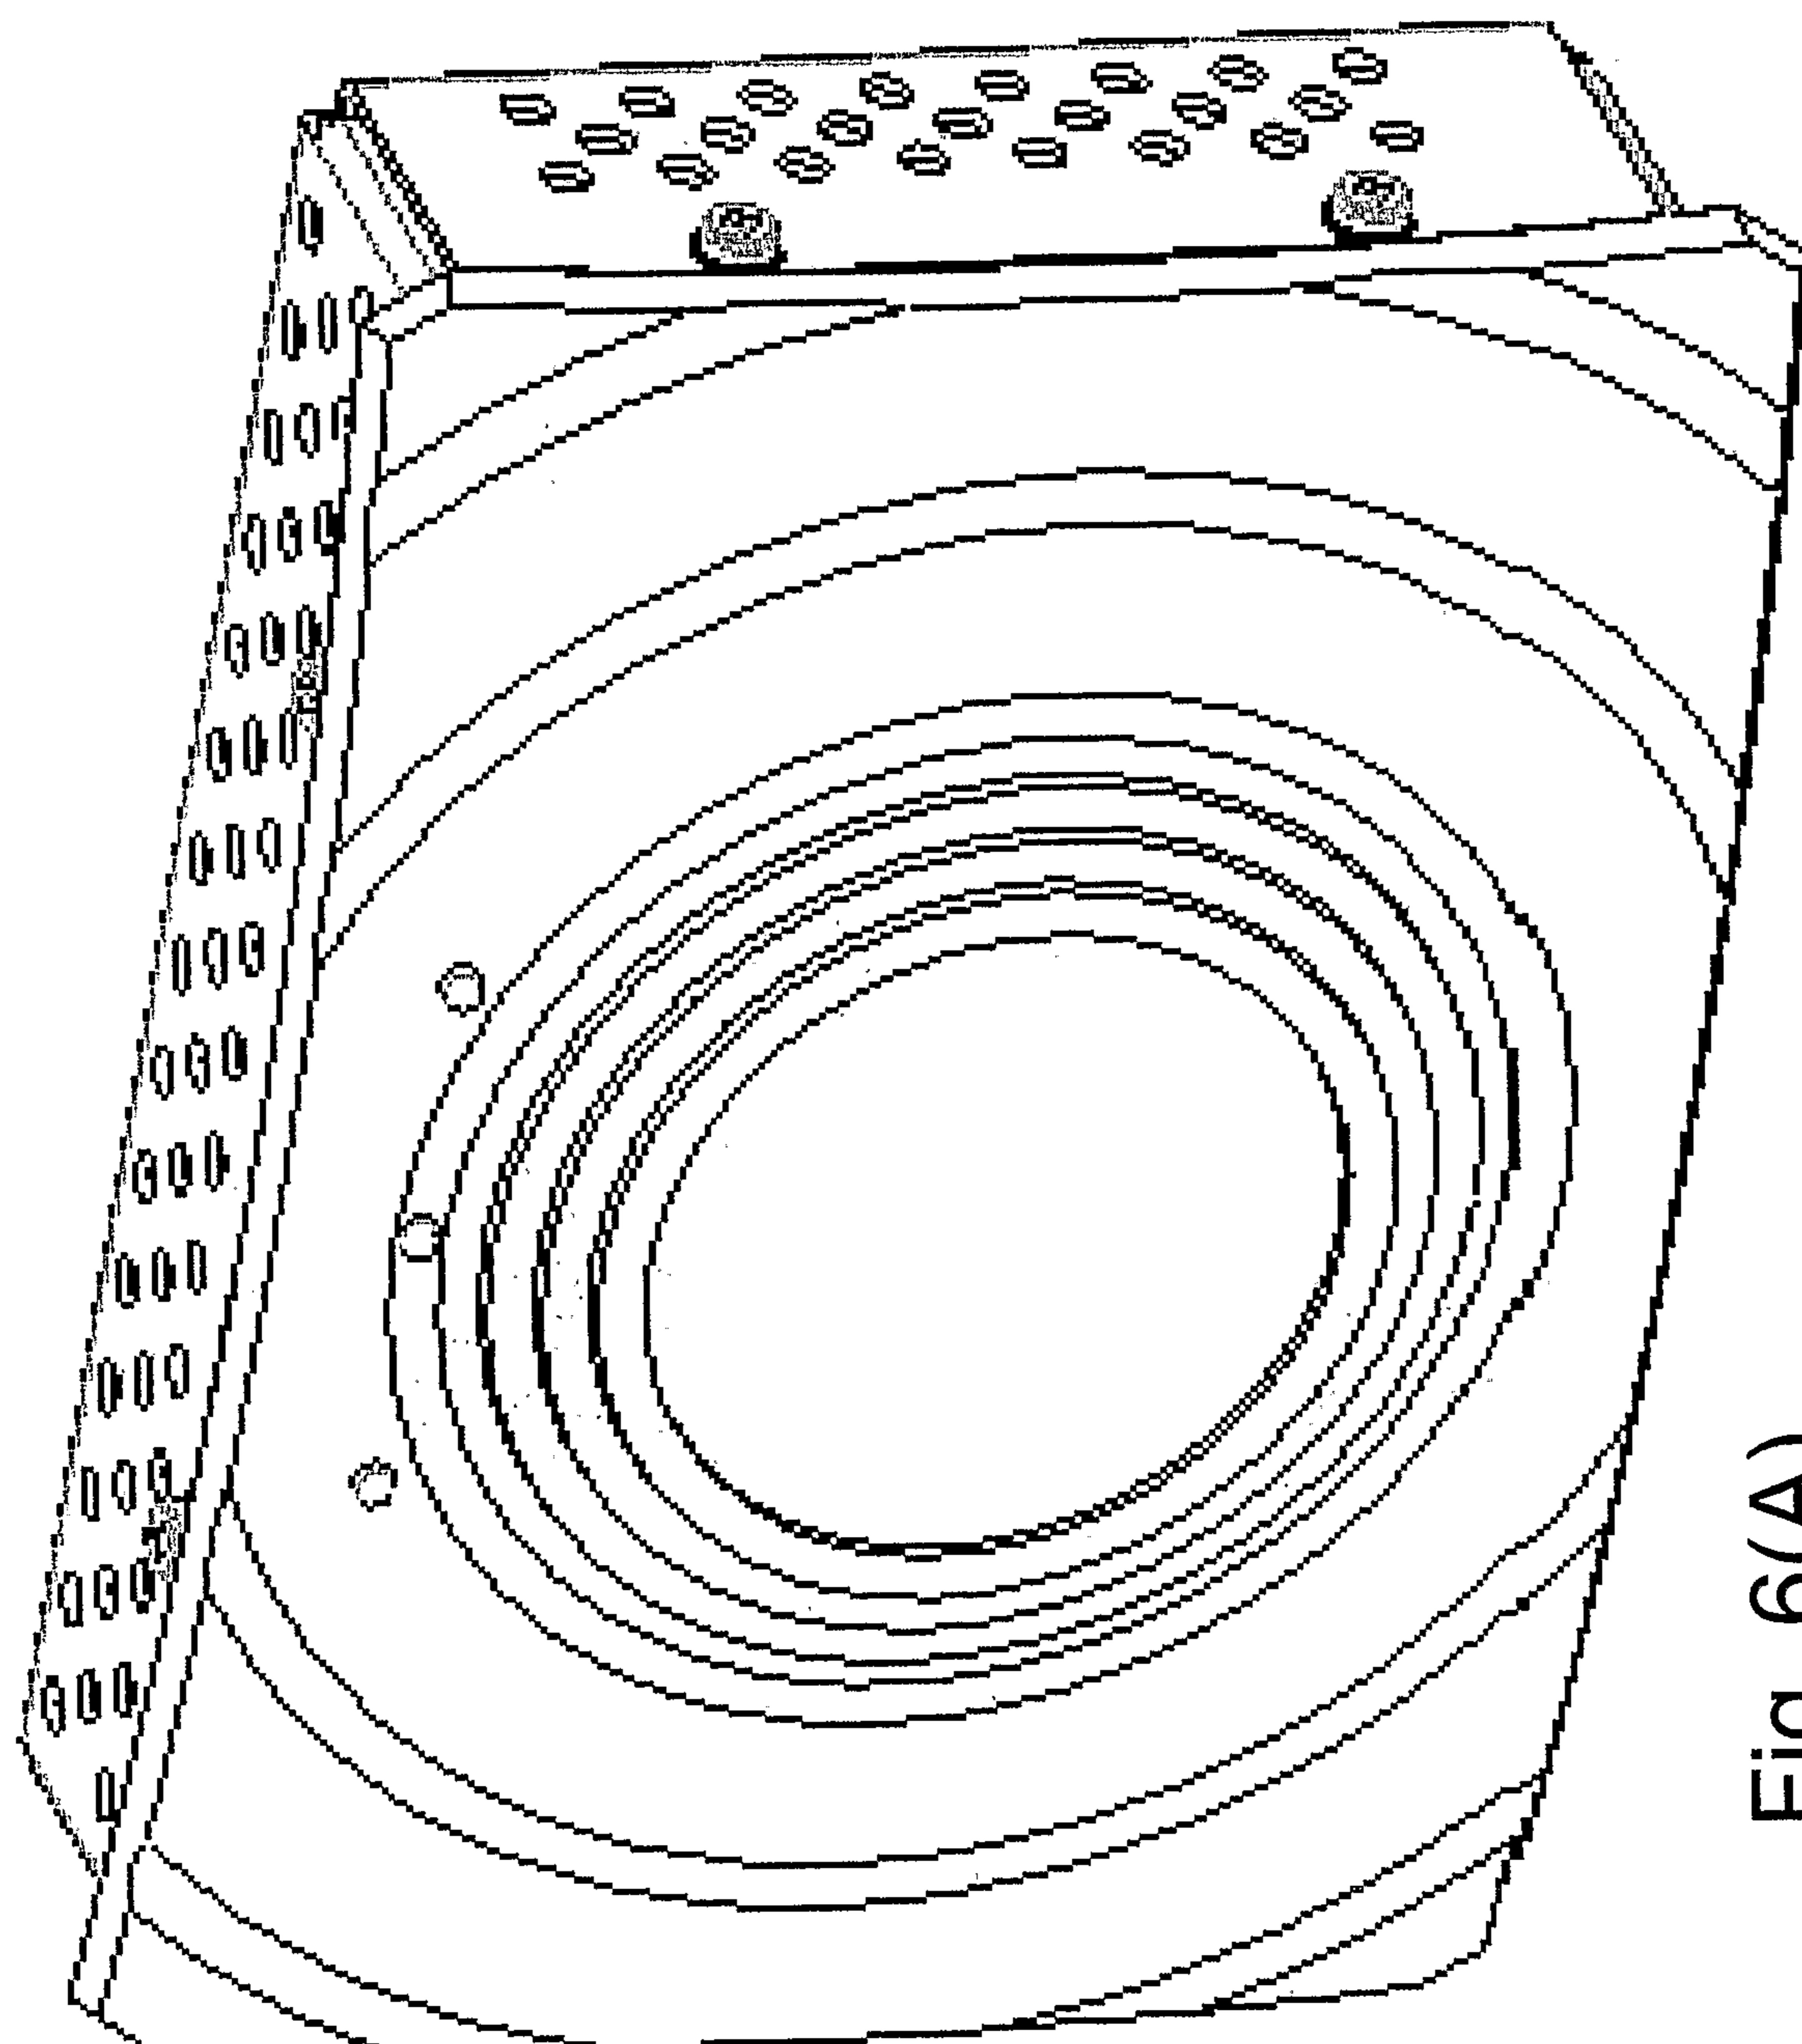


Fig. 6(A)  
Remote

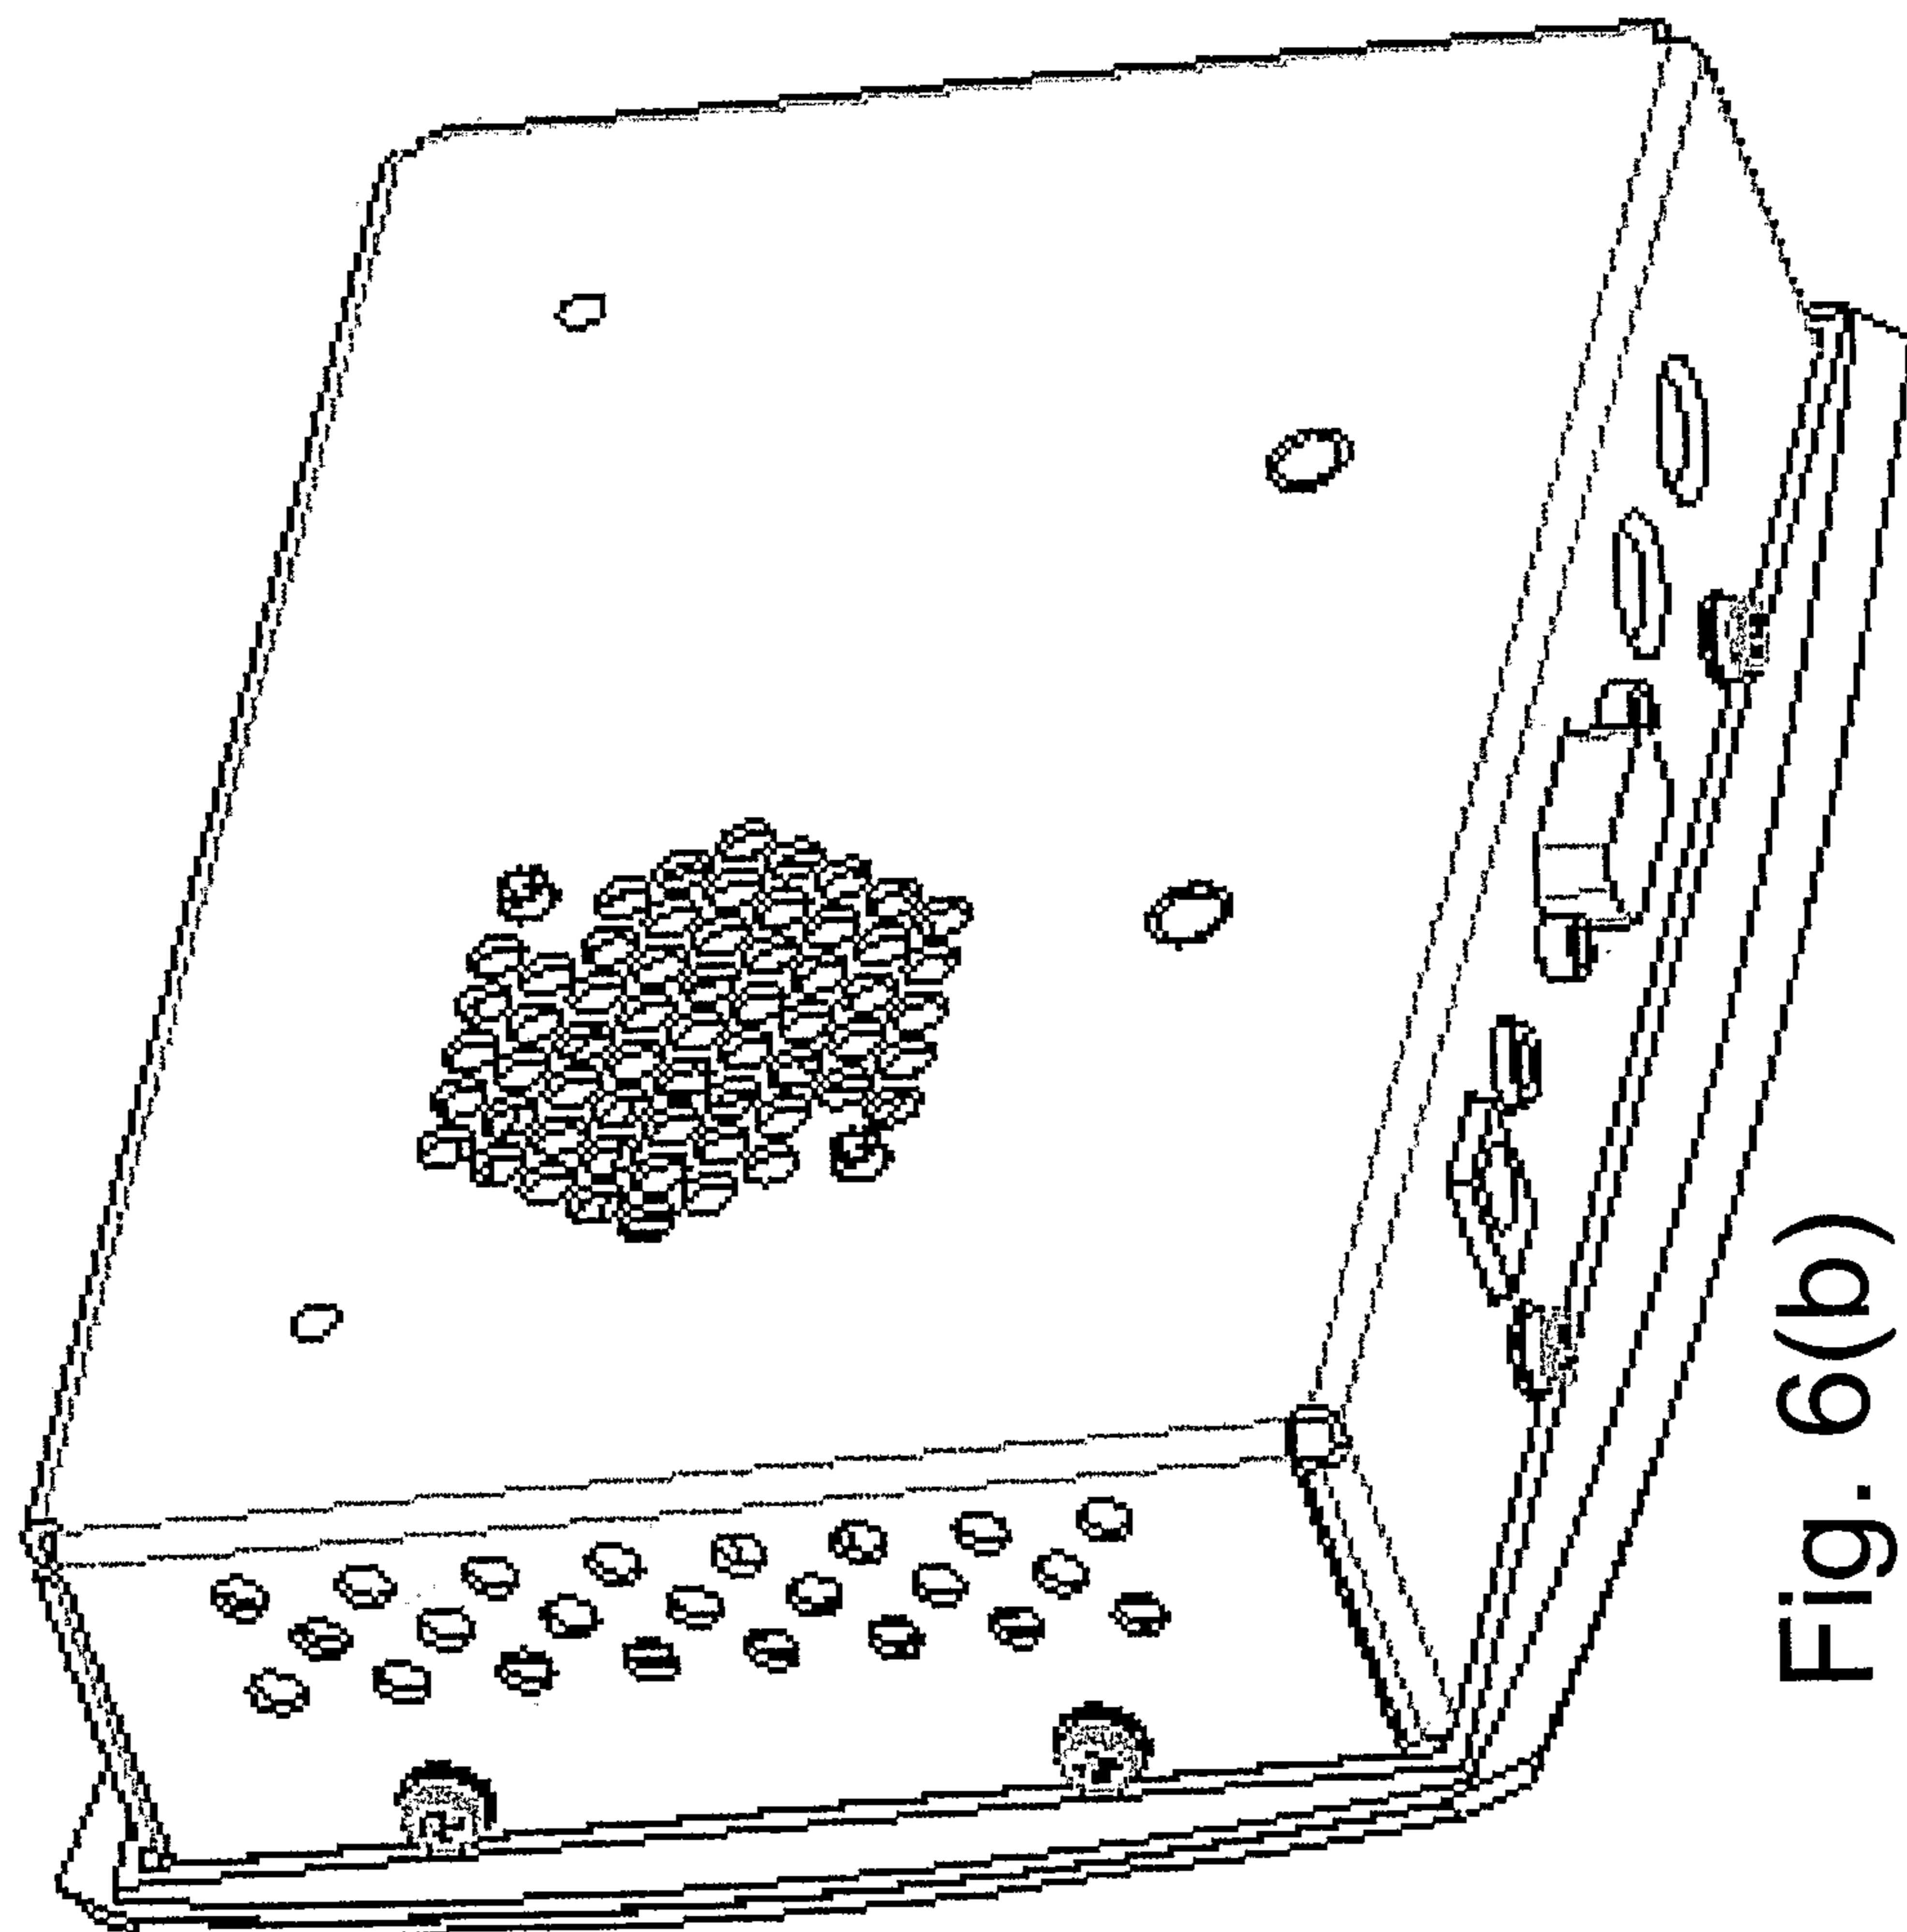


Fig. 6(b)  
Remote

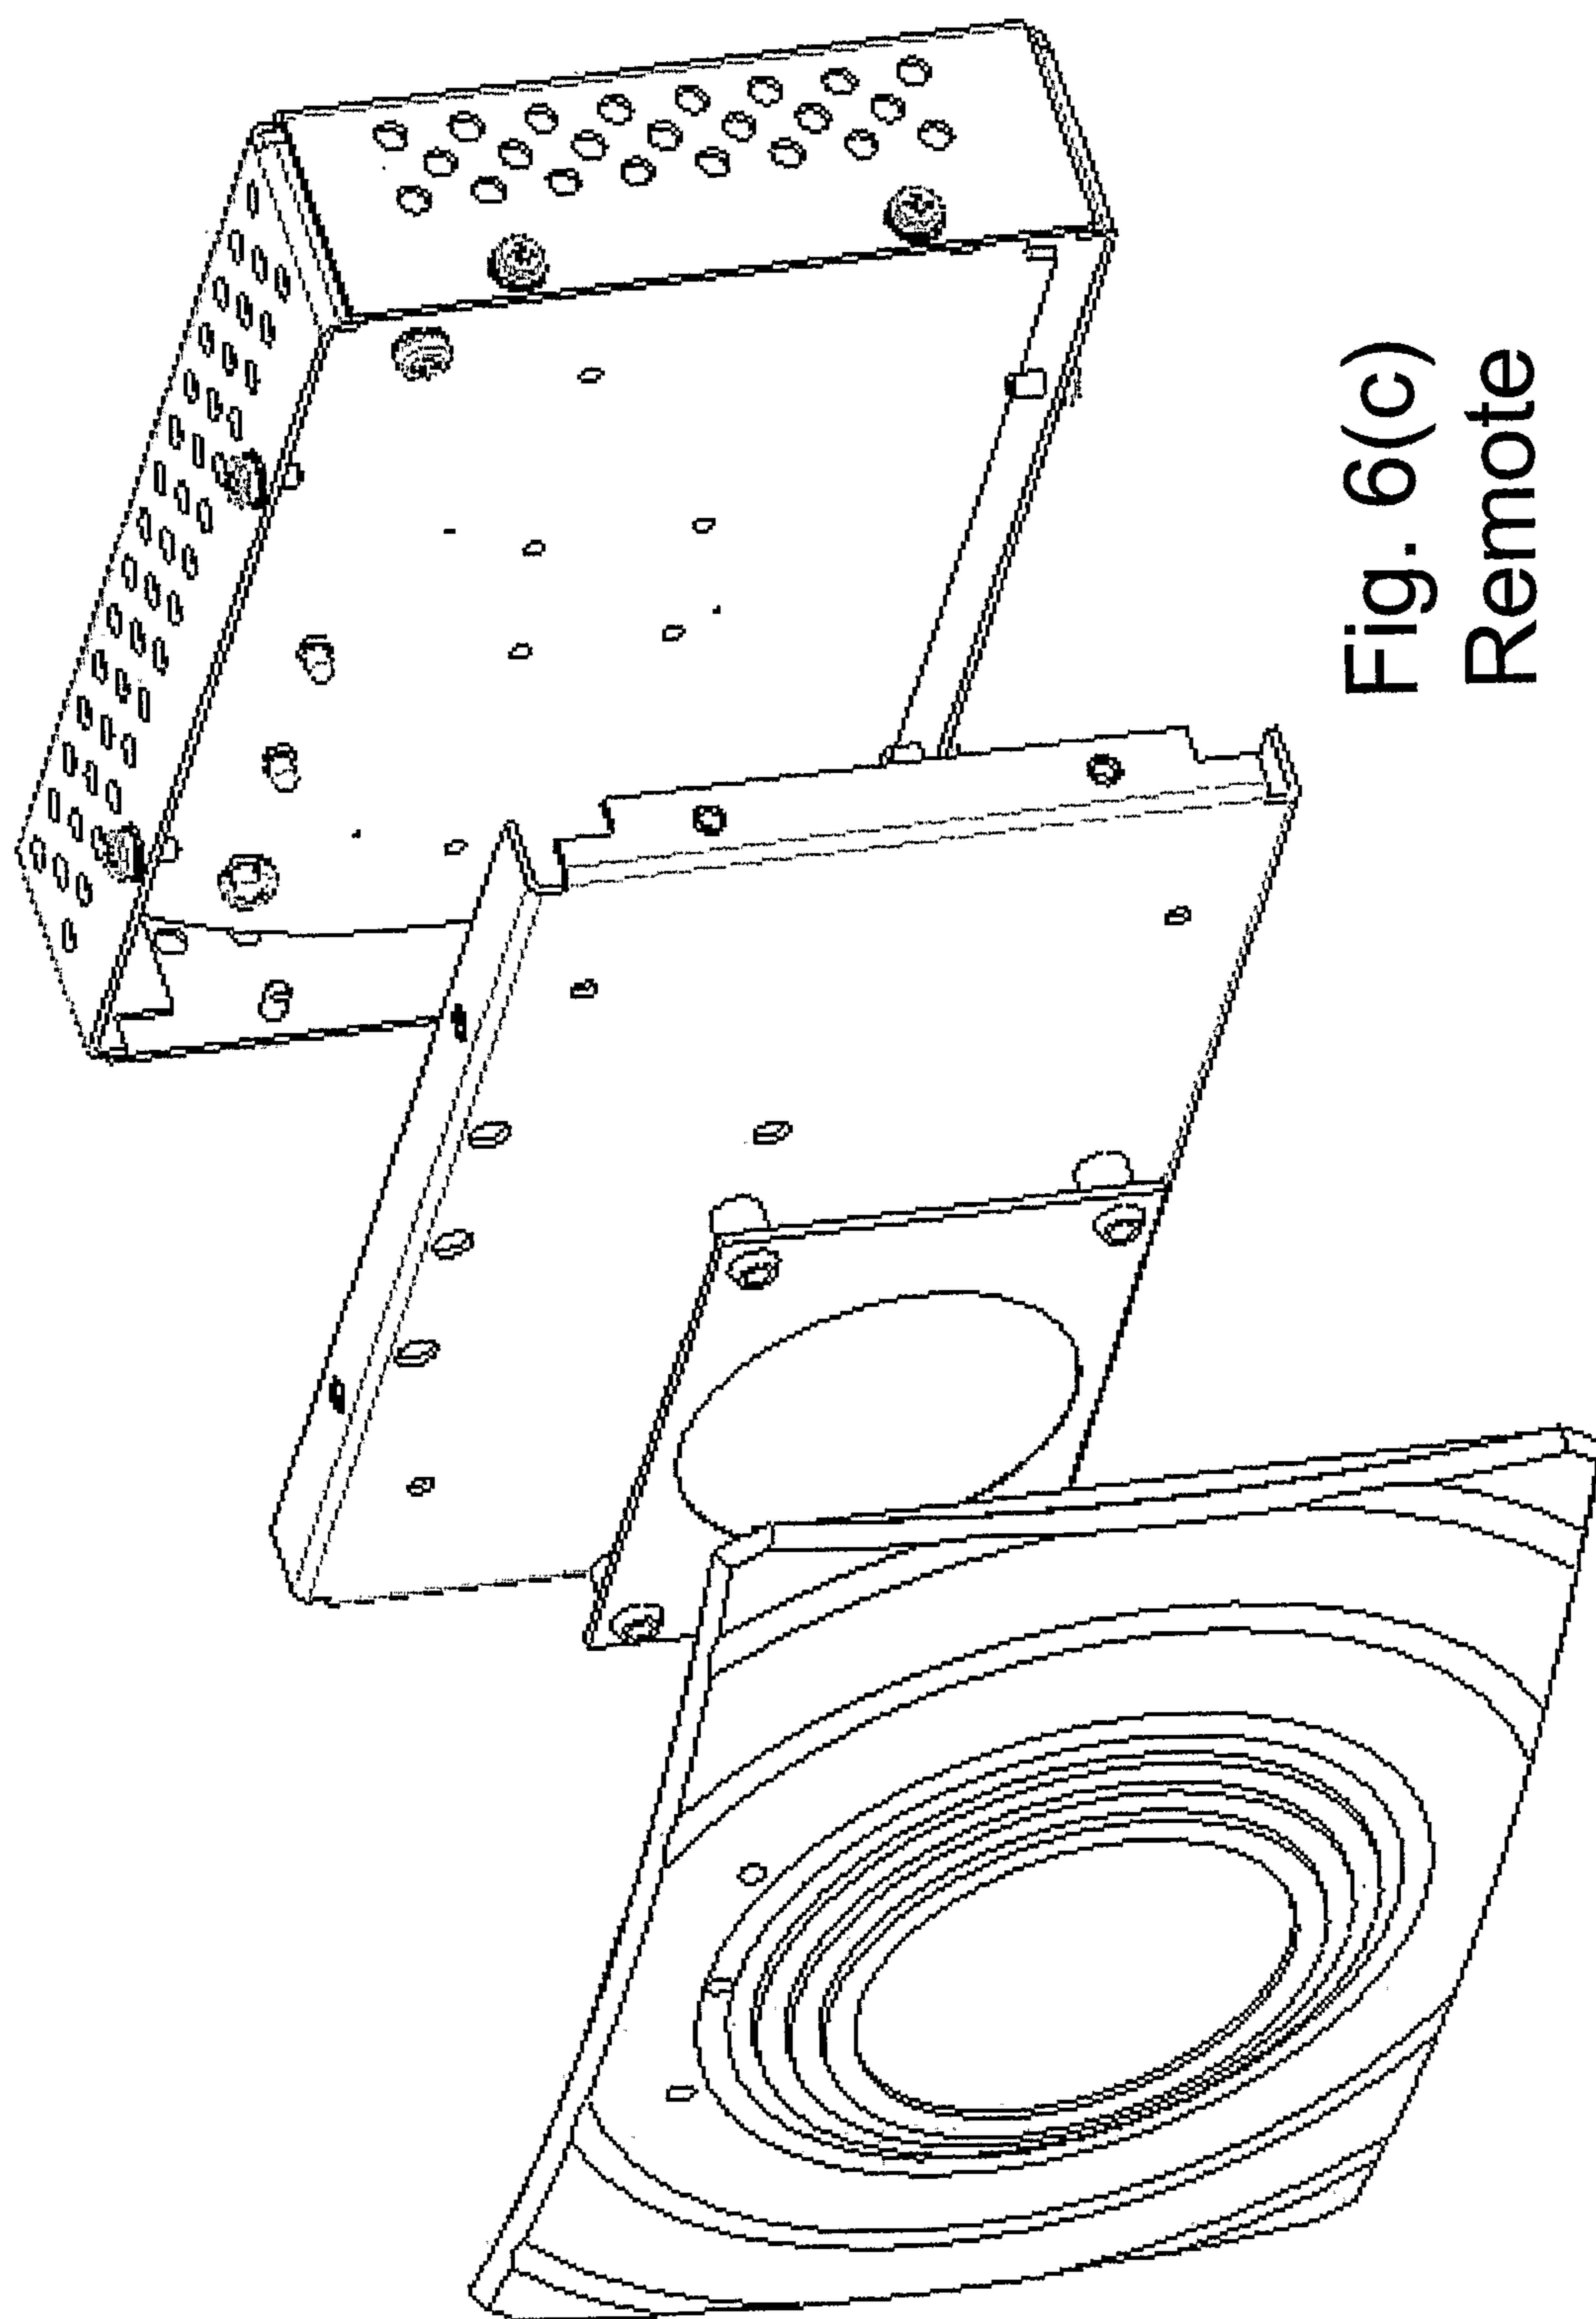


Fig. 6(c)  
Remote

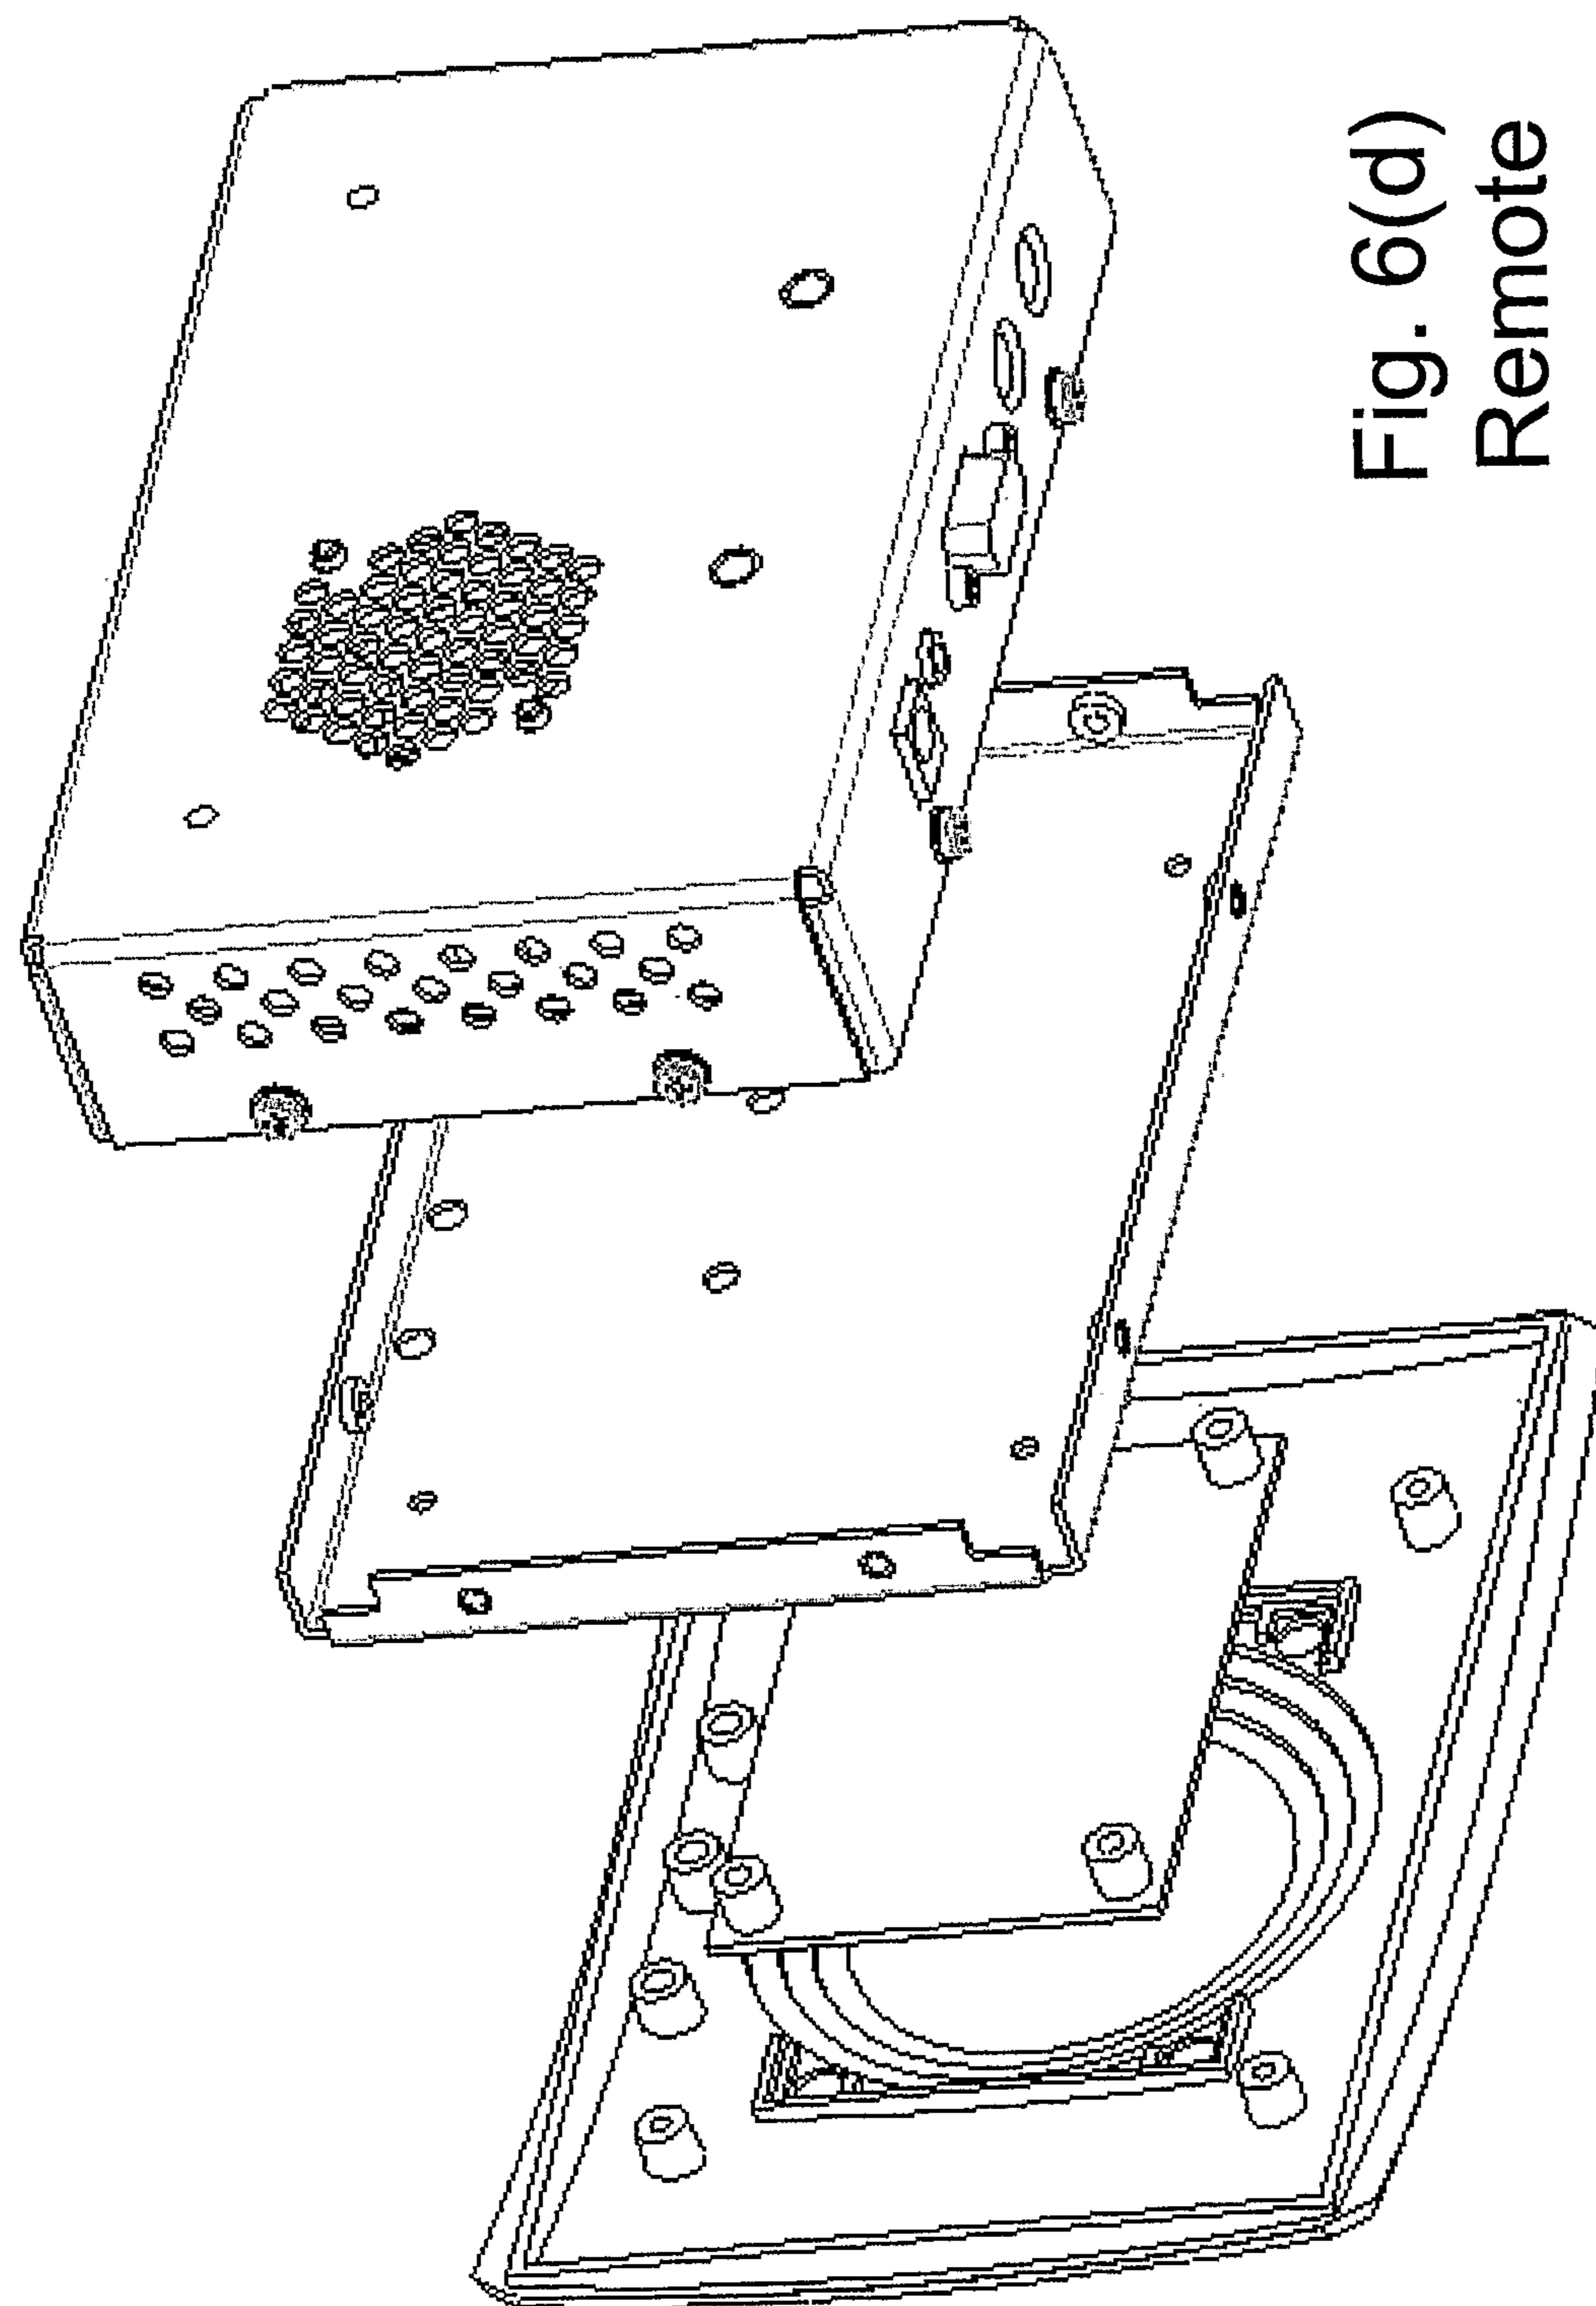


Fig. 6(d)  
Remote

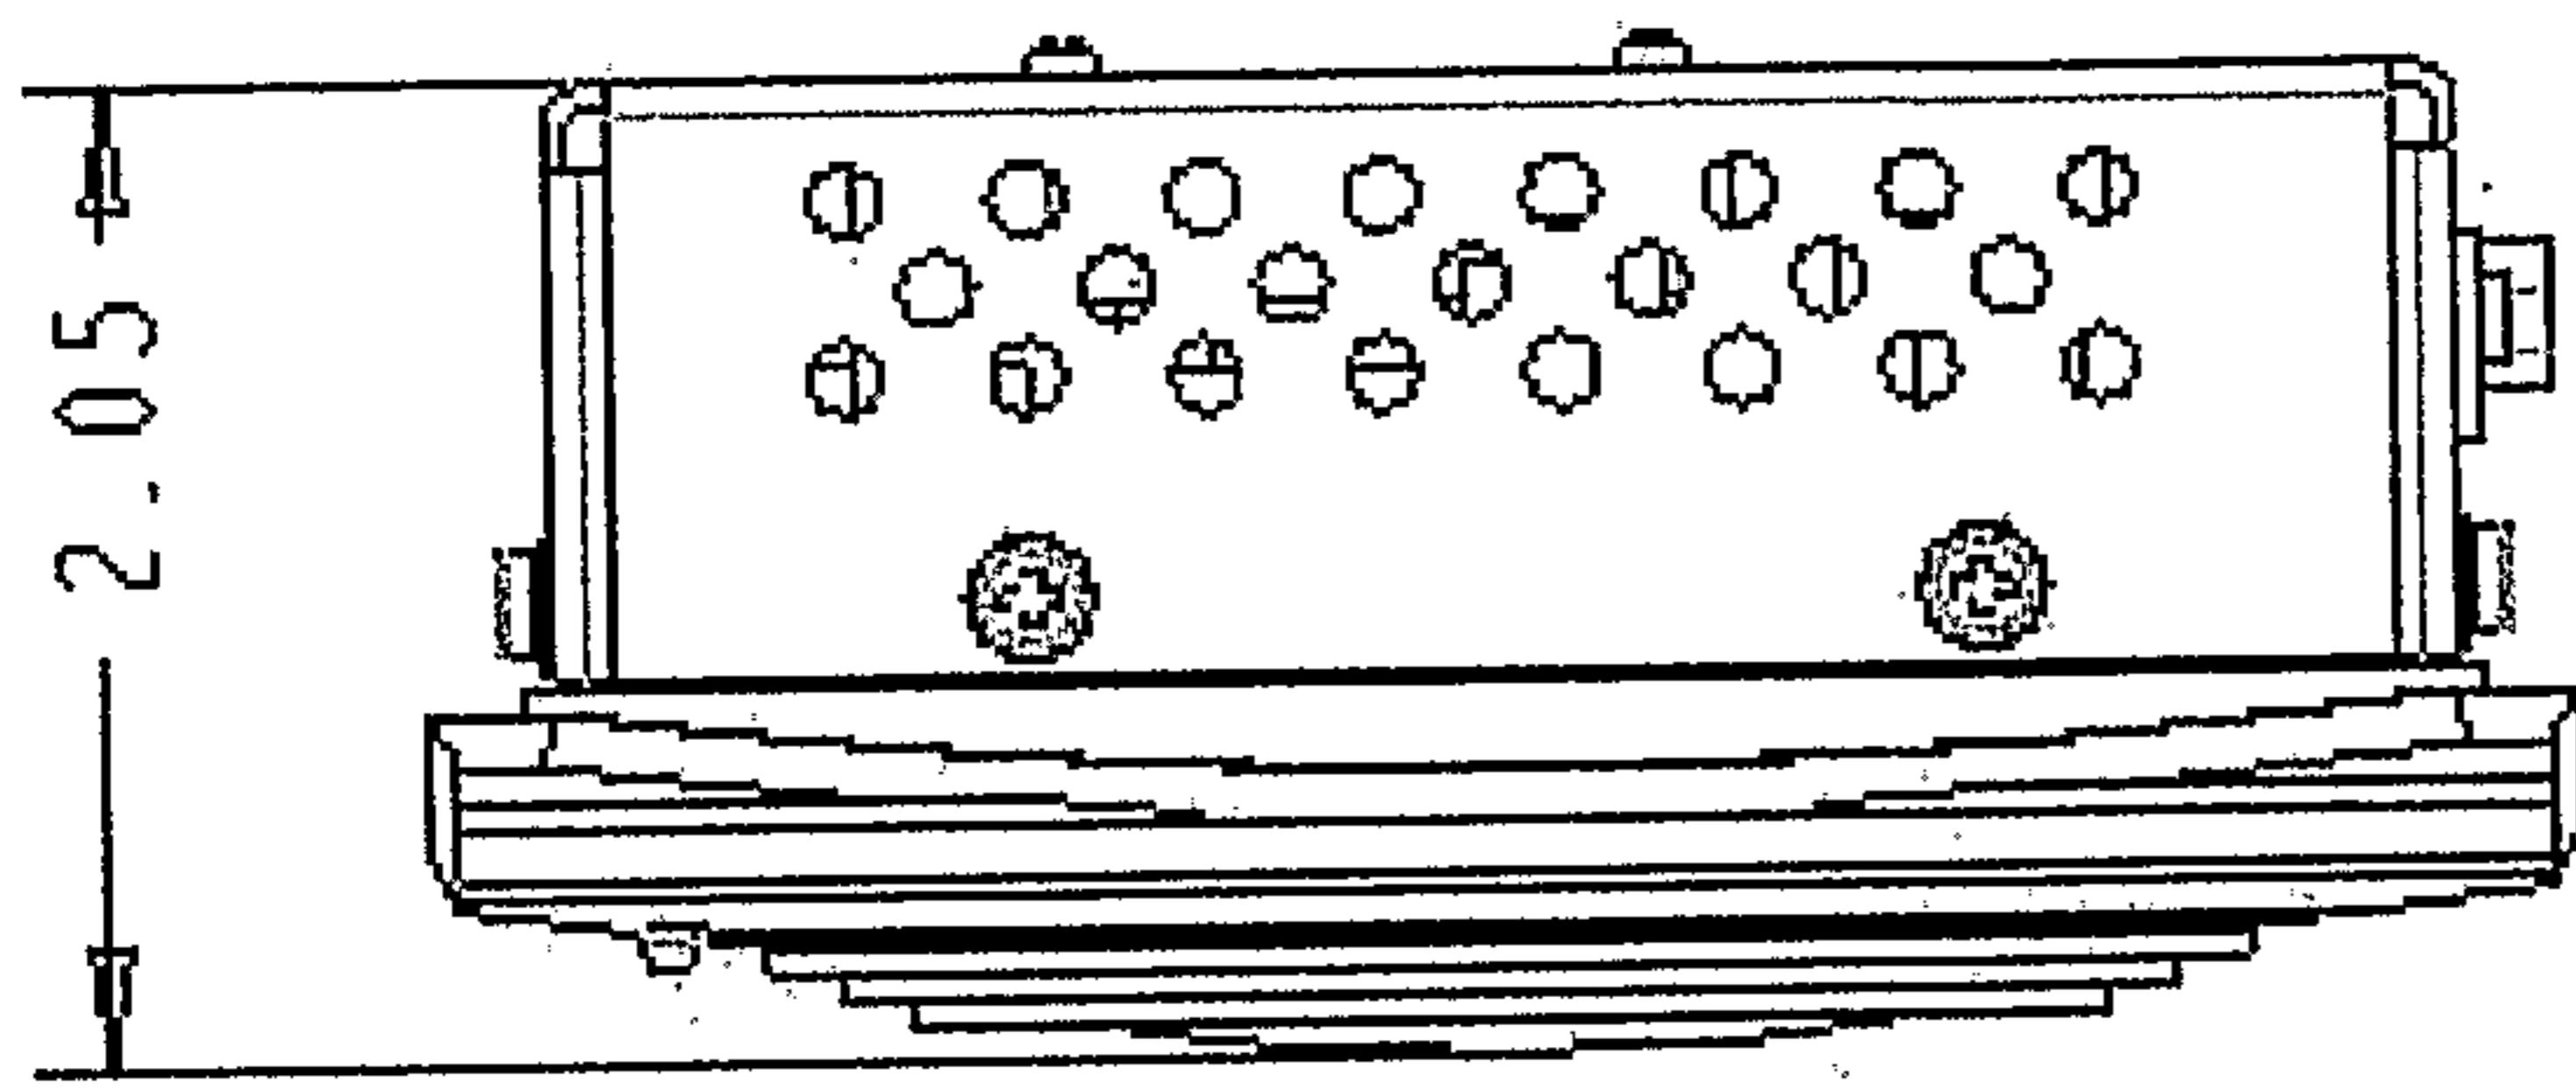


Fig. 6(g)  
Remote

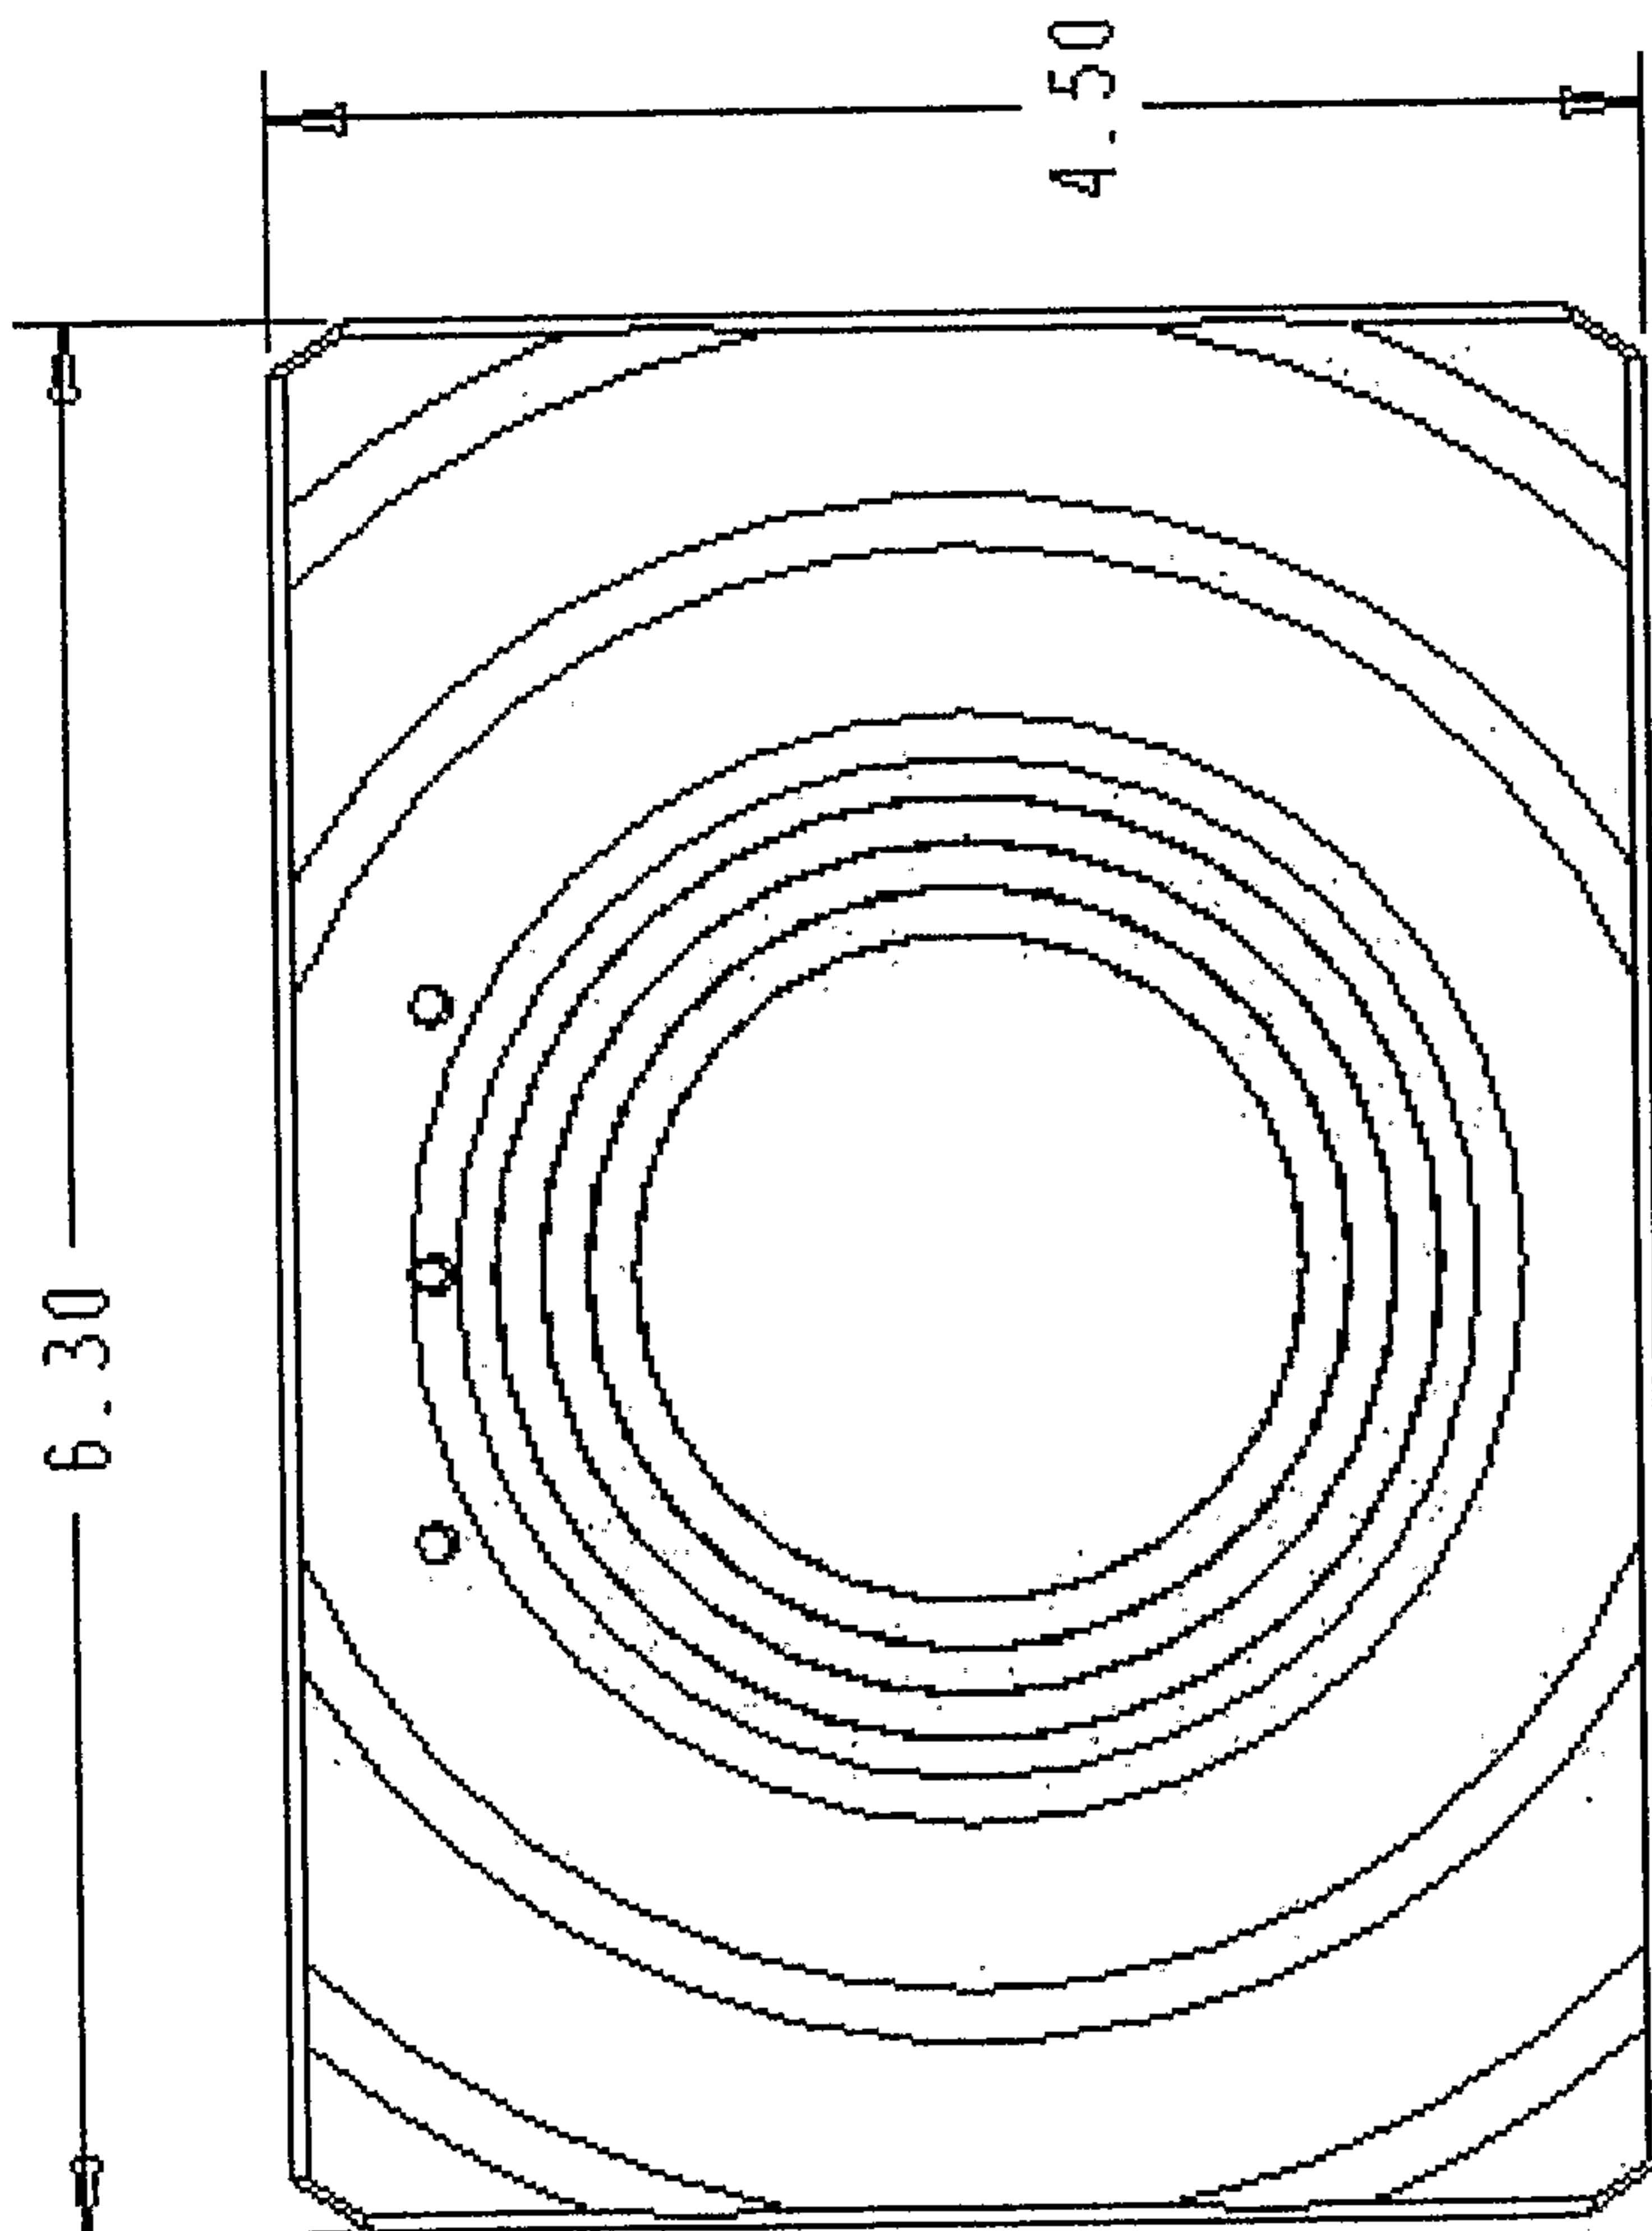


Fig. 6(e)  
Remote

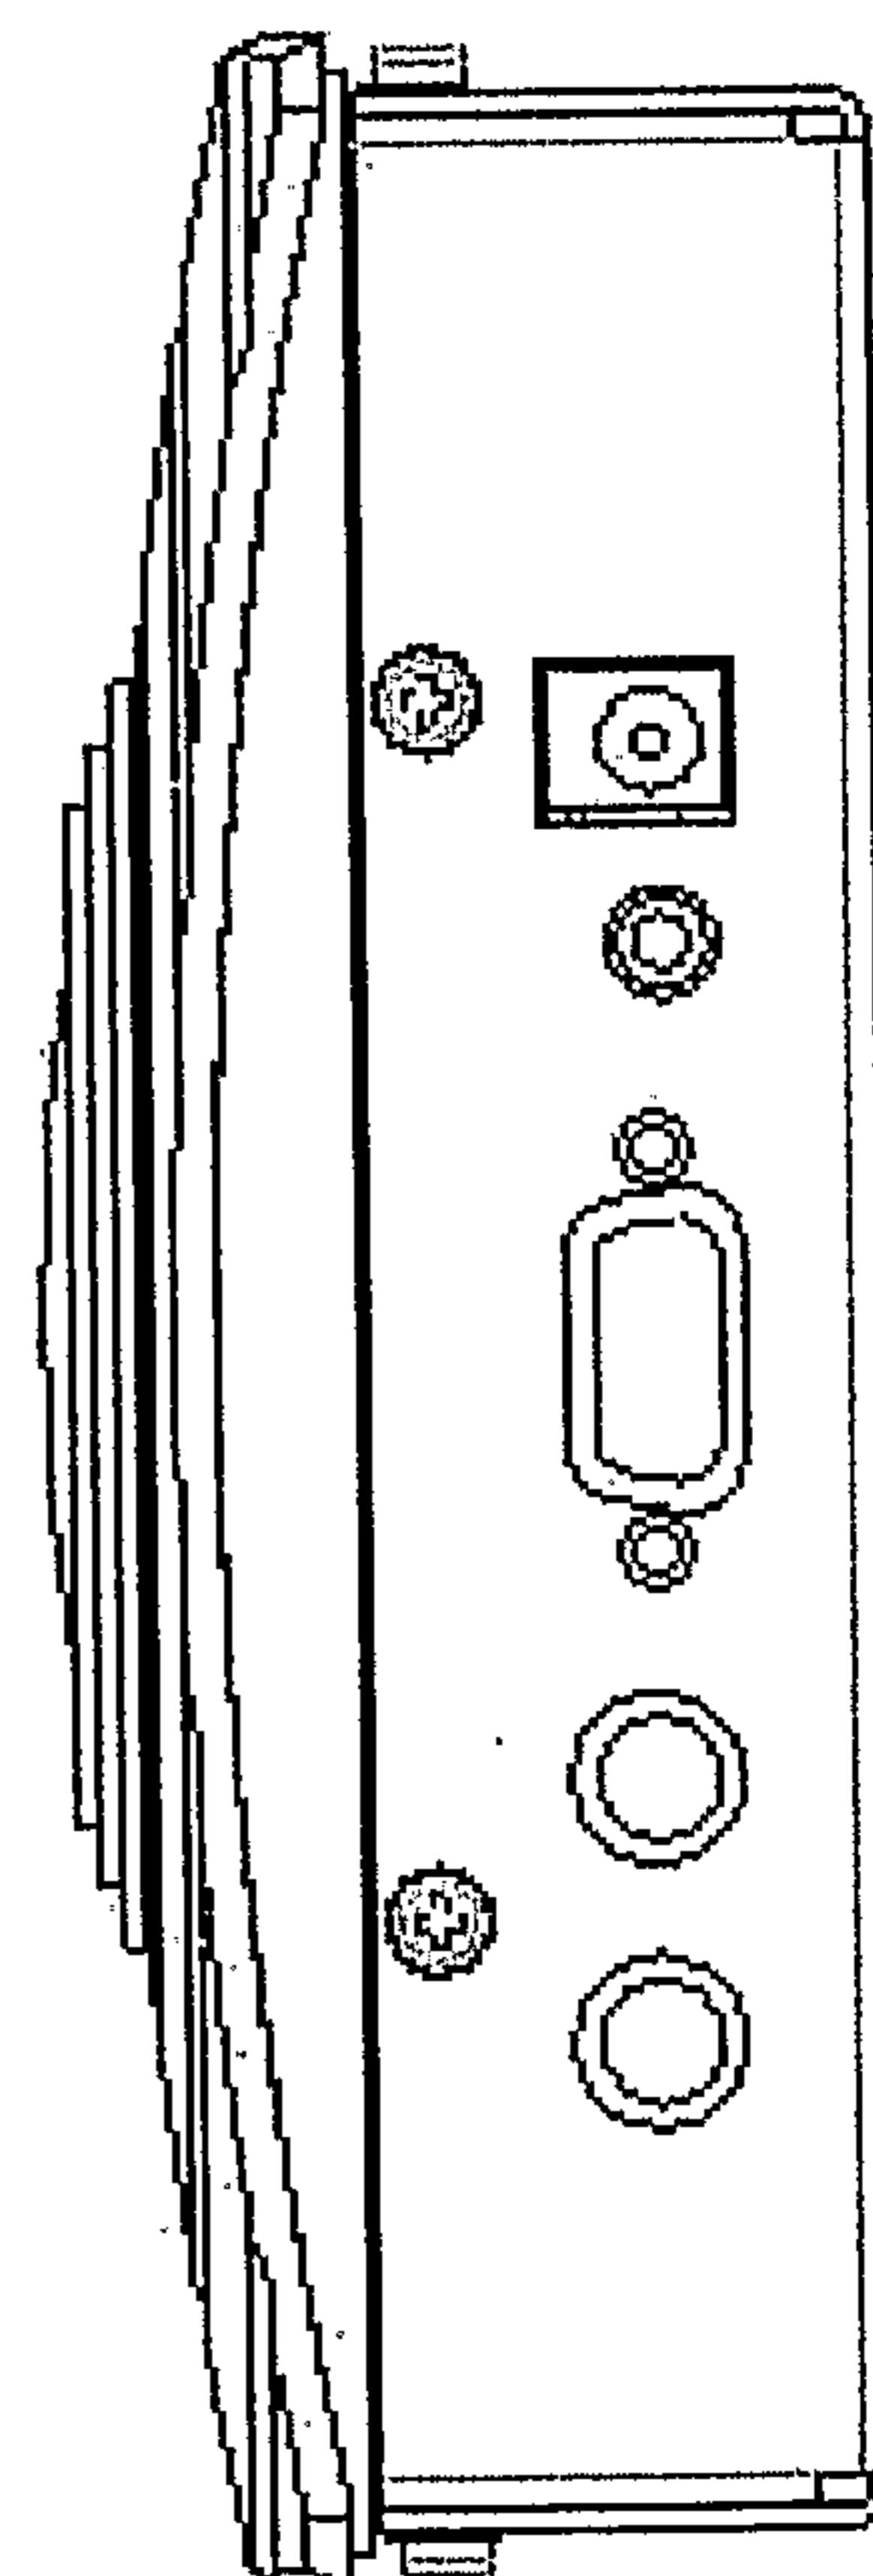


Fig. 6(f)  
Remote

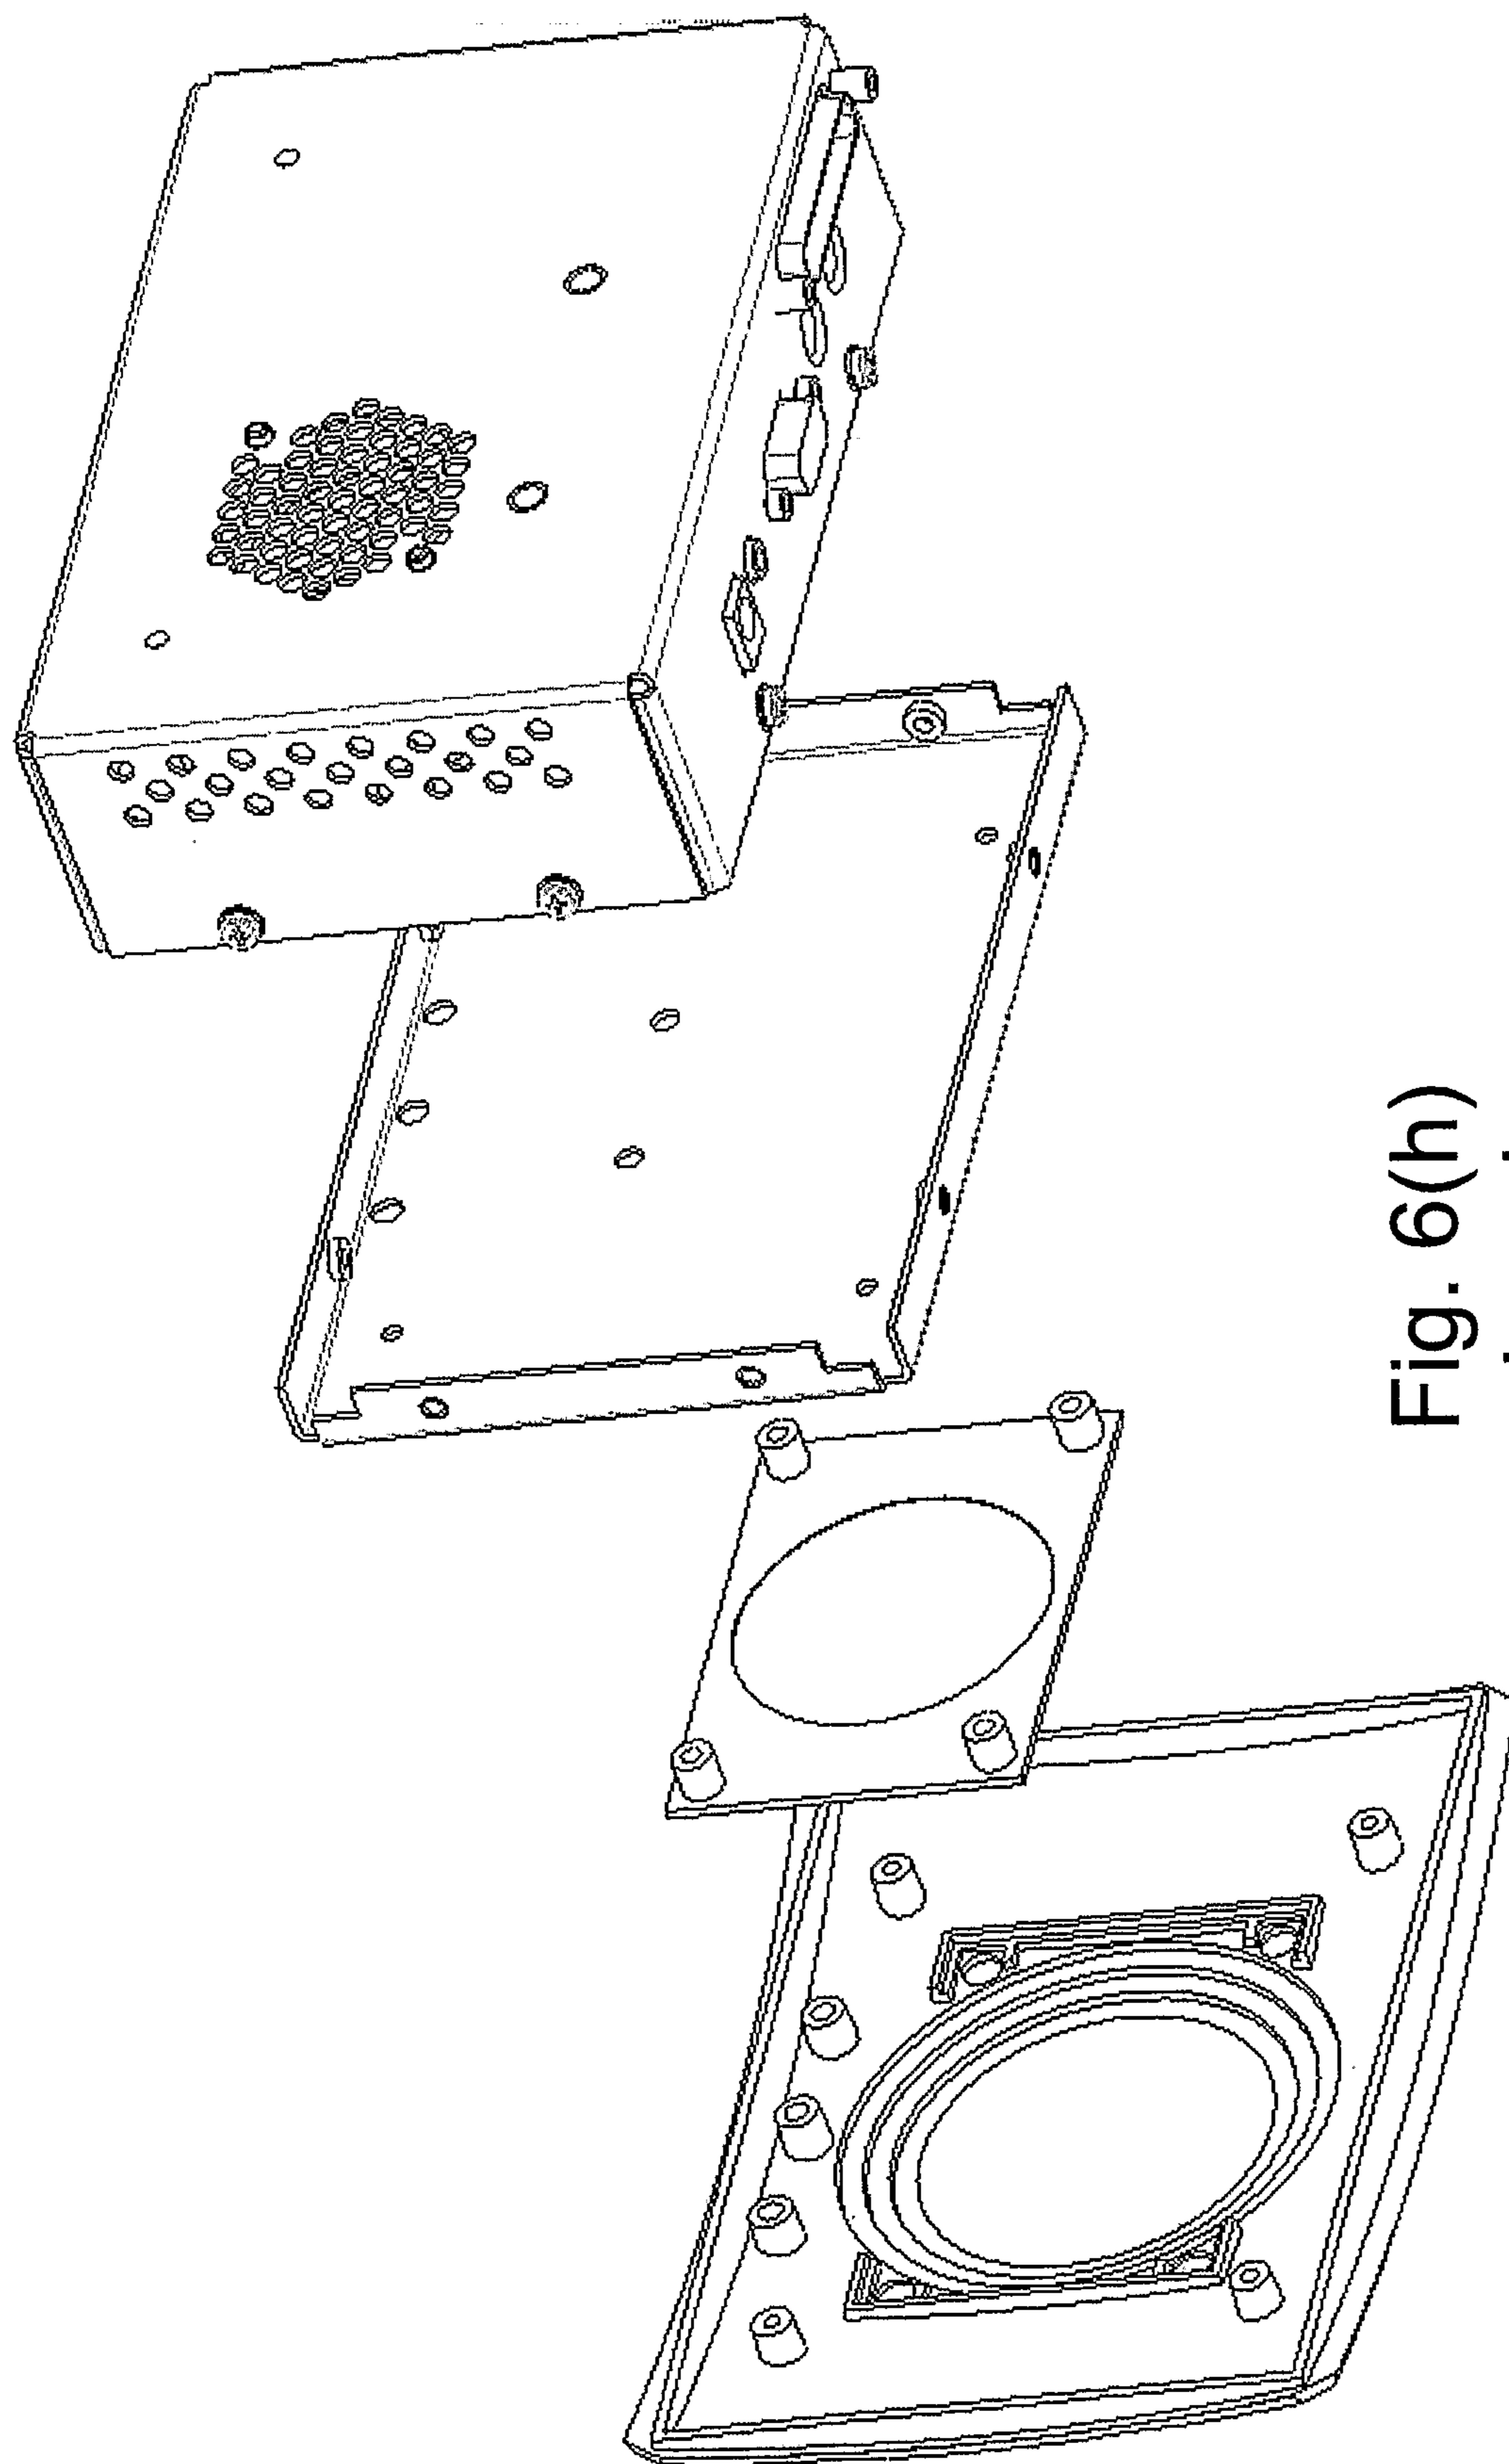


Fig. 6(h)  
Local

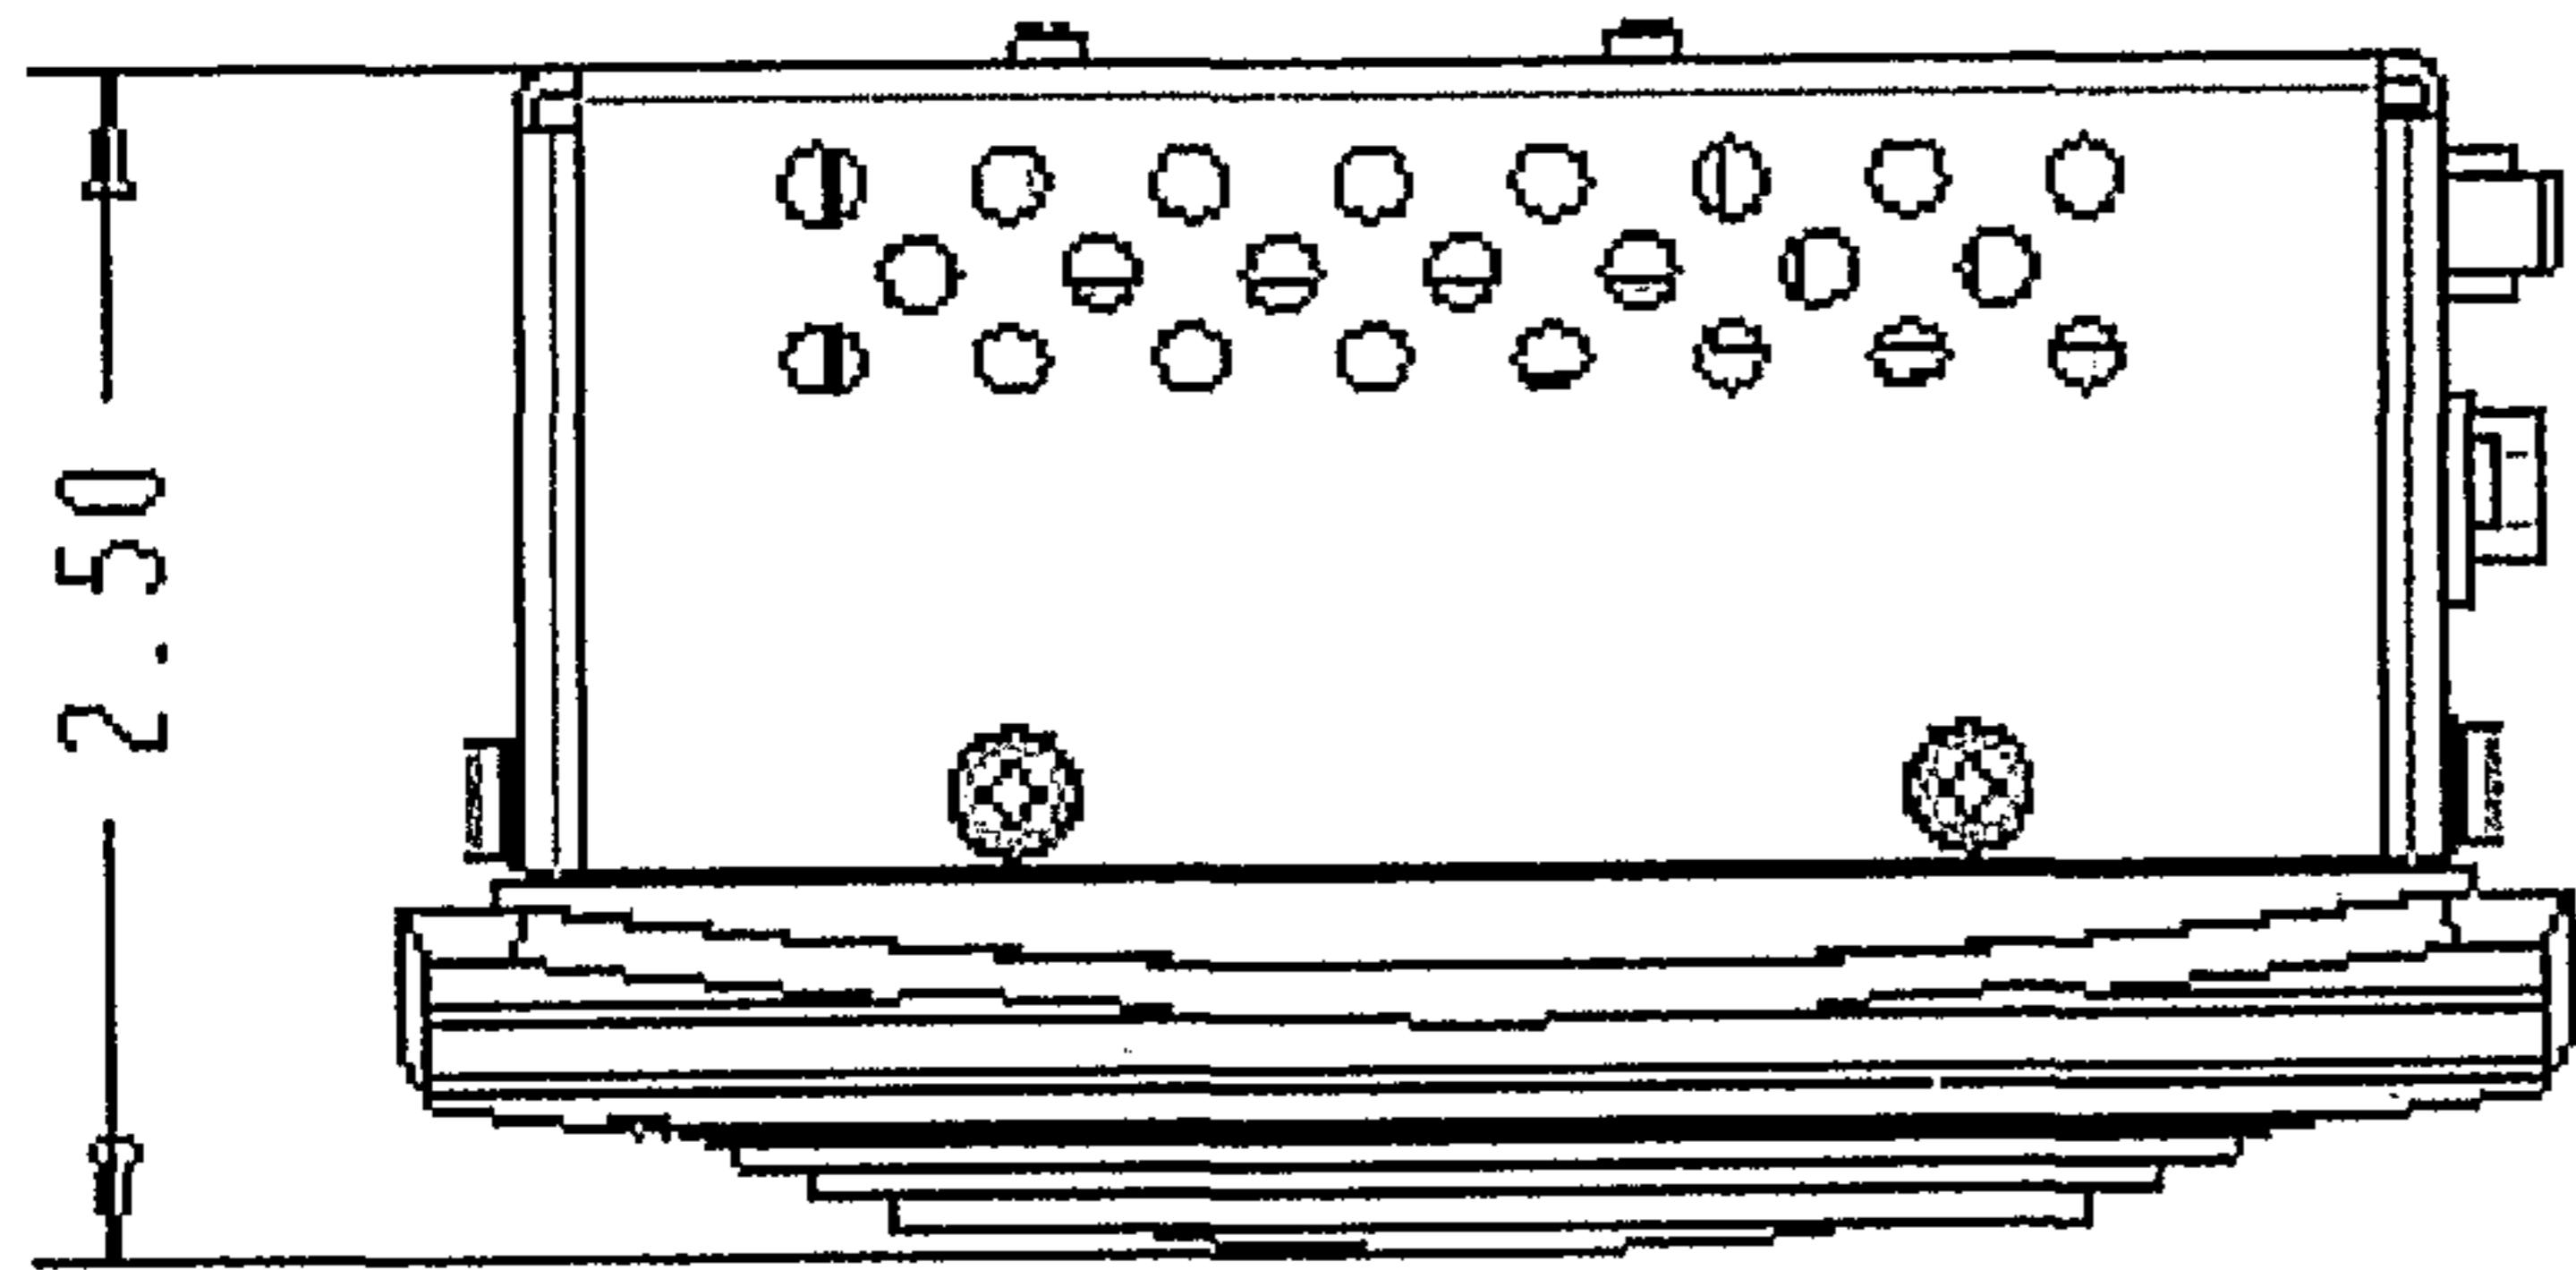


Fig. 6(j)  
Local

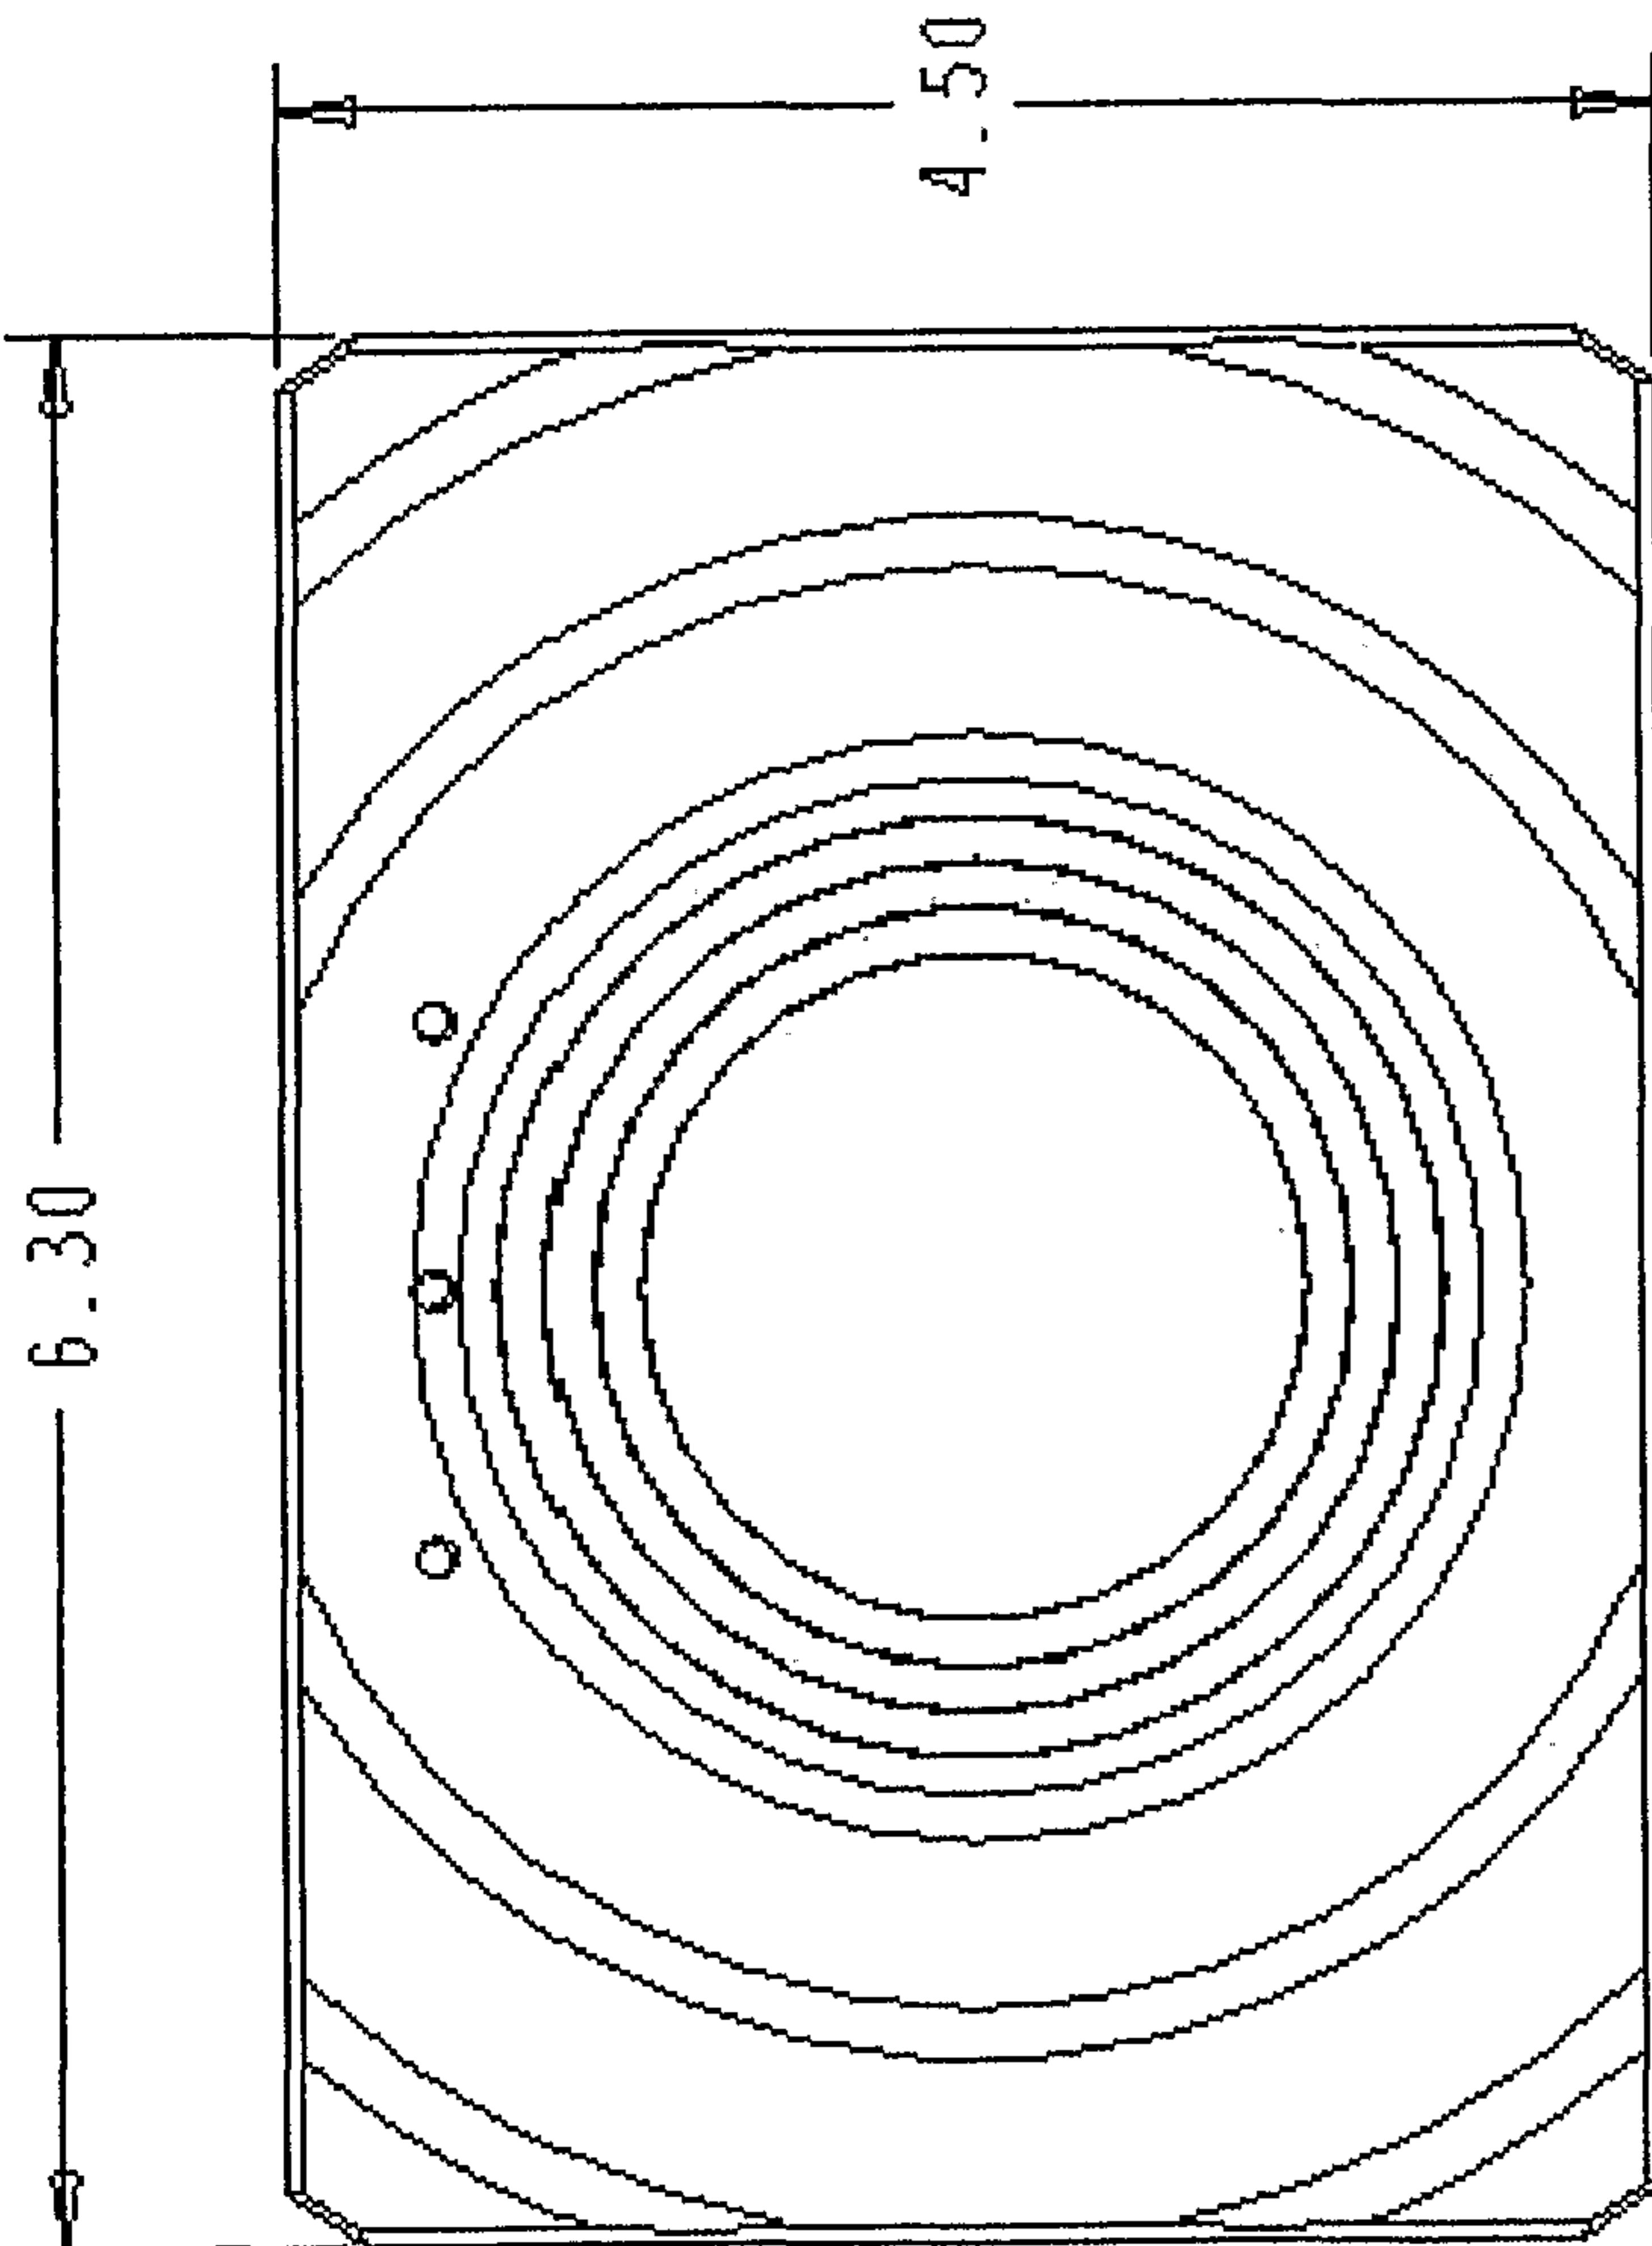


Fig. 6(i)  
Local

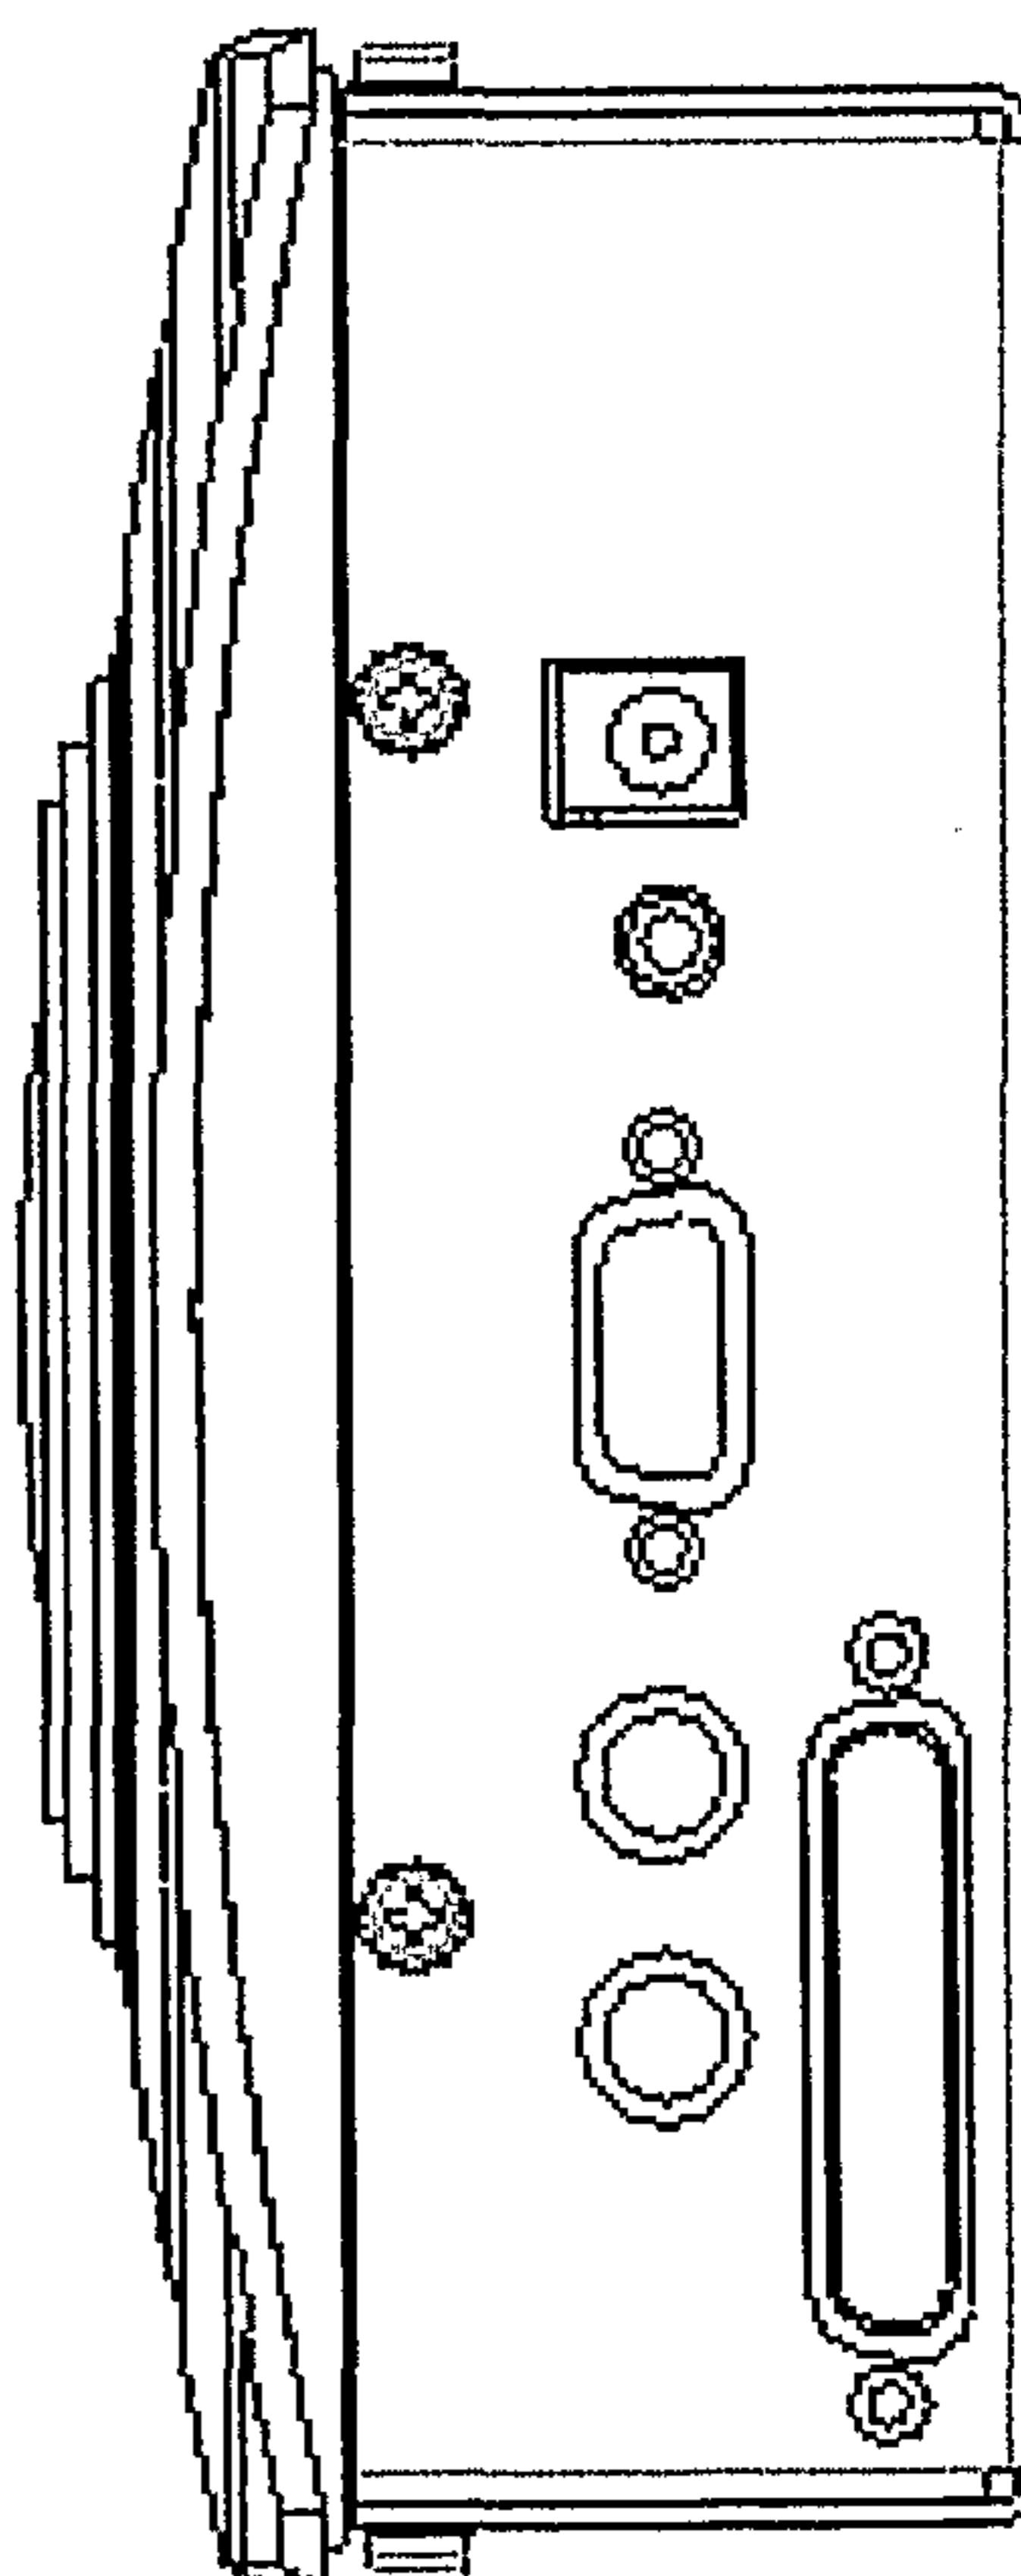


Fig. 6(k)  
Local

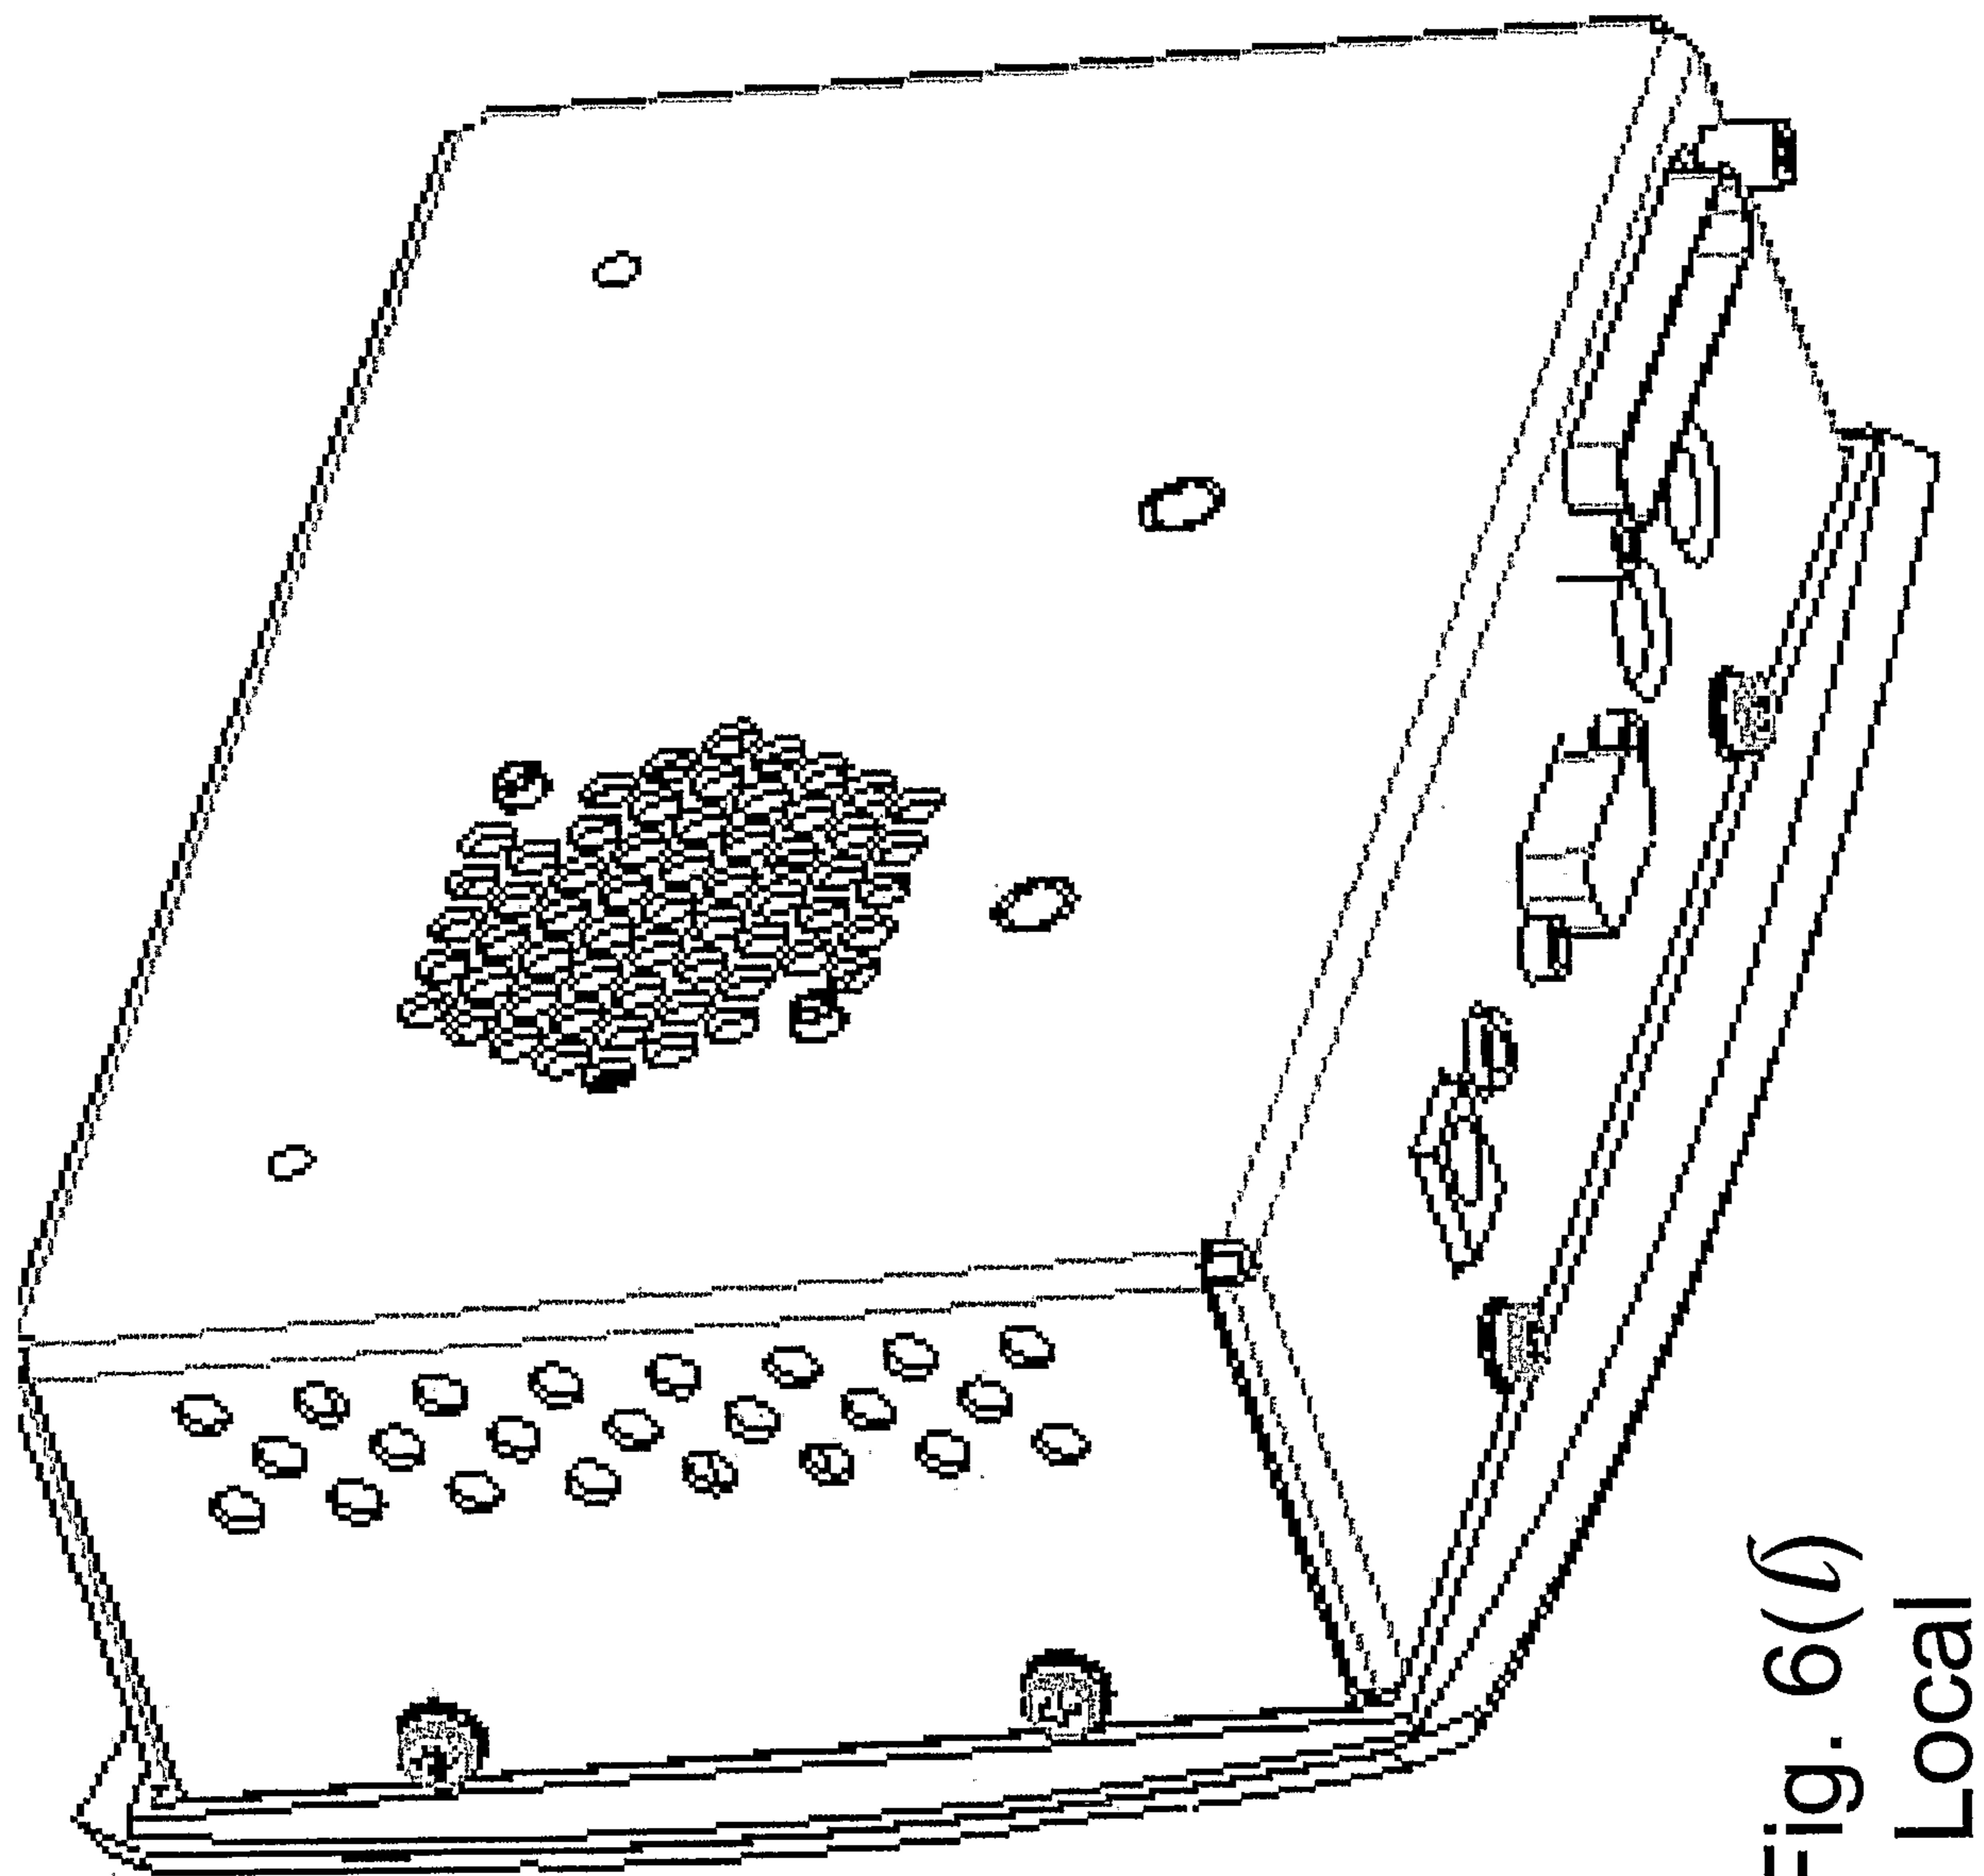


Fig. 6(1)  
Local


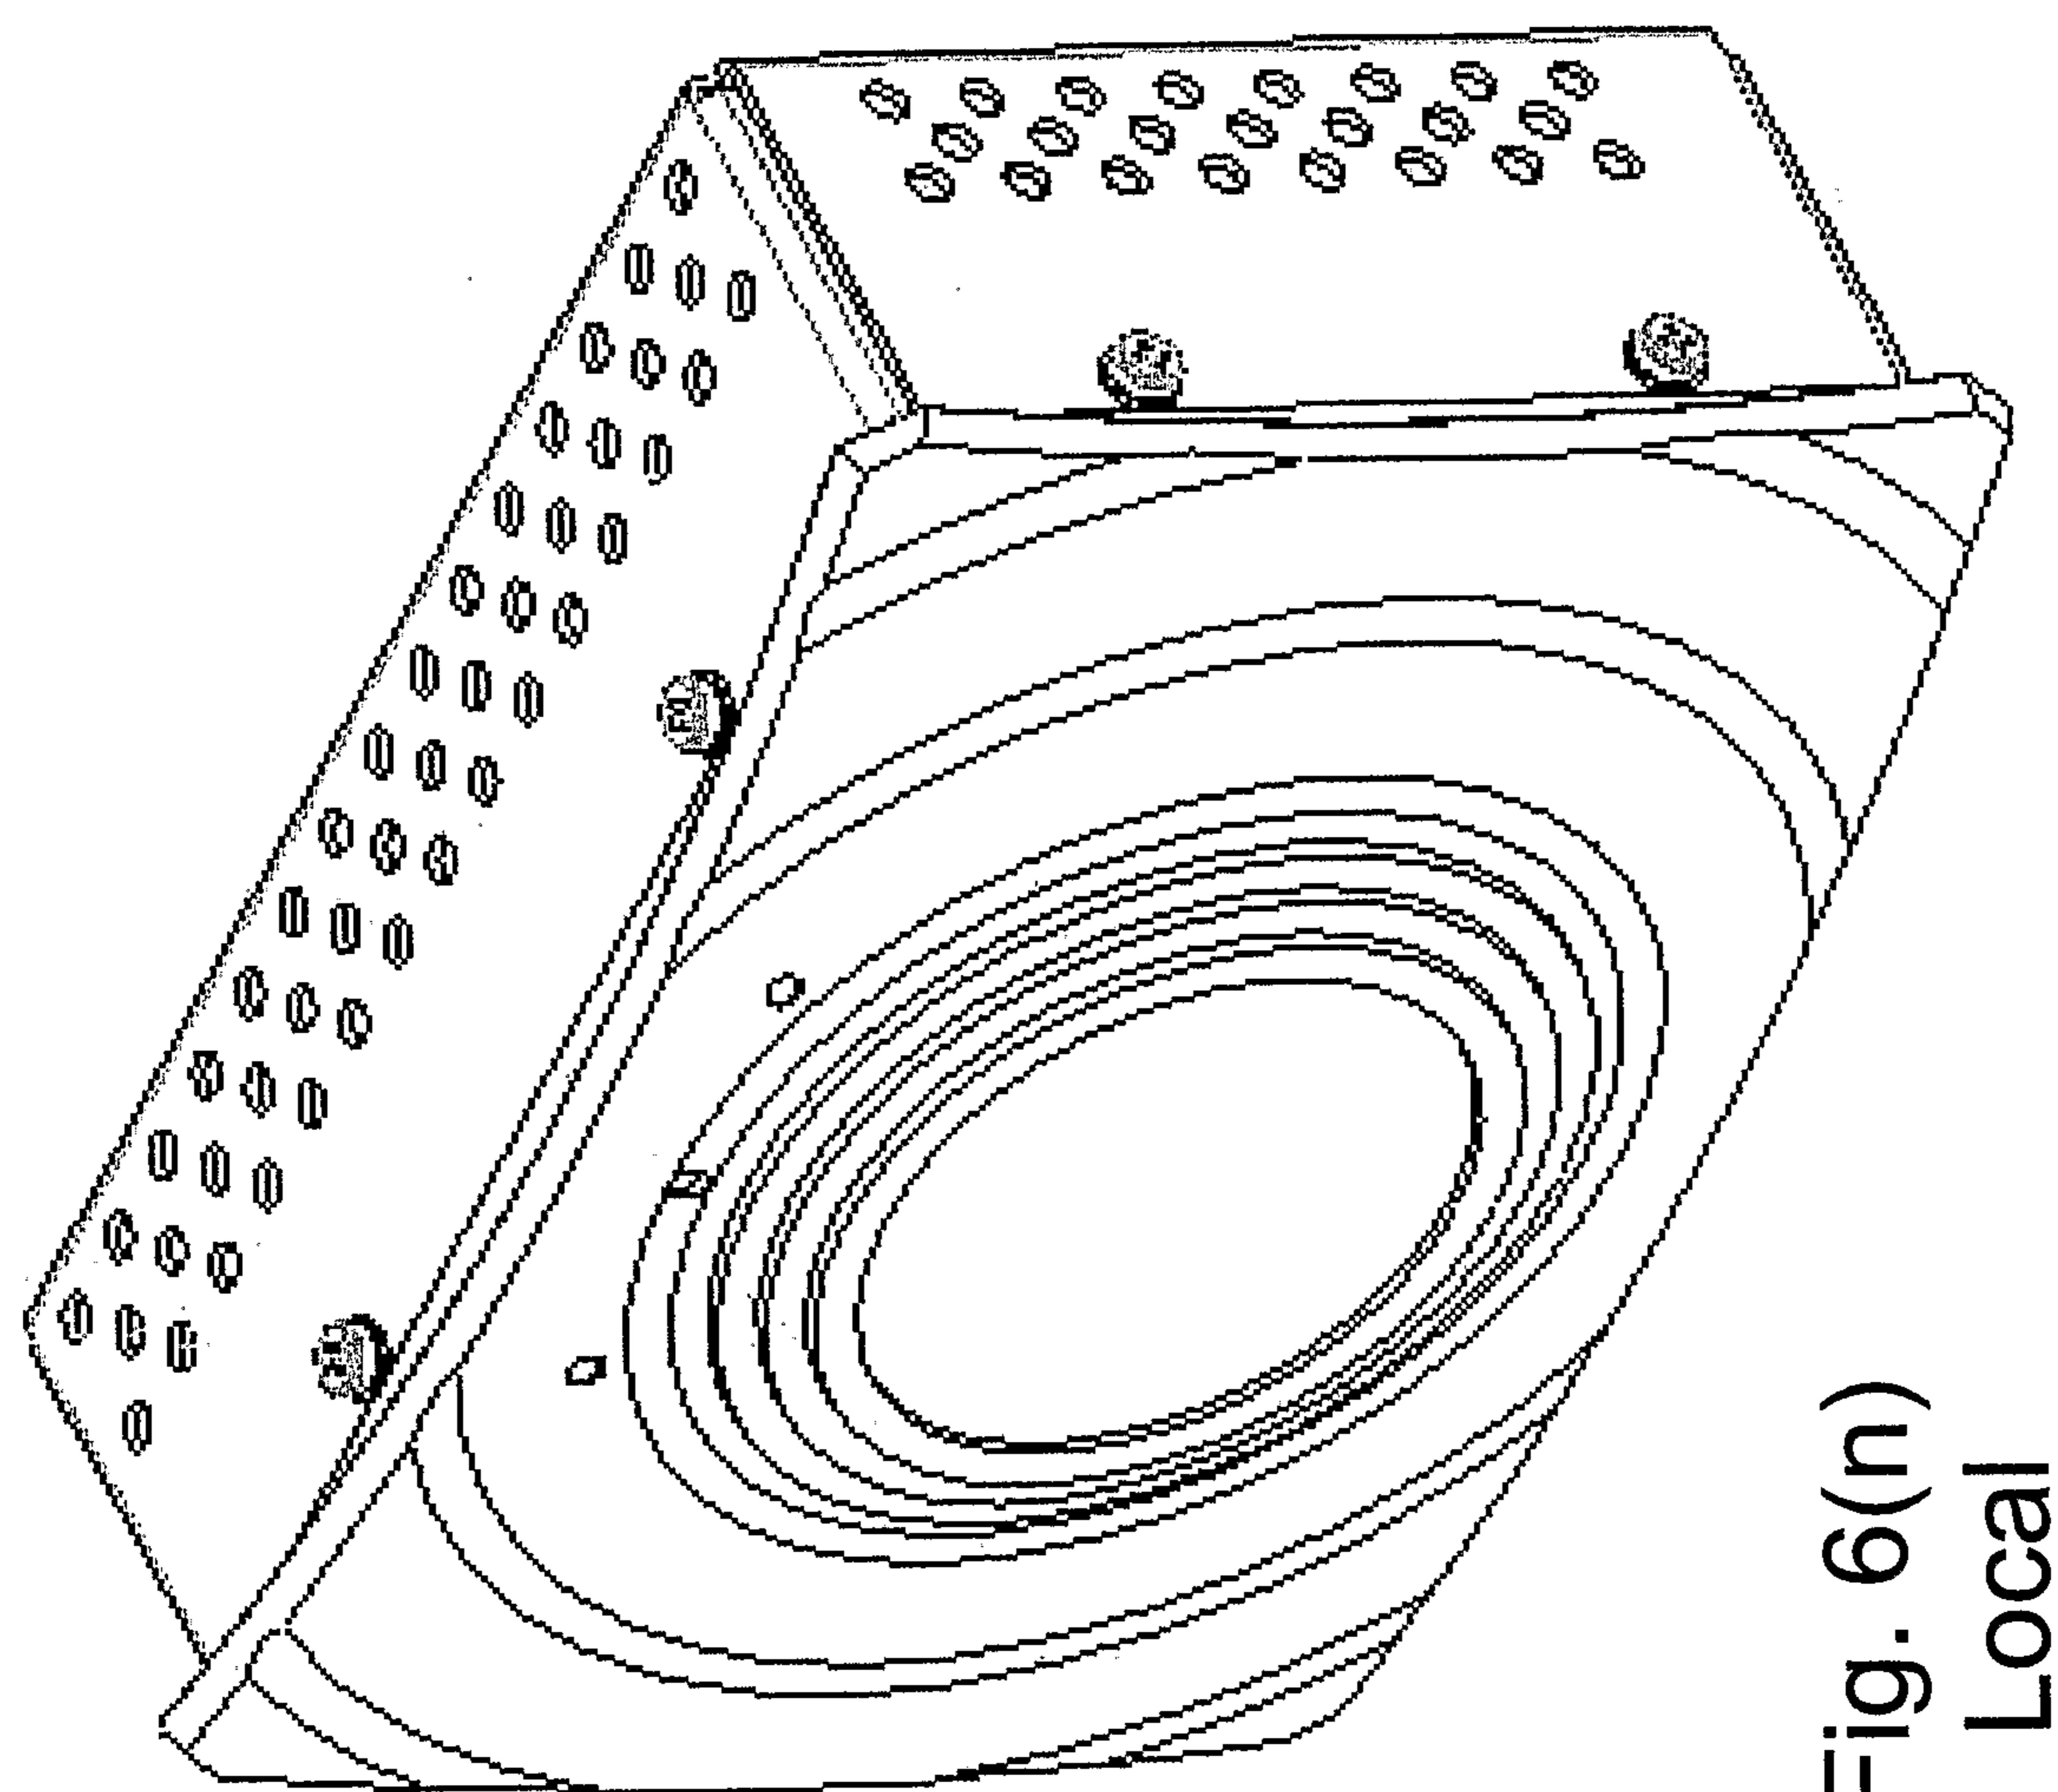


Fig. 6(n)  
Local



**Fig. 7**

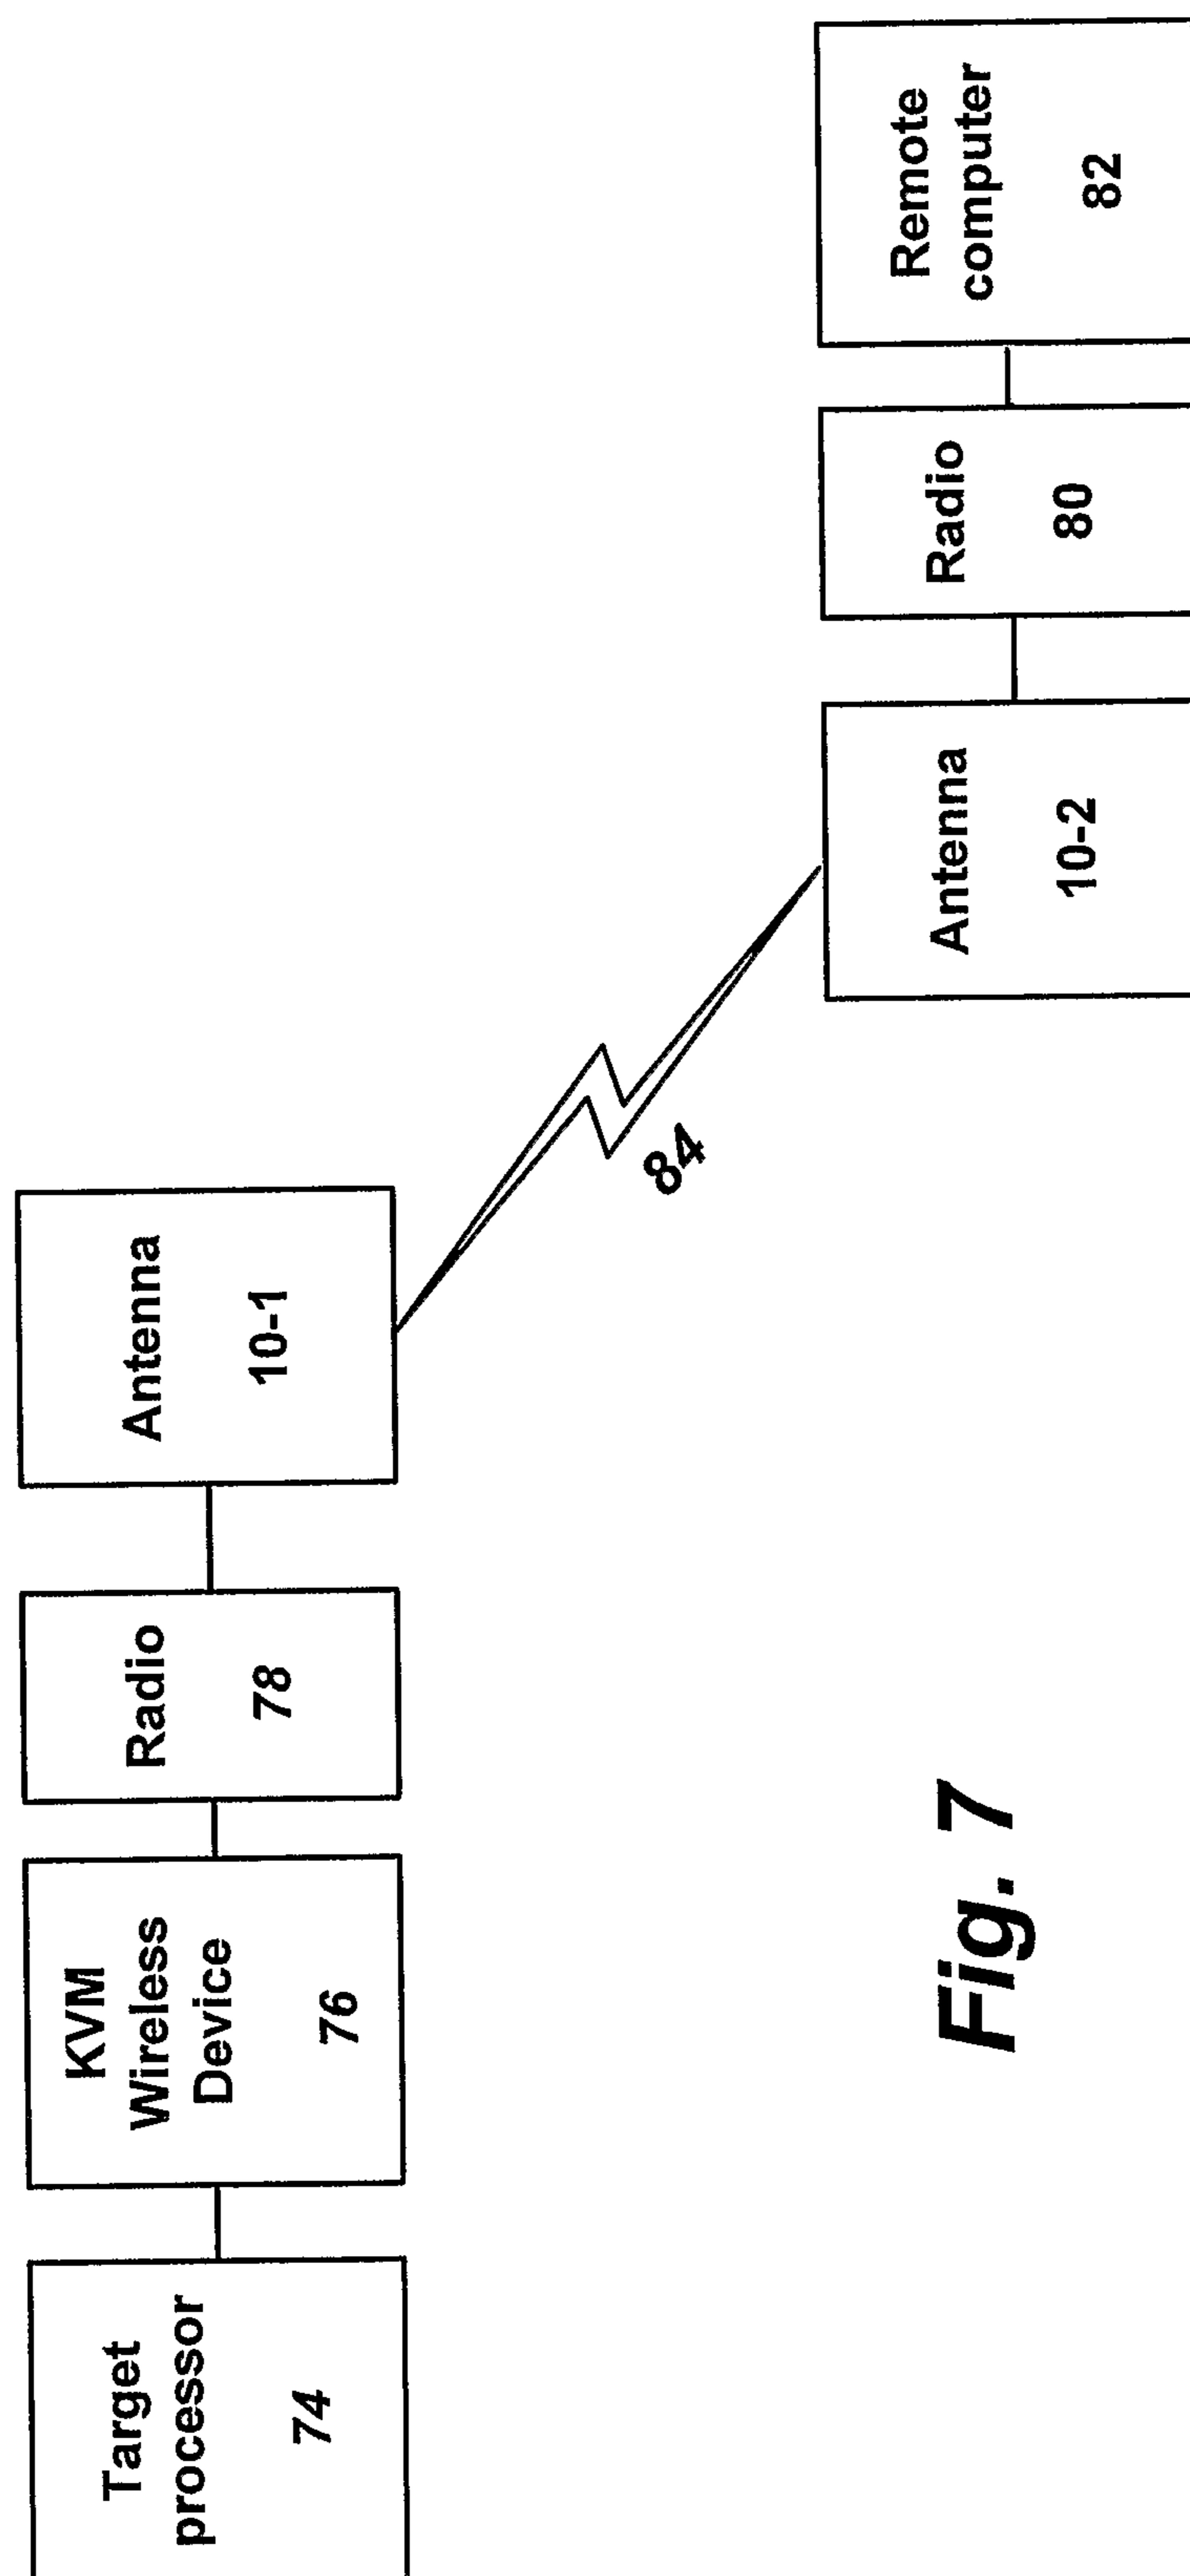