



(51) International Patent Classification:

B63C 11/34 (2006.01) *E02B 17/00* (2006.01)
B63C 11/42 (2006.01) *E21B 33/00* (2006.01)
B63B 25/00 (2006.01) *E21B 41/00* (2006.01)
B63B 27/00 (2006.01) *E21B 43/00* (2006.01)
B63G 8/00 (2006.01)

(21) International Application Number:

PCT/NO2018/050185

(22) International Filing Date:

11 July 2018 (11.07.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1711518.9 18 July 2017 (18.07.2017) GB

(71) Applicant: **EQUINOR ENERGY AS** [NO/NO]; Forusbeen 50, 4035 Stavanger (NO).

(72) Inventors: **MYHRE, Erling**; c/o Equinor Energy AS, Forusbeen 50, 4035 Stavanger (NO). **LYNGVÆR, Bernt**

Karsten; c/o Equinor Energy AS, Forusbeen 50, 4035 Stavanger (NO). **NÆSS, Sturle**; c/o Equinor Energy AS, Forusbeen 50, 4035 Stavanger (NO). **LARSEN, Kjell**; c/o Equinor Energy AS, Forusbeen 50, 4035 Stavanger (NO).

(74) Agent: **BRANDERHORST, Matthijs**; Marks & Clerk LLP, Fletcher House (2nd Floor), Heatley Road, Oxford Science Park, Oxford Oxfordshire OX4 4GE (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

(54) Title: SUBSEA INSTALLATION METHOD

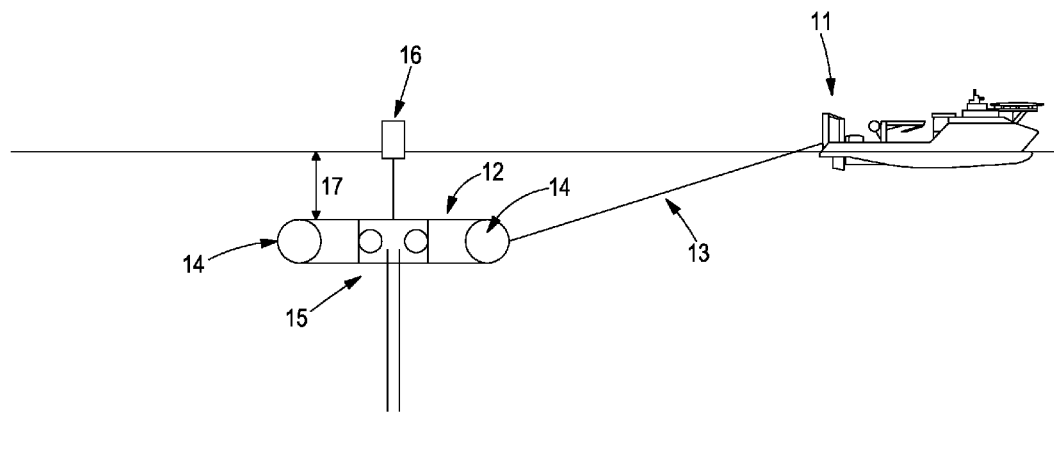


Fig. 1

(57) Abstract: A method of installing an object under water at a desired location, the method comprising: providing the object on a vessel, connecting the object to a submersible frame located below the water surface, wherein the vessel is spatially separated from the submersible frame along the direction of the water surface, releasing the object from the vessel such that the object becomes submerged and carries out a pendulum motion until the object is suspended from the submersible frame, and moving the object to the desired location.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

Subsea Installation Method

The invention relates to subsea installation of an object, and in particular to subsea installation of an object related to production of hydrocarbons.

5

Subsea installation of large objects may involve large vessels with cranes provided for the purpose of hoisting such large objects from the deck into the water and lowering the objects to the seabed. Examples of objects are templates and manifolds, and an example of the range of weights of such objects is 200 metric tonnes and upwards.

10

Vessels specifically arranged for this purpose are costly and controlling the motion of a large or heavy object in air requires a larger load capacity when compared to controlling the object in water.

15

According to a first aspect of the invention, there is provided a method of installing an object under water at a desired location, the method comprising providing the object on a vessel, connecting the object to a submersible frame located below the water surface, wherein the vessel is spatially separated from the submersible frame along the direction of the water surface, releasing the object from the vessel such that the object becomes submerged and carries out a pendulum motion until the object is suspended from the submersible frame, moving the object to the desired location.

20

The submersible frame may either be connected to said vessel or may be connected to a further vessel. The connection may be by way of a tow line, a power line, or a communication line. The buoyancy of the submersible frame may be adjusted to compensate for the weight of the object suspended below the frame. The vessel or the further vessel may be used for towing the submersible frame for positioning the object. The further vessel may be used for towing the submersible frame. The object may be moved by a winch provided on the submersible frame. The method may further comprise adjusting the position of the submersible frame with a propulsion system provided on the submersible frame. Examples of the desired position of the object are the seabed, a seabed processing system, or a wellhead system. The method may further comprise controlling the drag of the connection between the object and the submersible frame by attaching one or more drag objects to the connection. The drag objects may have positive buoyancy or increase the spatial extent of the connection when compared to the connection without the drag objects.

35

According to a second aspect of the invention, there is provided an assembly for installing an object under water at a desired location, the assembly comprising: a vessel arranged to carry the object, a submersible frame, a connection between the object and the submersible frame, wherein in use the vessel is spatially separated from the submersible frame along the direction of the water surface, wherein the object, the connection and the submersible frame are arranged such that, when releasing the object from the vessel, the object becomes submerged and carries out a pendulum motion until the object is suspended from the submersible frame, and wherein the frame comprises a winch mechanism for moving the object to the desired location.

The assembly may further comprise a further vessel arranged to tow the submersible frame, and the submersible frame may be connected to the further vessel by a tow line, a power line, or a communication line. The submersible frame may comprise a variable buoyancy system. The assembly may further comprise a buoy connected to the submersible frame for indicating the location of the submersible frame. The assembly may further comprise a remotely operated vehicle for interacting with the object after installation of the object on the seabed. The assembly may further comprise one or more drag objects attached to the connection between the object and the submersible frame, and the drag objects may have positive buoyancy or may increase the spatial extent of the connection by the shape of the drag objects.

Some embodiments of the invention will now be described by way of example only and with reference to the accompanying drawings, in which:

Fig. 1 illustrates a first step of a method;
Fig. 2 illustrates a second step of the method;
Fig. 3 illustrates a third step of the method;
Fig. 4 illustrates a fourth step of the method, and
Fig. 5 is a flow diagram of the method.

The inventors have realised that handling a large or heavy object under water has advantages over handling the object above the water level in air. The buoyancy forces on the object under water will reduce the load when compared to the full load on a crane in air. Further, the water resistance will dampen motion. The method disclosed herein uses a vessel to transport the object from the shore to the area in which the

object is to be installed. The object is then connected to a submersible frame which is located under the water surface. The object is released from the vessel by sliding or dropping the object into the water. The submersible frame and vessel are positioned with some horizontal distance in between. The object will start dropping into the water.

5 The connection between the frame and the object can initially be loose, such as a connection provided by a cable with some slack. When the object starts dropping, the connection will become tighter due to the separation between the vessel and the frame. The object will subsequently carry out a pendulum motion until at rest underneath the frame. The object can finally be moved to a desired location, for example by a winch

10 mechanism at the frame lowering the object onto the seabed or onto a wellhead system.

The pendulum motion takes place because the effective inertia of the frame is much larger than the inertia of the object, so the frame will move much less than the object.

15 The effective inertia of the frame can be made large by connecting the frame to a further vessel which is located on a side of the frame opposite to the side of the first vessel. The effective inertia of the frame can also be made large by giving the frame a shape which increases movement of surrounding water as a result of the frame moving. A smooth shape will cause less movement of water when compared to a

20 shape with many surfaces and cavities. The movement of the water gives rise to added mass, or virtual mass and the inertia of the frame will be increased due to the added mass.

The motion is referred to as pendulum motion herein, which is not restricted to oscillatory motion in which the object moves forth and back around an equilibrium position. Pendulum motion includes an overdamped oscillatory motion in which the object slowly approaches the equilibrium position without moving past the equilibrium position. Some numerical simulations of the pendulum motion of an object in water with realistic parameters carried out by the inventors show that the time period between

25 release of the object and proximity to the equilibrium position can be around 30 minutes.

The method disclosed herein has several advantages over methods involving a crane. The loads and motions of the object in air are avoided because the object is not hoisted

35 with a crane from deck and down to the sea surface. Further, the loads are reduced

while entering through the splash zone because there are no forces interacting at a crane hook. There is also no risk of snapping of cables due to sudden changes in load on the cable due to wave motion.

- 5 The method will also lead to reduced dynamic loads while lowering the object through the water because the submersed frame is stable and unaffected by waves unlike a vessel which is subject to wave motion and weather. For a crane, passive and active heave compensation is required but a submersed frame will not need compensation for wave motion. The pendulum motion of the object in water will also be damped due to
10 the resistance of the water.

- The method may be implemented in different ways. It is possible to use two vessels: a first one to transport and drop the object, and a second one on the opposite side of the frame to keep the frame in place during the pendulum motion. Alternatively, a single
15 vessel can be used when the frame is kept in place due to the effective mass of the frame being much larger than the effective mass of the object. In yet a different example, a single vessel is used and the frame has active propulsion which is used for positioning the frame, but the active propulsion will add costs to construction and use of the frame. The active propulsion can be used to transport the frame from the shore to
20 the position where the operation of lowering the object will take place. The active propulsion system can further be used to maintain a safe distance between the frame and the vessel from which the object is released. The active propulsion system can further be used to enable a precise positioning of the object on the seabed. The frame and active propulsion system together form an unmanned sub which can move
25 autonomously, or which is controlled remotely.

- An example of a frame is a sub with a longitudinal cylindrical shape similar to a classical submarine. The smooth shape will result in more motion of the sub when compared to an irregular shape during the pendulum motion, but that does not need to
30 be a problem. When moving to the site at which the lowering operation of the object will take place, the longitudinal axis of the sub has a horizontal orientation to enable efficient movement of the sub. During operation, however, the longitudinal axis of the sub has a vertical orientation whereby a winch mechanism for supporting the object is provided at the lowest point of the sub. The vertical orientation will provide a more

stable arrangement when compared to a horizontal orientation whereby the winch mechanism is provided at a central location of the sub.

5 When the object becomes suspended underneath the frame, variable buoyancy within the frame is used to keep the frame in the correct vertical location. An example of a variable buoyancy system is a variable volume buoyancy bag which is inflated to increase buoyancy and which is deflated to decrease buoyancy. Another example is a pressure tight tank which can selectively be filled with water or gas to vary the buoyancy.

10 A trim system may be provided which is arranged to keep the frame in a stable horizontal position. An example of a trim system is a plurality of tanks provided around the perimeter of the frame, whereby the tanks are filled with a fluid and are interconnected such that the weight of the fluid can be actively moved around the tanks
15 to keep the frame horizontal.

The expressions 'sea surface' and 'sea bed' are used herein, but the method is not restricted to use in a sea and the method is also suitable for use in lakes, oceans, or other volumes of water in which heavy objects are installed under the water surface.

20 An embodiment is illustrated in Fig. 1. A vessel 11 tows a submerged frame 12 to a desired location by way of a towline 13. The towline 13 can additionally be used for communication with the frame. The frame has one or more variable buoyancy elements 14, such as variable buoyancy bags. The frame has a winch system 15 for
25 raising or lowering a load. Optionally, a buoy 16 can be provided which is connected to the submerged frame with a cable and which can be used for easily determining the position of the frame and for communication between the frame and the vessel.

30 The frame is located at a distance 17 of around 100m below the water surface. This distance is chosen such that the frame is not subject to wave motion and weather conditions at the water surface. A distance of 50m would also achieve the same effect, depending on how large the waves are, and at distances deeper than 100m the same effect will also be achieved.

Figure 2 illustrates a next step of the method of using the frame. Vessel 11, submerged frame 12, buoy 16 and towline 13 are the same as the elements with the same reference numbers illustrated in Fig. 1. Towline 13 has some slack in this embodiment such that during installation vessel 11 and frame 12 do not directly influence each other's hydrodynamic properties. The towline can still be used for communication and power supply during installation and during the pendulum motion. A second vessel 21 is provided which is illustrated at the moment it drops object 22 into the water. A fibre rope 23 or other rope with slack connects object 22 and frame 12.

Figure 3 illustrates a next phase of the method of using the frame. The elements with the same reference numerals as in Figures 1 and 2 illustrate the same elements. Line 31 illustrates the trajectory carried out by object 22 during pendulum motion underneath frame 12. While the frame is located about 100 metres below the surface, the distance to the seabed 32 may be as deep as 3km.

Figure 4 shows a final phase of the method in which the object 22 has been lowered onto the seabed by way of the winch mechanism which provided in the frame 12. Additionally, a remotely operated vehicle 41 is illustrated which is used to interact with the object 22 and which is connected to vessel 11 with a cable 42.

In the illustrations described above, a buoy 16 is provided which is connected to the submerged frame with a cable and which can be used for easily determining the position of the frame underwater and for communication between the frame and the vessel. In those illustrations, the buoy does not contribute to the buoyancy or the dynamics of the submerged frame. A contribution by the buoy to the buoyancy of the submerged frame can be avoided by using a loose connection, or by using a connection which is adaptable in length. The shape of the buoy can also be a cylindrical shape which is positioned with the longitudinal axis of the cylinder in a vertical direction.

In a further illustration, the buoy does contribute to maintaining a relatively constant depth of the buoyancy frame. The connection between the buoy and the frame can be fixed in that illustration. If the depth of the buoyancy frame increases, the submerged part of the buoy will increase, and the buoyancy of the system will increase. If the depth of the buoyancy frame decreases, the submerged part of the buoy will decrease, and

the buoyancy of the system will decrease. The shape of the buoy will determine whether the change in buoyancy will be linear or exponential with the change in depth. Instead of a cylindrical shape, a cone shape could be used to achieve an exponential change.

5

The submerged frame is less sensitive to wave motion when compared to a vessel at the water surface. The buoy will be sensitive to wave motion, and a fixed connection to the submerged frame will cause an increased sensitivity of the frame to wave motion. However, the buoyancy contribution of the buoy occurs at a stage where wave forces are of limited importance, which is the stage at which the sub is adjusting the buoyancy when taking the full vertical load of the template. This stage occurs slightly after the step illustrated in Fig. 3. After this stage has been completed, which is at the end of the pendulum motion, the buoyancy contribution from the buoy is not required anymore and the connection between the buoy and the frame can be changed to a flexible connection. If the buoy is shaped longitudinally with a small cross sectional area along the water surface, the water line area will be small and the impact of waves will be small in dependence of vertical motion.

In an example, the connection between the buoy and the frame can be adjusted in length and can be changed from an adjustable connection to a fixed connection. A cable and a winch mechanism could for example be used for adjusting the length and the winch mechanism can be locked in order to provide a fixed connection. If the submersible frame required additional buoyancy, the connection can be tightened.

The properties of rope 23 or of another cable connecting the object and frame can also be varied to control the dynamics of the pendulum motion. A thicker cable will have a larger effective inertia when compared to a thinner cable and the larger effective inertia will cause a damping of the movement of the cable. In an embodiment, one or more objects are attached to the cable to control the dynamics of the cable. The objects can have positive buoyancy or only have a particular shape to affect the drag without having additional positive buoyancy. In an example, a plurality of positive buoyancy objects are spaced along the cable, at regular intervals or irregular intervals, between the object and the frame. In another example, a plurality of objects with a parachute shape or other shape with a larger surface area than that of the cable are spaced along the cable at regular or irregular intervals to increase drag during motion of the cable through the water.

Figure 5 is a diagram of the method disclosed herein, including the steps of providing the object on a vessel (S1), connecting the object to a submersible frame located below the water surface (S2), releasing the object from the vessel (S3) such that the
5 object becomes submerged and carries out a pendulum motion until the object is suspended from the submersible frame, and finally moving the object to the desired location (S4).

Although the invention has been described in terms of preferred embodiments as set
10 forth above, it should be understood that these embodiments are illustrative only and that the claims are not limited to those embodiments. Those skilled in the art will be able to make modifications and alternatives in view of the disclosure which are contemplated as falling within the scope of the appended claims. Each feature disclosed or illustrated in the present specification may be incorporated in the
15 invention, whether alone or in any appropriate combination with any other feature disclosed or illustrated herein.

CLAIMS:

1. A method of installing an object under water at a desired location, the method comprising:
- 5 providing the object on a vessel;
 connecting the object to a submersible frame located below the water surface;
 wherein the vessel is spatially separated from the submersible frame along the direction of the water surface;
- 10 releasing the object from the vessel such that the object becomes submerged and carries out a pendulum motion until the object is suspended from the submersible frame;
 moving the object to the desired location.
- 15 2. The method of claim 1, wherein the submersible frame is connected to said vessel.
- 3 The method of claim 1, wherein the submersible frame is connected to a further vessel.
- 20 4. The method of claim 2, wherein the submersible frame is connected to said vessel by a tow line, a power line, or a communication line.
5. The method of claim 3, wherein the submersible frame is connected to the further vessel by a tow line, a power line, or a communication line.
- 25 6. The method of any one preceding claim, further comprising adjusting the buoyancy of the submersible frame to compensate for the weight of the object.
- 30 7. The method of claim 2 or 4, further comprising the vessel towing the submersible frame for positioning the object.
8. The method of claim 3 or 5, further comprising the further vessel towing the submersible frame.

9. The method of any one of the preceding claims, wherein the object is moved by a winch provided on the submersible frame.
- 5 10. The method of any one of the preceding claims, further comprising adjusting the position of the submersible frame with a propulsion system provided on the submersible frame.
- 10 11. The method of any one of the preceding claims, wherein the desired position of the object is one of: the seabed; a wellhead system; or a seabed processing system.
12. The method of any one of the preceding claims, further comprising providing a buoy which is connected to the submersible frame, wherein the buoy is arranged to selectively provide additional buoyancy to the submersible frame.
- 15 13. The method of claim 12, wherein the buoy has a cylindrical shape or a cone shape.
14. The method of any one of the preceding claims, further comprising controlling the drag of the connection between the object and the submersible frame by attaching
20 one or more drag objects to the connection.
15. The method of claim 14, wherein the drag objects have positive buoyancy or increase the spatial extent of the connection.
- 25 16. An assembly for installing an object under water at a desired location, the assembly comprising:
a vessel arranged to carry the object;
a submersible frame;
a connection between the object and the submersible frame, wherein in use the
30 vessel is spatially separated from the submersible frame along the direction of the water surface;
wherein the object, the connection and the submersible frame are arranged such that, when releasing the object from the vessel, the object becomes submerged and carries out a pendulum motion until the object is suspended from the submersible
35 frame;

wherein the frame comprises a winch mechanism for moving the object to the desired location.

5 17. The assembly according to claim 16, further comprising a further vessel arranged to tow the submersible frame.

18. The assembly according to claim 16 or 17, wherein the submersible frame is connected to the further vessel by a tow line, a power line, or a communication line.

10 19. The assembly according to any one of claims 16 to 18, wherein the submersible frame comprises a variable buoyancy system.

15 20. The assembly according to any one of claims 16 to 19, wherein the assembly further comprises a buoy connected to the submersible frame for indicating the location of the submersible frame.

20 21. The assembly according to any one of claims 16 to 20, further comprising a remotely operated vehicle for interacting with the object after installation of the object on the seabed.

22. The assembly according to claim 20, wherein the buoy is connected to the submersible frame with an adjustable cable.

25 23. The assembly according to claim 22, wherein the cable is adjusted such that the buoyancy of the buoy provides a buoyancy force to the submersible frame.

24. The assembly according to any one of claims 16 to 23, further comprising one or more drag objects attached to the connection between the object and the submersible frame.

30 25. The assembly of claim 24, wherein the drag objects have positive buoyancy or increase the spatial extent of the connection by the shape of the drag objects.

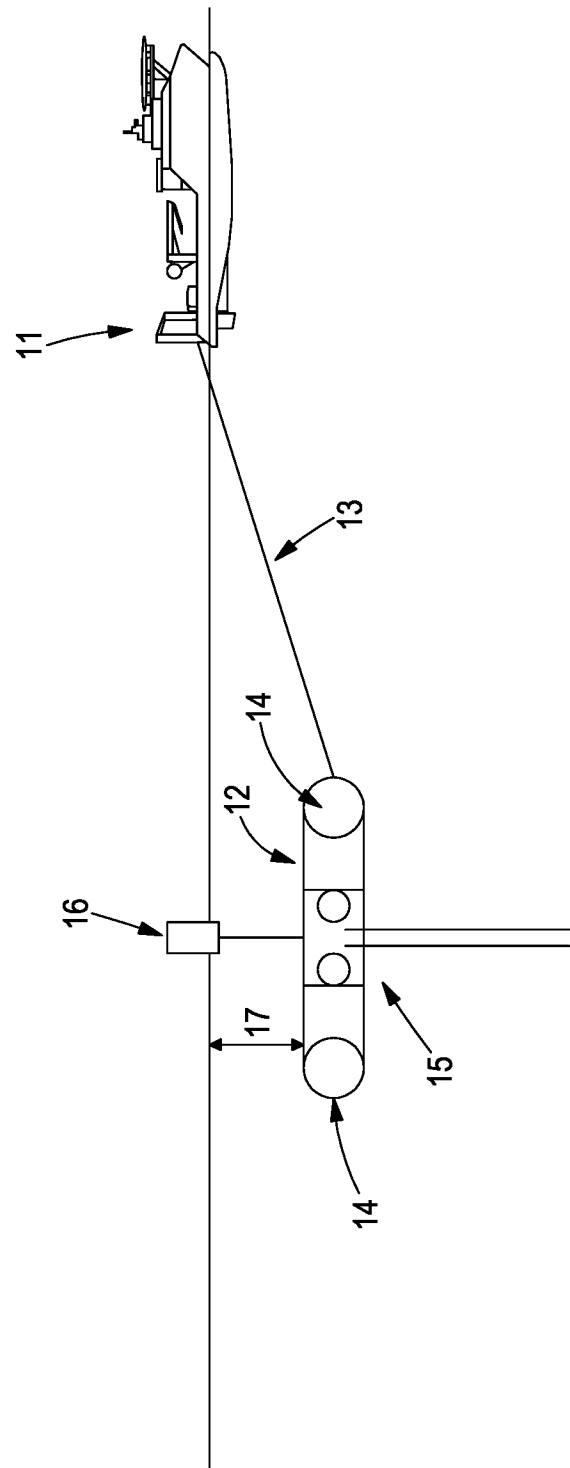


Fig. 1

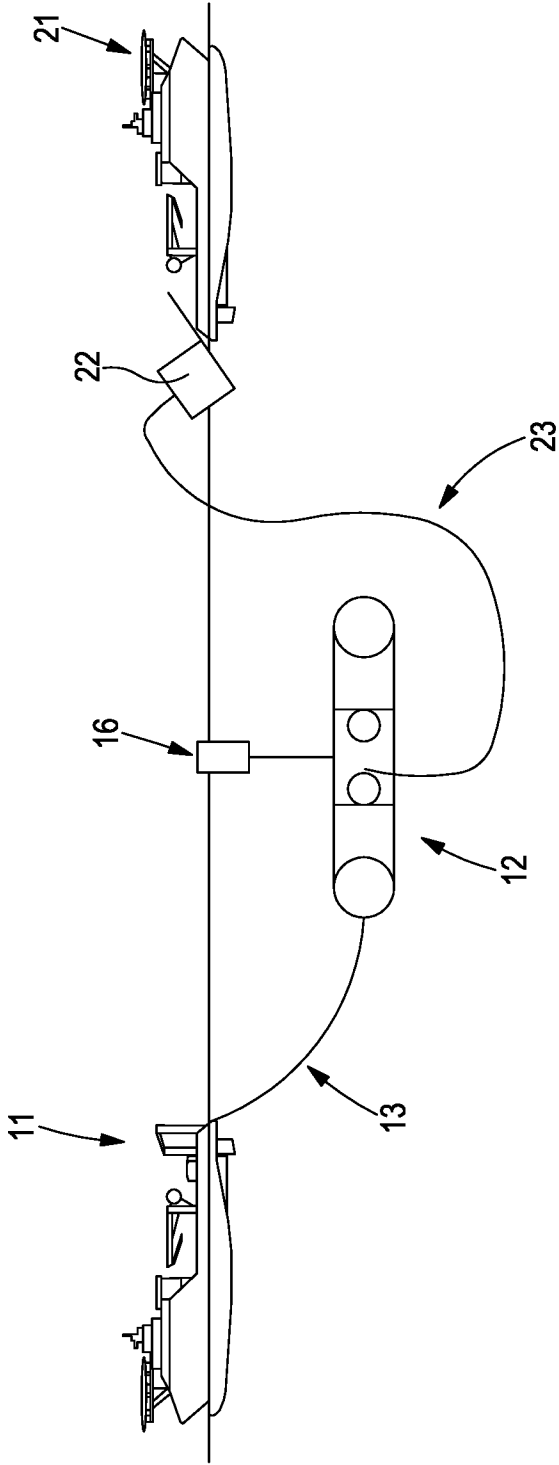


Fig. 2

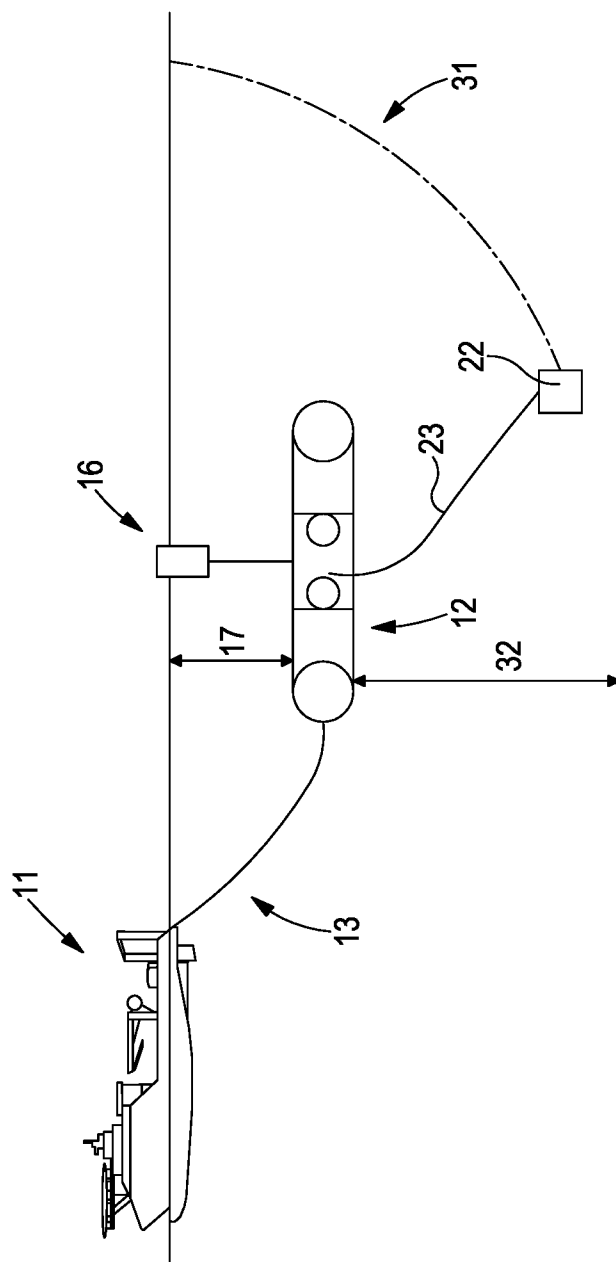


Fig. 3

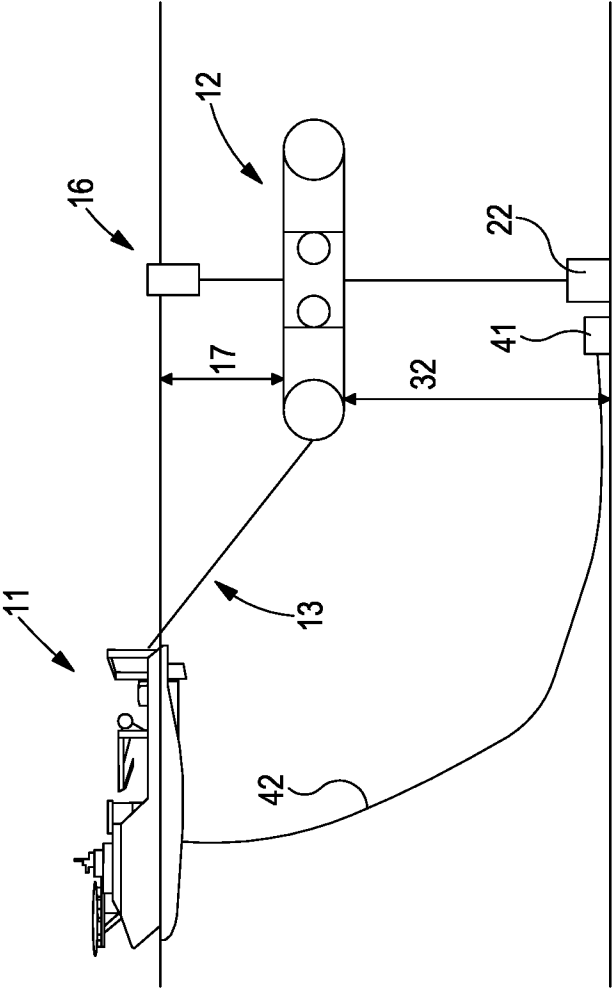


Fig. 4

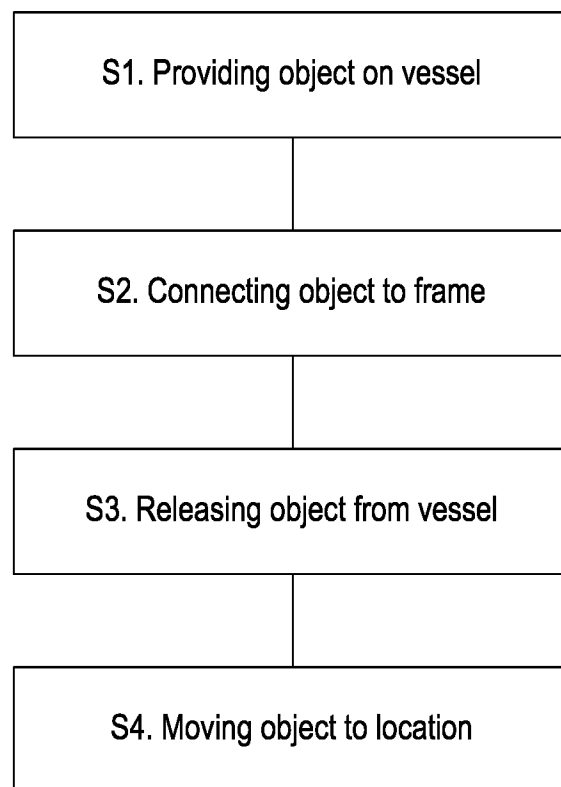


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO2018/050185

A. CLASSIFICATION OF SUBJECT MATTER IPC: B63C 11/34 (2006.01), B63C 11/42 (2006.01), B63B 25/00 (2006.01), B63B 27/00 (2006.01), B63G 8/00 (2006.01), E02B 17/00 (2006.01), E21B 33/00 (2006.01), E21B 41/00 (2006.01), E21B 43/00 (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) B63C, B63B, E21B, E02B Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched DK, NO, SE, FI: Classes as above. Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPODOC, WPI, FULL TEXT		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4797035 A (HUNTER ANDREW F) 1989.01.10	1-8, and 11-15
Y	Column 1, line 5 – column 2, line 47 and figures 1-2	9-10 and 16-25
Y	NO 339924 B1 (OCEANEERING AS [NO]) 2017.02.13 Page 1, lines 14-21 ; p.6, line 21 - p.7, line 19 and figures	9-10 and 16-25
A	GB 2 454 660 A (TECHNIP FRANCE [FR]) 2009.05.20 Page 3, lines 11-29 and figures	1-25
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: “A” document defining the general state of the art which is not considered to be of particular relevance “E” earlier application or patent but published on or after the international filing date “L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) “O” document referring to an oral disclosure, use, exhibition or other means “P” document published prior to the international filing date but later than the priority date claimed “T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention “X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone “Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art “&” document member of the same patent family		
Date of the actual completion of the international search 13/09/2018		Date of mailing of the international search report 21/09/2018
Name and mailing address of the ISA Nordic Patent Institute Helgeshøj Allé 81 DK - 2630 Taastrup, Denmark. Facsimile No. + 45 43 50 80 08		Authorized officer Ali, Mohamed Muse Telephone No. 0047 22 38 74 94

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO2018/050185

Patent document cited in search report / Publication date		Patent family member(s) / Publication date	
US 4797035 A	1989.01.10	NO 882476 A	1988.12.06
		GB 2206628 A	1989.01.11
		CA 1304588 C	1992.07.07
NO 339924 B1	2017.02.13	WO 2017146583 A1	2017.08.31
		NO 342840B B1	2018.08.13
		NO 342840B B1	2018.08.13
GB 2454660 A	2009.05.20	WO 2009063159 A1	2009.05.22