



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
16.03.2011 Bulletin 2011/11

(51) Int Cl.:
A47L 15/23 (2006.01)

(21) Application number: **10178371.0**

(22) Date of filing: **24.08.2004**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PL PT RO SE SI SK TR

(30) Priority: **29.08.2003 SE 0302325**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
04445085.6 / 1 510 168

(71) Applicant: **Electrolux Home Products Corporation N.V.**
1130 Brussels (BE)

(72) Inventor: **Haegermarck, Anders**
142 63 Trangsund (SE)

(74) Representative: **Schröer, Gernot H. Meissner, Bolte & Partner GbR**
Bankgasse 3
90402 Nürnberg (DE)


Remarks:

This application was filed on 22-09-2010 as a divisional application to the application mentioned under INID code 62.

(54) **Wash arm arrangement for a dishwasher**

(57) This invention relates to a wash arm arrangement for a dishwasher comprising a treatment chamber (11) having one or several freely rotating support arms (16) that are provided with one or several freely rotating

spray arms (20) through which liquid is distributed to the dish in the treatment chamber (11). All the movement of the support arm (16) is created as reaction forces and/or moments from the spray out of the spray arm (20).

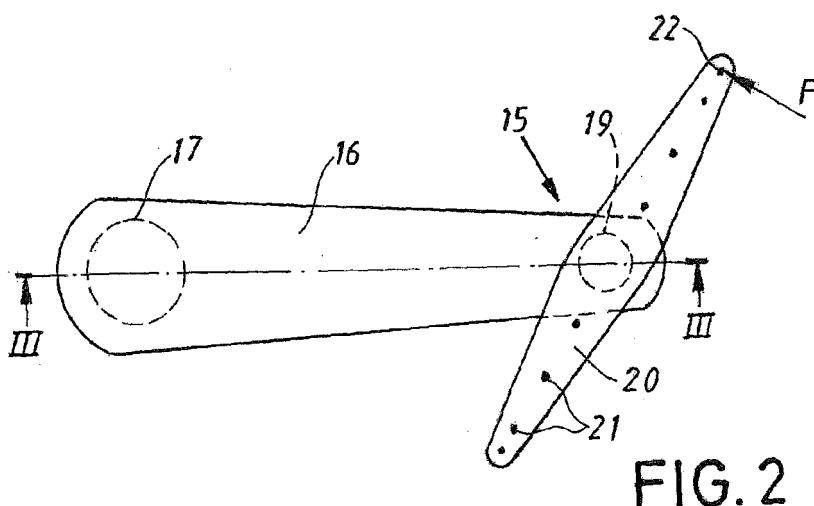

Description

[0001] This invention relates to a wash arm arrangement for a dishwasher comprising a treatment chamber having one or several freely rotating support arms that are provided with one or several freely rotating spray arms through which liquid is distributed to the dish in the treatment chamber.

[0002] Conventional dishwashers of the household type are usually provided with an upper and a lower rotating wash arm provided with several spray nozzles distributing the cleaning liquid to the dish which is placed in the treatment chamber. At least one of the nozzles is arranged such that a reaction force is created causing the wash arm to rotate. These spray systems have the disadvantage that the each spray of the rotating nozzle hits the same circle every revolution.

[0003] There also are previously known dishwasher arrangements, see for instance US 5477874 or DE 4416655, operating with one or several rotating support arms on which a spray arm is rotating. The support arm as well as the spray arm are provided with several spray nozzles some of which are directed such that a horizontal force component is created directly on the support arm as well as the spray arm causing the two arms to rotate. This means that a part of the flow is used to rotate the support arm.

[0004] Another type of wash arm arrangement is shown in EP 727177. According to this arrangement there is a reciprocating support arm provided with a rotating spray arm at each end. The support arm achieves its reciprocating motion by means of nozzles provided at the spray arms and the spray arms are mutually connected by means of a gear mechanism in order to synchronize the motion of the spray arms such that a balanced uniform motion is created. This is however a complicated and rather expensive solution.

[0005] The purpose of this invention is, contrary to traditional wash arm systems, to use a dishwasher spraying system that is distributing the liquid in a non uniform way by driving the support arm in incremental steps. This means that a more effective and faster washing can be achieved resulting in less water and energy consumption. It also means a simple and cheap wash arm arrangement using a freely rotating support arm that is provided with a freely rotating spray arm for driving the support arm. The arrangement is such that all the liquid used in the washing procedure is arranged to flow through the spray nozzle and there is consequently no loss of flow in order to drive the support arm separately.

[0006] An embodiment of the invention will now be described with reference to the accompanying drawing on which Fig. 1 shows a perspective view of a dishwasher according to the invention, Fig. 2 is a schematic plan view of the wash arm arrangement according to the invention, Fig. 3 is a section on the line III-III in Fig 2 whereas Fig 4 shows the driving forces of the spray arm and the support arm.

[0007] Fig. 1 shows a dishwasher 10 having a treatment chamber 11 in which dish is inserted on a lower and an upper basket 12 and 13. The treatment chamber is provided with a door 14 and has a wash arm arrangement 15 placed below the lower basket 12 as well as below the upper basket 13. The dishwasher is in a conventional manner provided with a circulation pump that distributes a cleaning liquid from a collecting container at the bottom of the treatment chamber to the wash arm arrangement from which it is sprayed towards the dish which is placed on the baskets.

[0008] The wash arm arrangement 15 comprises a support arm 16 that is rotating freely on a feeding duct 17 to which the cleaning liquid is supplied by said circulation pump. The support arm has a closed structure with the exception of an inlet opening 18 placed at the feeding duct 17 and an outlet sleeve 19 at the outer end of the support arm. The outlet sleeve 19 supports a spray arm 20 that rotates freely on the sleeve. The spray arm is provided with several nozzles 21 that direct the flow mainly vertically towards the dish. The spray arm is further provided with an additional nozzle 22 at one of its ends through which a cleaning liquid jet is directed obliquely upwards or sideways.

[0009] The arrangement operates in the following way. Cleaning liquid is distributed from the feeding duct 17 via the opening 18 into the support arm 16 and further through the outlet sleeve 19 and the nozzles 21 via the spray arm 20. Simultaneously liquid is flowing out through the nozzle 22 mainly perpendicular to the length direction of the spray arm 20 causing a horizontal driving force F on the spray arm. This force F creates a momentum about the sleeve 19 such that the spray arm 20 starts to rotate. The rotation of the spray arm 20 generates a friction momentum C at the sleeve 19 that forces the support arm 16 to rotate. At the same time the force F is transmitted to the support arm 16 through the sleeve 19 by its component F_1 parallel to the support arm 16 and F_2 perpendicular to it. Component F_2 creates a momentum around the feeding duct 17 which is added up to the friction momentum C at the sleeve 19 and contributes to the rotation of the support arm 16. Eventually the support arm 16 rotates with periodical angular velocity originated by a constant component C (friction given by satellite rotation) added up to a periodical one given by the component F_2 of the force F . By choosing suitable friction at the feeding duct 17 and at the sleeve 19 the support arm 16 is rotated in incremental steps. Due to that the increment steps are not fixed the position of the sprays will vary continuously thereby minimizing the risk for areas not being washed. Thus, the system creates a heavy flow directed at the items above the wash arm and this flow transports the dirt away in an efficient manner.

Claims

1. Wash arm arrangement for a dishwasher comprising

a treatment chamber (11) having one or several freely rotating support arms (16) that are provided with one or several freely rotating spray arms (20) through which liquid is distributed to the dish in the treatment chamber,




characterized in that

the liquid is distributed in a non uniform way by driving the support arm (16) in incremental steps.

2. Arrangement according to claim 1, **characterized in that** the spray arm (20) is provided with at least one nozzle (22) arranged such that one horizontal reaction force component (F) from the jet flowing out from the nozzle creates a moment (C) for the spray arm (20) about its rotation centre as well as a moment (M) for the support arm (16) about its rotation centre, and
that a suitable friction at the supporting means (17, 19) of the spray arm (20) and of the support arm (16) is chosen to achieve the rotation of the support arm (16) in incremental steps.
3. Arrangement according to claim 1 or 2, **characterized in that** all the movement of the support arm is created as reaction forces and/or moments from the spray out of the spray arm.
4. Arrangement according to any of claims 1-3, **characterized in that** all the liquid which is fed to the support arm (16) is arranged to flow out into the treatment chamber through the spray arm (20).
5. Arrangement according to any of claims 1-4, **characterized in that** the support arm (16) is a closed structure having one liquid inlet (18) and one liquid outlet (19).
6. Arrangement according to any of claims 1-5, **characterized in that** the support arm (16) is arranged to move in incremental steps when liquid is distributed through the wash arm.
7. Arrangement according to any of claims 1-6, **characterized in that** the spray arm (20) is provided with at least one nozzle (22) arranged such that one horizontal reaction force component (F) from the jet flowing out from the nozzle creates a moment (C) for the spray arm (20) about its rotation centre as well as a moment (M) for the support arm (16) about its rotation centre.
8. Arrangement according to any of claims 1-7, **characterized in that** the dishwasher is provided with at least one liquid feeding duct (17) on which the support arm is arranged to rotate.
9. Arrangement according to claim 8, **characterized in that** said support arm (16) is comprising an outlet

sleeve (19) that supports a spray arm (20) freely rotating on the sleeve (19), and that a suitable friction at the feeding duct (17) and at the sleeve (19) is chosen to achieve the rotation of the support arm (16) in incremental steps.

10. Arrangement according to claim 9, **characterized in that** the support arm (16) is a closed structure having one liquid inlet (18) placed at the feeding duct (17) and one liquid outlet which is said outlet sleeve (19).

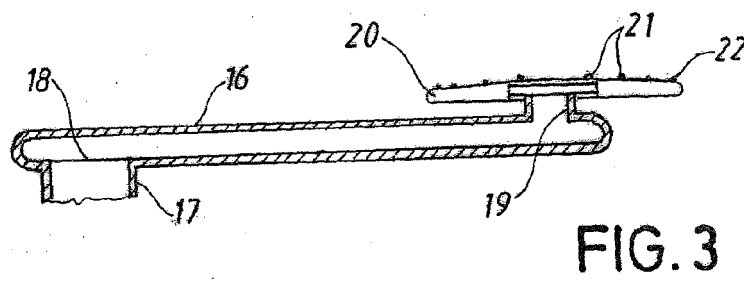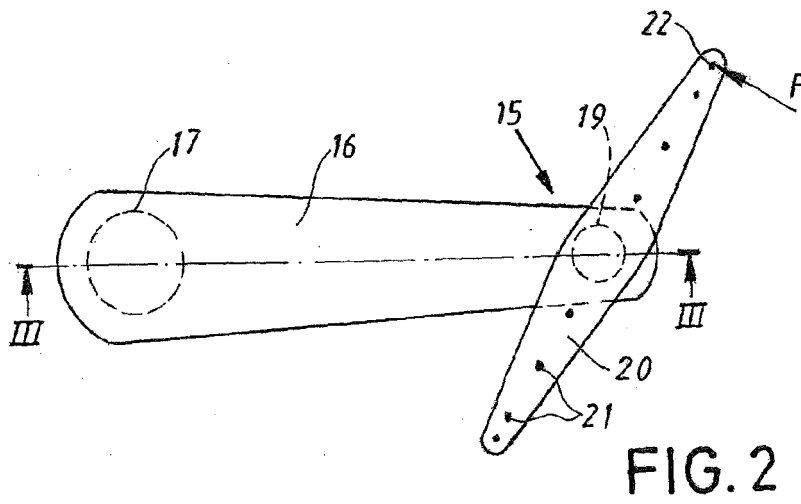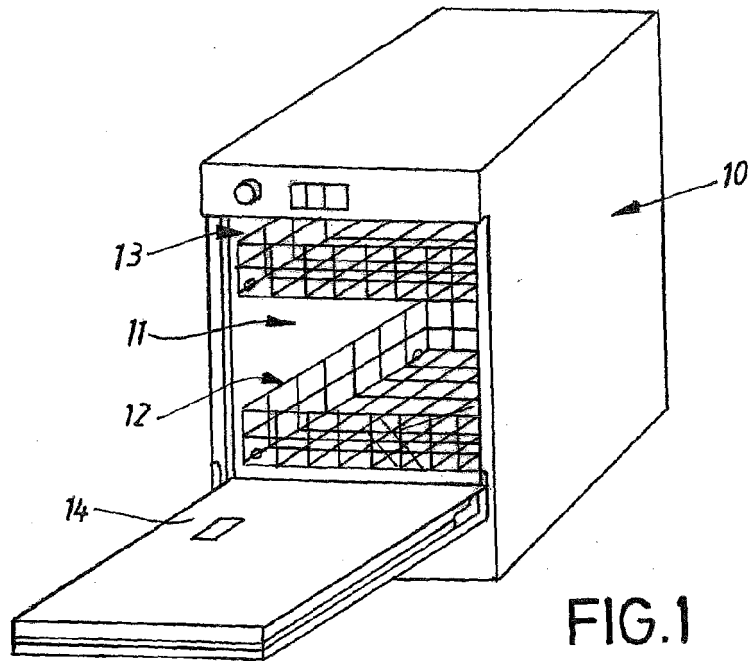

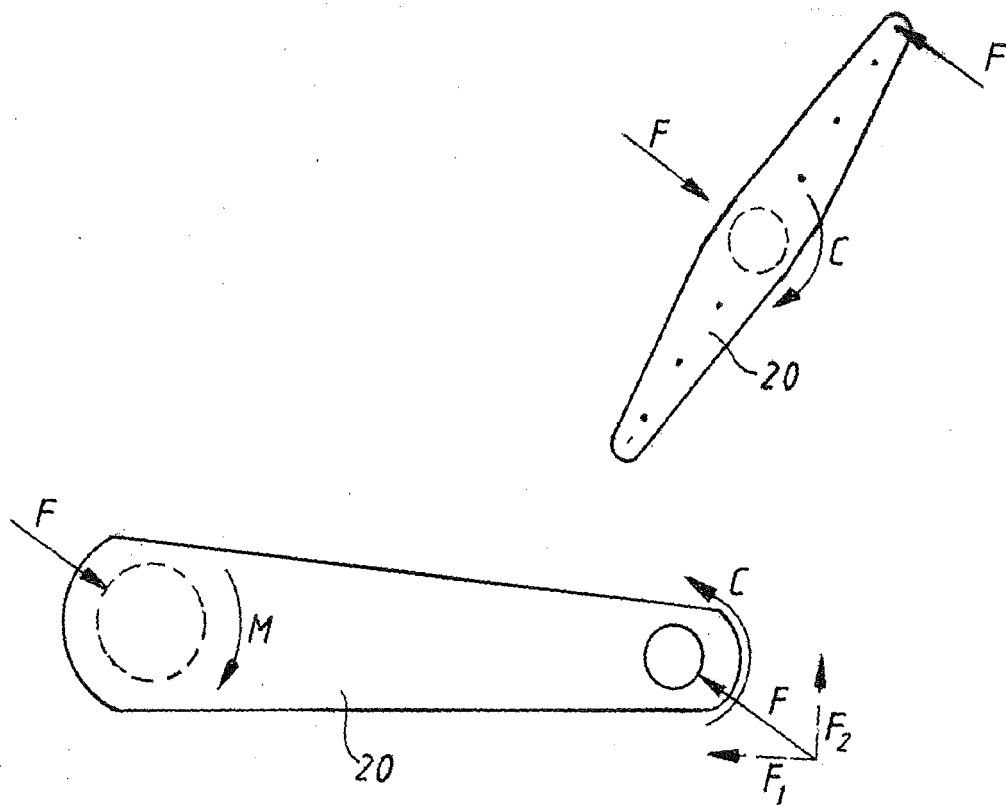


FIG. 4



EUROPEAN SEARCH REPORT

Application Number
EP 10 17 8371

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A,D	DE 19 65 345 A1 (BODSON, CLAUDE) 16 July 1970 (1970-07-16) * page 2, paragraph 2 - page 3, paragraph 4; claims 1-3; figures 1,2 *	1-10	INV. A47L15/23
A	US 3 771 725 A (JENKINS T ET AL) 13 November 1973 (1973-11-13) * claim 10; figures 2,3 *	1,3,8	
A	EP 0 727 177 A2 (SMEG SPA [IT]) 21 August 1996 (1996-08-21) * figures 1,2 *	1,3,5,7,8	
A,D	DE 44 16 655 A1 (GUTOEHRLEIN, HEINZ, 44269 DORTMUND, DE) 16 November 1995 (1995-11-16) * the whole document *	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			A47L
Place of search Munich		Date of completion of the search 12 January 2011	Examiner Kising, Axel
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 17 8371

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-01-2011

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
DE 1965345	A1	16-07-1970	FR	1600196 A		20-07-1970

US 3771725	A	13-11-1973	NONE			

EP 0727177	A2	21-08-1996	DE	69602216 D1		02-06-1999
			DE	69602216 T2		19-08-1999
			ES	2132867 T3		16-08-1999
			IT	MI950274 A1		15-08-1996

DE 4416655	A1	16-11-1995	NONE			

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5477874 A [0003]
- DE 4416655 [0003]
- EP 727177 A [0004]