

(19)



(11)

EP 2 981 764 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

06.05.2020 Bulletin 2020/19

(51) Int Cl.:

F23N 5/02 (2006.01)

(86) International application number:

PCT/US2014/032016

(21) Application number: **14776404.7**

(22) Date of filing: **27.03.2014**

(87) International publication number:

WO 2014/160866 (02.10.2014 Gazette 2014/40)

(54) **IN SITU PROBE WITH IMPROVED DIAGNOSTICS AND COMPENSATION**

IN-SITU-SONDE MIT VERBESSERTER DIAGNOSE UND KOMPENSATION

SONDE IN SITU AVEC DIAGNOSTICS ET COMPENSATION AMÉLIORÉS

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **29.03.2013 US 201361806629 P**
25.03.2014 US 201414224680

(43) Date of publication of application:

10.02.2016 Bulletin 2016/06

(73) Proprietor: **Rosemount Inc.**

Shakopee, MN 55379 (US)

(72) Inventors:

- **KRAMER, James, D.**
Homerville, OH 44235 (US)
- **NEMER, Joseph, C.**
Mayfield Heights, OH 44124 (US)

• **WEY, Anni, S.**

Strongsville, OH 44136 (US)

• **SIMMERS, Douglas, E.**

Massillon, OH 44646 (US)

• **STOJKOV, Mark**

Parma, OH 44134 (US)

(74) Representative: **Parker, Andrew James et al**

Meissner Bolte Patentanwälte

Rechtsanwälte Partnerschaft mbB

Widenmayerstraße 47

80538 München (DE)

(56) References cited:

WO-A1-97/49979

GB-A- 2 457 660

US-A- 4 128 458

US-A1- 2002 182 552

US-A1- 2004 182 133

US-A1- 2011 012 040

US-A1- 2011 012 040

US-B1- 6 846 458

US-B1- 6 846 458

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 981 764 B1

Description

BACKGROUND

[0001] Industrial process industries primarily rely upon energy sources that include one or more combustion processes. Such combustion processes include operation of a furnace or boiler to generate energy from combustion, which is then used for the process. While combustion provides relatively low-cost energy, its use is typically regulated and combustion efficiency is sought to be maximized. Accordingly, one goal of the process management industry is to reduce the production of greenhouse gases by maximizing combustion efficiency of existing furnaces and boilers.

[0002] In situ or in-process analyzers are commonly used for the monitoring, optimization, and control of combustion processes. Typically, these analyzers employ sensors that are heated to relatively high temperatures and are operated directly above, or near, the furnace or boiler combustion zone. Combustion analyzers, such as those sold under the trade designation Oxymitter or Model 6888 Combustion Flue Gas Transmitter available from Rosemount Analytical, Inc. of Solon, Ohio (a business unit of Emerson Process Management), often employ zirconia oxide sensors heated to a temperature above approximately 700° Celsius (1300° Fahrenheit).

[0003] In situ analyzers generally employ a sintered metal filter or other diffuser positioned between a measurement cell and the process combustion gas to allow the process combustion gas to diffuse to the measurement zone while minimizing flow effects and reducing measurement cell contamination. The diffuser readily allows the process combustion gas to contact the heated measurement cell. However, if the diffuser should become partially or fully plugged, it can introduce errors into the measurement. Thus, providing an in situ oxygen probe that is better able to diagnose diffuser obstructions and/or compensate for effects of such obstructions would advance the art of process analytic measurement and control. US 2011/012040 describes a known process combustion transmitter.

SUMMARY

[0004] A process combustion transmitter is provided. The transmitter includes a process probe extendible into a flow of process combustion exhaust. The process probe has a measurement cell and a diffuser that define a chamber within the process probe. Electronic circuitry is coupled to the measurement cell and is configured to provide an indication relative to a combustion process based on an output signal of the measurement cell. A pressure sensor is coupled to the electronic circuitry and is fluidically coupled to the chamber. The electronic circuitry is configured to provide an adjusted calibration based the pressure of a calibration gas measured within the chamber and on the output signal of the measurement

cell during a calibration.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005]

FIG. 1 is a diagrammatic view of an in situ analyzer with which embodiments of the present invention are particularly useful.

FIG. 2 is a diagrammatic exploded view of a process analytic oxygen transmitter in accordance with an embodiment of the present invention.

FIG. 3 is a block diagram of a process analytic oxygen transmitter in accordance with an embodiment of the present invention.

FIG. 4 is a flow diagram of a method of calibrating a process analytic oxygen transmitter in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0006] FIG. 1 is a diagrammatic view of an in situ process combustion analyzer. Transmitter 10 can be any suitable analyzer including the X-Stream O₂ Combustion Flue Gas Transmitter listed above. Transmitter 10 includes a probe assembly 12 that is disposed within a stack or flue 14 and measures at least one parameter related to combustion occurring at burner 16. Typically, transmitter 10 is an oxygen transmitter, but can be any device that measures any suitable parameter related to the combustion process. Burner 16 is operably coupled to a source of air or oxygen 18 and a source 20 of combustible fuel. Each of sources 18 and 20 is preferably coupled to burner through a valve of some sort to deliver a controlled amount of oxygen and/or fuel to burner 16 in order to control the combustion process. Transmitter 10 measures the amount of oxygen in the combustion exhaust flow and provides an indication of the oxygen level to combustion controller 22. Controller 22 controls one or both of valves 24, 26 to provide closed-loop combustion control. Transmitter 10 includes an oxygen sensor that typically employs a zirconia oxide sensor substrate to provide an electrical signal indicative of oxygen concentration, content or percentage in the exhaust.

[0007] Periodically and/or whenever otherwise desired, transmitter 10 is calibrated by providing a calibration gas from source 28 to probe 12. By measuring the response of the sensor(s) within probe 12 to the calibration gas, errors can be detected and compensated. In some instances, published specifications call for a minimum flow rate of the calibration gas in order to ensure that the cell area is entirely filled with calibration gas and that no flue gasses can mix with the calibration test gasses. In one specification, a minimum calibration gas flow-rate of 0.13 Nm³/hr (5 SCFH) is required.

[0008] Over a period of months or years, the diffuser element of probe 12 can become fully or partially plugged.

When this occurs, the minimum flowrate required by some published specifications (such as 0.13 Nm³/hr or 5 SCFH) will only be achieved at elevated pressures. In the case of manual calibration, a technician will increase calibration gas pressure until the desired flowrate is observed. For example, an instrument technician may perform a calibration with a badly plugged diffuser and notice when the bottle of calibration gas is opened that a 137.9 kPa (20 PSI) calibration gas pressure only provides a 0.053 Nm³/hr (2 SCFH) flow instead of the nominal 0.13 Nm³/hr (5 SCFH) flow. In this instance, the technician will adjust the calibration gas pressure regulator until the desired 0.13 Nm³/hr (5 SCFH) is achieved. The resulting pressure required to achieve such flow rate may be higher than 137.9 kPa (20 PSI), and may even pressurize the measurement cell of the probe assembly to some extent. Even a calibration performed where the measurement cell is pressurized on the order of 13.8 kPa (2 PSI) (approximately 56 inches/1422.4 mm of water column) will affect the calibration process itself and introduce errors. This is because the measurement cell will return to normal operating pressures after calibration and will read an erroneous value, such as an artificially low (0.5% O₂) value. Moreover, when the diffuser is partially or completely plugged, calibration gas may be trapped between the measurement cell and the diffuser thus undesirably influencing the process variable measurements.

[0009] Additionally, during operation, when the diffuser becomes partially plugged, it causes the response time of the process variable to slow, due to slower diffusion of the combustion or exhaust gasses through the partially or completely plugged diffuser to the measurement cell.

[0010] In accordance with the present invention, the backpressure of the calibration gas and/or the pressure proximate the measurement cell itself is measured during calibration. Since the measurement cell seals one side of the probe, the calibration gas must flow or otherwise diffuse out through the diffuser. Thus, if the diffuser is blocked, partially or completely, the calibration gas will not be able to escape and the backpressure or chamber pressure will rise. If the pressure is measured and exceeds a threshold, an indication of plugging can be provided. This indication can be provided by an alarm annunciated locally at the device, transmitted through a process communication loop or segment, or both. Further, the magnitude of the pressure observed during calibration can be related to a calibration error that can be compensated. Further still, additional remedial measures can also be taken based on the amount of plugging. For example, if the diffuser is 50% plugged, the transmitter may wait longer after calibration before providing process variable measurements in order to allow the calibration gas more time to escape through the partially plugged diffuser.

[0011] FIG. 2 is a diagrammatic view of an in situ process combustion analyzer in accordance with the present invention. Probe assembly 12 is generally configured to house a sensor core assembly which includes diffuser

32 disposed next to measurement cell 36. Measurement cell 36 and heater assembly 38 are electrically coupled to electronic circuitry contained on electronics board 42 in housing 44. Transmitter 10 also includes a plurality of gas inlets 46 and 48 to receive reference air and calibration gas, respectively.

[0012] As illustrated in FIG. 2, transmitter 10 includes a pressure sensor 50 that is fluidically coupled to chamber or region 52 between measurement cell 36 and diffuser 32. In the embodiment shown in FIG. 2, pressure sensor 50 is disposed along the calibration gas line (shown coupled to inlet 48) and thus measures the pressure of calibration gas proximate region 52. However, in other embodiments, pressure sensor 50 may be disposed within region 52. Pressure sensor 50 is electrically coupled to electronic circuitry on electronics board 42. Thus, pressure sensor 50 is able to provide an electrical indication of pressure within region 52 during calibration, normal operation, or both. Pressure sensor 50 may be any suitable type of pressure sensor including a deflectable diaphragm, capacitance-based pressure sensor, a deflectable diaphragm strain gauge, resistance-based pressure sensor, or any other suitable type of pressure sensor. However, the pressure sensor should be configured for exposure to the relatively low pressures and relatively high temperatures of operating in the flue-gas environments. Additionally, pressure sensor 50 may be disposed close to the flue-gas or in the electronics housing area (safe).

[0013] Zirconia oxide sensing technology has historically measured process oxygen by using ambient or instrument air as a reference (20.95% oxygen). Periodically, the sensor within measurement cell 38 may need to be calibrated where a precisely controlled amount of oxygen can be introduced to the sensor and exposed to measurement cell 36. Accordingly, ports 46 and 48 are coupled to conduits that direct the reference and calibration gases to measurement cell 36. The reference gas is provided to a side of the zirconia oxide substrate that is away from the process gas. During calibration, however, calibration gas is supplied to the side of the zirconia substrate that is opposed to the side exposed to reference gas. In this manner, each side is exposed to a gas. The calibration gas should flood region 52 and flow out diffuser 32. However, if the diffuser is even partially plugged, the ability of the calibration gas to flow out diffuser 32 is reduced. This will result in an increased calibration gas pressure, as set forth above. If the calibration gas has a higher pressure than nominal, this higher pressure will generate an increased oxygen reading by the sensor of oxygen in the calibration gas. If the sensor is calibrated at this higher pressure, then, when the pressure is reduced to the normal operating pressure, the calibrated sensor will read too low. However, by measuring the actual pressure in region 52 during the calibration, this effect can be measured and compensated. Additionally, the magnitude of the pressure itself can be used to provide a general indication of the degree of diffuser plugging.

Finally, the degree of plugging determined from the pressure measurement can be used to increase the amount of time that the transmitter waits after calibration before providing process oxygen measurements. Thus, in a partially plugged diffuser, the calibration gas is given more time to diffuse out of region 52 before process oxygen measurements are provided.

[0014] FIG. 3 is a block diagram of a process analytic oxygen transmitter in accordance with the present invention. For clarity, only a portion, region 52, of probe assembly 12 is depicted. However, FIG. 3 does indicate additional components of electronics board 42. Specifically, electronic circuitry on electronics board 42 includes controller 60 coupled to communication module 62 and measurement circuitry 64. Additionally, controller 60 is also operably coupled to solenoid 66, which controls the flow of calibration gas from source 28 to chamber 52. Controller 60 may be any suitable device that executes a sequence of instructions to perform one or more control functions. In one embodiment, controller 60 is a micro-processor.

[0015] Communication module 62 is coupled to controller 60 and allows controller 60 to communicate with one or more process devices, such as combustion controller 22 (shown in FIG. 1) in accordance with a wired process industry standard communication protocol. Examples of such protocols include the Highway Addressable Remote Transducer HART® Protocol and wireless process communication protocols, such as IEC 62591.

[0016] Measurement circuitry 64, in one embodiment, includes an analog-to-digital converter configured to measure an electrical characteristic, such as capacitance, of pressure sensor 50 that is indicative of pressure within chamber 52 and provide a digital indication of such to controller 60. Measurement circuitry 64 may also include suitable amplification, filtering, and/or linearizing circuitry as desired.

[0017] During normal operation, controller 60 maintains solenoid 66 in a disengaged state thus isolating calibration gas source 28 from chamber 52. Flue/combustion gasses from the combustion process diffuse through diffuser 32 and contact oxygen sensor 68. Oxygen sensor 68, in accordance with known techniques, will produce a voltage that is related to the difference in oxygen partial pressure between process side 70 in chamber 52 and reference side 72. This voltage is measured by suitable measurement circuitry, such as measurement circuitry 64 and indicated to controller 60. Controller 60 then communicates, via communication module 62, a process variable output to any suitable device, such as combustion controller 22.

[0018] FIG. 4 is a flow diagram of a method of calibrating a process analytic oxygen transmitter in accordance with an embodiment of the present invention. The method indicated in FIG. 4, will also be described with respect to the block diagram of FIG. 3. Method 100 begins at block 102 where controller 60 engages solenoid 66 causing calibration gas from source 28 to flow into and fill chamber

52. Calibration gas will flow out of chamber 52 via diffuser 32. While the calibration gas is so flowing, controller 60 monitors the pressure within chamber 52 via pressure sensor 50 and measurement circuitry 64, as indicated at block 104. The monitored pressure is compared to a threshold at block 106, and if the pressure is above the threshold, then controller 60 will indicate diffuser plugging at block 108. This indication can be via a local annunciation, via communication through module 62, or both. Once the plugging annunciation/indication is generated, control passes to block 110. Additionally, if the monitored pressure is not above the threshold, then control passes simply from block 106 to block 110.

[0019] At block 110, the output of sensor 68 in response to the calibration gas is obtained. At block 112, the calibration is adjusted based on the pressure measured during block 104. Thus, if the diffuser is partially plugged and the pressure becomes high enough to generate calibration errors, such pressure can be measured and the calibration itself is adjusted based on the pressure. The relationship between the measured pressure and the effect on calibration can be characterized in any suitable format including a lookup table 114 or a curve-fit calculation, 116. These relationships can be obtained through testing and provided by the manufacturer of the device. Once the adjustment is obtained, the new calibration value(s) is/are stored at block 118. Once the calibration value(s) is/are stored, controller 60 de-energizes solenoid 66 and the flow of calibration gas is ceased. At block 120, controller 60 waits until sufficient time has elapsed before proceeding to block 122 and beginning operation with the new calibration value(s). This wait period, in accordance with one embodiment of the present invention, is adjusted based on the pressure measured during block 104. Thus, if a higher pressure is measured (indicative of partial plugging), then it will take longer for the calibration gas to diffuse out of chamber 52. Thus, controller 60 will wait longer before proceeding to block 122.

[0020] While some techniques can provide an indication of a plugged diffuser based on the speed with which the sensor responds to process changes, it is believed that embodiments of the present invention will provide a faster and more quantified diagnostic than such techniques.

[0021] Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the scope of the invention.

Claims

1. A process combustion transmitter (10) comprising; a process probe (12) extendible into a flow of process combustion exhaust, the process probe (12) having a measurement cell and a diffuser (32), the meas-

- urement cell and the diffuser (32) defining a chamber (52) within the process probe (12); electronic circuitry coupled to the measurement cell and configured to provide an indication relative to a combustion process based on an output signal of the measurement cell; 5
a pressure sensor (50) operably coupled to the electronic circuitry and fluidically coupled to the chamber (52); and
wherein the electronic circuitry is configured to provide an adjusted calibration based on the pressure of a calibration gas measured within the chamber and on the output signal of the measurement cell (52) during a calibration.
2. The process combustion transmitter of claim 1, wherein the electronic circuitry is configured to provide an indication of diffuser (32) plugging based on said pressure measured during the calibration.
 3. The process combustion transmitter (10) of claim 2, wherein the indication is a local annunciation.
 4. The process combustion transmitter (10) of claim 2, wherein the indication is communicated in accordance with a process communication protocol.
 5. The process combustion transmitter (10) of claim 1, wherein the electronic circuitry is configured to resume process measurements after calibration using the adjusted calibration.
 6. The process combustion transmitter (10) of claim 5, wherein the electronic circuitry is configured to wait a selected amount of time after calibration before resuming process measurements.
 7. The process combustion transmitter (10) of claim 6, wherein the amount of time is selected based on the pressure measured during calibration.
 8. The process combustion transmitter (10) of claim 1, wherein the electronic circuitry includes a controller (60) coupled to measurement circuitry (64) and wherein the measurement circuitry (64) is operably coupled to the pressure sensor (50).
 9. The process combustion transmitter of claim 8, and wherein the electronic circuitry further comprises a communication module (62) coupled to the controller (60) and configured to communicate in accordance with a process communication protocol.
 10. A method of calibrating a process combustion transmitter (10), the method comprising: 55
providing a flow of calibration gas into a chamber (52) defined, at least partially, by a measurement cell and a diffuser (32);
measuring a pressure of calibration gas in the chamber (52) while the calibration gas is flowing;
measuring the measurement cell response to the calibration gas; and
providing an adjusted calibration based on the measurement cell response and the measured pressure.
 11. The method of claim 10, wherein the measurement cell includes an oxygen sensor.
 12. The method of claim 10, and further comprising providing an indication of diffuser plugging based on the measured pressure.
 13. The method of claim 10, and further comprising waiting a selected amount of time after the calibration to begin providing process measurements using the adjusted calibration.
 14. The method of claim 13, wherein the selected amount of time is based on the pressure measured during calibration.
 15. The method of claim 10, and further comprising measuring a pressure within the chamber (52) during normal operation and providing a compensated process variable output.

Patentansprüche

1. Prozessverbrennungssender (10), umfassend:

eine Prozesssonde (12), die in einen Fluss von Prozessverbrennungsabgas erstreckbar ist, wobei die Prozesssonde (12) eine Messzelle und einen Diffusor (32) aufweist, wobei die Messzelle und der Diffusor (32) eine Kammer (52) innerhalb der Prozesssonde (12) definieren;
eine elektronische Schaltung, die mit der Messzelle gekoppelt ist und konfiguriert ist, um eine Anzeige in Bezug auf einen Verbrennungsprozess basierend auf einem Ausgangssignal der Messzelle bereitzustellen;
einen Drucksensor (50), der betriebsmäßig mit der elektronischen Schaltung verbunden ist und mit der Kammer (52) in Fluidverbindung steht; und
wobei die elektronische Schaltung konfiguriert ist, um eine eingestellte Kalibrierung basierend auf dem Druck eines Kalibriergases, der in der Kammer (52) gemessen wird, und auf dem Ausgangssignal der Messzelle (52) während einer Kalibrierung bereitzustellen.

2. Prozessverbrennungssender nach Anspruch 1, wobei die elektronische Schaltung konfiguriert ist, um eine Anzeige eines verstopften Diffusors (32) basierend auf dem Druck, der während der Kalibrierung gemessen wird, bereitzustellen. 5
3. Prozessverbrennungssender (10) nach Anspruch 2, wobei die Anzeige eine lokale Anzeige ist.
4. Prozessverbrennungssender (10) nach Anspruch 2, wobei die Anzeige gemäß einem Prozesskommunikationsprotokoll kommuniziert wird. 10
5. Prozessverbrennungssender (10) nach Anspruch 1, wobei die elektronische Schaltung konfiguriert ist, um Prozessmessungen nach der Kalibrierung unter Verwendung der eingestellten Kalibrierung wieder aufzunehmen. 15
6. Prozessverbrennungssender (10) nach Anspruch 5, wobei die elektronische Schaltung konfiguriert ist, um eine ausgewählte Zeitdauer nach der Kalibrierung abzuwarten, bevor die Prozessmessungen wiederaufgenommen werden. 20
7. Prozessverbrennungssender (10) nach Anspruch 6, wobei die Zeitdauer basierend auf dem Druck, der während der Kalibrierung gemessen wird, ausgewählt wird. 25
8. Prozessverbrennungssender (10) nach Anspruch 1, wobei die elektronische Schaltung eine mit der Messschaltung (64) gekoppelte Steuerung (60) enthält, und wobei die Messschaltung (64) betriebsbereit mit dem Drucksensor (50) gekoppelt ist. 30
9. Prozessverbrennungssender nach Anspruch 8, wobei die elektronische Schaltung ferner ein Kommunikationsmodul (62) umfasst, das mit der Steuerung (60) gekoppelt ist und konfiguriert ist, um gemäß einem Prozesskommunikationsprotokoll zu kommunizieren. 35
10. Verfahren zum Kalibrieren eines Prozessverbrennungssenders (10), wobei das Verfahren umfasst: 40
 - Einströmen eines Kalibriergases in eine Kammer (52), die zumindest teilweise durch eine Messzelle und einen Diffusor (32) definiert ist; Messen eines Kalibriergasdrucks in der Kammer (52), während das Kalibriergas strömt; Messen der Messzellen-Reaktion auf das Kalibriergas; und
 - Vornehmen einer eingestellten Kalibrierung basierend auf der Messzellen-Reaktion und dem gemessenen Druck. 45
11. Verfahren nach Anspruch 10, wobei die Messzelle

einen Sauerstoffsensor umfasst.

12. Verfahren nach Anspruch 10, ferner umfassend das Bereitstellen einer Anzeige eines verstopften Diffusors basierend auf dem gemessenen Druck.
13. Verfahren nach Anspruch 10, ferner umfassend ein Abwarten einer ausgewählten Zeitdauer nach der Kalibrierung, um mit dem Vornehmen von Prozessmessungen unter Verwendung der eingestellten Kalibrierung zu beginnen.
14. Verfahren nach Anspruch 13, wobei die ausgewählte Zeitdauer auf dem während der Kalibrierung gemessenen Druck basiert.
15. Verfahren nach Anspruch 10, ferner umfassend das Messen eines Drucks in der Kammer (52) während eines normalen Betriebes, und das Bereitstellen einer vom Kompensationsprozess abhängigen Ausgabe.

Revendications

1. Émetteur de combustion de process (10) comprenant :
 - une sonde de process (12) capable de s'étendre jusqu'à dans un flux de gaz d'échappement de combustion de process, la sonde de process (12) ayant une cellule de mesure et un diffuseur (32), la cellule de mesure et le diffuseur (32) définissant une chambre (52) à l'intérieur de la sonde de process (12) ;
 - des circuits électroniques couplés à la cellule de mesure est configuré pour fournir une indication en relation à un process de combustion sur la base d'un signal de sortie de la cellule de mesure ;
 - un capteur de pression (50) fonctionnellement couplé aux circuits électroniques et couplé sur le plan fluide à la chambre (52) ; et
 - dans lequel les circuits électroniques sont configurés pour fournir un calibrage ajusté sur la base de la pression d'un gaz de calibrage mesurée à l'intérieur de la chambre et sur le signal de sortie de la cellule de mesure (52) pendant un calibrage.
2. Émetteur de combustion de process selon la revendication 1, dans lequel les circuits électroniques sont configurés pour fournir une indication d'un colmatage du diffuseur (32) sur la base de ladite pression mesurée pendant le calibrage.
3. Émetteur de combustion de process (10) selon la revendication 2, dans lequel l'indication est une an-

nonce locale.

4. Émetteur de combustion de process (10) selon la revendication 2, dans lequel l'indication est communiquée en accord avec un protocole de communication de process. 5
5. Émetteur de combustion de process (10) selon la revendication 1, dans lequel les circuits électroniques sont configurés pour reprendre les mesures de process après un calibrage en utilisant le calibrage ajusté. 10
6. Émetteur de combustion de process (10) selon la revendication 5, dans lequel les circuits électroniques sont configurés pour attendre une durée temporelle sélectionnée après calibrage avant de reprendre les mesures de process. 15
7. Émetteur de combustion de process (10) selon la revendication 6, dans lequel la durée temporelle est sélectionnée sur la base de la pression mesurée pendant le calibrage. 20
8. Émetteur de combustion de process (10) selon la revendication 1, dans lequel les circuits électroniques incluent un contrôleur (60) couplé à des circuits de mesure (64), et dans lequel les circuits de mesure (64) sont fonctionnellement couplés au capteur de pression (50). 25
30
9. Émetteur de combustion de process selon la revendication 8, dans lequel les circuits électroniques comprennent en outre un module de communication (62) couplé au contrôleur (60) et configuré pour communiquer en accord avec un protocole de communication de process. 35
10. Procédé pour calibrer un émetteur de combustion de process (10), le procédé comprenant les étapes consistant à : 40
 - fournir un flux d'un gaz de calibrage vers une chambre (52) définie, au moins partiellement, par une cellule de mesure et par un diffuseur (32) ; 45
 - mesurer une pression du gaz de calibrage dans la chambre (52) alors que le gaz de calibrage s'écoule ;
 - mesurer la réponse de la cellule de mesure au gaz de calibrage ; et 50
 - fournir un calibrage ajusté basé sur la réponse de la cellule de mesure et sur la pression mesurée. 55
11. Procédé selon la revendication 10, dans lequel la cellule de mesure inclut un capteur d'oxygène.

12. Procédé selon la revendication 10, comprenant en outre l'étape consistant à fournir une indication d'un colmatage du diffuseur sur la base de la pression mesurée.

13. Procédé selon la revendication 10, comprenant en outre l'étape consistant à attendre une durée temporelle sélectionnée après le calibrage pour commencer à fournir des mesures de process en utilisant le calibrage ajusté.

14. Procédé selon la revendication 13, dans lequel la durée temporelle sélectionnée est basée sur la pression mesurée pendant le calibrage.

15. Procédé selon la revendication 10, comprenant en outre l'étape consistant à mesurer une pression à l'intérieur de la chambre (52) pendant un fonctionnement normal et à fournir une sortie de variable de process compensée.

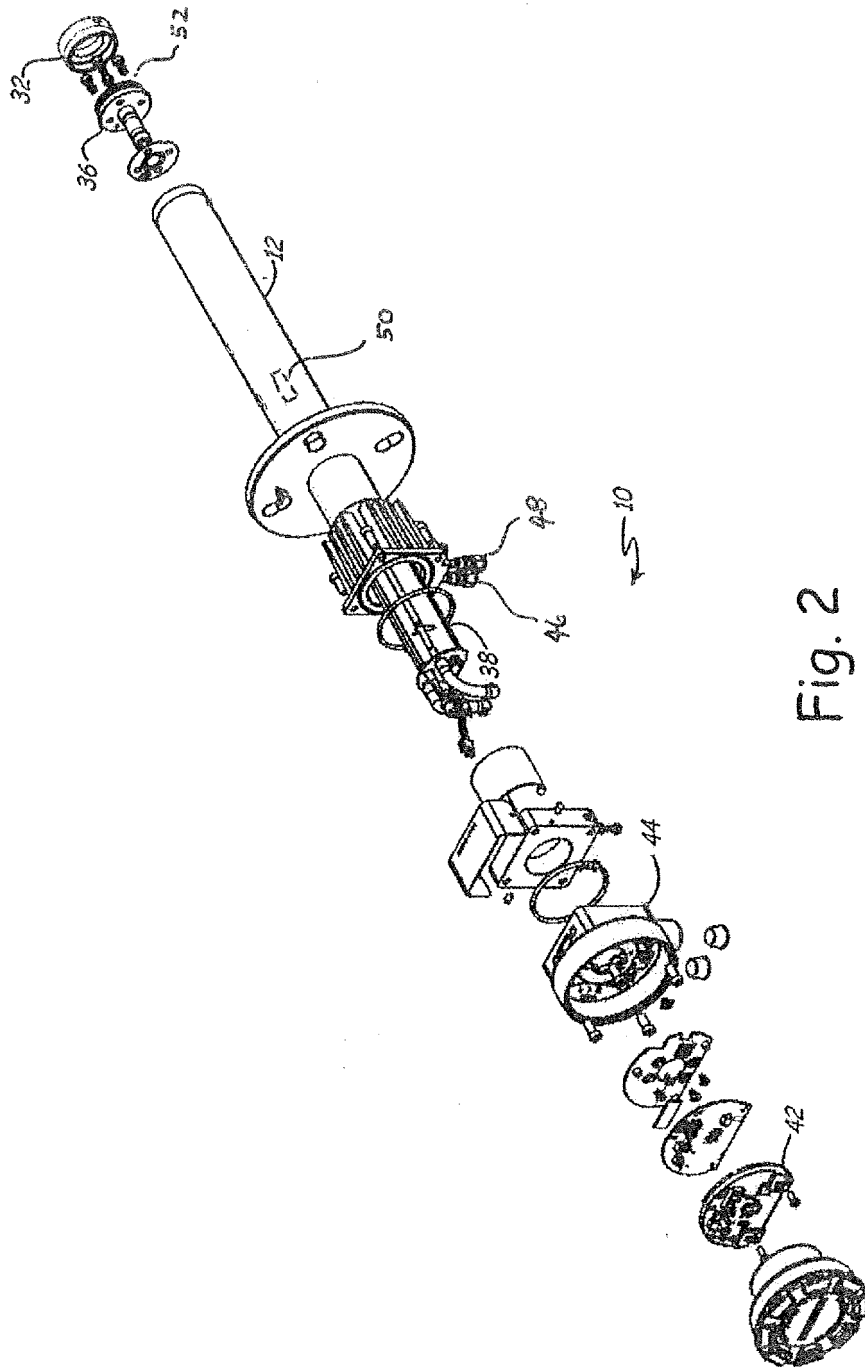


Fig. 2

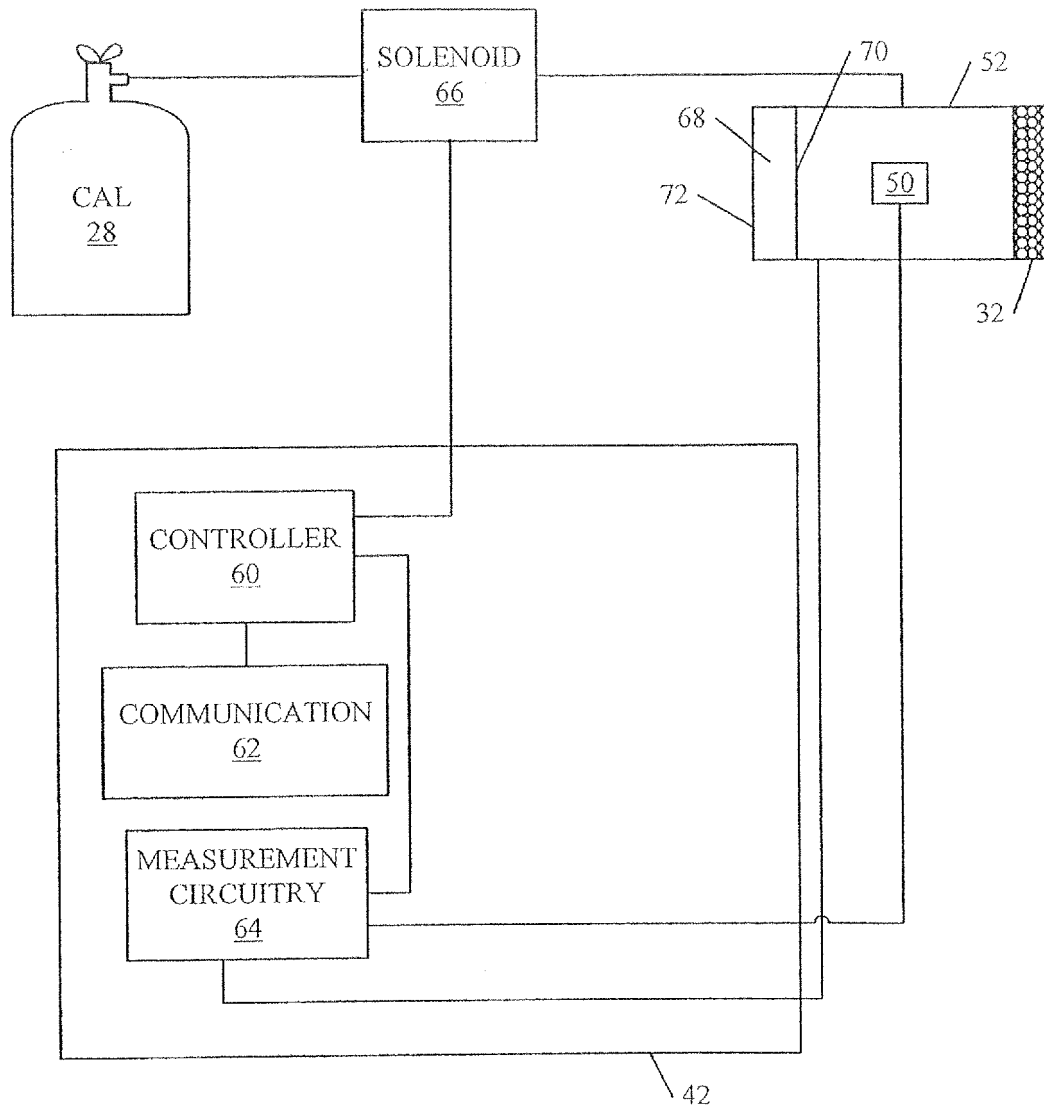


Fig. 3

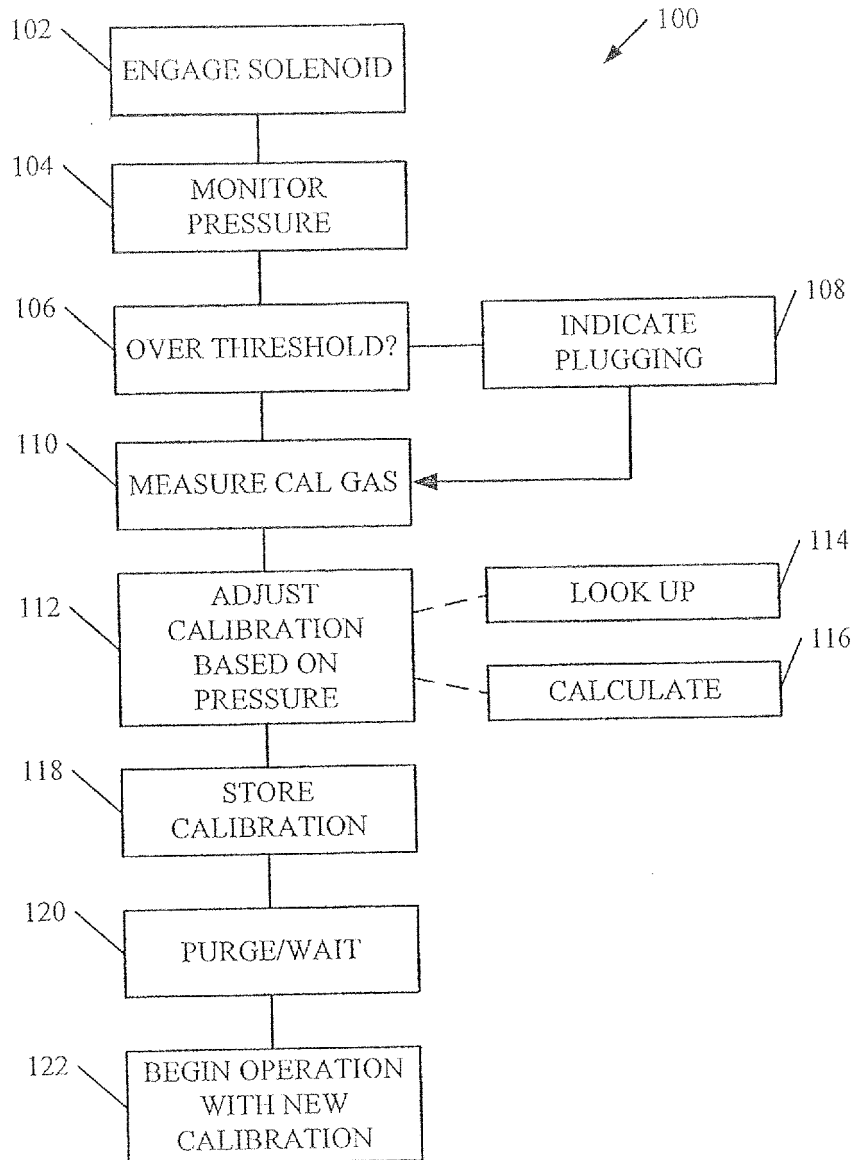


Fig. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2011012040 A [0003]