

(19)



INTELLECTUAL PROPERTY
OFFICE OF SINGAPORE

(11) Publication number:

SG 182461 A1

(43) Publication date:

30.08.2012

(51) Int. Cl:

B63B 59/08;

(12)

Patent Application

(21) Application number: 2012051017

(71) Applicant:

ØSTERVOLD, TOR MIKAL STENEVIK,
N-5397 BEKKJARVIK NO NO
ØSTERVOLD, STEN TERJE STENEVIK,
N-5397 BEKKJARVIK NO NO

(22) Date of filing: 03.02.2011

(72) Inventor:

ØSTERVOLD, TOR MIKAL STENEVIK
N-5397 BEKKJARVIK NO
ØSTERVOLD, STEN TERJE STENEVIK
N-5397 BEKKJARVIK NO

(30) Priority: NO 20100172 03.02.2010

(54) **Title:**

TOOL AND METHOD FOR CLEANING SURFACES SUBSEA

(57) **Abstract:**

The invention provides a tool (4) for cleaning surfaces subsea, comprising a body having a cleaning face (11) for holding against and preferably also moving along the surface to be cleaned, the face has a shape convex or corresponding to the surface to be cleaned, and a means for distance control of the cleaning face of the body such that a gap is provided between said face and the surface (3) to be cleaned when the tool is in operation, and/or openings or channels are arranged for allowing surrounding water to flow in towards the centre of the cleaning face. Further, the cleaning face comprises a suction outlet for water, debris and contamination, in operation the outlet (13) is connected to a suction device (17) so that water, debris and contamination is drawn into the outlet for transport to further treatment.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 August 2011 (11.08.2011)

(10) International Publication Number
WO 2011/095531 A1

(51) International Patent Classification:

B63B 59/08 (2006.01)

(21) International Application Number:

PCT/EP2011/051521

(22) International Filing Date:

3 February 2011 (03.02.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20100172 3 February 2010 (03.02.2010) NO

(72) Inventors; and

(71) Applicants : ØSTERVOLD, Tor Mikal [NO/NO]; Stenevik, N-5397 Bekkjarvik (NO). ØSTERVOLD, Sten Terje [NO/NO]; Stenevik, N-5397 Bekkjarvik (NO).

(74) Agent: PROTECTOR IP CONSULTANTS AS; Oscarsgate 20, N-0352 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: TOOL AND METHOD FOR CLEANING SURFACES SUBSEA

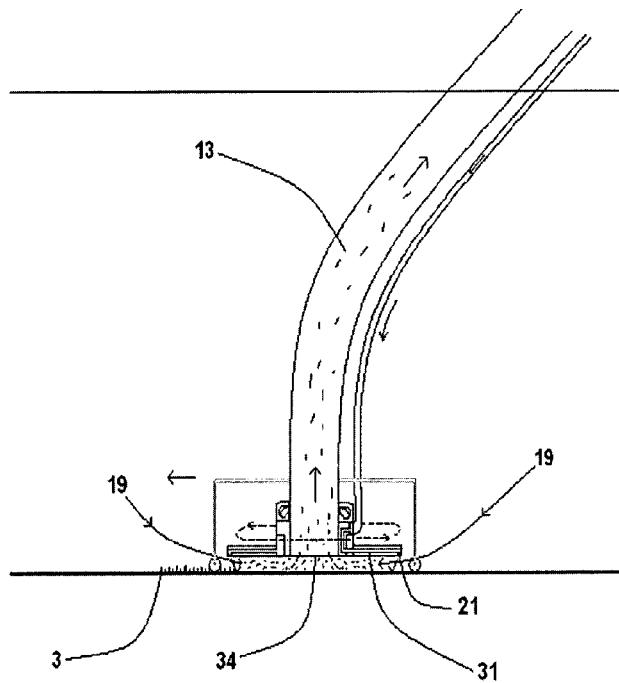


Fig 3

(57) Abstract: The invention provides a tool (4) for cleaning surfaces subsea, comprising a body having a cleaning face (11) for holding against and preferably also moving along the surface to be cleaned, the face has a shape convex or corresponding to the surface to be cleaned, and a means for distance control of the cleaning face of the body such that a gap is provided between said face and the surface (3) to be cleaned when the tool is in operation, and/or openings or channels are arranged for allowing surrounding water to flow in towards the centre of the cleaning face. Further, the cleaning face comprises a suction outlet for water, debris and contamination, in operation the outlet (13) is connected to a suction device (17) so that water, debris and contamination is drawn into the outlet for transport to further treatment.



- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

TOOL AND METHOD FOR CLEANING SURFACES SUBSEA

5 Field of the invention

The present invention relates to cleaning of subsea surfaces, that is submerged or immersed surfaces. More specifically, the invention relates to tools and methods for cleaning of subsea surfaces without contaminating the surrounding water.

10

Background of the invention and prior art

Cleaning of subsea surfaces, such as the submerged parts of ship hulls,

receives gradually more attention. One reason is the advantages of cleaning hulls of vessels in order to improve fuel economy due to reduced friction when

15 sailing. Another reason is the resulting pollution, not only from released soft and hard marine or aquatic growth, but also possibly released or scraped-off anti-fouling agents, paint and other poisonous and harmful materials. Previously, the released material used to be left in the water at the site of cleaning, resulting in pollution and sediments that easily are swirled about by large ships. Patent

20 publication US 4,926,775 contains description and illustration of a tool useful for cleaning of subsea surfaces, but operation of the tool results in severe pollution.

However, in patent publication WO 2009/142506, two embodiments of a cup-shaped rotating tool with spraying nozzles and a central suction outlet are

25 described, and related methods for cleaning. In one embodiment, the cup having integrated nozzles rotates, the rotation is due to the momentum from the cleaning fluid being sprayed out from the nozzles. In the other embodiment, rotary arms with nozzles rotate inside the cup, the rotation is about the central outlet, around which outlet the plumbing of a watery cleaning fluid supply is

30 arranged. The tools have proved to work very well, but they are quite complicated and therefore rather expensive and susceptible to malfunction.

Further, the rotating mass is large, the energy for rotation is taken from the flow energy of the cleaning fluid, resulting in less energy for cleaning. And even though the suction effect of the tools in operation is good, improved suction

effect is desirable, which will facilitate the operation as the tool easier will follow the surface to be cleaned.

Accordingly, a demand exists for tools that are simpler, less expensive, even 5 more reliable and with improved cleaning effect and suction effect. The objective of the present invention is to provide tools and methods that are beneficial with respect to the above mentioned demand.

Summary of the invention

10 The objective is met with the present invention.

The invention provides a tool for cleaning surfaces subsea, comprising a body having a cleaning face for holding against and preferably also moving along the surface to be cleaned, the face has a shape convex or

15 corresponding to the surface to be cleaned, and

a means for distance control of the cleaning face of the body such that a gap is provided between said face and the surface to be cleaned when the tool is in operation, and/or openings or channels are arranged for allowing surrounding water to flow in towards the centre of the cleaning face. Further, the 20 cleaning face comprises a suction outlet for water, debris and contamination, in operation the outlet is connected to a suction device so that water, debris and contamination is drawn into the outlet for transport to further treatment. More specifically, surrounding water is drawn in under the cleaning face and together with loosened material it is sucked into the suction outlet.

25

The tool is a far simpler construction than the existing tools described above, the simplest embodiments are without nozzles for spray of high pressure cleaning fluid or other specific means for cleaning, such as brushes, which 30 embodiments are particularly beneficial for removal of soft marine growth and where investments must be kept at a minimum. Other embodiments are beneficial for more or all of the parameters discussed above.

The term cleaning face means surface or side of the tool to be held against the surface to be cleaned. Said face is flat or more convex than the surface to be

cleaned is concave, in order to be held tightly or at a controlled gap distance from said surface. The openings or channels allows tight placement on the surface to be cleaned, but for most embodiments a gap is provided by distance means such as rollers, wheels, balls or brushes with adapted stiffness, which

5 stiffness preferably increases stepwise or gradually toward the cleaning face. The suction outlet is preferably but not necessarily coaxial or central in or on the cleaning face. A supply line of high pressure cleaning fluid, preferably water, is preferably arranged coaxial and central for tools having cleaning nozzles that rotate, with a high pressure swivel for rotation included. Rotation of nozzles,

10 discs and brushes are preferably achieved by momentum or flow energy from injection nozzles, by directing the nozzles inclined or obliquely inwards, inside the circumference of the cleaning face and directed at an angle from the supply pipe or an arm rotatably connected to it. Alternative means for rotation are for example based on a possible turbine in the suction flow, the turbine

15 hydraulically or mechanically driving the rotatable parts, or a motor. Nozzles can be arranged to rotate on a rotatable disc. The cleaning face preferably comprises flat surface inside the periphery, preferably circular symmetric, such as a flat ring shape. In operation the flat surface provides underpressure and suction effect of the tool toward the surface according to the venturi effect, due

20 to low static pressure in the flow. In operation, the suction flow must be larger than the possible high pressure injection jet flow, in order to maintain suction effect of the tool. Preferably the suction flow rate is 1,5 times or more than the jet flow rate. Due to the flat surface, providing improved suction effect, the ratio suction flow rate/jet flow rate can be lower than for related prior art tools.

25 Preferably, the flat ring shaped surface inside the periphery is larger than the edge of the cup according to WO 2009/142506, that is wider than 2mm, 5mm, 8mm, 10mm, 15mm, 20mm, 25mm, 30mm, 40mm or 50mm. Said ring shaped surface is preferably without any disturbing jet flows/cleaning nozzles, so that

30 the holding effect of said ring shaped surface is not disturbed and a maximum of cleaning effect and ease of moving is maintained. Cleaning nozzles are preferably arranged only inside said flat ring shaped surface in order not to disturb the holding effect of said flat ring shaped surface, and preferably nozzles are not directed so as to disturb the in substance laminar flow under said flat

surface. These feature, each one alone but more preferably in combination, provide a surprising effect of good cleaning capability and ease of manipulating the tool.

5 The tool of the invention may include any feature as described or illustrated here or elsewhere, in any operative combination, said combinations are all embodiments of the invention.

10 The invention also provides a method for cleaning surfaces subsea, using a tool according to the invention, distinguished by the steps:

holding a cleaning face of the tool against the surface to be cleaned, and activate suction flow through a suction outlet in the cleaning face,

activate an optional spray of high pressure cleaning fluid through optional high pressure cleaning nozzles, and

15 moving the cleaning face of the tool to cover the surface to be cleaned.

20 Either a diver, a ROV (remotely operated vehicle) or a ROT (remotely operated tool) hold and manipulates the tool, by replacements or moving along the surface to be cleaned. To this end, the tool comprises a convenient handle or fastening.

The invention also provides use of the tool according to the invention, for cleaning surfaces subsea whilst collecting loosened debris and other material for further treatment.

25 A further embodiment of the invention is a method for verification of the quality, such as the paint quality of a surface, distinguished by cleaning the surface by operating a tool of the present invention, collecting the loosened material, analyzing said material in order to find out whether or not paint or corrosion products etc. are included in a significant quantity. If for example paint is loosened and thereby included in the collected material, the quality of the paint is insufficient. The quality of the paint can be measured as a function of the amount of paint in the collected material. The tool and operating conditions are preferably standardized, but can be adapted specifically to specific surfaces.

Figures

The invention is illustrated with figures, of which

Fig. 1 illustrates a method of using a tool, according to the present invention,

5 and

Fig. Nos. 2-7 illustrate example embodiments of a tool according to the present invention.

Detailed description

10 Reference is made to Figure 1, illustrating an example of a cleaning operation of the invention. Visualised is a cargo vessel 1 at port, with a service vessel 2, undertaking cleaning to the submerged surfaces of cargo vessel 1, 3. The cleaning tool 4 is held by or assembled with a remotely operable vehicle (ROV) 5, which is manoeuvred from the service vessel 2. The cleaning tool is
15 manipulated to cover said surface with a cleaning face of the tool whilst said surface is cleaned. All loosened debris and other material are filtrated and hard waste collected when it comes onboard the service vessel 2. Filtration, UV-radiation and separation and collection of any poisonous material are some of the operations that can take place on the service vessel 2. In order not to
20 overload the drawing with information, the ROV and the connection to it are not illustrated. An upper horizontal line indicates sea level in the drawings.

Figure 2. illustrates a cleaning tool comprising a cleaning face 11, a spacer frame 12, a vacuum hose 13, a suction nozzle 14, a high pressure hose 15, a
25 high pressure inlet 16, a high pressure low diameter swivel 17, rotatable high pressure pipes 18 and high pressure nozzles 21. The figure illustrates, by arrows, how the cleaning tool operates, as the rotating fluid arms 18 are cleaning the surface 3 whilst dirt is sucked into the suction chamber 14 from where it is transported throughout the vacuum hose 13 to the service vessel 2
30 for further treatment. From outside of the tool, water 19 is sucked into the suction chamber and further throughout the vacuum hose. High pressure cleaning fluid, i.e. water, comes from a high pressure pump onboard the service vessel, through the high pressure hose 15, further into a water inlet 16 and through the high pressure swivel 17 before flowing into the high pressure arms

18 having spray nozzles in its external ends 21. The inward and inclined orientation of the jet nozzles 21 causes the rotation of the high-pressure pipes 18, due to forces from the jet flow. Preferably the means for distance control is integrated as wheels or roller balls or similar on or into the cleaning face, not as 5 a separate spacer frame 12 as illustrated as an example.

Figure 3 illustrates a tool with a cleaning face comprising a rotating disc 31 mounted at the lower rim of a suction hose 13. All released debris is flushed 10 from the high pressure nozzles 21 in an angle towards the centre of the disc 34, where it is sucked through the vacuum hose 13 to the assisting vessel 2 for further treatment. The angle of the jet nozzles 21 causes the disc 31 to rotate in addition to cleaning the submerged surface 3. The high pressure line for jetting cleaning fluid is preferably arranged in the suction line, with a central swivel. 15 The rotatable disc may include brushes on the cleaning face, preferably exchangeable brushes, so that harder brushes can be used for removing scale or other hard materials.

Figure 4. illustrates a basic embodiment of the tool of the invention, as it 20 contains only a spacer frame 12 with wheels 41 and a suction hose 13. The tool is manipulated over an impure surface and debris is sucked up and transported through the suction hose for further treatment in the assisting vessel. This embodiment is sufficiently effective for removal of soft marine growth from ship hulls, concrete structures and other submerged surfaces.

25 Figure 5. illustrates a tool with a disc 51 which include drilled holes enabling an even water transfer from the high pressure hose 15 to nozzles 21 mounted in the discs 51. The range of nozzles enables provides evenly cleaning of the surface 3. Released debris and other material 6 is transported, through the 30 suction hose 13, to the service vessel 3 for further treatment .

Figure 6. illustrates a tool having a rotating disc 61 with brushes 62 at its underside, the cleaning face. The rotating disc with brushes is moved over the surface 3 to remove all unwanted materials 6 from the surface, which materials

are then sucked up into the central opening of the disc 34 and further through the suction hose 13. Means for distance control are preferably included, such as integrated into the brushes by adapted stiffness and roller wheels or roller balls, as illustrated, in order to avoid jamming of the tool. Sliding of the tool along the 5 surface is surprisingly easy as the friction is surprisingly low while the disc rotates and the suction effect by the venturi effect is surprisingly good. Also the cleaning is surprisingly good. Preferably, rotation is achieved by a turbine in the suction line, operatively connected to the disc. Preferably, the suction line inlet of the tools of the invention comprises a seat for a turbine, such as on a shaft 10 connected to a rotating disc and/or nozzles.

Figure 7. illustrates a tool having a rotating disc 71 which is driven by a turbine / motor 70. This enables the disc/plate to rotate in either direction, as its cleaning jets are not the means for rotation. At the underside of the disc a number of 15 nozzles 21 are integrated, the nozzles flushes the surface 3 with high- pressurised water. Likewise the other figures, all loosened fouling/material 6 is removed from the submerged surface, by the high-pressurised water jets and sucked into the suction in the middle 34 of the disc 71. From there on, the fouling is sucked through the suction hose 13 for further treatment onboard the 20 assisting vessel 2. The great advantage of this solution is that the cleaning is more efficient as the jets do not loose energy on rotating the disc, rather all nozzle energy is used for cleaning. Subsequently, less cleaning pressure and flow is needed and it is possible to control the discs rotation by controlling the motor/turbine that drifts the disc. The turbine and rotating disc are preferably 25 arranged to a common central shaft.

The tool, methods and use of the invention may comprise any operative combination of features as described or illustrated in this document, which combinations are embodiments of the invention.

CLAIMS

1.

Tool for cleaning surfaces subsea, comprising

- 5 a body having a cleaning face for holding against and preferably also moving along the surface to be cleaned, the face has a shape convex or corresponding to the surface to be cleaned, and
- 10 a means for distance control of the cleaning face of the body such that a gap is provided between said face and the surface to be cleaned when the tool is in operation, and/or openings or channels are arranged for allowing surrounding water to flow in towards the centre of the cleaning face,
- 15 characterised in that the cleaning face comprises a suction outlet for water, debris and contamination, in operation the outlet is connected to a suction device so that water, debris and contamination is drawn into the outlet for transport to further treatment.

15

2.

Tool according to claim 1, characterised in that the face comprises flat surface inside the periphery, in operation the flat surface provides underpressure and suction effect of the tool toward the surface according to the

20 venturi effect.

3.

Tool according to claim 1, characterised in that the face is a flat surface inside the periphery but outside the outlet, in operation the flat surface

25 provides underpressure and suction effect of the tool toward the surface according to the venturi effect.

4.

Tool according to claim 1, characterised in that the face includes a central chamber, a cleaning fluid supply line is arranged at the centre of the chamber and face, rotatable about a swivel, arms extend in radial direction from the central rotatable supply line, cleaning nozzles are arranged on the arms, directed inclined at an angle inwards at the surface to be cleaned, inside the chamber.

5.

Tool according to any one of claim 1-4, characterised in that the means for distance control comprises roller balls on a flat ring-shaped surface

5 inside the periphery of the tool.

6.

Tool according to any one of claim 1-5, characterised in that it comprises cleaning brushes arranged on the face, such as on a flat ring-shaped

10 rotatable or non-rotatable surface inside the periphery of the tool, the brushes may act as the only or additional means for distance control in addition to providing mechanical or abrasive cleaning effect, preferably high pressure nozzles are also arranged on or in the cleaning face.

15 7.

Tool according to one of claim 1-3, characterised in that the cleaning face comprises a disc-shaped surface (disc), the disc includes holes that at inner ends are connected to a high pressure cleaning fluid supply and at outer ends are shaped and directed as high pressure nozzles directed at the 20 surface to be cleaned.

8.

Method for cleaning surfaces subsea, using a tool according to any one of claims 1-7, characterised by

25 holding a cleaning face of the tool against the surface to be cleaned, and activate suction flow through a suction outlet in the cleaning face, activate an optional spray of high pressure cleaning fluid through optional high pressure cleaning nozzles, and moving the cleaning face of the tool to cover the surface to be cleaned.

30

9.

Method for verification of the quality on a surface, such as paint quality, characterised by cleaning the surface by operating a tool of the present invention, collecting the loosened material, analyzing said material in

order to find out whether or not paint or corrosion products are included in a significant quantity, and preferably quantifying said quantity.

10.

- 5 Use of the tool according to any one of claims 1-8, for cleaning surfaces subsea whilst collecting loosened debris and other material for further treatment or analysis.

10