

(51) International Patent Classification:
H04L 12/56 (2006.01)(21) International Application Number:
PCT/IB2011/050815(22) International Filing Date:
25 February 2011 (25.02.2011)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KORPINEN, Pekka, Olavi** [FI/FI]; Neulaspolku 1 C 22, FIN-02110 Espoo (FI). **RAKKOLA, Juha, Matti** [FI/FI]; Numersinkatu 11 A 20, FIN-02600 Espoo (FI). **GILLET, Michel, Rene, Gustave** [BE/FI]; Omenamäenkatu 12 C 8, FIN-00990 Helsinki (FI).(74) Agent: **SMITH, Gary, John**; Page White & Farrer, Bedford House John Street, London Greater London WC1N 2BF (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A METHOD AND AN APPARATUS FOR A GATEWAY

Figure 2

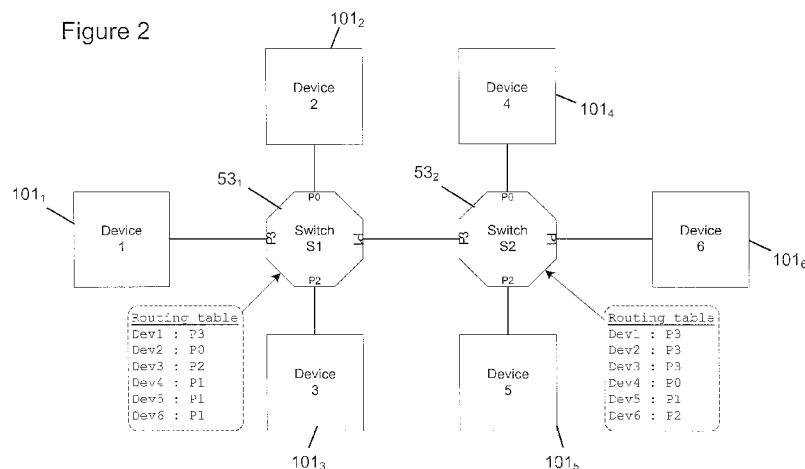

(57) Abstract: An apparatus comprises at least one processor and at least one memory including computer code. The at least one memory and the computer code are configured to with the at least one processor cause the apparatus to at least perform receiving a first message from a first port, the first message for transmission in a communications network. The first message comprises at least one destination address. The apparatus is also configured to perform determining whether the first message is deliverable and generating a second message comprising the at least one destination address for each undeliverable address; and transmitting the second message.

A METHOD AND AN APPARATUS FOR A GATEWAY

Technical Field:

The present application relates to a method and an apparatus more specifically but not exclusively to an apparatus configured to communicate between two devices.

5

Description of the Related Art:

Communication environments can be quite varied. For example, within a single device or entity, there may be communications between different functionalities, nodes, modules and sub-systems within that device. Alternatively, two or more devices may be connected together and there may be communications between two or more of the devices. It is known to have two devices communicating with each other via one or more other devices such as in the context of a packet data network, a mobile communications network, system area network or the like. The packet data network provides communication between communicating devices using a layer protocol for interconnecting devices, components circuits or modules such as cellular telephones, handheld computers, digital cameras multimedia devices and/or the like. Beside that external systems can also be connected to the single device or entity to enable the single device or entity to be upgradeable.

20 The communication network might be based on a high-speed serial physical interconnect which may support several lanes operating at rates up to several Gbit per second per lane and may use low-voltage, source-synchronous, scalable-signalling technology. On the physical interconnect a protocol stack may operate. The protocol stack defines how data is transmitted across the physical network.

25

Some standards and the protocols implement data integrity checks – in other words checks to determine that the data transmitted by the data originator (or first end node) of the network has been received and is being processed by a data final destination (or second end node). Where the network nodes have a limited

capacity for receiving and processing data typical network protocols implement a stop or discard process.

One such network protocol implemented within electronic devices is the MIPI
5 Unified Protocol (UniPro) system which defines the components that wish to communicate as devices or nodes of a network. Multiple components or devices are in turn coupled to the network by way of gateway devices or switches. Communication across the network is performed by routing packets from the originating device between the gateway devices and to the addressed device.

10

However there can be problems in such networks where devices fail or where couplings between devices fail. In such situations, packets may not contain information defining the originating device and allow further packets to be sent without reaching the same unreachable addressed device. This uses up network
15 capacity without any expectation of success.

Although network protocols such as internet protocol (IP) can overcome such problems by incorporating within a packet the originating address, this solution requires the network to contain additional layers of protocol for packet handling.
20 This therefore complicates the network and requires additional network overhead both in network capacity and packet processing.

SUMMARY:

25 Various aspects of the invention are set out in the claims.

There is provided according to a first aspect of the application a method comprising: receiving a first message from a first port, the first message for transmission in a communications network, the first message comprising at least
30 one destination address; determining whether the first message is deliverable; generating a second message comprising the at least one destination address for each undeliverable address; and transmitting the second message.

Transmitting the second message may comprise transmitting the second message on the first port.

5 Transmitting the second message may comprise transmitting the second message on every port.

Transmitting the second message may comprise transmitting the second message to each port coupled to a peer device.

10 Determining whether the first message is deliverable may comprise: determining from a routing table at least one port associated with the at least one destination address.

15 The first message may be a data message.

The second message may be a control message.

20 According to a second aspect of the application there is provided a method comprising: receiving a first message from a network via at least one port, the first message comprising at least one address identifier; removing an association in a routing table between the at least one address identifier and the at least one port.

25 The first message may be at least one of: a control message; and a notification message.

30 The method may comprise transmitting a second message for transmission in a communications network via a first port, the second message comprising at least one destination address, and wherein the first message is received via the first port in response to the second message being determined as being undeliverable.

Removing an association in a routing table between the at least one address identifier and the at least one port may comprise at least one of: deleting the

routing table entry associated with the at least one address identifier; and amending the routing table entry associated with the at least one address identifier such that the routing table entry is a null field.

- 5 The method may comprise closing all connections to the device associated with the at least one address identifier.

10 In a third aspect of the application there is an apparatus comprising at least one processor and at least one memory including computer code, the at least one memory and the computer code configured to with the at least one processor cause the apparatus to at least perform: receiving a first message from a first port, the first message for transmission in a communications network, the first message comprising at least one destination address; determining whether the first message is deliverable; generating a second message comprising the at least one
15 destination address for each undeliverable address; and transmitting the second message.

Transmitting the second message may cause the apparatus to perform transmitting the second message on the first port.

20

Transmitting the second message may cause the apparatus to perform transmitting the second message on every port.

Transmitting the second message may cause the apparatus to perform
25 transmitting the second message to each port coupled to a peer device.

Determining whether the first message is deliverable may cause the apparatus to perform determining from a routing table at least one port associated with the at least one destination address.

30

In a fourth aspect of the application there is an apparatus comprising at least one processor and at least one memory including computer code, the at least one memory and the computer code configured to with the at least one processor

cause the apparatus to at least perform: receiving a first message from a network via at least one port, the first message comprising at least one address identifier; removing an association in a routing table between the at least one address identifier and the at least one port.

5

The apparatus may be configured to perform: transmitting a second message for transmission in a communications network via a first port, the second message comprising at least one destination address, and wherein the first message is received via the first port in response to the second message being determined as
10 being undeliverable.

Removing an association in a routing table between the at least one address identifier and the at least one port may comprise at least one of: deleting the routing table entry associated with the at least one address identifier; and
15 amending the routing table entry associated with the at least one address identifier such that the routing table entry is a null field.

The apparatus may be configured to perform closing all connections to the device associated with the at least one address identifier.

20

In a fifth aspect of the application there is provided an apparatus comprising: a receiver configured to receive a first message from a first port, the first message for transmission in a communications network, the first message comprising at least one destination address; a delivery determiner configured to determine
25 whether the first message is deliverable; a message generator configured to generate a second message comprising the at least one destination address for each undeliverable address; and a transmitter configured to transmit the second message.

30 The transmitter may comprise a port selector configured to transmit the second message on the first port.

The transmitter may comprise a port selector configured to transmit the second message on every port.

5 The transmitter may comprise a port selector configured to transmit the second message to each port coupled to a peer device.

10 A delivery determiner may comprises: a routing table comprising a list of ports associated with device addresses; a routing table lookup configured to determine whether the routing table comprises an entry associated with the at least one destination address.

15 In a sixth aspect of the application there is provided an apparatus comprising: a receiver configured to receive a first message from a network via at least one port, the first message comprising at least one address identifier; a de-associater configured to removing an association in a routing table between the at least one address identifier and the at least one port.

20 A transmitter may be configured to transmit a second message for transmission in a communications network via a first port, the second message comprising at least one destination address, and wherein the first message is received via the first port in response to the second message being determined as being undeliverable.

25 The de-associator may comprise at least one of: a deleter configured to delete the routing table entry associated with the at least one address identifier; and an amender configured to amend the routing table entry associated with the at least one address identifier such that the routing table entry is a null field.

30 The apparatus may comprise a connection closer configured to close all connections to the device associated with the at least one address identifier.

In a seventh aspect of the application there is provided a computer program, comprising: code for receiving a first message from a first port, the first message for transmission in a communications network, the first message comprising at

least one destination address; code for determining whether the first message is deliverable; code for generating a second message comprising the at least one destination address for each undeliverable address; and code for transmitting the second message; when the computer program is run on a processor.

5

Code for transmitting the second message may comprise code for transmitting the second message on the first port.

10 Code for transmitting the second message may comprise code for transmitting the second message on every port.

Code for transmitting the second message may comprise code for transmitting the second message to each port coupled to a peer device.

15 Code for determining whether the first message is deliverable may comprise code for determining from a routing table at least one port associated with the at least one destination address.

20 In an eighth aspect of the application there is provided a computer program comprising: code for receiving a first message from a network via at least one port, the first message comprising at least one address identifier; and code for removing an association in a routing table between the at least one address identifier and the at least one port; when the computer program is run on a processor.

25

The computer program may comprise code for transmitting a second message for transmission in a communications network via a first port, the second message comprising at least one destination address, and wherein the first message is received via the first port in response to the second message being determined as
30 being undeliverable.

Code for removing an association in a routing table between the at least one address identifier and the at least one port may comprise at least one of: code for

deleting the routing table entry associated with the at least one address identifier; and code for amending the routing table entry associated with the at least one address identifier such that the routing table entry is a null field.

- 5 The computer program may comprise code for closing all connections to the device associated with the at least one address identifier.

In a ninth aspect of the application there is provided an apparatus comprising: means for receiving a first message from a first port, the first message for
10 transmission in a communications network, the first message comprising at least one destination address; means for determining whether the first message is deliverable; means for generating a second message comprising the at least one destination address for each undeliverable address; and means for transmitting the second message.

15

The means for transmitting the second message may comprise means for transmitting the second message on the first port.

The means for transmitting the second message may comprise means for
20 transmitting the second message on every port.

The means for transmitting the second message may comprises means for transmitting the second message to each port coupled to a peer device.

- 25 The means for determining whether the first message is deliverable may comprise: means for determining from a routing table at least one port associated with the at least one destination address.

In a tenth aspect of the application there is provided an apparatus comprising:
30 means for receiving a first message from a network via at least one port, the first message comprising at least one address identifier; and means for removing an association in a routing table between the at least one address identifier and the at least one port.

The apparatus may comprises: means for transmitting a second message for transmission in a communications network via a first port, the second message comprising at least one destination address, and wherein the first message is received via the first port in response to the second message being determined as being undeliverable.

The means for removing an association in a routing table between the at least one address identifier and the at least one port may comprise at least one of: means for deleting the routing table entry associated with the at least one address identifier; and means for amending the routing table entry associated with the at least one address identifier such that the routing table entry is a null field.

The apparatus may comprise means for closing all connections to the device associated with the at least one address identifier.

Embodiments of the present application aim to address the above problems.

BRIEF DESCRIPTION OF THE DRAWINGS:

20

For better understanding of the exemplary embodiments of the application, reference will now be made by way of example to the accompanying drawings in which:

25 Figure 1 shows a schematic view of a system area network over which exemplary embodiments of the application can be implemented;

Figure 2 shows a schematic view of a generic system area network according to some embodiments;

30 Figure 3 a schematic view of a device within the generic system area network according to some embodiments;

Figure 4 shows a flow diagram of the operation of a device according to some embodiments;

Figure 5 shows a further flow diagram of the operation of the device showing some further embodiment operations;

Figure 6 shows an additional flow diagram of the operation of the device showing some embodiment operations; and

- 5 Figure 7 shows a schematic network operation data flow diagram showing the operation of the network according to some embodiments.

DETAILED DESCRIPTION:

- 10 The exemplary embodiments of the present application relate but not exclusively to network architectures in a user equipment. These embodiments of the application may be applicable to other user equipment networks for connecting elements or modules within user equipment or any other types of electronic devices.

15

- For example in some embodiments the electronic device or apparatus within which the embodiments of the application can be found can be a personal computer, a portable personal computer such as a laptop or tablet computer, a personal audio player or recorder (also known as mp3 players), a personal video player or recorder (also known as mp4 players), a camera, or a media device (an electronic device which is capable of handling many different media).
- 20

- Reference is made to Figure 1 which shows a schematic view of a system area network comprised in such an electronic device 1. The electronic device 1 comprises several components/sub-systems or devices connected or coupled together via a wired network 51. For clarity components of the electronic device 1 not directly concerned with the present application are not shown.
- 25

- 30 The system area network 51 comprises a series of nodes or switching devices 53 which act as switches or routers for receiving and distributing packets from an end to end originating device to an end to end addressed device. These end to end

originating and addressed devices can be the components/sub-systems or devices described herein.

The system area network 51 therefore can couple or connect a series of
5 processors, sub-systems, modules or generally devices to carry out various processes or applications associated with the user equipment or electronic device. For example as shown in Figure 1, the system area network 51 is connected to a communications processor 3 (for communicating with the cellular network), an applications processor 5 (arranged to controlling the operation of applications), a
10 radio/TV processor 7 (arranged to receive either analogue/digital radio/TV signals), a Bluetooth processor 9 (arranged to receive and transmit Bluetooth data over a Bluetooth communications channel), a camera sub-system 11 arranged to receive and transmit digital image data from the camera (the camera in some embodiments be connected to the system area network and transmit raw data to
15 the camera sub-system 11), an audio sub-system 13 (arranged to transmit audio data for example MP3 audio data), and a I/O sub-system 15 connected to the earpiece/speaker 17 and/or the microphone 19. These processors/sub-systems described are examples only and some embodiments of the present application can in some embodiments have more or fewer sub-systems connected to the
20 system area network 51. Furthermore in some embodiments at least one sub-system is connected to the system area network 51 via an external connection not shown in Figure 1.

In system area networks point-to-point (P2P) flow control may be used to
25 guarantee reliability and packet integrity between nodes on link level (between two neighbouring nodes or devices). Additional end-to-end flow (E2E) can in some embodiments be used to guarantee reliability and packet integrity between end nodes in a system area network 51.

30 The electronic device 1 furthermore in some embodiments can comprise a wireless switch 55 which is connected or coupled to at least one wired node. For example as shown in Figure 2 the wireless switch 55 is coupled via a wired connection to the system area network 51 and furthermore is configured to

communicate to wireless devices via a wireless connection. The wireless devices are shown in Figure 1 as wireless device A 71 and wireless device B 73. It would be appreciated that each wireless device may itself contain a system area network with one or more nodes or devices.

5

In some embodiments a coupling or link between electronic devices using the system area network can be performed by any suitable link or coupling, for example any suitable communication link such as a USB coupling can be implemented to form a bridge between device system area networks.

10

With respect to Figure 2 a generic example of a system area network comprising switches 53 is shown permitting communication between devices 101. In the example shown in Figure 2 six devices 101 are shown coupled together with two switches. It would be understood that the topology of the network shown and described herein is for example only and the electronic device could comprise any

15

number of switches arranged in any suitable topological arrangement.

In the embodiments of the application each device 101 comprises a single port through which packets can be output and received. It would however be

20

understood that in some embodiments a device can comprise any suitable number of ports. For example in some embodiments a device could comprise more than one port to allow redundancy (for example to allow connectivity in case of coupling failure) or to permit additional data flow capacity.

25

Each device can represent for example any of the following systems or sub-systems of the electronic device or apparatus 1 such as the communications processor 3 (or radio frequency engine for communicating with the cellular network), the applications processor 5 (arranged to control the operation of applications), a radio/TV processor 7 (arranged to receive either analogue/digital

30

radio/TV signals), a Bluetooth or low power radio frequency processor 9 (arranged to receive and transmit Bluetooth data over a Bluetooth communications channel or any other suitable low power radio frequency communications system), a camera sub-system 11 (arranged to receive and transmit digital image data from

the camera which in some embodiments can be connected to the system area network and transmit raw data to the camera sub-system 11), an audio sub-system 13 (arranged to transmit audio data for example MP3 audio data), and a I/O sub-system 15 (for example connected to the earpiece/speaker 17 and/or the microphone 19).

Furthermore the system area network shown in Figure 2 comprises a first switch 53₁ configured with four ports for communicating. Each port as described herein represents a point-to-point packet data connection and as such couples the switch to a further device or switch. In the example shown in Figure 2, the first switch 53₁ comprises a first port P0 which is configured to couple the first switch 53₁ to the second device 101₂, a second port P1 which is configured to couple the first switch 53₁ to the second switch 53₂, a third port P2 which is configured to couple the first switch 53₁ to the third device 101₃ and a fourth port P3 which is configured to couple the first switch 53₁ to the first device 101₁.

Furthermore the system area network shown in Figure 2 comprises a second switch 53₂ configured also with four ports for communicating. The second switch 53₂ comprises a first port P0 which is configured to couple the second switch 53₂ to the fourth device 101₄, a second port P1 which is configured to couple the second switch 53₂ to the sixth device 101₆, a third port P2 which is configured to couple the second switch 53₂ to the fifth device 101₅ and a fourth port P3 which is configured to couple the second switch 53₂ to the first switch 53₁.

It would be further understood that although the switches as shown and described as having four ports it would be understood that in some embodiments each switch can comprise more or fewer than four ports. Furthermore although in the examples described herein the ports are two way or bi-directional couplings it would be understood that in some embodiments the port defines a one way or uni-directional flow of packet data.

With respect to Figure 3, the switch 53 is shown in further detail. The switch 53 comprises in some embodiments a wired transceiver 205. The wired transceiver

205 is configured to receive the various port connections or couplings, for example as shown in Figure 3 the four port switch configuration shown in Figure 2 is shown in further detail whereby the first port P0, the second port P1, the third port P2, and the fourth port P3 are each coupled to the wired transceiver 205. The wired
5 transceiver 205 can be configured to receive packets from each of the ports, and furthermore to transmit packets to each of the ports. In some embodiments the wired transceiver 205 comprises a reconfigurable switch arrangement controlled by the processor 201.

10 In some embodiments the switch 53 further comprises a processor 201. The processor 201 can in some embodiments be configured to perform various program codes. The implemented program codes can comprise code for handling and processing data received at the switch and further comprise code for controlling the wired transceiver 205 for communicating. The program code can in
15 some embodiments be stored for example in the memory 203 for retrieval by the processor 201 whenever needed.

The switch 53 can further comprise memory 203. The memory can in some embodiments provide further a section for storing the received packet data, for
20 example data that is being processed by the processor 201. The program code can, in some embodiments, be implemented completely in hardware or firmware.

In some embodiments the memory 203 can further comprise a routing table. The routing table can be a simple look-up table with devices associated with a port or
25 vice versa. The routing table within the memory can be used by the processor for controlling the wired transceiver 205. Thus when the switch receives a packet to be sent onwards through the network, the packet comprising an address or addressing identification part, the processor 201 can look-up the destination address or device address within the routing table and from the routing table
30 determine the port the wired transceiver 205 is to use to output the packet. The routing table can in some embodiments be a table with lists, where each entry on the list comprises a device linked to or associated with a port number. In some further embodiments the list can further comprise additional information on each

entry such as whether the port is coupled to the same type of device, in other words whether the port is coupled to a peer.

Thus the processor 201 can in some embodiments identify to which port the
5 packet is to be forwarded and configure the wired transceiver 205 to output the packet on the correct port.

As can be seen in Figure 2, the first switch 53₁ comprises a routing table whereby device 1 is linked to the fourth port P3, device 2 is linked to the first port P0, device
10 3 is linked to the third port P2, and the fourth, fifth and sixth devices are linked to the second port P1, in other words are not directly coupled to the first switch but via the second switch. Similarly, with respect to the second switch the routing table shown in Figure 2 for the second switch associates the first, second and third devices with the fourth port of the second switch P3, the fourth device with the first
15 port P0, the fifth device with the second port P1 and the sixth device with the third port P2.

With respect to Figure 4, the operation of the switch 53 according to some embodiments of the application is shown where for example the switch 53 is
20 unable to deliver a packet message.

The processor 201, or delivery determiner, or means for determining delivery, can on receiving a packet perform a delivery check. For example the processor 201 can in some embodiments examine the memory 203 to determine whether or not
25 there is a matching or associated entry in the routing table which matches the packet or destination address information. For example, in some embodiments, the packet address information is a DestDevId entry.

Where there is a matching entry then the processor 201 can determine that the
30 packet is deliverable and as described herein control the wired transceiver 205 to output the packet and message payload via the associated port to a further switch or device.

Where there is no matching or associated entry then the processor 201 determines that the packet or message is undeliverable. A lack of a matching entry can be generated previously, for example, where a previous packet is undelivered or no response from the port is received.

5

The determination that the packet is undeliverable operation is shown in Figure 4 by step 301.

10 The processor 201, or message generator, or means for generating a message can then in some embodiments generate a control or notification message to identify that the device has been determined as being unreachable. In some embodiments the processor 201 can thus generate a CFG_Device_Unreachable for a specific device identifier (in this case the DevId = X).

15 The generation of such a control or notification message can be seen in Figure 4 by step 302.

20 Furthermore in some embodiments the processor 201 can then control the wired transceiver 205 or transmitter to pass or transmit the control or notification message on the same port that the incoming or originally received packet was received on. In other words the wired transceiver 205 under control of the processor 201 can transmit the control message on the packet ingress port.

25 The operation of transmitting the control message on the packet ingress port shown in Figure 4 by step 303.

30 The first three steps can be considered to be a single operation switch response step S1, whereby the switch determines that the received packet is undeliverable and responds to the received packet with a control message indicating this fact.

In some embodiments the control or notification message can be received at the switch or device which in some embodiments sent the original packet deemed to be undeliverable to the switch, on the packet output or outgress port. The control

or notification message contains, for example, the device or destination address identifier for the unreachable device.

The operation of receiving the control or notification message from the switch on
5 the packet output port is shown in Figure 4 by step 304.

The device which receives the control message can then, in response to the notification or control message, remove from the routing table stored in the device the entry to the destination or addressed device indicated in the control message
10 (in this example device X).

The operation of removing the entry to device X in the routing table is shown in Figure 4 by step 305.

15 These two steps within the device receiving the notification or control message from the switch, can be seen to be a notification response step S2 as shown in Figure 4.

Furthermore the switch can then control the further transmission of packets or
20 messages by closing the connection to the addressed or destination device to which the initial packet has been deemed to be undeliverable.

The closing of the connection to the device X is shown in Figure 4 by step 306.

25 The operation of the closing the connections to the device X is shown as a further step S3.

With respect to Figure 5 a further series of operations with respect to the switch 53
is shown. The operations shown in Figure 5 describe only the operations with
30 respect to the initial single operation step S1 determining that the packet address or destination address is unreachable and the response to this determination. In such embodiments, the remainder of the steps such as S2 and S3 implemented within the device which receives the control or notification message can be in

some embodiments implemented in the same manner as described with respect to the operations shown in Figure 4.

With respect to Figure 5, the processor 201 on receiving a packet to be forwarded
5 determines whether or not the packet is unreachable or reachable. As described previously, this can in some embodiments be determined by whether or not the packet or message received contains an address which has an entry in the routing table. Where no routing table entry is found then the processor 201 can determine that the packet address is unreachable.

10

This determination of the message address or destination being unreachable can be seen for example in Figure 5 by step 301.

15

Furthermore the processor 201 on determining that the packet or message address is unreachable can generate a control or notification message in the same manner as described previously containing the device identifier of the device to which the packet has been determined to be undeliverable.

20

The operation of generating the control message is shown in Figure 5 by the step 302.

25

However in some embodiments the processor 201 can control the wired transceiver 205 to output the control or notification message to all ports connected to the switch. This would for example rapidly propagate the control or notification message not only backwards along the initial packet direction but also to other devices and thus help to prevent other devices from sending packets which cannot be delivered.

30

The operation of transmitting control messages to all ports connected to the switch is shown in Figure 5 by step 401.

The operations of determining whether a packet or message address is unreachable or undeliverable, generating a control or notification message when a

packet has been determined to be unreachable, and transmitting the control message to all ports connected or coupled to the switch can be seen as being a modified S1 step which is shown in Figure 5 as S1'.

- 5 With respect to Figure 6 a further example of the operation of the switch 53 according to some embodiments of the application is shown. The difference between the operations for response step 1 or S1 between the examples shown with respect to Figure 4 and Figure 5 is that the processor 201, having generated a control or notification message in response to determining that the packet
10 address or destination is unreachable, controls the wired transceiver 205 to output the control message to each port which is coupled to a device of the same type as the current device.

The 'peer' type filtering transmission operation is shown in Figure 6 by step 501.
15

Thus in such embodiments the switch would only transmit a control message to further switches and a device would send a message only to another device.

The peer-to-peer control or notification message operation can as a whole be seen
20 as being a modified response step or S1 is shown in Figure 6 as S1''.

With respect to Figure 7 an example operation of a system area network according to these embodiments is shown. The system area network with respect to this example is fully described by the first device 101₁, the first switch 53₁, the second
25 switch 53₂ and the sixth device 101₆. At some point a connection can be established between device 1 and device 6 and shown for example by the connection 600.

At some point a packet may be sent from the first device to the sixth device. Thus
30 the first device generates a first message "a" which it wishes to send to the sixth device.

The operation of generating the first message "a" is shown in Figure 7 as step 601.

The first device 101₁ can then send the first message "a" with a destination device identifier with a value of 6, indicating that the addressed packet is to be received finally at the sixth device and containing the message "a".

5

The device 1 is as shown in Figure 2 coupled to the first switch and passes the packet to the first switch as shown in Figure 7 as step 603.

10 The first switch 53₁, receives the packet and determines from the routing table that the packet is to be forwarded onto the second port P1 to the second switch 53₂. The first switch then controls the wired transceiver 205 to output the packet with the destination device identifier being equal to 6 and the message "a" to the second switch.

15 The transmission of the packet comprising the first message between the first and second switches is shown in Figure 7 by step 605.

20 The second switch having received the packet with the destination device identifier 6 uses the second switch routing table to determine that the packet should then be output on the second port P1 to the sixth device 101₆.

The transmitting or passing of the packet from the second switch to the sixth device is shown in step 607.

25 This as described previously is the method according to embodiments of the application for which packets can be sent across the system area network.

30 At some point in this example the second switch detects or determines a link problem at the second port P1. The detection of the link problem at port P1 is shown in Figure 7 by step 610_a.

The second switch 53₂ can for example detect or determine a link problem, for example where the routing table has a device value associated with a null or zero

port value or removed from the list completely. For example in the example shown in Figure 7 the processor 201 can operate a program such as SetPort(DevID, port_number) where DevID is the device which is unreachable and the port_number is set to none or 0 which updates the routing table in the switch closest to the link problem to 'remove' the association between the device and the port. In this example the command run could be SetPort(DevId=6,None)

The operation of rewriting the routing table in the switch or device closest to the line problem is shown in Figure 7 by step 610_b.

10

The first device 101₁ can for example at some point generate a second message "b" which is also to be sent to the sixth device 101₆. However unknown to the first device 101₁ there is currently no active coupling between the first device and the sixth device. However according to some embodiments of the application the system area network can be alerted to any problems within the network by the use of the control or notification messages.

15

The generation of the second message "b" is shown in Figure 7 by step 611.

20 The second message "b" is transmitted between the first device and the first switch within a packet with a destination device identifier DestDevId=6 value as shown in step 613.

25 The first switch S1 53₁ having received the packet and using the routing table information forwards the packet comprising the second message "b" to the second switch 53₂ as shown in step 615.

However at the second switch 53₂ the routing table look-up fails as shown in step 616 due to the lack of an entry due to the earlier link problem or device failure.

30

In response to this look-up failure, in other words having determined at the second switch that the message destination device is unreachable and the message is therefore undeliverable the second switch 53₂ generates a control or notification

message, for example a CFG_device_unreachable(DevId=6), with the device ID of the sixth device and passes or transmits this message back along the same port from which the message was received. In other words sending the notification or control message from the second switch 53₂ to the first switch 53₁.

5

The operation of sending this control message back from the second switch to the third switch is shown in Figure 7 by step 617.

The first switch 53₁ having received the control or notification message can then
10 update the routing table to delete the association between the sixth device and the port currently stored for the sixth device.

This for example is shown in Figure 7 in step 618 where the first switch 53₁ runs or operates a SetPort(DevID=6,None) command where the device ID DevID=6 is
15 associated with the value of zero or null.

Thus for every further message sent the notification or control message is passed further back towards the source of any messages. For example when the first device 101₁ generates a third message "c" such as shown in step 621 and then
20 transmits the third message in a packet to the first switch as shown in Figure 7 by step 623, when the first switch 53₁ receives the packet it is unable to determine an output port in the routing table associated with the destination device and thus further generates a control message back to the first device 101₁ as shown in step 625. The first device then can close all connections to the sixth device and thus
25 stop attempting to send messages to the sixth device and using network resources as shown in step 626.

In general, the various embodiments of the invention may be implemented in hardware or special purpose circuits, software, logic or any combination thereof.
30 For example, some aspects may be implemented in hardware, while other aspects may be implemented in firmware or software which may be executed by a controller, microprocessor or other computing device, although the invention is not limited thereto.

While various aspects of the invention may be illustrated and described as block diagrams, flow charts, or using some other pictorial representation, it is well understood that these blocks, apparatus, systems, techniques or methods
5 described herein may be implemented in, as non-limiting examples, hardware, software, firmware, special purpose circuits or logic, general purpose hardware or controller or other computing devices, or some combination thereof.

The exemplary embodiments of this invention may be implemented by computer
10 software executable by a data processor of the apparatus, such as in the processor entity, or by hardware, or by a combination of software and hardware. Further in this regard it should be noted that any blocks of the logic flow as in the Figures may represent program steps, or interconnected logic circuits, blocks and functions, or a combination of program steps and logic circuits, blocks and
15 functions. The software may be stored on such physical media as memory chips, or memory blocks implemented within the processor, magnetic media such as hard disk or floppy disks, and optical media such as for example DVD and the data variants thereof, CD.

20 The memory may be of any type suitable to the local technical environment and may be implemented using any suitable data storage technology, such as semiconductor-based memory devices, magnetic memory devices and systems, optical memory devices and systems, fixed memory and removable memory. The data processors may be of any type suitable to the local technical environment,
25 and may include one or more of general purpose computers, special purpose computers, microprocessors, digital signal processors (DSPs) and processors based on multi-core processor architecture, as non-limiting examples. The processor or processors in some embodiments of the invention may be application specific integrated circuits (ASIC) or any form of data processing arrangement. For
30 example the processors may be implemented using custom integrated circuit implementations, or using field programmable gate arrays (FPGA) or any technology using sea-of-gates configurations.

The foregoing description has provided by way of exemplary and non-limiting examples a full and informative description of the exemplary embodiment of this invention. However, various modifications and adaptations may become apparent to those skilled in the relevant arts in view of the foregoing description, when read
5 in conjunction with the accompanying drawings and the appended claims. However, all such and similar modifications of the teachings of this invention will still fall within the scope of this invention as defined in the appended claims.

The applicant hereby discloses in isolation each individual feature described
10 herein and any combination of two or more such features, to the extent that such features or combinations are capable of being carried out based on the present specification as a whole in the light of the common general knowledge of a person skilled in the art, irrespective of whether such features or combinations of features solve any problems disclosed herein, and without limitation to the scope of the
15 claims. The applicant indicates that aspects of the present invention may consist of any such individual feature or combination of features. In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

CLAIMS:

1. A method comprising:
receiving a first message from a first port, the first message for transmission
5 in a communications network, the first message comprising at least one destination address;
determining whether the first message is deliverable;
generating a second message comprising the at least one destination address for each undeliverable address; and
10 transmitting the second message.
2. The method as claimed in claim 1, wherein transmitting the second message comprises transmitting the second message on the first port.
- 15 3. The method as claimed in claim 1, wherein transmitting the second message comprises transmitting the second message on every port.
4. The method as claimed in claim 1, wherein transmitting the second message comprises transmitting the second message to each port coupled to a
20 peer device.
5. The method as claimed in any previous claim, wherein determining whether the first message is deliverable comprises:
determining from a routing table at least one port associated with the at
25 least one destination address.
6. The method as claimed in any previous claim, wherein the first message is a data message.
- 30 7. The method as claimed in any previous claim, wherein the second message is a control message.
8. A method comprising:

receiving a first message from a network via at least one port, the first message comprising at least one address identifier;

removing an association in a routing table between the at least one address identifier and the at least one port.

5

9. The method as claimed in claim 8, wherein the first message is at least one of:

a control message; and

a notification message.

10

10. The method as claimed in claims 8 and 9, further comprising:

transmitting a second message for transmission in a communications network via a first port, the second message comprising at least one destination address, and wherein the first message is received via the first port in response to the second message being determined as being undeliverable.

15

11. The method as claimed in claims 8 to 10, wherein removing an association in a routing table between the at least one address identifier and the at least one port further comprises at least one of:

20 deleting the routing table entry associated with the at least one address identifier; and

amending the routing table entry associated with the at least one address identifier such that the routing table entry is a null field.

25 12. The method as claimed in claims 8 to 11, further comprising closing all connections to the device associated with the at least one address identifier.

13. An apparatus comprising at least one processor and at least one memory including computer code, the at least one memory and the computer code configured to with the at least one processor cause the apparatus to at least perform:

30

receiving a first message from a first port, the first message for transmission in a communications network, the first message comprising at least one destination address;

determining whether the first message is deliverable;

- 5 generating a second message comprising the at least one destination address for each undeliverable address; and
transmitting the second message.

14. The apparatus as claimed in claim 13, wherein transmitting the second
10 message further causes the apparatus to perform transmitting the second message on the first port.

15. The apparatus as claimed in claim 13, wherein transmitting the second
message further causes the apparatus to perform transmitting the second
15 message on every port.

16. The apparatus as claimed in claim 13, wherein transmitting the second
message further causes the apparatus to perform transmitting the second
message to each port coupled to a peer device.

20

17. The apparatus as claimed in claims 13 to 16, wherein determining whether the first message is deliverable further causes the apparatus to perform determining from a routing table at least one port associated with the at least one destination address.

25

18. The apparatus as claimed in claims 13 to 17, wherein the first message is a data message.

19. The apparatus as claimed in claims 13 to 18, wherein the second message
30 is a control message.

20. An apparatus comprising at least one processor and at least one memory including computer code, the at least one memory and the computer code

configured to with the at least one processor cause the apparatus to at least perform:

receiving a first message from a network via at least one port, the first message comprising at least one address identifier;

- 5 removing an association in a routing table between the at least one address identifier and the at least one port.

21. The apparatus as claimed in claim 20, wherein the first message is at least one of:

- 10 a control message; and
a notification message.

22. The apparatus as claimed in claims 20 and 21, further configured to perform:

- 15 transmitting a second message for transmission in a communications network via a first port, the second message comprising at least one destination address, and wherein the first message is received via the first port in response to the second message being determined as being undeliverable.

- 20 23. The apparatus as claimed in claims 20 to 22, wherein removing an association in a routing table between the at least one address identifier and the at least one port further comprises at least one of:

deleting the routing table entry associated with the at least one address identifier; and

- 25 amending the routing table entry associated with the at least one address identifier such that the routing table entry is a null field.

24. The apparatus as claimed in claims 20 to 23, further configured to perform closing all connections to the device associated with the at least one address
30 identifier.

25. An apparatus comprising:

a receiver configured to receive a first message from a first port, the first message for transmission in a communications network, the first message comprising at least one destination address;

5 a delivery determiner configured to determine whether the first message is deliverable;

a message generator configured to generate a second message comprising the at least one destination address for each undeliverable address; and

a transmitter configured to transmit the second message.

10 26. The apparatus as claimed in claim 25, wherein the transmitter comprises a port selector configured to transmit the second message on the first port.

27. The apparatus as claimed in claim 25, wherein the transmitter comprises a port selector configured to transmit the second message on every port.

15

28. The apparatus as claimed in claim 25, wherein the transmitter comprises a port selector configured to transmit the second message to each port coupled to a peer device.

20 29. The apparatus as claimed in claims 25 to 28, wherein a delivery determiner comprises:

a routing table comprising a list of ports associated with device addresses;

a routing table lookup configured to determine whether the routing table comprises an entry associated with the at least one destination address.

25

30. The apparatus as claimed in claims 25 to 29, wherein the first message is a data message.

31. The apparatus as claimed in claims 25 to 30, wherein the second message is a control message.

30

32. An apparatus comprising:

a receiver configured to receive a first message from a network via at least one port, the first message comprising at least one address identifier;

a de-associater configured to removing an association in a routing table between the at least one address identifier and the at least one port.

5

33. The apparatus as claimed in claim 32, wherein the first message is at least one of:

a control message; and

a notification message.

10

34. The apparatus as claimed in claims 32 and 33, further comprising:

a transmitter configured to transmit a second message for transmission in a communications network via a first port, the second message comprising at least one destination address, and wherein the first message is received via the first port in response to the second message being determined as being undeliverable.

15

35. The apparatus as claimed in claims 32 to 34, wherein the de-associator comprises at least one of:

a deleter configured to delete the routing table entry associated with the at least one address identifier; and

20

an amender configured to amend the routing table entry associated with the at least one address identifier such that the routing table entry is a null field.

36. The apparatus as claimed in claims 32 to 35, further comprising a connection closer configured to close all connections to the device associated with the at least one address identifier.

25

37. A computer program, comprising:

code for receiving a first message from a first port, the first message for transmission in a communications network, the first message comprising at least one destination address;

30

code for determining whether the first message is deliverable;

code for generating a second message comprising the at least one destination address for each undeliverable address; and
code for transmitting the second message;
when the computer program is run on a processor.

5

38. The computer program as claimed in claim 37, wherein code for transmitting the second message comprises code for transmitting the second message on the first port.

10 39. The computer program as claimed in claim 37, wherein code for transmitting the second message comprises code for transmitting the second message on every port.

15 40. The computer program as claimed in claim 37, wherein code for transmitting the second message comprises code for transmitting the second message to each port coupled to a peer device.

20 41. The computer program as claimed in claim 37 to 40, wherein code for determining whether the first message is deliverable comprises code for determining from a routing table at least one port associated with the at least one destination address.

25 42. The computer program as claimed in any claim 37 to 41, wherein the first message is a data message.

25

43 The computer program as claimed in claim 37 to 42, wherein the second message is a control message.

30 44. A computer program comprising:
code for receiving a first message from a network via at least one port, the first message comprising at least one address identifier; and
code for removing an association in a routing table between the at least one address identifier and the at least one port;

when the computer program is run on a processor.

45. The computer program as claimed in claim 44, wherein the first message is at least one of:

- 5 a control message; and
 a notification message.

46. The computer program as claimed in claims 44 and 45, further comprising:
code for transmitting a second message for transmission in a
10 communications network via a first port, the second message comprising at least
one destination address, and wherein the first message is received via the first
port in response to the second message being determined as being undeliverable.

47. The computer program as claimed in claims 44 to 46, wherein code for
15 removing an association in a routing table between the at least one address
identifier and the at least one port further comprises at least one of:

code for deleting the routing table entry associated with the at least one
address identifier; and

code for amending the routing table entry associated with the at least one
20 address identifier such that the routing table entry is a null field.

48. The computer program as claimed in claims 44 to 47, further comprising code
for closing all connections to the device associated with the at least one address
identifier.

25

49. An apparatus comprising:

means for receiving a first message from a first port, the first message for
transmission in a communications network, the first message comprising at least
one destination address;

30 means for determining whether the first message is deliverable;

means for generating a second message comprising the at least one
destination address for each undeliverable address; and

means for transmitting the second message.

50. The apparatus as claimed in claim 49, wherein the means for transmitting the second message comprises means for transmitting the second message on the first port.

5

51. The apparatus as claimed in claim 49, wherein the means for transmitting the second message comprises means for transmitting the second message on every port.

10 52. The apparatus as claimed in claim 49, wherein means for transmitting the second message comprises means for transmitting the second message to each port coupled to a peer device.

53. The apparatus as claimed in any of claims 49 to 52, wherein the means for
15 determining whether the first message is deliverable comprises:

means for determining from a routing table at least one port associated with the at least one destination address.

54. The apparatus as claimed in any of claims 49 to 53, wherein the first
20 message is a data message.

55. The apparatus as claimed in any of claims 49 to 54, wherein the second message is a control message.

25 56. An apparatus comprising:
means for receiving a first message from a network via at least one port, the first message comprising at least one address identifier; and
means for removing an association in a routing table between the at least one address identifier and the at least one port.

30

57. The apparatus as claimed in claim 56, wherein the first message is at least one of:

a control message; and

a notification message.

58. The apparatus as claimed in claims 56 or 57, further comprising:


5 means for transmitting a second message for transmission in a communications network via a first port, the second message comprising at least one destination address, and wherein the first message is received via the first port in response to the second message being determined as being undeliverable.

59. The apparatus as claimed in any of claims 56 to 58, wherein the means for
10 removing an association in a routing table between the at least one address identifier and the at least one port further comprises at least one of:

means for deleting the routing table entry associated with the at least one address identifier; and

15 means for amending the routing table entry associated with the at least one address identifier such that the routing table entry is a null field.

60. The apparatus as claimed in any of claims 56 to 59, further comprising means for closing all connections to the device associated with the at least one address identifier.

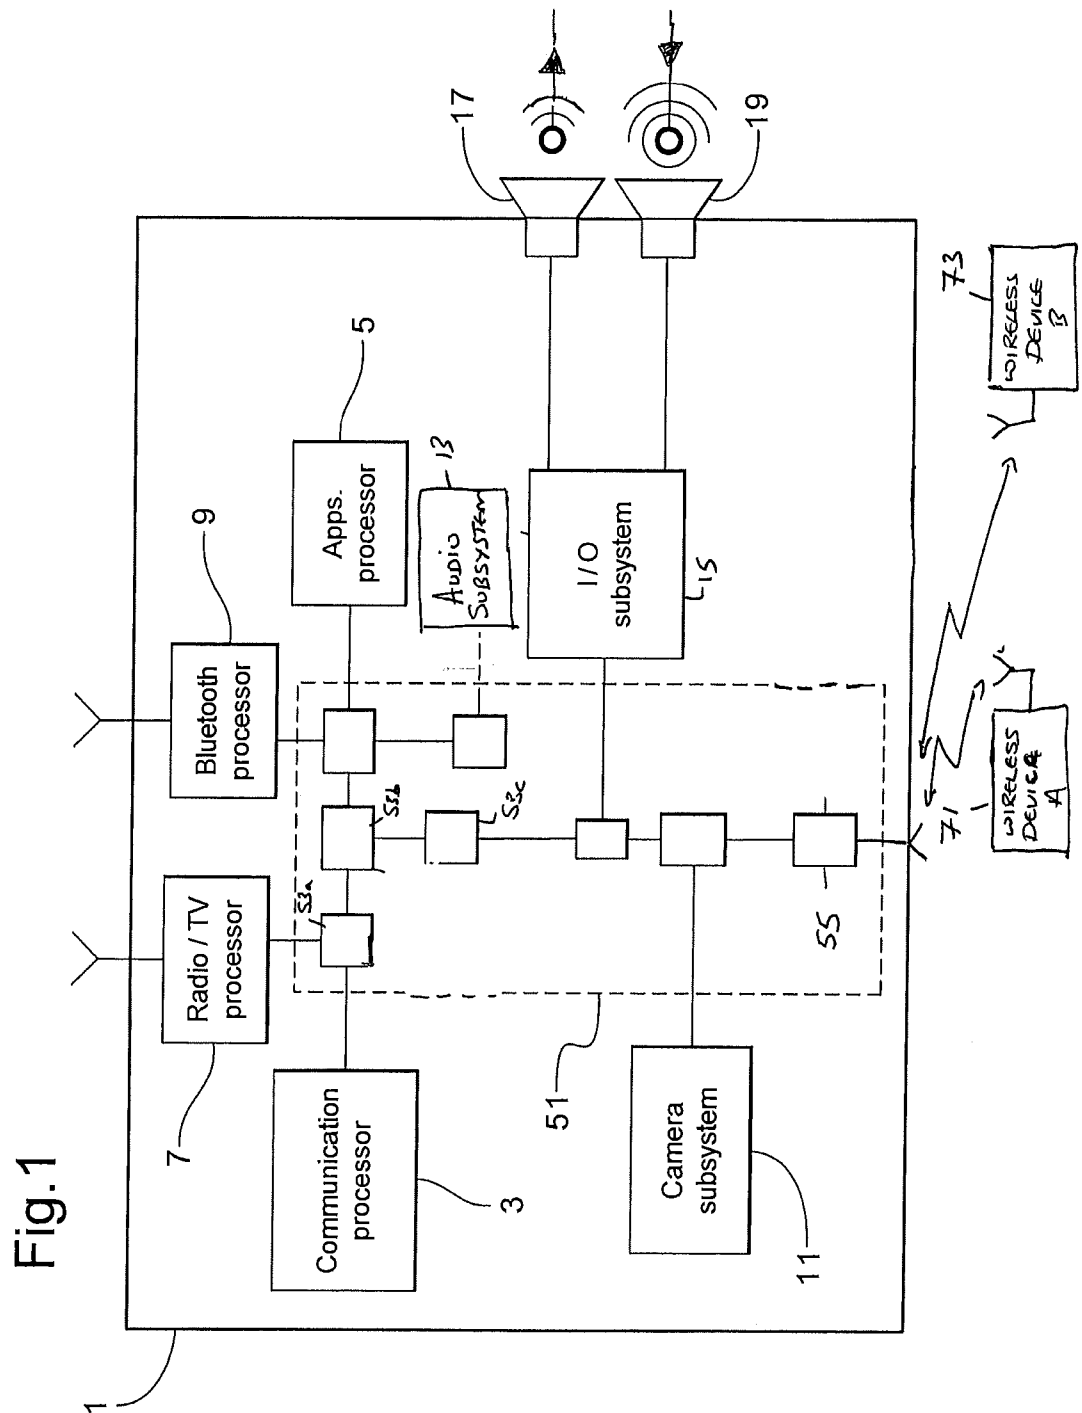

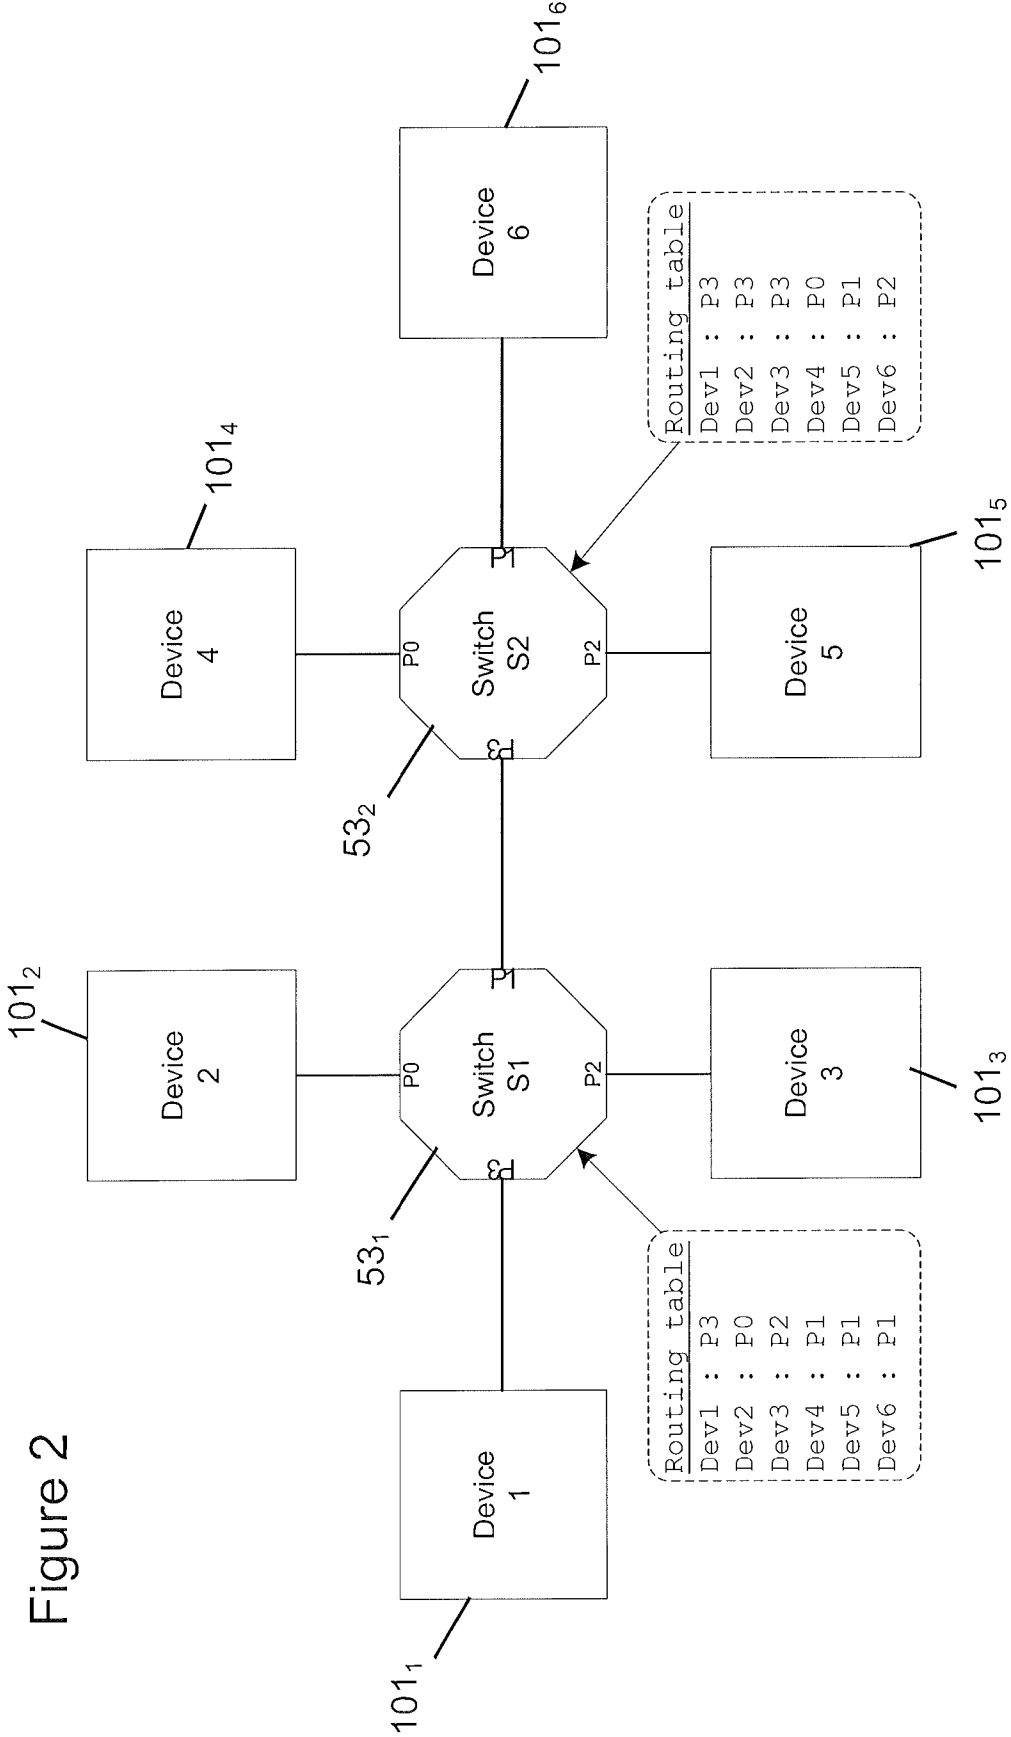


Fig 3

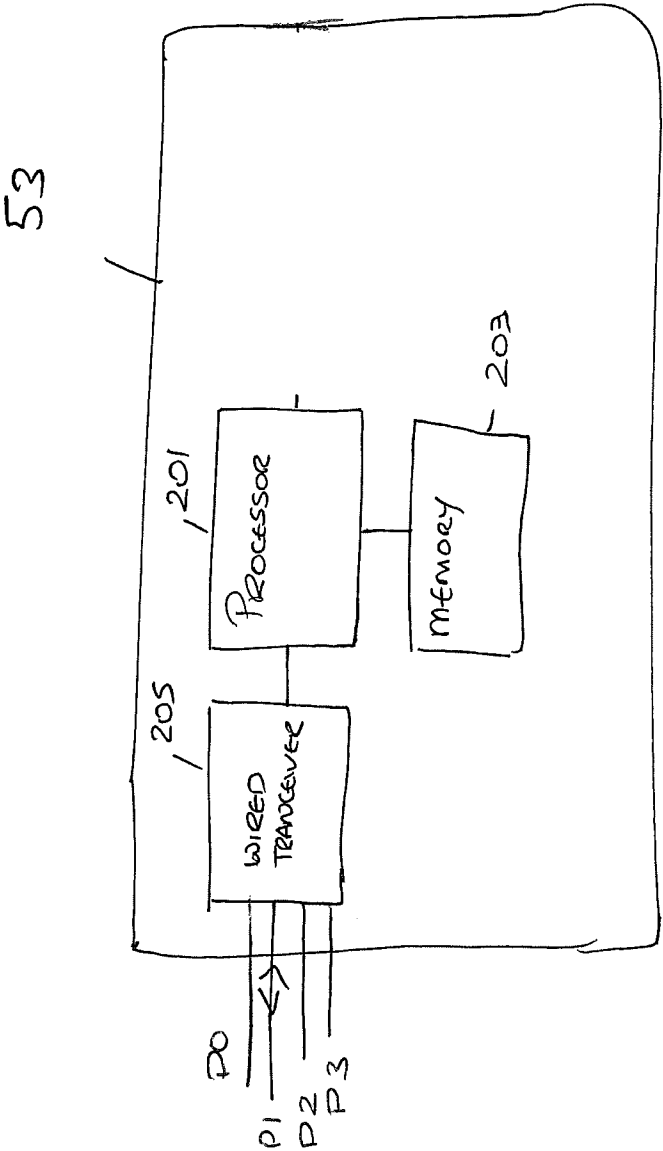


Fig 4

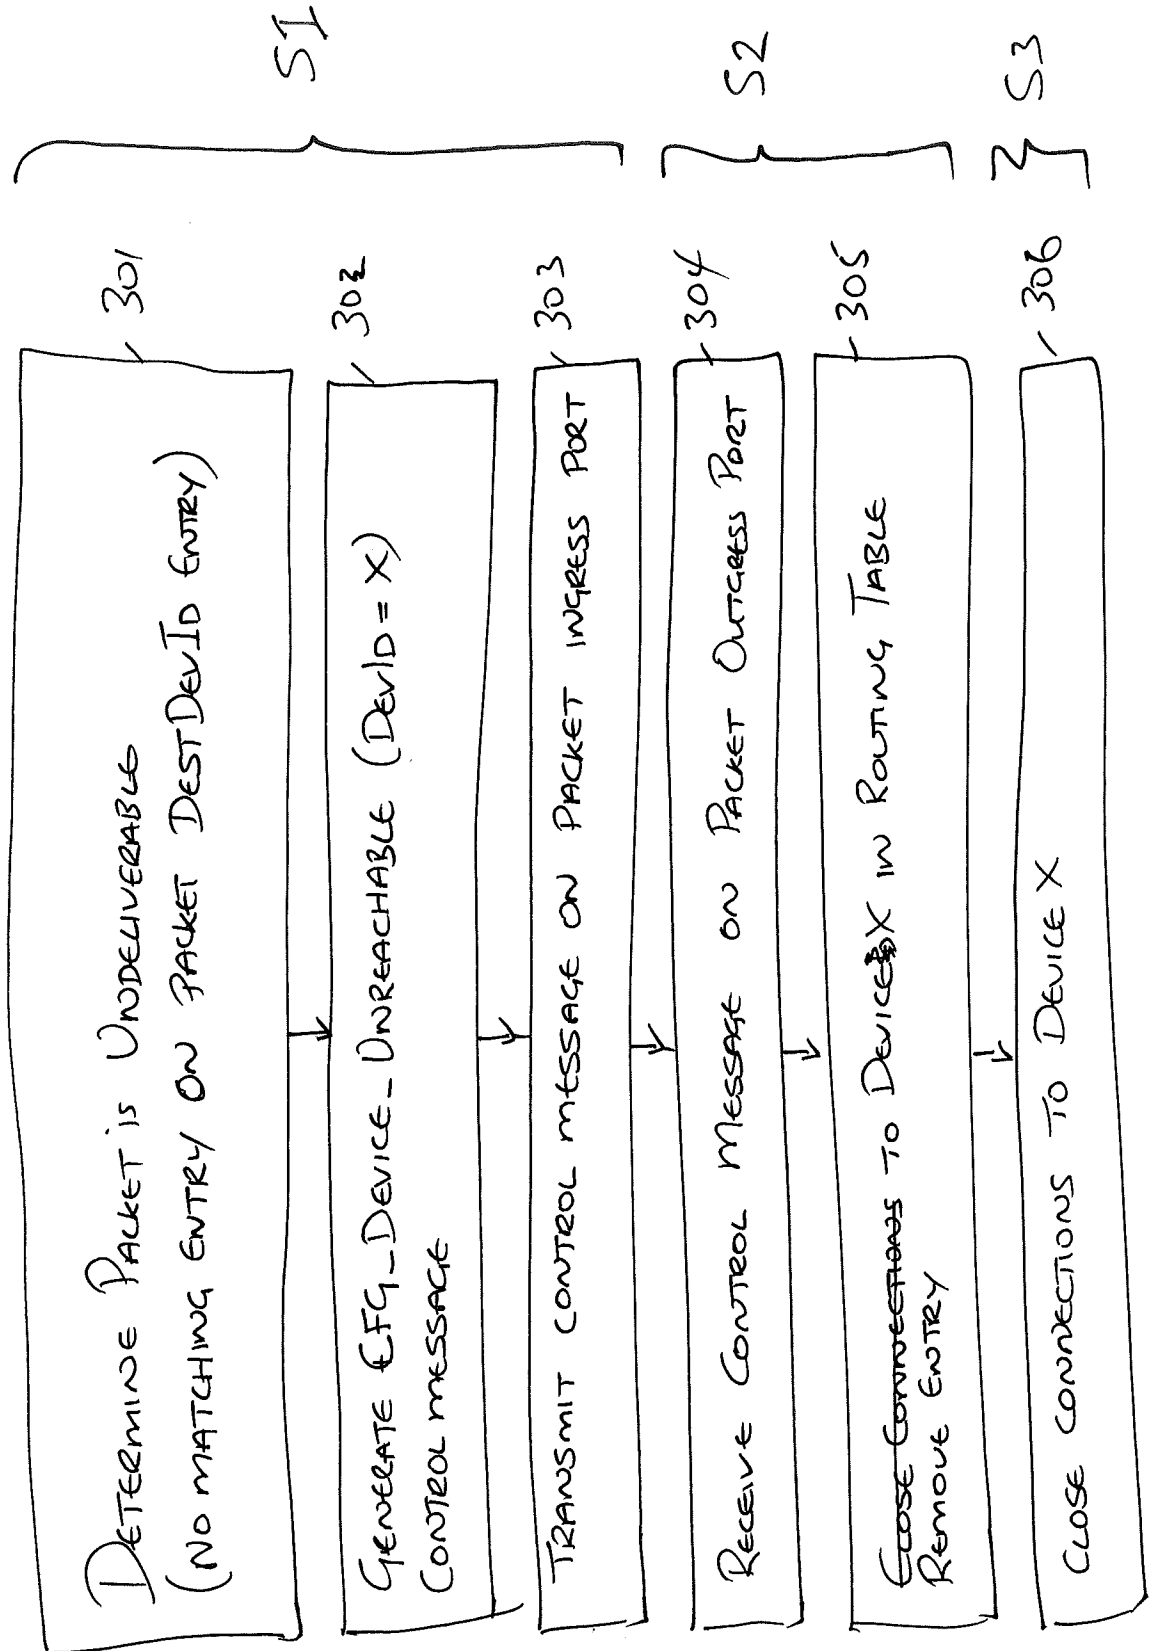


Fig 5

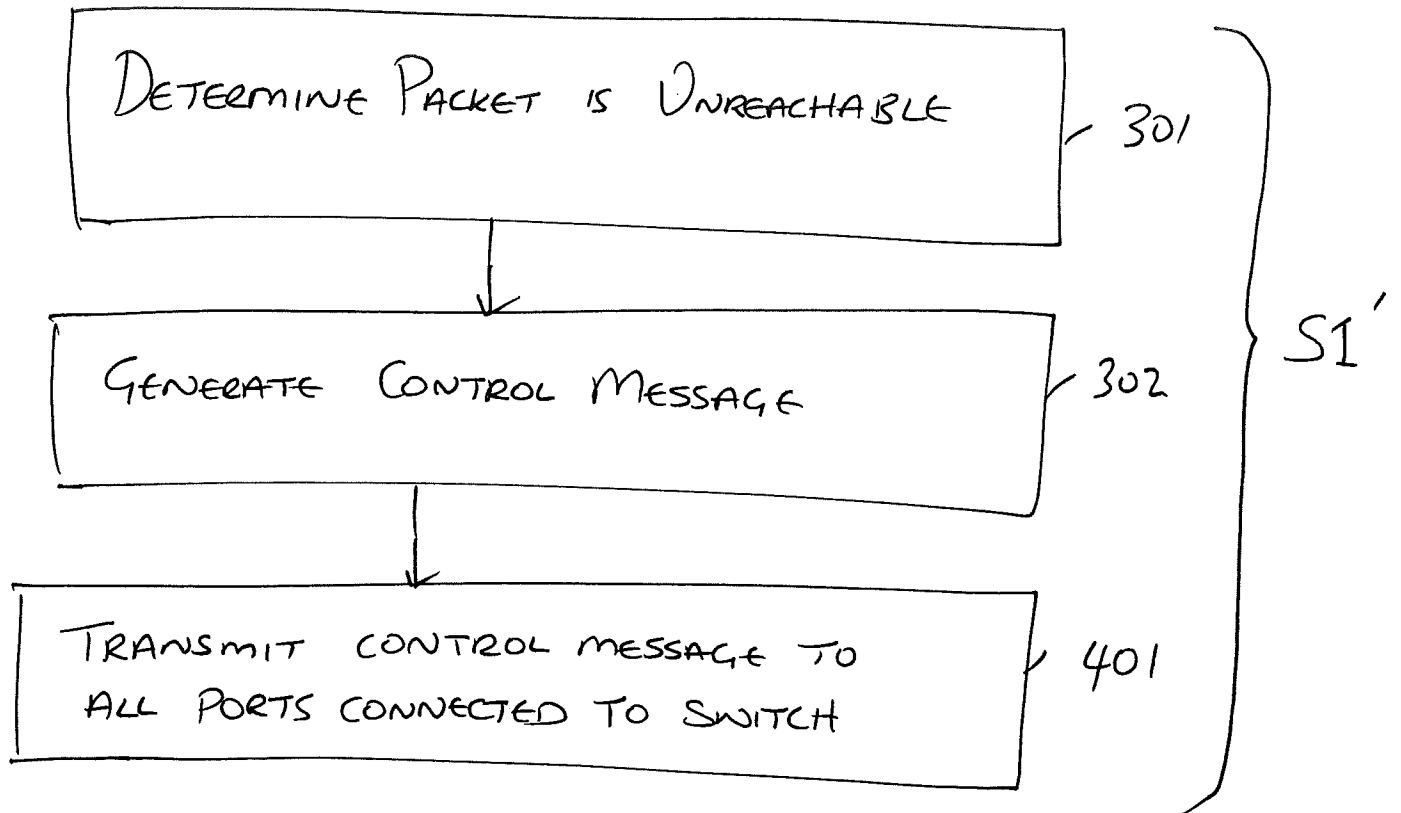
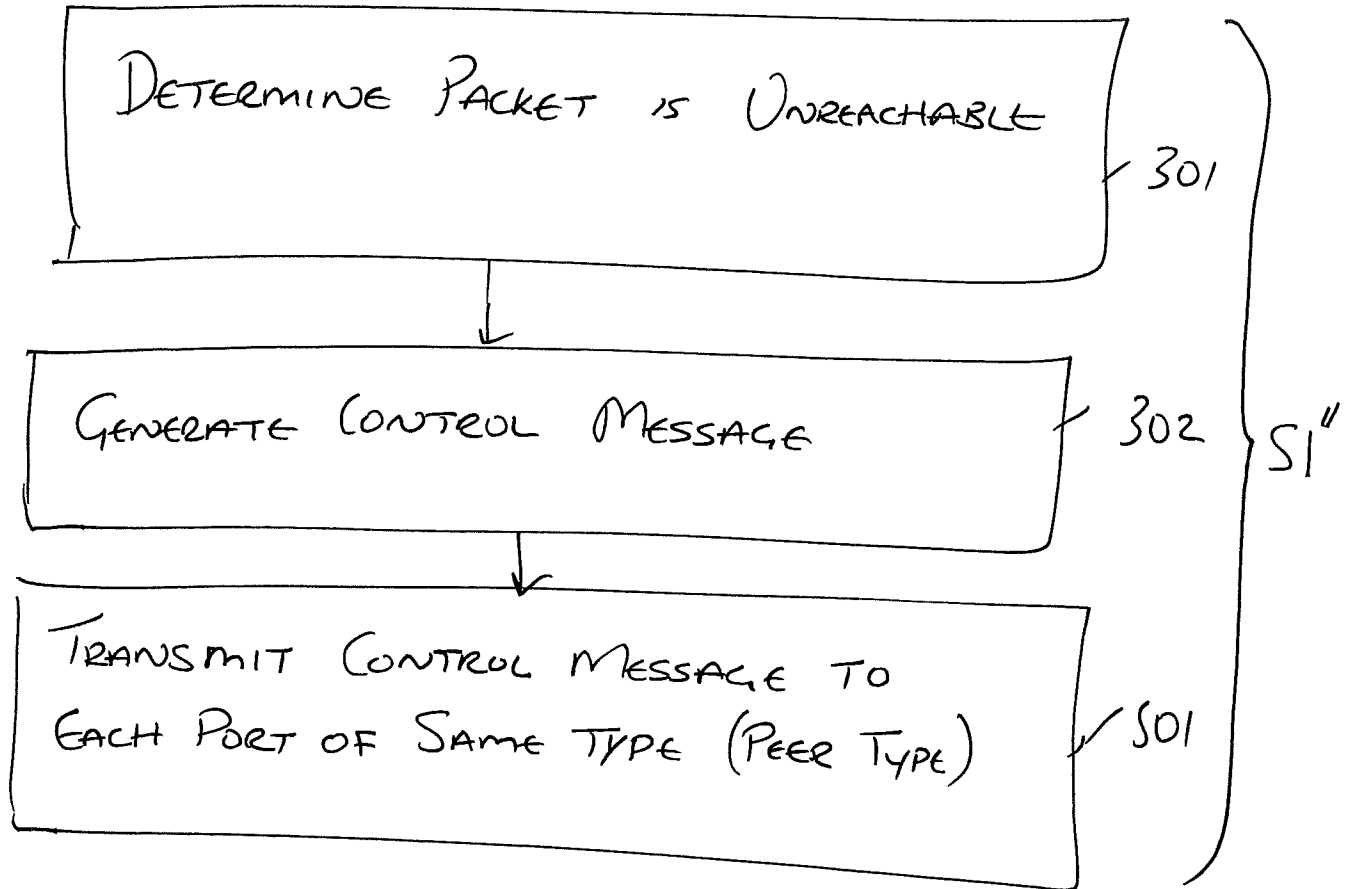


FIG 6



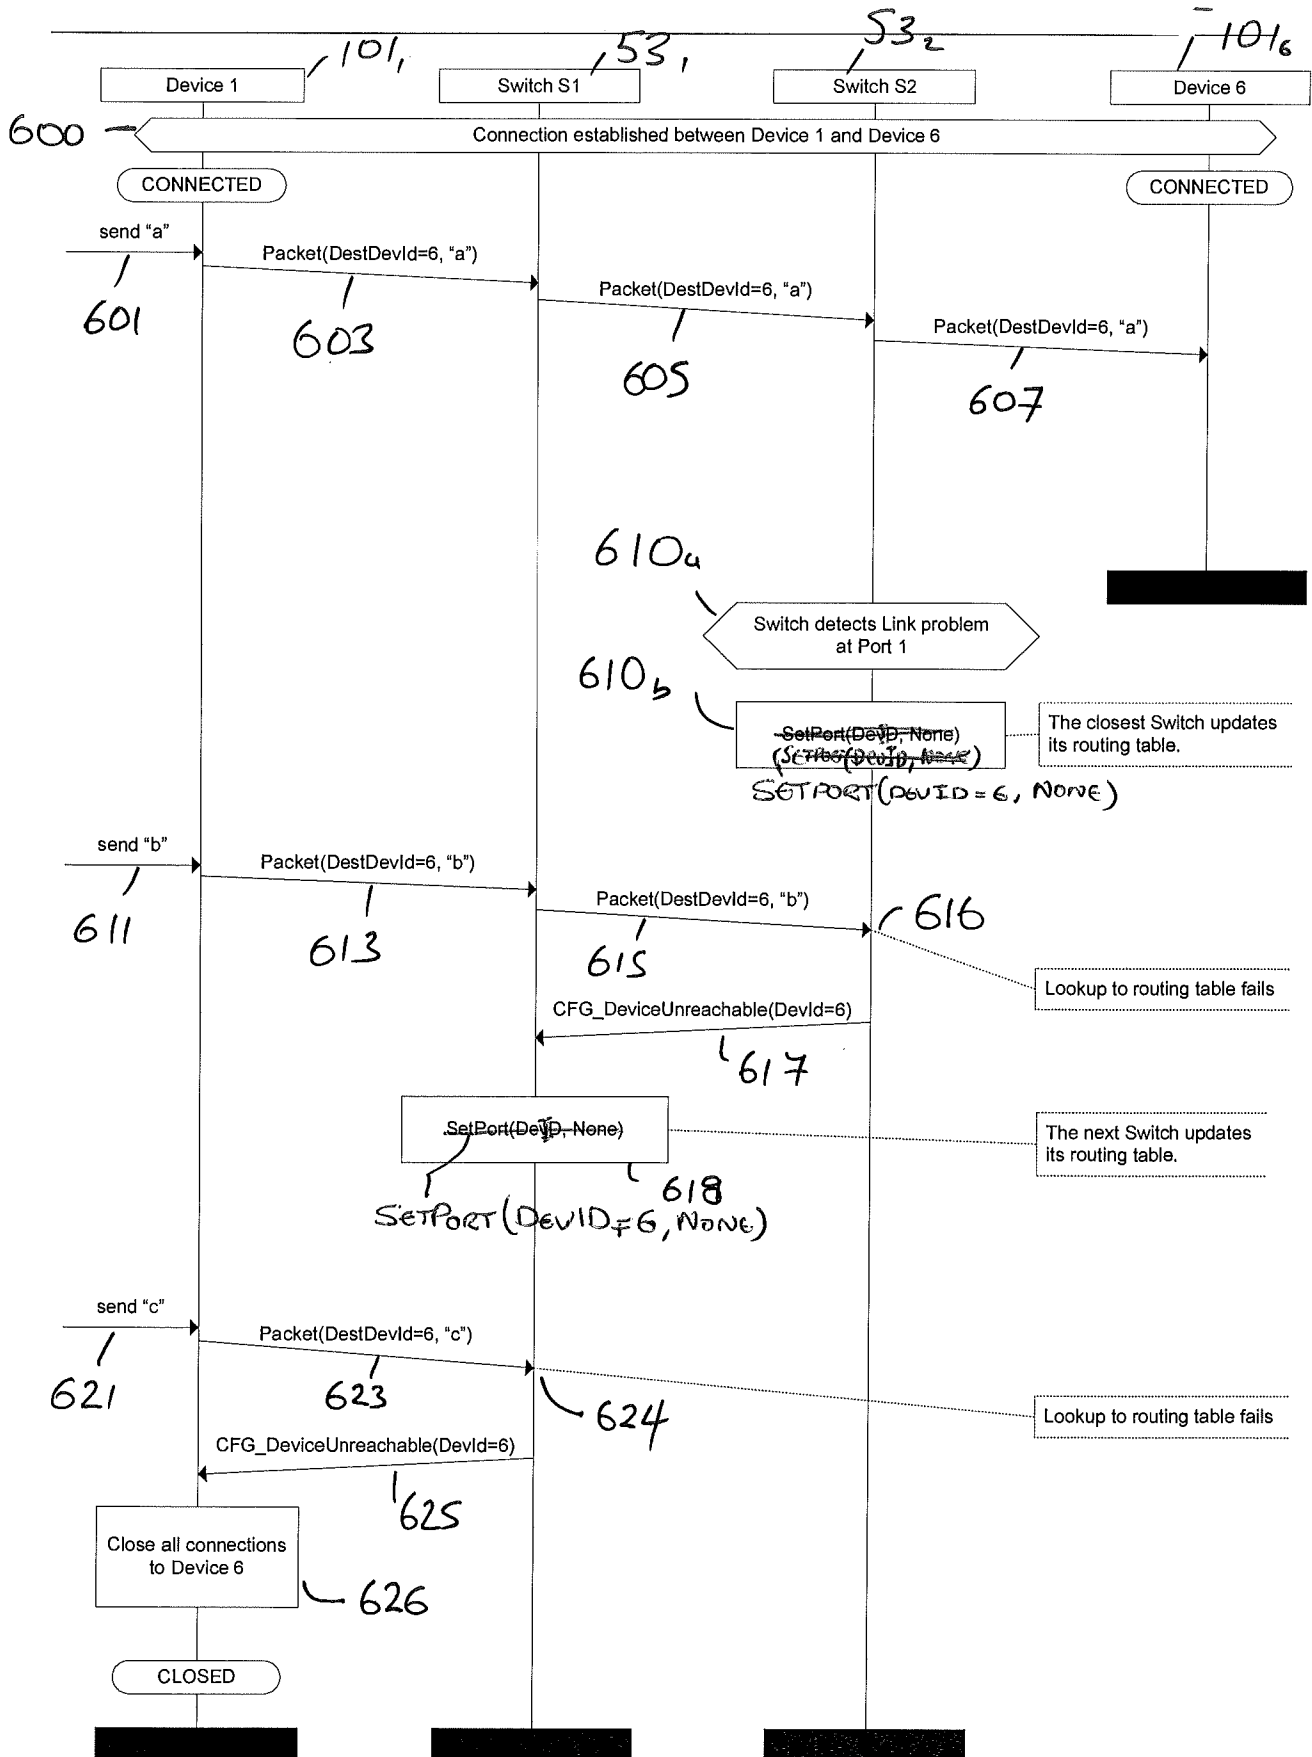


Fig — — — —

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB2011/050815

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE, DK, FI, NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, PAJ, WPI data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 7428209 B1 (ROBERTS LAWRENCE G), 23 September 2008 (2008-09-23); abstract; column 2, line 43 - line 45; column 2, line 49 - line 51; column 3, line 7 - line 11; column 7, line 62 - line 67; column 8, line 11 - line 15; column 11, line 24 - line 30; column 14, line 2 - line 7; column 13, line 36 - line 42; column 13, line 50 - line 57; column 14, line 48 - line 57; figures 8,13 --	1-2, 6-14, 18-26, 30-38, 42-50, 54-60



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

07-05-2012

Date of mailing of the international search report

08-05-2012

Name and mailing address of the ISA/SE

Patent- och registreringsverket
Box 5055
S-102 42 STOCKHOLM
Facsimile No. + 46 8 666 02 86

Authorized officer

Markus Stålö

Telephone No. + 46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB2011/050815

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	Jian Qiu; Yong Liu; Mohan, G.; Kee Chaing Chua; , "Fast Spanning Tree Reconnection for Resilient Metro Ethernet Networks," Communications, 2009. ICC '09. IEEE International Conference on , vol., no., pp.1-5, 14-18 June 2009 doi: 10.1109/ICC.2009.5199031; figures 1,2a-c; See Chapter III. B. FSTR Protocol. --	1-60
A	Nair, P.M.V.; Nair, S.V.S.; Marchetti, M.F.; Chiruvolu, G.; Ali, M.; , "Distributed Restoration Method for Metro Ethernet," Networking, International Conference on Systems and International Conference on Mobile Communications and Learning Technologies, 2006. ICN/ICONS/MCL 2006. International Conference on , vol., no., pp. 94, 23-29 April 2006 doi: 10.1109/ICNICONSMCL.2006.80; See Chapters I. Introduction, 4.3 Failure detection... and 4.4 Reconfiguration. --	1-60
A	EP 1416671 A2 (ZARLINK SEMICONDUCTOR VN INC), 6 May 2004 (2004-05-06); abstract; paragraph [0038]; figure 4 --	1-60
A	US 20080025203 A1 (TALLET FRANCOIS), 31 January 2008 (2008-01-31); abstract; paragraphs [0052]-[0056]; figure 5 --	1-60
A	US 20070242602 A1 (PANG TAK M ET AL), 18 October 2007 (2007-10-18); abstract; paragraphs [0005], [0019]-[0022], [0040]-[0041]; figure 10 -- -----	1-60

Continuation of: second sheet

International Patent Classification (IPC)

H04L 12/56 (2006.01)

Download your patent documents at www.prv.se

The cited patent documents can be downloaded:

- From "Cited documents" found under our online services at www.prv.se
(English version)
- From "Anförda dokument" found under "e-tjänster" at www.prv.se
(Swedish version)

Use the application number as username. The password is **GSDEQZXFL**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/IB2011/050815

US	7428209 B1	23/09/2008	NONE		
EP	1416671 A2	06/05/2004	CN	1499780 A	26/05/2004
			US	20040085894 A1	06/05/2004
			US	20040085893 A1	06/05/2004
			US	7835265 B2	16/11/2010
			US	7260066 B2	21/08/2007
US	20080025203 A1	31/01/2008	NONE		
US	20070242602 A1	18/10/2007	EP	2008385 A4	15/09/2010
			US	7948922 B2	24/05/2011
			WO	2007121200 A2	25/10/2007