

**(12) PATENT**  
**(19) AUSTRALIAN PATENT OFFICE**

**(11)** Application No. **AU 199743143 B2**  
**(10)** Patent No. **734962**

(54) Title  
Process for making multilayer coatings with a strippable topcoat

(51)<sup>6</sup> International Patent Classification(s)  
B05D 005/00 B05D 007/00

(21) Application No: 199743143 (22) Application Date: 1997.09.24

(87) WIPO No: WO98/13148

(30) Priority Data

|             |            |              |
|-------------|------------|--------------|
| (31) Number | (32) Date  | (33) Country |
| 9620246     | 1996.09.26 | GB           |

(43) Publication Date : 1998.04.17  
(43) Publication Journal Date : 1998.06.11  
(44) Accepted Journal Date : 2001.06.28

(71) Applicant(s)  
PRC-Desoto International, Inc.

(72) Inventor(s)  
Michael Fowler

(74) Agent/Attorney  
WATERMARK PATENT and TRADEMARK ATTORNEYS, Locked Bag 5, HAWTHORN VIC 3122

(56) Related Art  
EP 0147984  
US 4274887  
EP 0014597

OPI DATE 17/04/98 APPLN. ID 43143/97  
AOJP DATE 11/06/98 PCT NUMBER PCT/GB97/02596



AU9743143

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>(51) International Patent Classification 6:</b><br>B05D 5/00, 7/00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>A1</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b>(11) International Publication Number:</b> WO 98/13148<br><b>(43) International Publication Date:</b> 2 April 1998 (02.04.98) |
| <b>(21) International Application Number:</b> PCT/GB97/02596<br><b>(22) International Filing Date:</b> 24 September 1997 (24.09.97)<br><b>(30) Priority Data:</b><br>9620246.0 26 September 1996 (26.09.96) GB<br><i>PAC-Desoto International, Inc.</i><br><b>(71) Applicant (for all designated States except US):</b> <del>COOR-</del><br>PAULDS AEROSPACE INC. (US/US); 2820 Empire Avenue, Burbank, CA 91504 (US).<br><b>(72) Inventor; and</b><br><b>(73) Inventor/Applicant (for US only):</b> FOWLER, Michael [GB/GB]; 5 Easedale Close, St. Nicholas Park, Nuneaton, Warwickshire CV11 6EX (GB).<br><b>(74) Agent:</b> HALE, Stephen, Geoffrey; J.Y. & G.W. Johnson, Kingsbourne House, 229-231 High Holborn, London WC1V 7DP (GB). | <b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).<br><br><b>Published</b><br><i>With international search report.<br/>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i><br><br> |                                                                                                                                  |
| <b>(54) Title:</b> PROCESS FOR MAKING MULTILAYER COATINGS WITH A STRIPPABLE TOPCOAT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                  |
| <b>(57) Abstract</b><br><p>In a process for overcoating a substrate having a cured primer coating with a curable topcoat which when cured is swellable by a stripping solvent, a non-volatile polar material is applied to the primed substrate from an aqueous liquid vehicle before coating with the topcoat. The polar material facilitates the removal of the topcoat from the primer by the stripping solvent, as is required for example when repainting aircraft. The polar material has sufficiently high affinity for the primer surface that it is not washed off the primer surface by water rinsing or by application of the topcoat paint.</p>                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                  |

- 1 -

## PROCESS FOR MAKING MULTILAYER COATINGS WITH A STRIPPABLE TOPCOAT

Field of the invention

This invention relates to the application to a substrate of a coating system in which a cured primer coating is overcoated with a top coat which is intended to be strippable, that is to say removable from the primed substrate by a stripping solvent without removal of the primer from the substrate. Such coating systems are widely used on aircraft and may also be used on other substrates, for example commercial vehicles, cars, yachts or railway vehicles.

Aircraft are usually painted with a primer which is based on an epoxy resin and a curing agent, particularly an amino-functional curing agent, although the primer can be an alternative cured coating, for example polyurethane. The top coat is usually based on polyurethane, particularly a polyester-urethane. The coatings must resist water and certain organic solvents such as aviation fuel and preferably also resist hydraulic fluids based on phosphate esters such as tricresyl phosphate or tri-n-butyl phosphate, e.g. that sold under the trade mark "Skydrol". Each coating is generally cured by the reaction of components which have been packaged separately and are mixed at or shortly before application. When an aircraft is to be repainted it is usual to remove at least the top coat using a paint stripper before repainting. The preferred stripping solvents used nowadays are based on aqueous benzyl alcohol with acidic (formic acid) or alkaline additives although some halogenated solvents such as methylene chloride with phenol are still used. In general, the top coat adheres to the primer so strongly that the top coat cannot be stripped without removing or at least damaging the primer. Aircraft owners and operators would prefer a paint system in which the primer remained on the aircraft to prevent the stripping solvent contacting any resins, sealants or adhesives used in the aircraft construction or the metallic substrate and to avoid repeating the pre-treatment and primer coating of the aircraft.

### **Background Art**

Existing strippable coating systems generally use an intermediate coating between the primer and the top coat. One type of intermediate coating, described in GB-A-1511935, is a non-crosslinked polyamide. This at least partially resists the solvent used to remove the top coat and can itself easily be removed by alcohol-based solvents to reveal the primer. Similarly, DE-A-2528943 describes a linear non-crosslinked elastic polyurethane coating used between crosslinked polyurethane primer and top coat layers. EP-A-147984 describes a barrier intermediate coating comprising a film-forming addition polymer comprising units of a vinyl aromatic monomer and units of a monomer containing a hydroxy alkyl group in an amount to provide a hydroxyl content of the addition polymer in the range 0.5 to 5 per cent by weight reacted with a polyisocyanate containing at least 2 isocyanate groups per molecule.

All these prior art intermediate coatings are based on solutions of synthetic resins in organic solvents. There has been a demand for an intermediate coating which releases less, preferably no, volatile organic solvent.

### **Disclosure of the invention**

In a process according to the invention for overcoating a substrate having a cured primer coating with a curable top coat which when cured is swellable by a stripping solvent, a non-volatile non-film-forming polar material is applied to the primed substrate from an aqueous liquid vehicle before coating with the top coat, the said polar material having sufficiently high affinity for the primer surface that it is not washed off the primer surface by water rinsing or by application of the top coat paint, whereby the said polar material facilitates the removal of the top coat from the primer by the stripping solvent.

The invention also provides a process for overcoating a substrate having a cured primer coating to facilitate the removal by a stripping solvent of a subsequently applied top coat, characterised in that a non-volatile non-film-forming acidic aromatic polar organic compound is applied to the primed substrate from aqueous solution, the said acidic aromatic compound having sufficiently high affinity for the primer surface that it is not washed off the primer surface by water rinsing.



By a cured primer coating we mean a coating which is curable by chemical reaction when applied and which has cured sufficiently to be at least touch dry at the time when the polar organic compound (polar material) is applied. The polar organic compound is thus usually applied at least 2 or 3 hours after the substrate  
5 has been primer coated and may be applied at any later time, including several days or more later when the primer is fully cured.

The polar material is not an intermediate coating as known from the prior art and is not a film-forming material. It is non-volatile, that is to say it does not evaporate to any significant extent at 20°C. In some instances it is preferably not  
10 polymeric, although polymers or oligomers having a plurality of anionic groups can be used and in other instances may be preferred. The polar material, particularly if it is not polymeric, may be applied at such a low thickness that it is present on the primer surface as a molecular monolayer or partial monolayer, for example a monolayer covering 10 to 60 or 80% of the surface area.  
15 Unexpectedly, the polar material allows good adhesion between the top coat and the primer on application of the top coat and in service but greatly weakens the interlayer adhesion between the primer and the top coat when the top coat is swollen by stripping solvent. The suitability of a candidate polar material can be readily assessed by applying it to the primed substrate and rinsing with water to  
20 see if it is completely removed.

The primer coating is preferably based on an epoxy resin cured with an amino-functional curing agent such as an

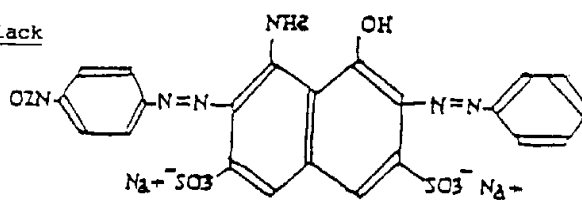
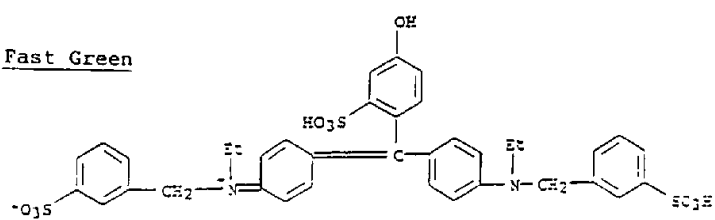
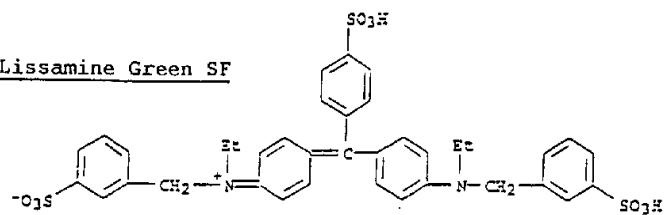
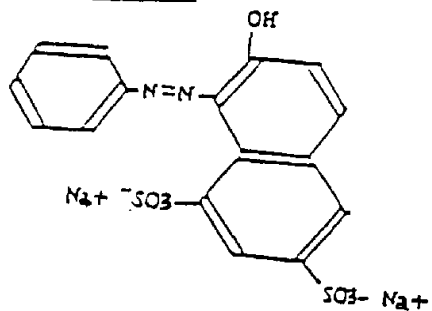




- 4 -

amino-functional polyamide and/or an araliphatic diamine. A crosslinked polyurethane primer is an alternative. The primer generally contains an anticorrosive pigment such as a chromate, phosphate, phosphonate or molybdate and may contain one or more other pigments and/or fillers. The primer coating can be applied from solution or dispersion in an organic solvent or can be a high solids or solventless composition or may be applied as an aqueous composition.

Many of the polar materials which have been found to be effective, particularly over amine-cured epoxy primers, contain at least one acidic group such as a carboxylic acid group or sulphonic acid or phosphonic acid group present in free acid or salt form. In general, carboxylic acid groups if present are preferably in free acid form whereas sulphonic or phosphonic acid groups if present are preferably fully or partially neutralised e.g. in alkali metal salt form. The polar material is usually a polar organic compound, preferably a polar organic aromatic compound. The acidic group is preferably attached directly to an aromatic ring. Many of the effective compounds additionally contain at least one hydroxy group and/or amino group. The polar material (polar organic compound) preferably has a molecular weight in the range 120 or 150 up to about 1000 or 1500. Many of the effective compounds are known as dyes, although one of the most preferred compounds is gallic acid (3,4,5-trihydroxy-benzoic acid), which is not generally regarded as a dye. 2,5-Dihydroxybenzoic acid is also effective, although 3,5-dihydroxybenzoic acid is much less effective in giving stripping. 4,5-Dihydroxy-1,3-benzenedisulphonic acid (generally used in disodium salt form) is also effective in giving selective stripping. Examples of acidic dyes which have been found effective in giving selective stripping are Catechol Violet, Fast Green, Lissamine Green SF, Orange G, Amido Black and Methyl Orange. The chemical structures of these dyes are shown below .

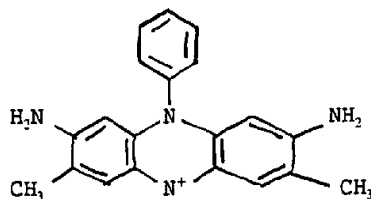
- 5 -

Amido BlackFast GreenLissamine Green SFOrange GCatechol VioletMethyl Orange

- 6 -

Mixtures of polar materials can be used, for example mixtures of gallic acid with a dye such as Fast Green. Further examples of acidic dyes which can give selective stripping are sulphonyl porphyrins, for example 5, 10, 15, 20-tetrakis (4-sulphonatophenyl)-porphine manganese (III) chloride of molecular weight 1023, bromocresol purple, calcion (a sulphonate-functional dye), fluorescent brightener 28 (an optical brightener), Nigrosin (Acid Black 2), Brilliant Black BN, citrazinic acid, xylenol blue Na salt, Reactive Blue 2, xylenol orange Na salt, Brilliant Blue R, Brilliant Blue G and chromoxane cyanine R. Aurin (rosolic acid), which is an acid dye although it does not contain any carboxylic or stronger acid groups, is also moderately effective.

15 The dye Safranine O, having the structure



Cl<sup>-</sup>

which does not contain any acidic groups, has also been found to be effective, although other dyes containing amine or hydroxyl groups with no acidic groups such as malachite green, night blue and crystal violet have been found to be ineffective.

Examples of acid-functional polymeric polar materials which have given selective stripping are a hyperbranched poly (5-hydroxyisophthalic acid), poly(styrene sulphonate) in sodium salt form, sodium polyphosphate and polyacrylic acid. Guluronic acid oligomer and mannuronic acid oligomer (obtained by depolymerisation of alginic acid) are also effective. All of these materials can be applied from aqueous solution.

- 7 -

Gluconic acid is an example of a non-aromatic acidic organic polar compound which is quite effective in giving selective stripping. We have found that materials sold as surfactants are usually ineffective in giving selective stripping.

The concentration of polar material in the liquid aqueous vehicle applied to the primed substrate is generally in the range 0.0001 to 20 g/L (grams per litre). The polar material is preferably applied from aqueous solution. The aqueous composition is preferably coated on the primed substrate and then rinsed with water, although it may be simply coated on the primed substrate without rinsing. The aqueous liquid vehicle may contain an organic solvent (preferably of low volatility) to improve wetting of the primer surface, for example a terpene (which may be used with a surfactant) or N-methyl pyrrolidone. If such an organic solvent is used it is preferably present at less than 20%, most preferably less than 10%, by weight of the aqueous liquid vehicle. If rinsing is to be used, the aqueous solution of the polar material generally has a concentration of at least 0.01 g/L and preferably at least 0.1 g/L of the polar material, and the solution is preferably thickened, for example so that it is thixotropic or pseudoplastic or has a viscosity similar to that of conventional paints. The thickening agent used can for example be a fine-particle silica gel such as that sold under the Trade Mark "Aerosil 200", which can for example be used at 1 to 4% by weight of the aqueous composition, and/or a bentonite clay and/or a polysaccharide. The concentration of polar material in such a thickened solution is generally up to 10 or 20 g/L, for example 0.2 to 5 g/L. The aqueous composition can be applied by conventional coating methods such as spray, for example airless spray, roller or brush, and it is preferably left in contact with the primed surface for at least 1 or 2 minutes up to 1 or 3 hours or even 24 hours before rinsing with water. We have found that even after thorough rinsing a thin layer of the polar material,

- 8 -

generally  $10^{-5}$  to  $10^{-3}$  grams per square metre, remains firmly bound to the primer. We believe that, particularly at the lower end of the range, this amount of polar material corresponds to a monolayer or partial monolayer (a monolayer covering a substantial part of the primed surface).

If rinsing is not to be used, the aqueous solution of polar material is preferably applied to the primed substrate as a fine spray, for example an aerosol spray, to ensure even distribution of the polar material. The concentration of polar material in the aqueous solution is preferably 0.0001 to 2 g/L, particularly 0.001 to 0.01 or 0.1 g/L, for aerosol spray, although higher concentrations can be used if the aerosol spray is fine enough to give even distribution. The amount of polar material applied is preferably  $10^{-5}$  to  $10^{-1}$ , most preferably  $10^{-4}$  to  $10^{-3}$  or  $10^{-2}$ , grams per square metre if rinsing is not to be used. This amount of polar material, particularly at the higher end of the range, gives rise to a coating which is thicker than a monolayer and may be up to 50 molecular layers, for example 5 to 25 molecular layers, thick. We have found that for gallic acid a partial monolayer generally gives the best results whereas for some dye molecules a coating thicker than a monolayer gives the best results. Even when rinsing is not used, the polar material should have sufficient affinity for the primer surface that it is not washed off the primer surface by water rinsing.

The top coat paint applied is generally a curable coating comprising two or three co-reactive components which are usually packaged separately and mixed at application (for example by twin-feed spray) or shortly before application (for example up to 8 hours before). The top coat paint, particularly for aircraft coatings, is preferably a polyurethane such as a polyester-urethane, although other curable paints such as polyester, fluoropolymer or acrylic polymer paints, based for example on oxazolidine-functional acrylic polymers, can be used. The

- 9 -

top coat paint is preferably applied from organic solvent solution, but it can in general be applied from dispersion in water and/or organic solvent.

Whether or not rinsing has been used, the solution of 5 polar material is preferably allowed to dry on the primed substrate for at least 30 minutes, preferably at least 2 or 3 hours, before the top coat is applied.

After the top coat has been allowed to cure, preferably for at least 3 days, it adheres firmly to the primer, and 10 the coating system is resistant to spraying with salt-laden water and to immersion in "Skydrol" phosphate ester and generally to immersion in water without separation of the top coat from the primer or significant blistering. However, when the top coat is treated with a paint stripper in which 15 it swells, particularly a stripper of a type used commercially to strip aircraft paints, swelling of the top coat is followed by detachment from the primer. The top coat lifts off the primer and may fall right away or is readily removed by low-pressure water washing. The top coat can 20 readily be removed within a time which is generally 10 minutes to 5 hours and usually 0.5 to 2 hours after application of the paint stripper, without any removal of the primer. The primer may be somewhat swollen or discoloured by the paint stripper, but it resists removal 25 with the top coat and continues to adhere to the substrate. Any swelling of the primer subsides as the paint stripper dries. The stripper most widely used to strip aircraft paints, particularly polyurethane top coats, is an aqueous thickened mixture of benzyl alcohol and formic acid. 30 Alternative strippers are alkaline thickened aqueous benzyl alcohol or a stripper based on methylene chloride and phenol (used to strip certain fluoropolymer and acrylic top coats).

We are not clear exactly what happens to the polar material bound to the primer surface when the paint stripper 35 is applied. It is strongly preferred that the polar

---



- 11 -

pressure water wash used to clean off the stripping solvent (some fell off even before washing), leaving a clean intact primer surface.

Some of the coated panels were coated with "Turco 6776" formic acid-based stripping solvent. After 1 hour the top coat layer had lifted off the primer and was readily removed.

Some of the coated panels were tested by immersion in hot (70°C) "Skydrol" hydraulic fluid for 17 days. No deterioration was observed.

Some of the coated panels were tested by immersion in cold tap water for 15 days. Very slight blistering was observed but the adhesion of the coating was 100% in a cross-hatch adhesion test whether carried out wet or after drying.

#### Examples 2 to 4

The process of Example 1 was repeated using a 0.66 g/L solution of Fast Green dye in place of gallic acid. Spectroscopic surface analysis indicated that the dye monolayer covered about 35% of the surface and that there was about  $1 \times 10^{-4}$  g/m<sup>2</sup> of the dye on the surface. Example 1 was also repeated for both chemicals applied 19 hours (rather than 5 hours) after primer application. In all cases satisfactory stripping of the top coat was achieved (time required for clean strips may vary). The results are summarised in the following Table 1.

Table 1

| Example No | Chemical used | Time applied (after primer) | Stripping in "Turco 9090" after 90 minutes | Stripping in "Turco 6776" after 75 minutes                       | Skydrol resistance (17 days at 70°C)                         | Water resistance (15 days at 20°C)                               | Salt spray test results                                              |
|------------|---------------|-----------------------------|--------------------------------------------|------------------------------------------------------------------|--------------------------------------------------------------|------------------------------------------------------------------|----------------------------------------------------------------------|
| 1          | Galllic acid  | 5 hours                     | Clean strip after 90 minutes               | Clean strip after 75 minutes                                     | No deterioration                                             | No significant blistering. 100% adhesion wet and dry             | No undercoat corrosion. Very slight lifting at scribe                |
| 2          | Fast Green    | 5 hours                     | Clean strip after 1 hour                   | Clean strip after 1 hour with discoloration of primer            | Generally good, but slight loss of top coat at edge of panel | Blistering and loss of wet adhesion (Adhesion good after drying) | No undercoat corrosion. Very slight lifting at scribe                |
| 3          | Galllic acid  | 19 hours                    | Clean strip after 90 minutes               | Clean strip after 75 minutes with discoloration of primer        | Swelling at edge of panel                                    | No significant blistering. 100% adhesion wet and dry             | No undercoat corrosion. Very slight intercoat delamination at scribe |
| 4          | Fast Green    | 19 hours                    | Clean strip after 1 hour                   | Clean strip after 75 minutes with slight discoloration of primer | No deterioration                                             | Slight blistering. Adhesion 20% wet, 100% dry                    | No undercoat corrosion, no defects                                   |

- 13 -

The coating systems of Examples 1 and 2 were also tested for strippability using "Turco 1270/5" stripping solvent, which is an alkaline aqueous benzyl alcohol-based solvent. The coating system of Example 2 gave a clean strip (clean lifting off the top coat) after 90 minutes. The coating system of Example 1 required 4.5 hours in contact with the stripping solvent, but a clean strip of the top coat was then achieved.

#### Examples 5 to 8

10 Following the procedure of Example 1, panels were coated with coating systems in which the following polar organic compounds were used in place of gallic acid.

|    | Polar organic compound              | Concentration in aqueous solution |
|----|-------------------------------------|-----------------------------------|
| 15 |                                     |                                   |
|    | Example 5 Catechol Violet           | 0.64 g/L                          |
|    | Example 6 Nigrosin                  | 0.8 g/L                           |
|    | Example 7 Lissamine Green SF        | 1.3 g/L                           |
| 20 | Example 8 2,5-dihydroxybenzoic acid | 6.2 g/L                           |

The strippability test used was a quick test using formic acid. Very good strippability (top coat detached itself) was achieved in 10 minutes in Examples 5 and 6, and 25 the top coat could be easily stripped off in Example 7 and fairly easily in Example 8.

#### Examples 9 to 17

Aluminium panels were chromic acid pickled prior to coating. The primer specified in Table 2 below was spray 30 applied and dried for 4 hours at 50% relative humidity (R.H.) and 22°C. The primed panels were dipped in a 0.2% by weight solution of aqueous gallic acid for 20 minutes, then rinsed with tap water and air dried at 50% R.H. and 22°C for 24 hours before topcoating with the top coat specified in 35 Table 2. Stripping tests were carried out in duplicate, after 7 days' drying, on the fully coated panels at 50% R.H. and 22°C. The strippers used were "Turco 9090"

- 14 -

(formic/oxalic acid based) for Examples 9-14 and "Turco 5351" (methylene chloride/phenol based) for Examples 15-17. Two further dried panels were tested for Skydrol and water resistance (2 weeks' Skydrol immersion at 70°C and 7 days' 5 water immersion at 40°C, respectively).

---

- 15 -

Table 2

| <u>Example</u> | <u>Primer</u>                                                         | <u>Top Coat</u>                                                          |
|----------------|-----------------------------------------------------------------------|--------------------------------------------------------------------------|
| 9              | Epoxy-amine of Example 1                                              | Ti-Flex* Polyester-urethane of Example 1                                 |
| 10             | Epoxy-amine of Example 1                                              | Desothane HS* high-solids polyurethane (volatile organic content 420g/L) |
| 11             | DesoPrime* high-solids epoxy-amine (volatile organic content 360 g/L) | Polyester-urethane of Example 1                                          |
| 12             | High solids epoxy-amine                                               | Desothane HS                                                             |
| 13             | Crosslinked polyester urethane                                        | Desothane HS                                                             |
| 14             | Chromate-free epoxy-amine primer                                      | Desothane HS                                                             |
| 15             | Crosslinked polyurethane                                              | Aviox* acrylic-oxazolidine polymer                                       |
| 16             | 2-pack water-based epoxy-amine                                        | "LLT 2000" Fluoropolymer                                                 |
| 17             | 2-pack water-based epoxy amine                                        | Aviox                                                                    |

\*Ti-Flex, Desothane, Desoprime and Aviox are Trade Marks.

- 16 -

All of the Examples showed selective stripping, with the top coat lifting off the primer within 90 minutes and then being readily removed by low-pressure water wash.

Examples 9 to 13 and 15 to 17 showed no deterioration in the Skydrol immersion test. The paint system of Example 14 resisted Skydrol for 5 days but showed some loss of adhesion after 14 days' Skydrol immersion.

All of the Examples survived the water immersion test without blistering or other deterioration.

10

Examples 18 to 40

The polar materials described in Table 3 below showed at least reasonable efficacy in a brief preliminary selective stripping test.

Aluminium panels were coated with an epoxy/amine primer clear coat as in Example 1 and aged for 4 hours at 23°C before being dipped in a 1 g/L aqueous solution of the polar material at 30-35°C for 30 minutes. The panels were not rinsed but were stood vertically to air-dry for 135 minutes, and then top-coated with Desothane white polyurethane top coat. The fully coated panel was dried at ambient temperature for about 24 hours and then at 40°C overnight.

The panels were then tested for selective stripping by "Turco 9090" aqueous benzyl alcohol/formic acid-based stripping solvent and by "Turco 1270/5" stripping solvent which comprises aqueous benzyl alcohol made alkaline to pH12.

The time of contact in minutes with each stripping solvent is shown in Table 3, as is the degree of stripping, that is to say the percentage of the area of the panel over which the top coat was readily stripped from the primer.

---

- 17 -

| <u>Example</u> |    | <u>Polar Material</u>                                 | <u>Turco 9090</u> |                  | <u>Turco 1270/5</u> |                  |
|----------------|----|-------------------------------------------------------|-------------------|------------------|---------------------|------------------|
| <u>No.</u>     |    |                                                       | <u>Time of</u>    |                  | <u>Time of</u>      |                  |
|                |    |                                                       | <u>Contact</u>    | <u>Selective</u> | <u>Contact</u>      | <u>Selective</u> |
|                |    |                                                       | <u>min</u>        | <u>Stripping</u> | <u>min</u>          | <u>Stripping</u> |
| 5              | 18 | Sulphonyl porphyrin                                   | 26                | 100              | 26                  | 95               |
|                | 19 | Hyperbranched polyester of 5-hydroxy-isophthalic acid | 20                | 95               | 30                  | 100              |
|                | 20 | Bromocresol purple                                    | 27                | 90               | 27                  | 97.5             |
|                | 21 | Calcion                                               | 27                | 100              | 27                  | 95               |
|                | 22 | Fast Green - Gallic acid (50/50 by weight mixture)    | 29                | 97.5             | 29                  | 85               |
| 15             | 23 | Poly(styrene sulphonate) Na salt                      | 25                | 90               | 25                  | 100              |
|                | 24 | Guluronic acid oligomer of Mn 520                     | 25                | 90               | 25                  | 100              |
|                | 25 | Mannuronic acid oligomer of Mn 2250                   | 25                | 75               | 25                  | 92.5             |
|                | 26 | Fluorescent Brightener 28                             | 27                | 90               | 57                  | 92               |
| 20             | 27 | Brilliant Black BN                                    | 23                | 82.5             | 25                  | 90               |
|                | 28 | Sodium polyphosphate                                  | 25                | 75               | 44                  | 95               |
|                | 29 | 4,5-dihydroxy-1,3-benzene disulphonic acid, Na salt   | 35                | 80               | 48                  | 85               |
|                | 30 | Purpurogallin                                         | 25                | 60               | 25                  | 100              |
|                | 31 | Citrazinic acid                                       | 27                | 80               | 28                  | 75               |
| 25             | 32 | Xylenol blue Na salt                                  | 44                | 65               | 44                  | 90               |
|                | 33 | Reactive Blue 2                                       | 29                | 60               | 60                  | 95               |
|                | 34 | Rosolic acid Na salt                                  | 25                | 90               | 116                 | 60               |
|                | 35 | Xylenol orange Na salt                                | 26                | 70               | 80                  | 80               |
|                | 36 | Brilliant blue R                                      | 22                | 65               | 30                  | 77.5             |
| 30             | 37 | Brilliant blue G                                      | 25                | 80               | 56                  | 60               |
|                | 38 | Poly (acrylic acid)                                   | 25                | 95               | 48                  | 45               |
|                | 39 | Gluconic acid                                         | 40                | 60               | 40                  | 80               |
|                | 40 | Chromoxane cyanine R                                  | 27                | 60               | 40                  | 80               |
|                |    | none                                                  | 25                | 0                | 66                  | 0                |

- 18 -

As can be seen from the Table, all these materials gave selective stripping over at least 70% of the area of the panel (average over two strippers) in these tests. Without the polar material, no selective stripping was achieved.

5 Use of conventional surfactants such as sodium stearate in place of the above polar materials also gave no selective stripping.

---

CLAIMS

1. A process for overcoating a substrate having a cured primer coating with a curable top coat which when cured is swellable by a stripping solvent, characterised in that a  
5 non-volatile non-film-forming polar material is applied to the primed substrate from an aqueous liquid vehicle before coating with the top coat, the said polar material having sufficiently high affinity for the primer surface that it is not washed off the primer surface by water rinsing or by  
10 application of the top coat paint, whereby the said polar material facilitates the removal of the top coat from the primer by the stripping solvent.
2. A process according to claim 1, characterised in that the polar material is a non-polymeric organic compound  
15 having a molecular weight in the range 120 to 1500.
3. A process according to claim 1, characterised in that the polar material is a non-polymeric aromatic organic compound having a molecular weight in the range 150 to 1000.
4. A process according to claim 1, characterised in  
20 that the polar material is a polymer or oligomer having a plurality of anionic groups.
5. A process for treating a substrate having a cured primer coating to facilitate the removal by a stripping solvent of a subsequently applied top coat, characterised in  
25 that a non-volatile non-film-forming acidic aromatic polar organic compound is applied to the primed substrate from aqueous solution, the said acidic aromatic compound having sufficiently high affinity for the primer surface that it is not washed off the primer surface by water rinsing.
- 30 6. A process according to claim 5, characterised in that the aromatic compound contains at least one carboxylic acid group.



AMENDED SHEET

7. A process according to claim 5, characterised in that the aromatic compound contains at least one sulphonic acid group.
8. A process according to claim 6 or claim 7, characterised in that the aromatic compound additionally contains at least one hydroxy group and/or amino group.
9. A process according to claim 8, characterised in that the aromatic compound is gallic acid.
10. A process according to any one of claims 1 to 9, characterised in that the primer coating is based on an epoxy resin cured with an amino-functional curing agent.
11. A process according to any one of claims 1 to 9, characterised in that the primer coating is based on a crosslinked polyurethane.
12. A process according to any one of claims 1 to 11, characterised in that the primed substrate bearing the polar material is subsequently overcoated with a top coat comprising a curable polyurethane.
13. A process according to any one of claims 1 to 11, characterised in that the primed substrate bearing the polar material is subsequently overcoated with a top coat comprising a curable polyester, fluoropolymer or acrylic polymer.
14. A process according to any one of claims 1 to 13, characterised in that the polar material is applied from a thickened aqueous solution.
15. A process according to any one of claims 1 to 14, characterised in that the primed substrate is rinsed with water after application of the polar material.



16. A process according to claim 15, characterised in that the polar material is applied to the primed substrate from an aqueous solution having a concentration of 0.01 to 20 grams per litre.

17. A process according to any one of claims 1 to 16, characterised in that the polar material is applied to the primed substrate by aerosol spray.

18. A process according to claim 17, characterised in that the concentration of polar material in the aerosol spray is 0.0001 to 2 grams per litre.

19. A process according to any one of claims 1 to 18, characterised in that the polar material when coated is present as a molecular monolayer or partial monolayer on the primed surface.

**DATED** this 19th day of April 2001

**PRC-DESOTO INTERNATIONAL, INC.**

WATERMARK PATENT & TRADEMARK ATTORNEYS  
290 BURWOOD ROAD  
HAWTHORN VICTORIA 3122  
AUSTRALIA

Case: P7421AU00 IAS/JPF/PXT

