




(86) Date de dépôt PCT/PCT Filing Date: 2006/03/09
(87) Date publication PCT/PCT Publication Date: 2006/10/19
(45) Date de délivrance/Issue Date: 2013/03/05
(85) Entrée phase nationale/National Entry: 2007/10/11
(86) N° demande PCT/PCT Application No.: SE 2006/000300
(87) N° publication PCT/PCT Publication No.: 2006/110074
(30) Priorité/Priority: 2005/04/15 (SE0500841-2)

(51) Cl.Int./Int.Cl. *B25C 5/11* (2006.01),
B25C 5/16 (2006.01), *B25D 1/00* (2006.01)
(72) Inventeurs/Inventors:
EBBESSON, JAN, SE;
SOEDERHOLM, BJOERN, SE
(73) Propriétaire/Owner:
ISABERG RAPID AB, SE
(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : MARTEAU CLOUEUR
(54) Title: HAMMER TACKER

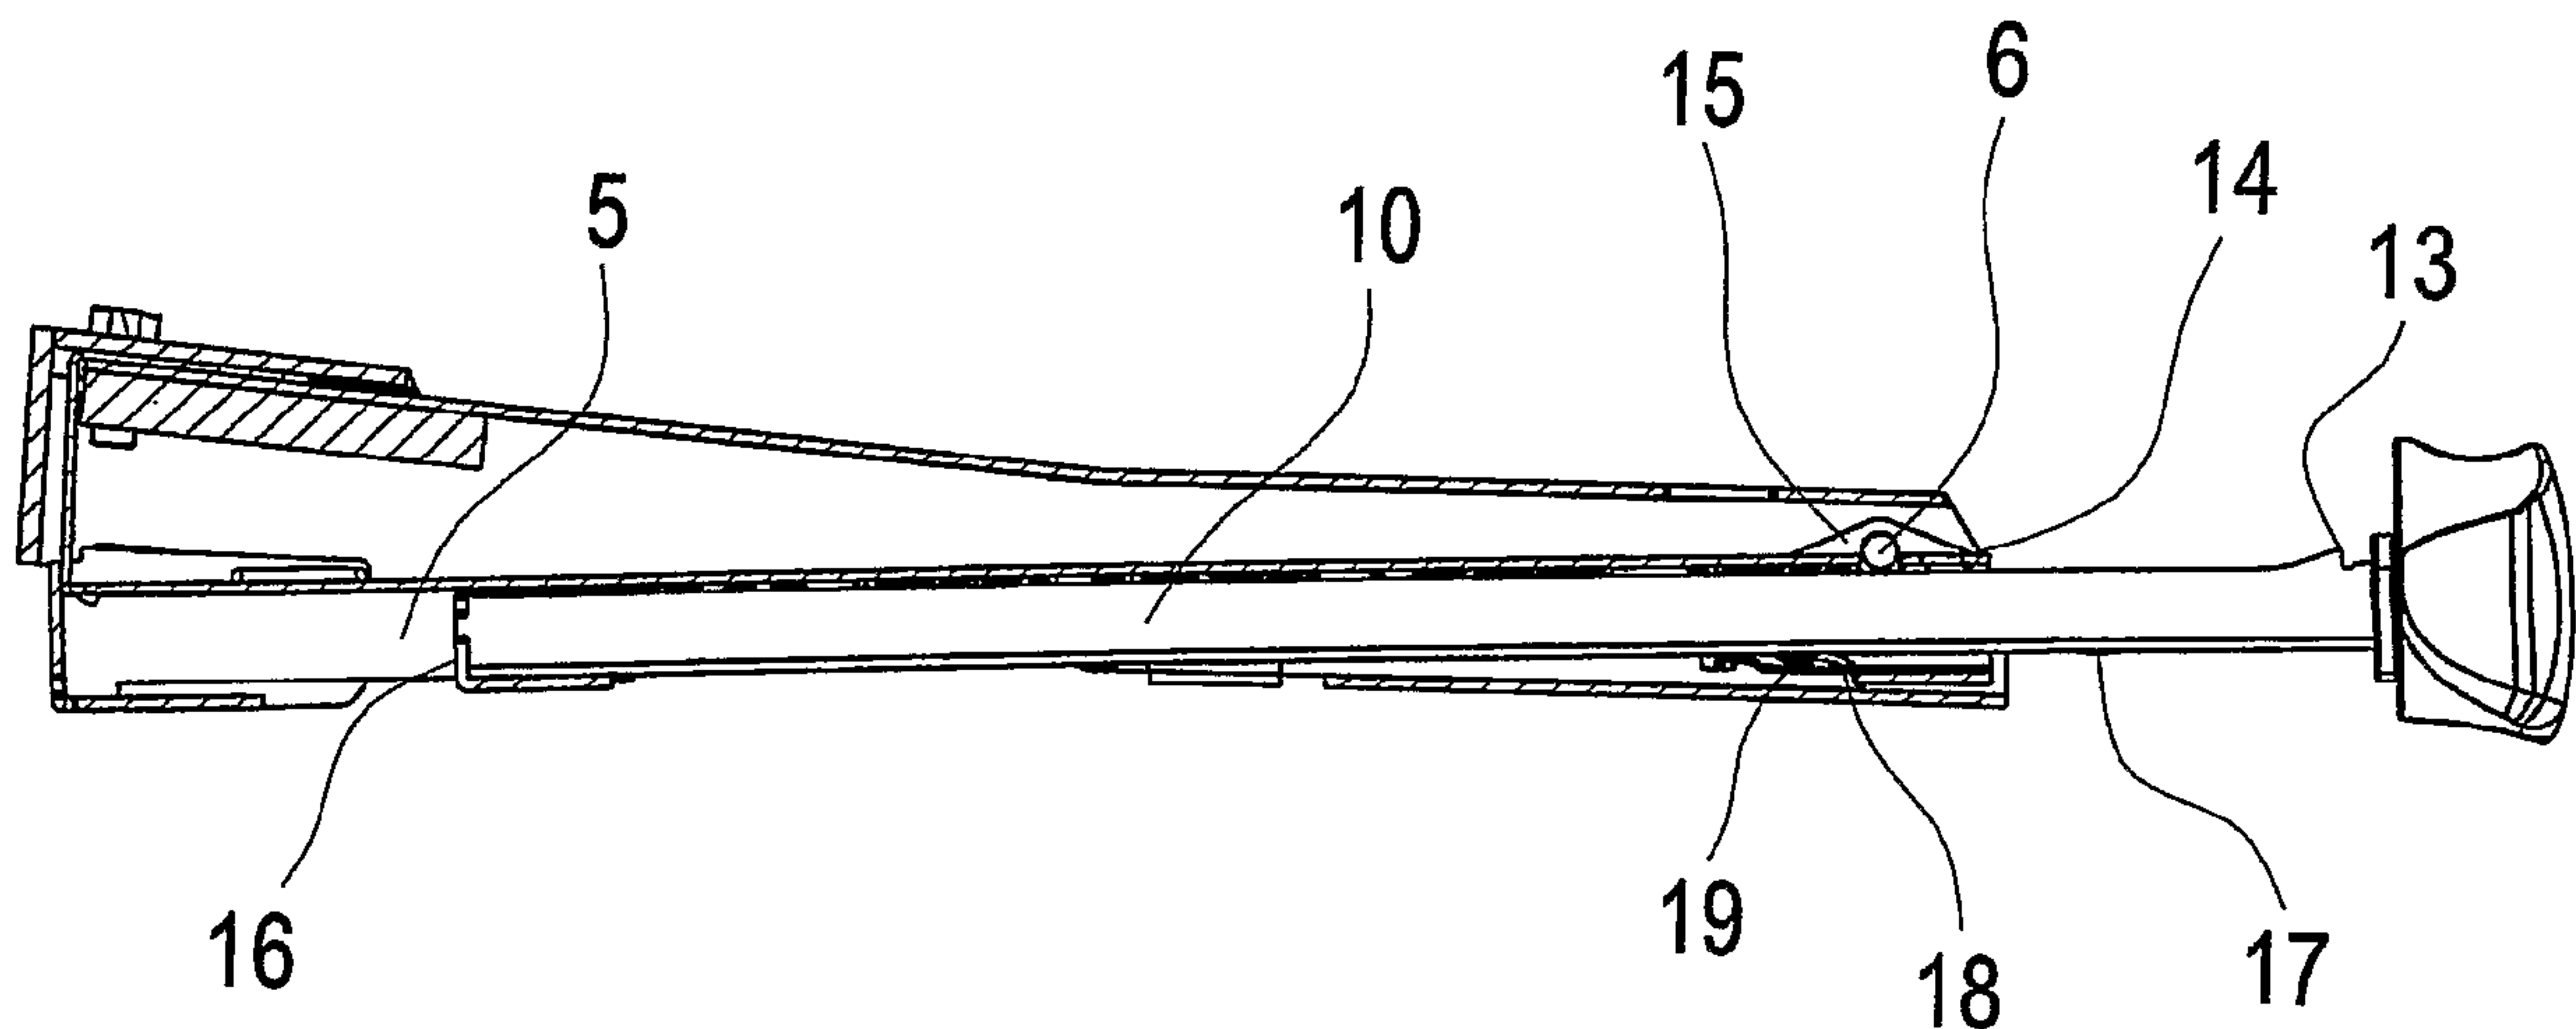

(57) Abrégé/Abstract:

Hammer tacker (1) for driving staples (7) into a workpiece, which tacker comprises a body (2) and a magazine (5) which is pivotally connected by connecting means (6) to the body in such a way that at the front edge of the tacker said magazine can move into and out of the body, and which magazine is provided with an endpiece (9) containing an elongate staple rail (10) which in the longitudinal direction of the magazine is slidably fitted to the magazine and is secured to the magazine by securing means (13,14) and which, when fitted, leaves a gap (23) between its front edge (16) and the tacker's front edge (22), whereby the securing means (13,14) take the form of a hook means (13) integral with the staple rail/magazine (10;5) and an aperture (14) attached to the magazine/staple rail (5; 10) and lockingly engage with one another when the staple strip is fitted to the magazine.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 October 2006 (19.10.2006)

PCT

(10) International Publication Number
WO 2006/110074 A1

(51) International Patent Classification:

B25C 5/11 (2006.01) *B25D 1/00* (2006.01)
B25C 5/16 (2006.01)

(21) International Application Number:

PCT/SE2006/000300

(22) International Filing Date: 9 March 2006 (09.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

0500841-2 15 April 2005 (15.04.2005) SE

(71) Applicant (for all designated States except US): **IS-ABERG RAPID AB** [SE/SE]; Box 115, S-330 27 Hestra (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **EBBESSON, Jan** [SE/SE]; Broddhult 7, S-335 93 Åsenhöga (SE). **SÖDERHOLM, Björn** [SE/SE]; Trollehöjdsvägen 37, S-565 32 Mullsjö (SE).

(74) Agent: **JOHANNESSON, Urban**; Isaberg Rapid AB, Box 115, S-330 27 Hestra (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HAMMER TACKER

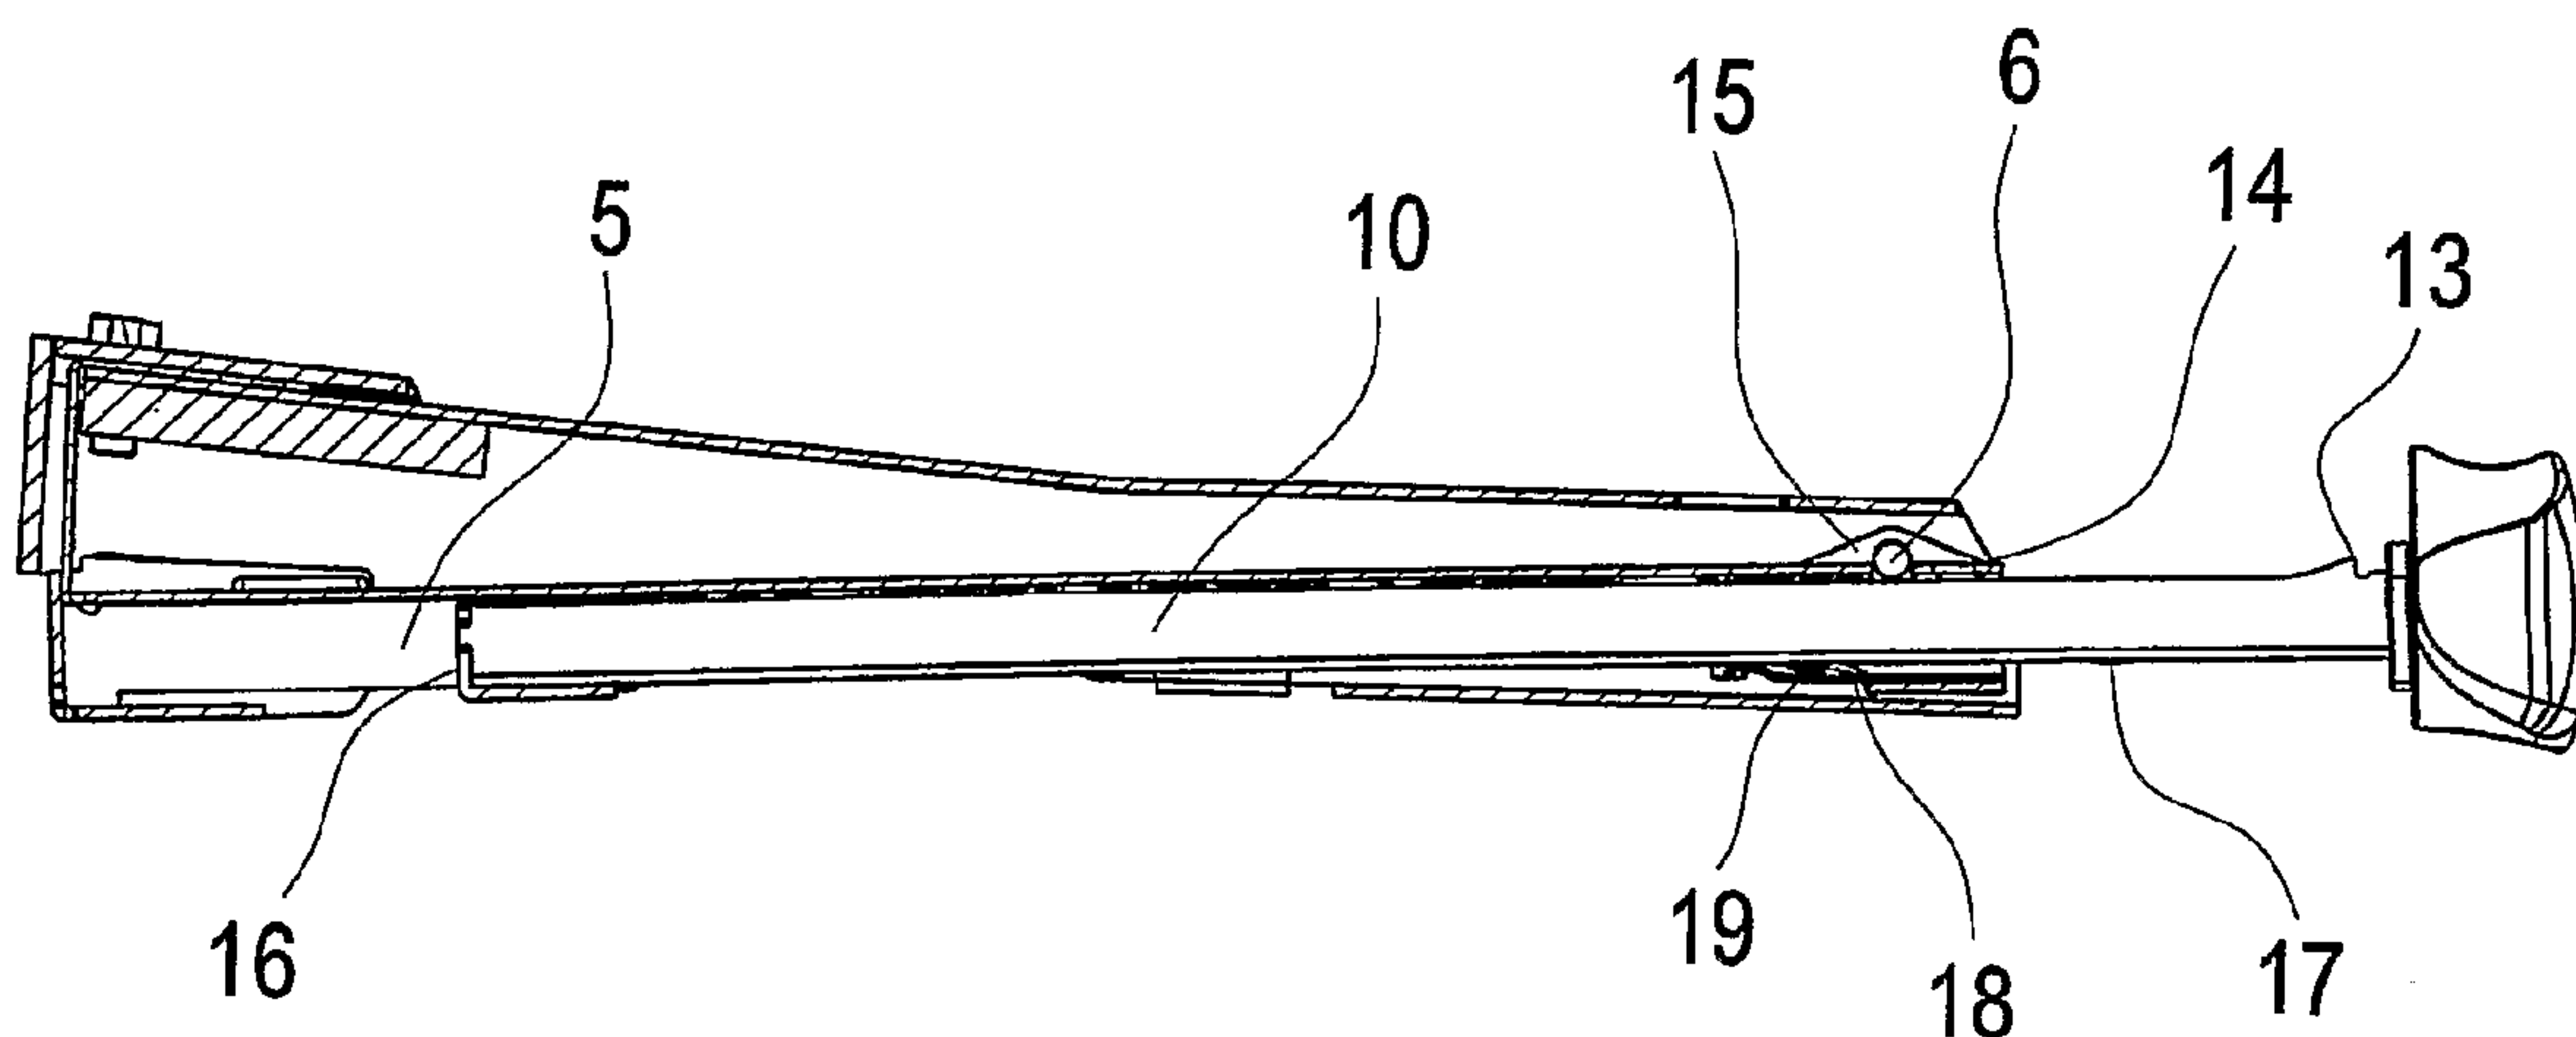

(57) Abstract: Hammer tacker (1) for driving staples (7) into a workpiece, which tacker comprises a body (2) and a magazine (5) which is pivotably connected by connecting means (6) to the body in such a way that at the front edge of the tacker said magazine can move into and out of the body, and which magazine is provided with an endpiece (9) containing an elongate staple rail (10) which in the longitudinal direction of the magazine is slidably fitted to the magazine and is secured to the magazine by securing means (13, 14) and which, when fitted, leaves a gap (23) between its front edge (16) and the tacker's front edge (22), whereby the securing means (13, 14) take the form of a hook means (13) integral with the staple rail/magazine (10; 5) and an aperture (14) attached to the magazine/staple rail (5; 10) and lockingly engage with one another when the staple strip is fitted to the magazine.

WO 2006/110074 A1

HAMMER TACKER

Technical field

The present invention relates to a hammer tacker for driving staples into a
5 workpiece, which tacker comprises a body and a magazine which is pivotably
connected by connecting means to the body in such a way that at the front
edge of the tacker said magazine can move into and out of the body, which
magazine comprises an endpiece containing an elongate staple rail which in
the longitudinal direction of the magazine is slidably fitted to the magazine and
10 is secured to the magazine by securing means and which, when fitted, leaves a
gap between its front edge and the front edge of the tacker.

State of the art

A hammer tacker of the kind indicated in the introduction is previously known.
However, that known tacker has a number of disadvantages. One such
15 disadvantage is that the securing means takes the form of a snap fitting which
is actuatingly applied to the staple rail by an elastic means and which snaps in,
to cooperate with an element disposed in the magazine, when the staple rail is
in a fitted position. This design means that the securing means, which
comprises a relatively large number of parts, is readily worn by the forces
20 which occur in the tacker during use and thereby loses its function. A further
disadvantage of the known tacker is that it lacks a locking function to reliably
prevent the securing means from losing its securing function when the
magazine in the course of a working stroke moves into the body. Moreover,
the previous tacker has the disadvantage of lacking means of pushing the
25 staple rail forwards in order to ensure that the size of the gap at the front edge
of the tacker does not change.

Problem

There is thus a need to provide a tacker of the kind indicated in the introduction which is of a design such that it is not readily worn by the forces which occur during use, that it has a locking function to prevent the securing means from losing its securing function when the staple magazine moves into the body and that it has means for ensuring that the gap between the staple rail and the front edge of the stapler does not increase.

Proposed solution

The present invention overcomes the disadvantages indicated above of a tacker of the kind indicated in the introduction which is characterised in that the securing means take the form of a hook means firmly attached to the staple rail/magazine and an aperture provided in the magazine/staple rail and lockingly engage with one another when the staple rail is fitted to the magazine.

The present invention is further characterised in that an elastic means presses the hook means and the aperture together to engage with one another.

The present invention is still further characterised in that the staple rail comprises a spacing element which, when the magazine is pressed into the body, cooperates with the body and prevents the hook means from moving out of engagement with the aperture.

The present invention is also characterised in that the elastic means also causes the staple rail to move forwards.

Finally, the present invention is characterised in that the elastic means takes the form of a leaf spring.

Brief description of the drawings

The invention is described below with reference to the attached drawings, in which:

Fig. 1 is a general view of a hammer tacker according to the present invention;

5 Fig. 2 is a view corresponding to Figure 1, showing a staple being driven into a workpiece;

Fig. 3 is a view corresponding to Figure 1 in which the endpiece of the tacker has been pulled out;

Fig. 4 is a view corresponding to Figure 3 as viewed from below;

10 Fig. 5 is a sectional view along the line A-A in Figure 3;

Fig. 6 is a side view of a tacker in which the magazine is outside the body and in which forward and rear portions are depicted in section;

Fig. 7 is a view corresponding to Figure 6 in which the magazine has moved into the body;

15 Fig. 8 is an enlarged view of the region B-B in Figure 6 and

Fig. 9 is an enlarged view of the region C-C in Figure 7.

Preferred embodiment example

Figure 1 depicts a hammer tacker 1 which comprises a body 2 which has at its
20 rear portion a handgrip 3 and at its front portion a stapling head 4. The drawing also shows a magazine 5 which in a known manner is connected pivotably by a pin 6 to the body so that the magazine can move into and out of

the body 2 in the direction indicated by the double arrow P. Figure 2 depicts the tacker in a position in which in a known manner it drives a staple 7 into a workpiece 8. The drawing shows the tacker in the position in which a staple has been driven into the workpiece and, as may be seen, in this position the magazine 5 has moved into the body 2. Figure 3 shows an endpiece 9 which in a known manner is fitted to the magazine 5. The endpiece is slidably fitted to the magazine and is fitted to the magazine by being introduced into the magazine from the rear edge, and since this fitting is known and obvious to one skilled in the art no further description of it will be given here. The endpiece contains a staple rail 10, an end plug 11 and a feed device which is not depicted in the drawing but is generally known to one skilled in the art. Figure 4 depicts the tacker in the position shown in Figure 3 as viewed from below and shows that in this position the magazine is open, making it possible to load staples to the inside 12 of the magazine in a manner known to one skilled in the art. Figure 5 shows the staple rail 10 accommodated in the magazine 5. It also shows that the staple rail is provided with an integral hook means 13 and that the magazine has an aperture 14. It also shows that the magazine has a coupling lug 15 through which the pin 6 extends, thereby connecting the magazine pivotably to the body. The staple rail has at the front edge a surface 16 whose function will be explained below, and at the rear edge the rail is provided with a protrusion 17. The magazine is provided at its rear edge with an elastic means 18 in the form of a leaf spring 19 whose function will likewise be explained below. Figures 6 and 7 show that when the staple rail is fitted to the magazine, the hook means 13 is inserted in the aperture 14. In this position the hook means is held in the aperture by the leaf spring 19 urging the staple rail in the direction indicated by the arrow U. The staple rail has at the front edge a boss 20 which comes to abutment against a stop 21 attached to the body, which stop prevents the possibility of the staple rail moving further forwards in the direction F, thus leaving a gap 23 between the

surface 16 and an opposite surface 22 provided at the front edge of the stapling head, through which gap a staple fed forwards (not depicted in the drawings) can be driven by a driver 24 for insertion in a workpiece. In Figure 6, the magazine has its front edge outside the body and in Figure 7 the magazine has moved into the body, a movement effected by the magazine pivoting about the pin 6.

Figures 8 and 9 show that the portion of the leaf spring which abuts against the staple rail has an arcuate shape 25 and that the protrusion 17 likewise has an arcuate shape 26, with the result that when the leaf spring presses the staple rail in the direction U the cooperation between the two arcuate shapes will also push the staple rail forwards in the direction indicated by the arrow F, thereby ensuring that the gap 23 remains the same size as that determined by the cooperation between the boss 20 and the stop 21. The drawings also show that the end plug 11 is provided with a spacing element 27 and the body with a stop surface 28. In Figure 9 the front edge of the magazine has moved into the body and the fact that the magazine pivots about the pin 6 results in the spacing element coming close up against the stop surface 28, thereby preventing the staple rail from moving downwards in the direction indicated by the arrow N and hence ensuring that the hook means 13 cannot move out of engagement with the aperture 14. When the front edge of the magazine is outside the body, the spacing element 27 will be in a position such as that depicted in Figure 8 and the hook means 13 will then be able to move down and out of the aperture 14.

Since the hook means forms an integral part of the staple rail, said means will not be subject to wear such as otherwise occurs in cases where it takes the form of a freestanding part connected to the staple rail, and the fact that the spacing element 27 and the stop surface 28 cooperate and prevent the hook means 13 from losing its engagement with the aperture 14 when the staple

magazine 5 moves into the body ensures that the staple rail remains in the magazine when the tacker is used.

In the embodiment depicted, the hook means is shown integral with the staple rail and the aperture accommodated in the magazine. However, as will readily
5 be appreciated by one skilled in the art, it is possible, without departing from the invention, for the reverse to be the case, whereby the hook means is situated in the magazine and the aperture in the rail.

1. A hammer tacker (1) for driving staples (7) into a workpiece (8), wherein the tacker comprises a body (2), which has at its front portion a stapling head (4) having a front edge (22) and at its rear portion a handgrip (3), and a magazine (5) having a front edge (16) which is pivotably connected by connecting means (6) to the body in such a way that at the front portion of the body said magazine can move into and out of the body (P), wherein the magazine comprises an endpiece (9) containing an elongate staple rail (10) which in the longitudinal direction of the magazine is slidably fitted to the magazine and is secured to the magazine by securing means (13,14) and which, when fitted, leaves a gap (23) between the front edge (16) of the magazine (5) and the front edge (22) of the stapling head (4)
CHARACTERISED in that the securing means (13,14) take the form of a hook means (13) integral with the staple rail(10) and an aperture (14) attached to the magazine(5) and lockingly engage with one another when the staple rail (10) is fitted to the magazine (5).
2. A hammer tacker (1) for driving staples (7) into a workpiece (8), wherein the tacker comprises a body (2), which has at its front portion a stapling head (4) having a front edge (22) and at its rear portion a handgrip (3), and a magazine (5) having a front edge (16) which is pivotably connected by connecting means (6) to the body in such a way that at the front portion of the body said magazine can move into and out of the body (P), wherein the magazine comprises an endpiece (9) containing an elongate staple rail (10) which in the longitudinal direction of the magazine is slidably fitted to the magazine and is secured to the magazine by securing means (13,14) and which, when fitted, leaves a gap (23) between the front edge (16) of the magazine (5) and the front edge (22) of the stapling head (4)
CHARACTERISED in that the securing means (13,14) take the form of a hook means (13) integral with the magazine (5) and an aperture (14) attached to the staple rail (10) and lockingly engage with one another when the staple rail (10) is fitted to the magazine (5).

3. The hammer tacker (1) according to claim 1 or 2 CHARACTERISED in that an elastic means (19) presses the hook means (13) and the aperture (14) together to engage with one another.
4. The hammer tacker according to claim 3 CHARACTERISED in that the elastic means (19) also causes the staple rail (10) to move in the direction of the stapling head (4).
5. The hammer tacker (1) according to any one of claim 1-4 CHARACTERISED in that the staple rail (10) comprises a spacing element (27) which, when the magazine (5) is pushed into the body (2), cooperates with the body and prevents the possibility of the hook means (13) moving out of engagement with the aperture (14).
6. The hammer tacker according to claim 3 or 4 CHARACTERISED in that the elastic means (19) takes the form of a leaf spring (20).

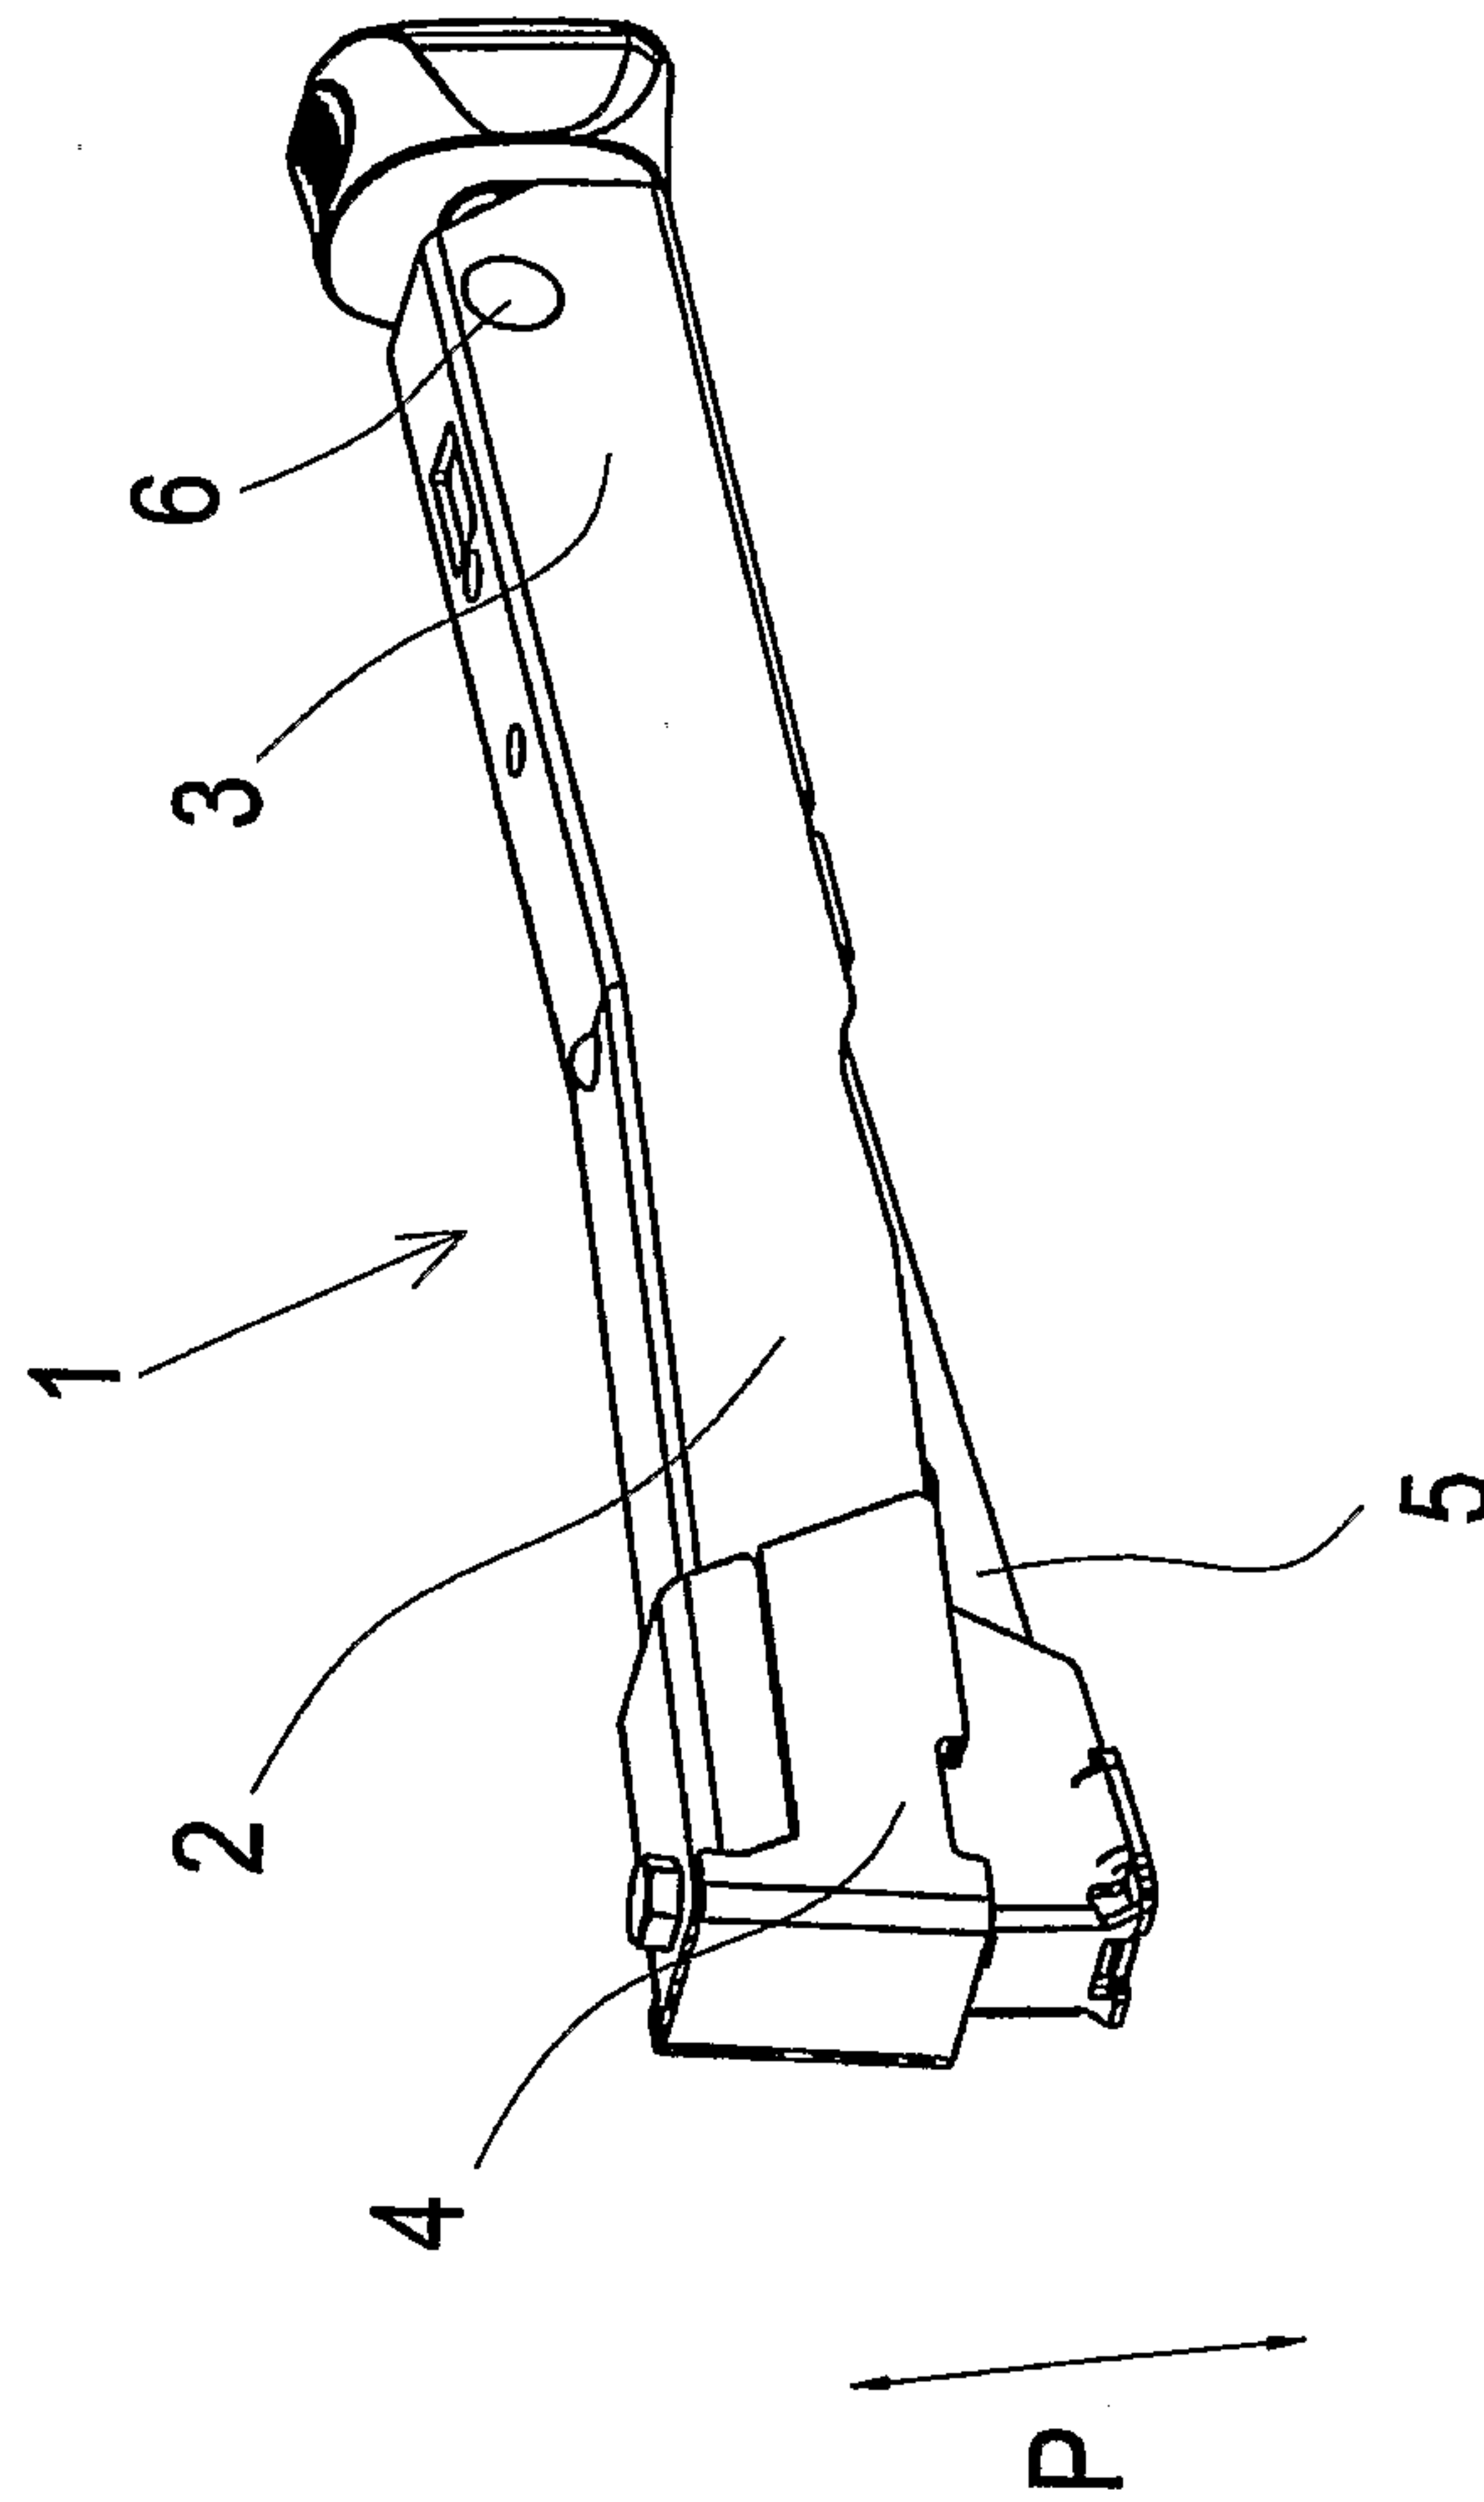


Fig 1

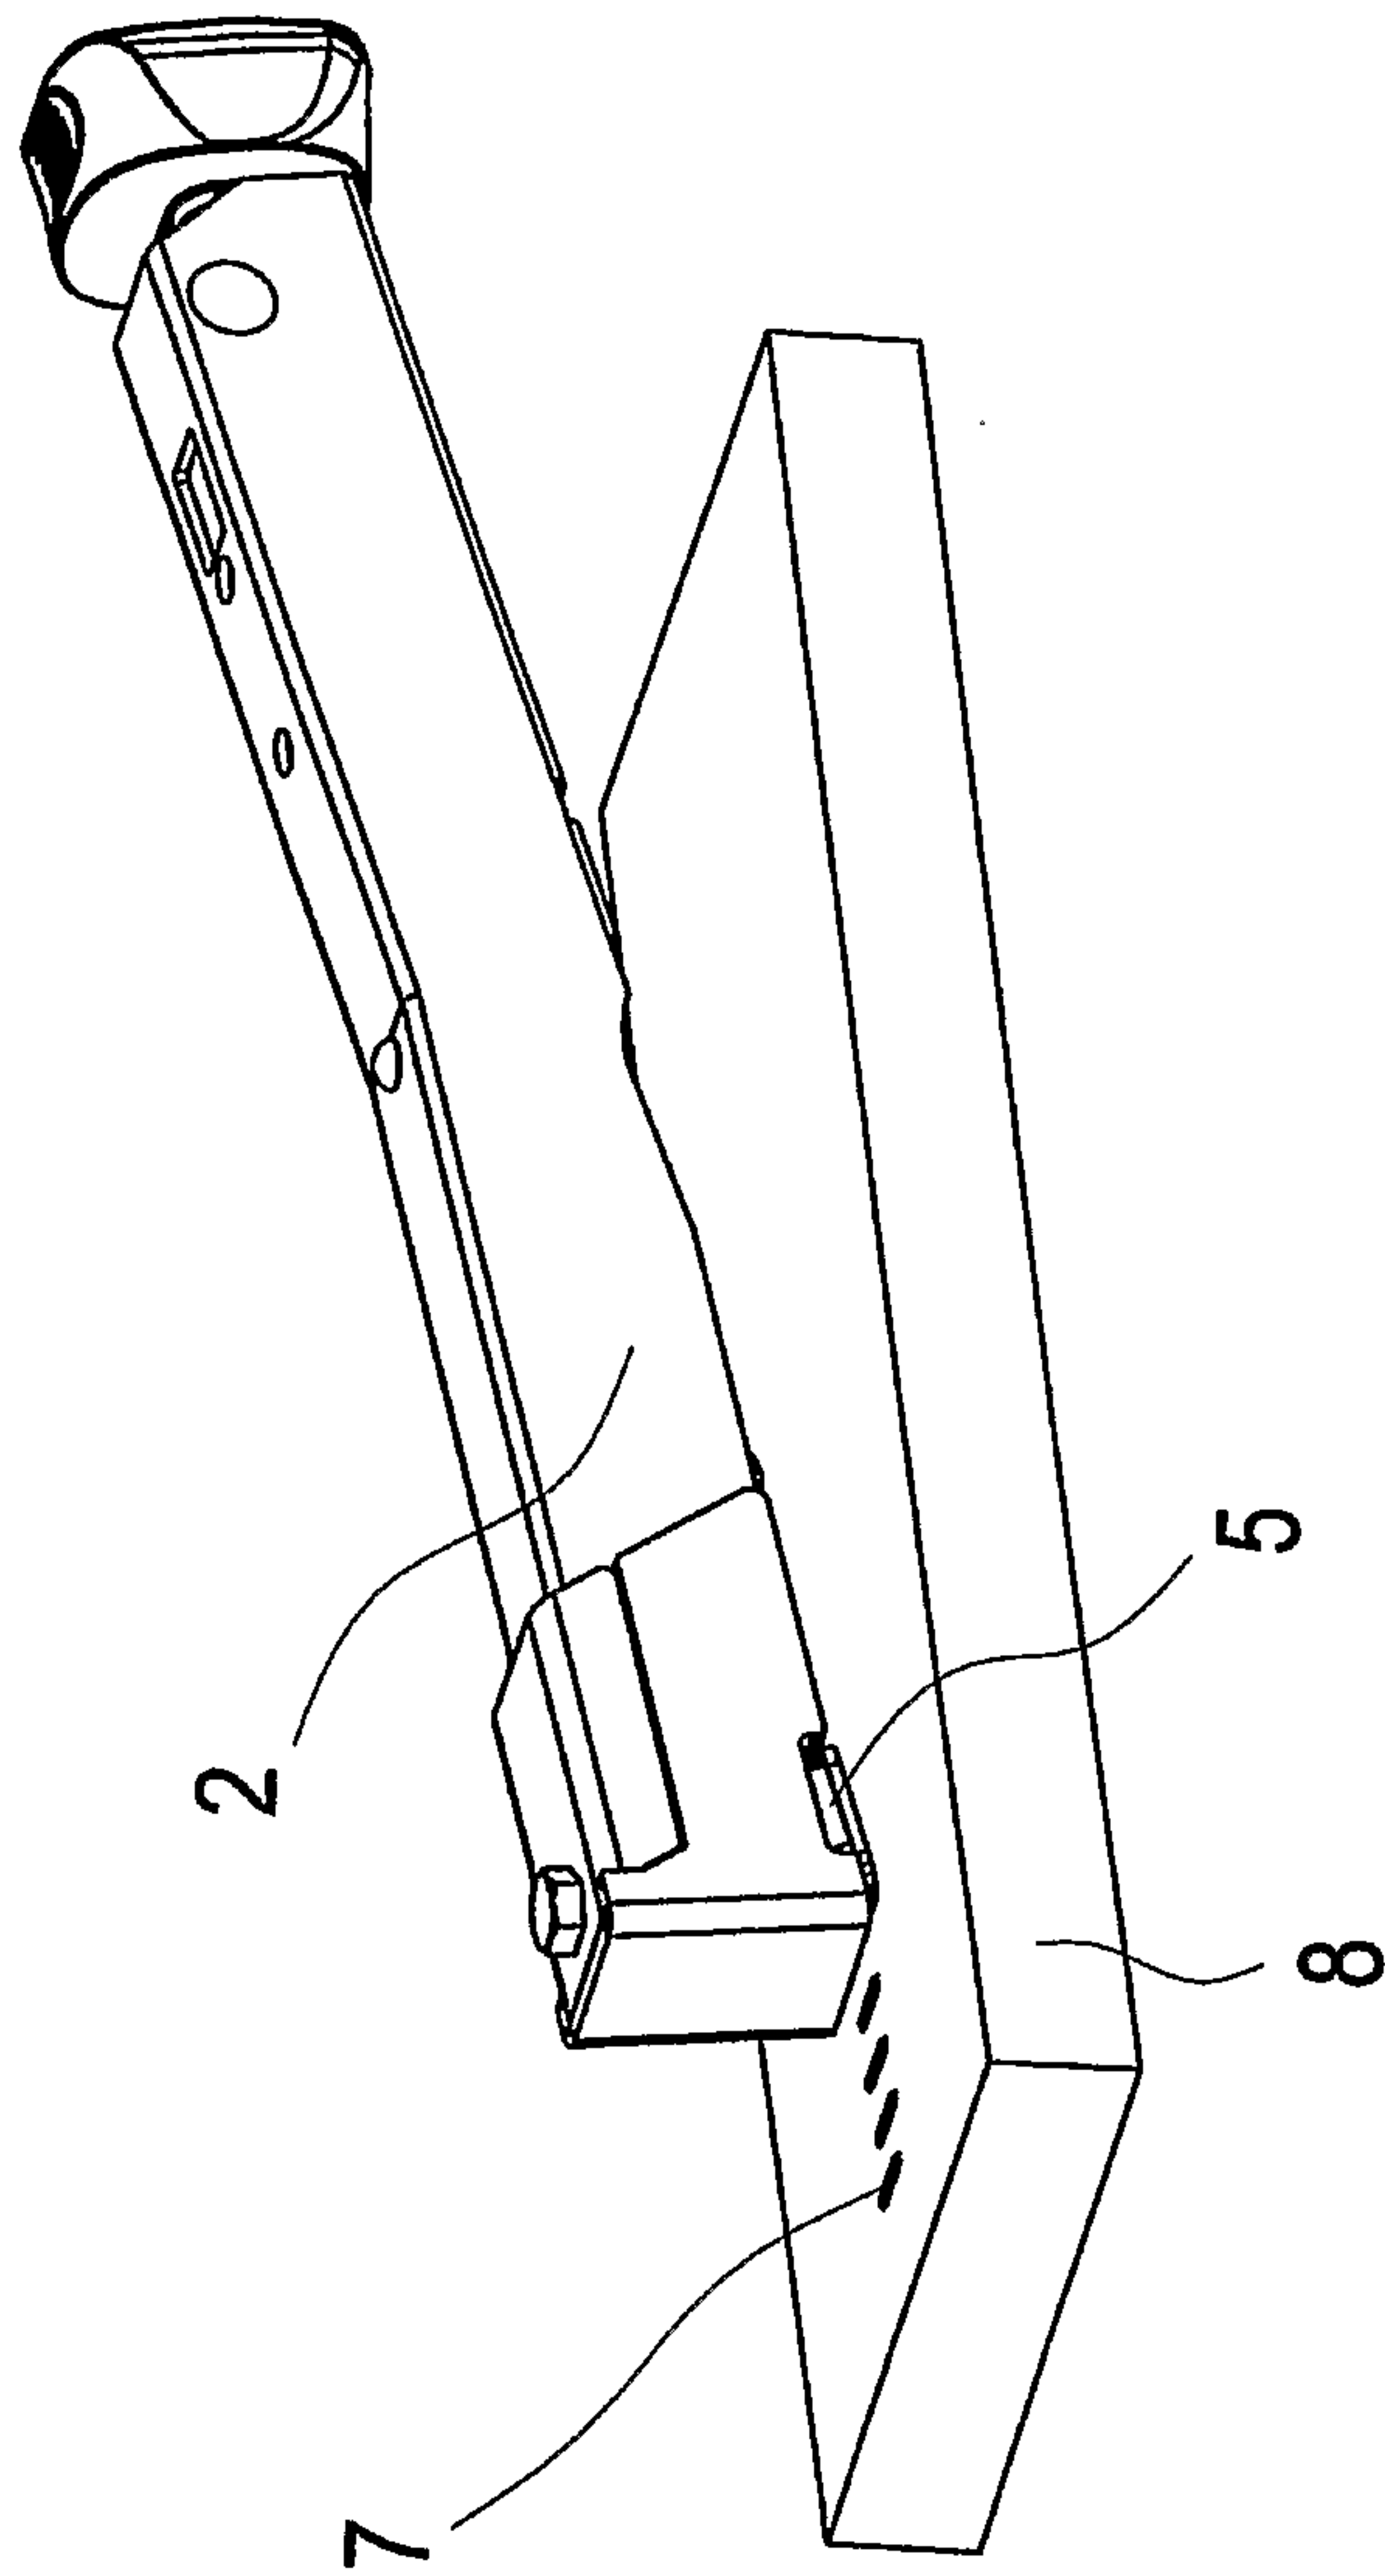


Fig 2

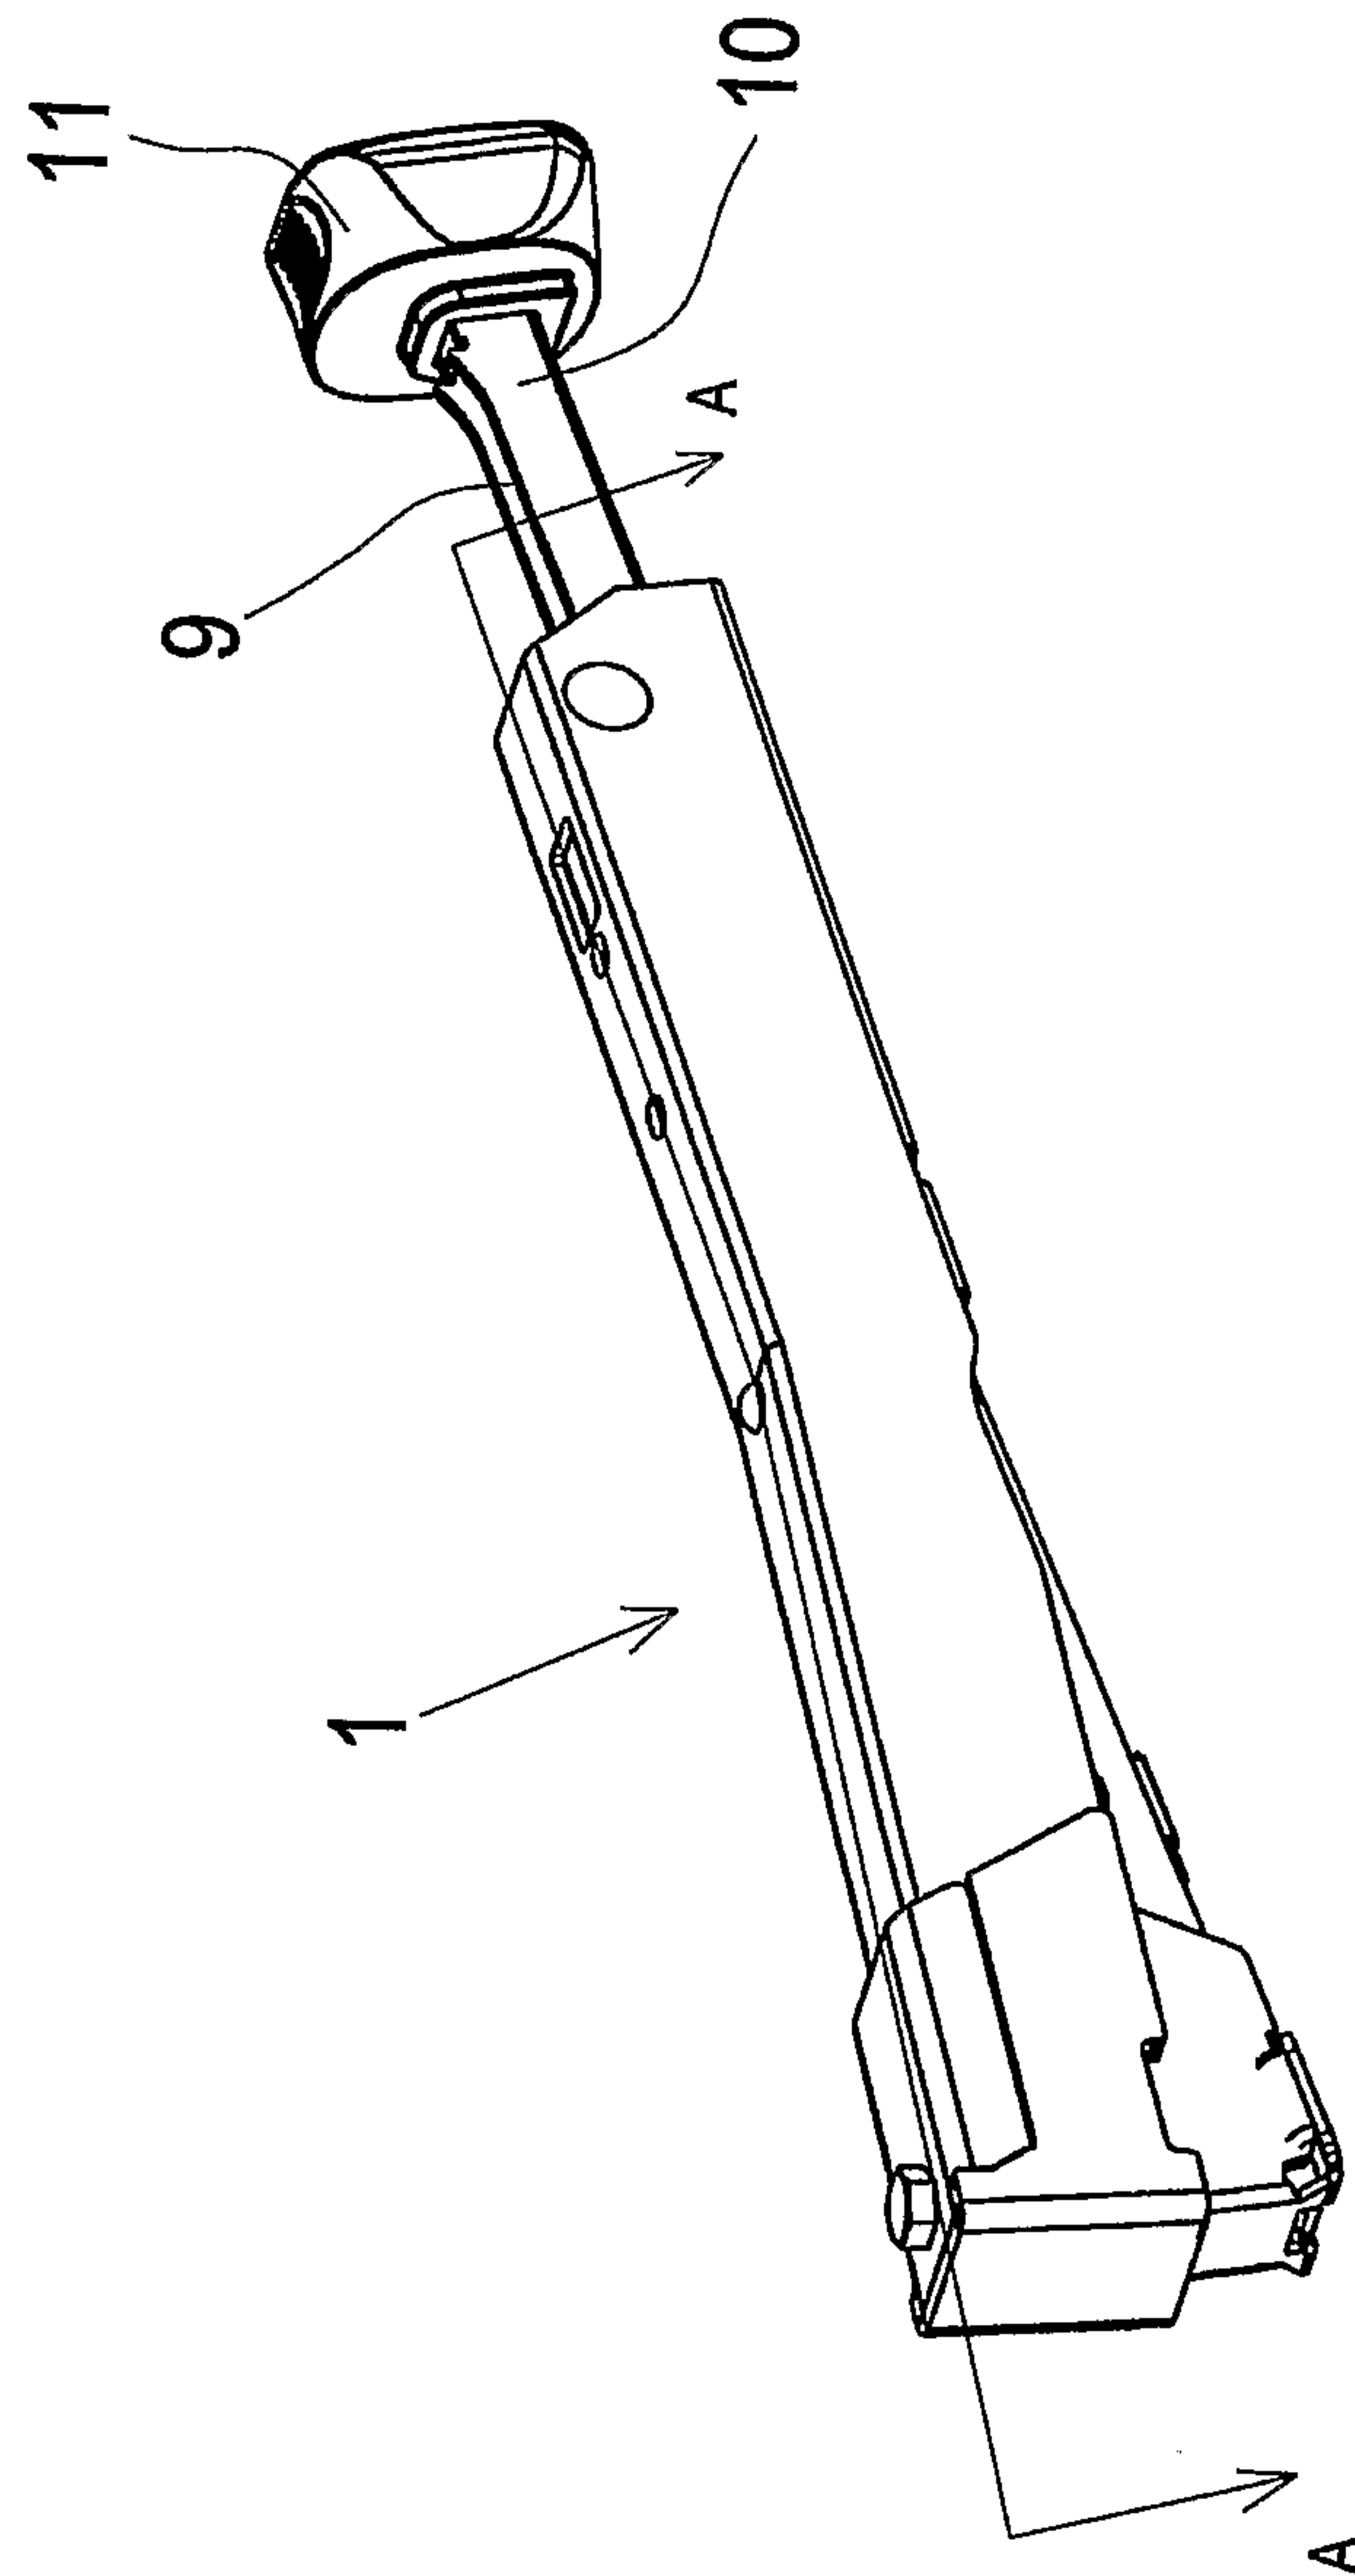


Fig 3

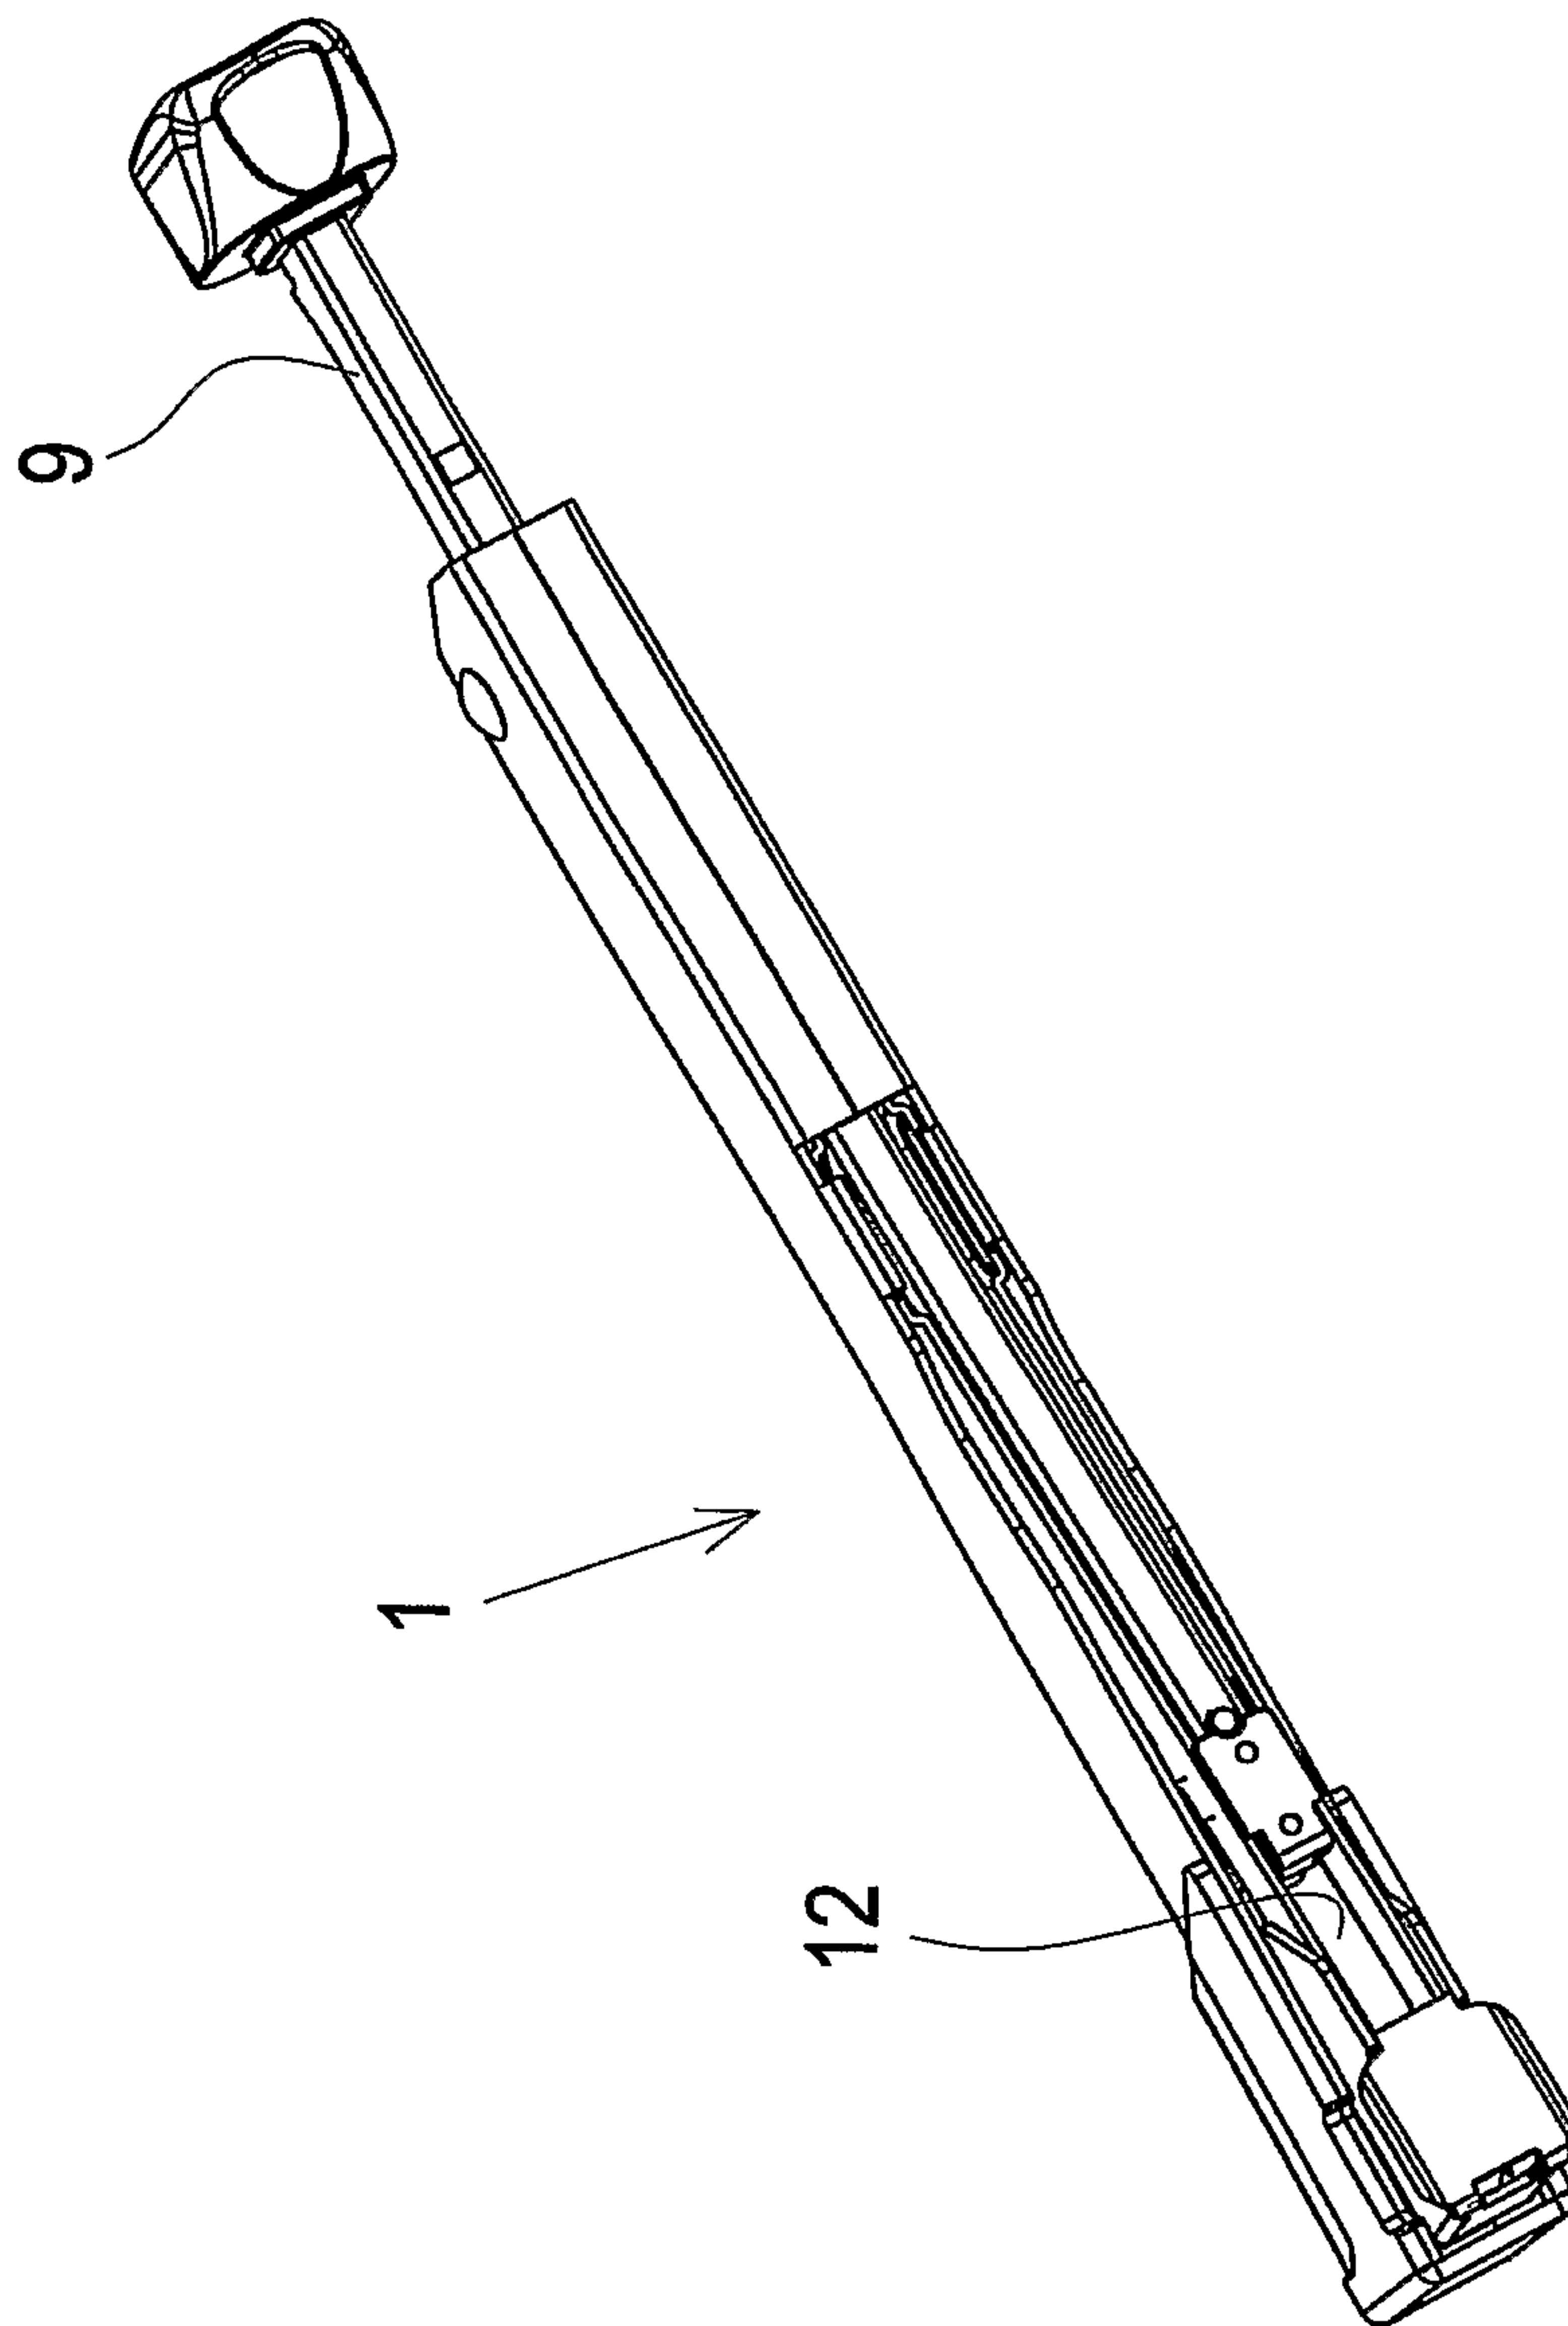


Fig 4

Fig 5

VIEW A-A

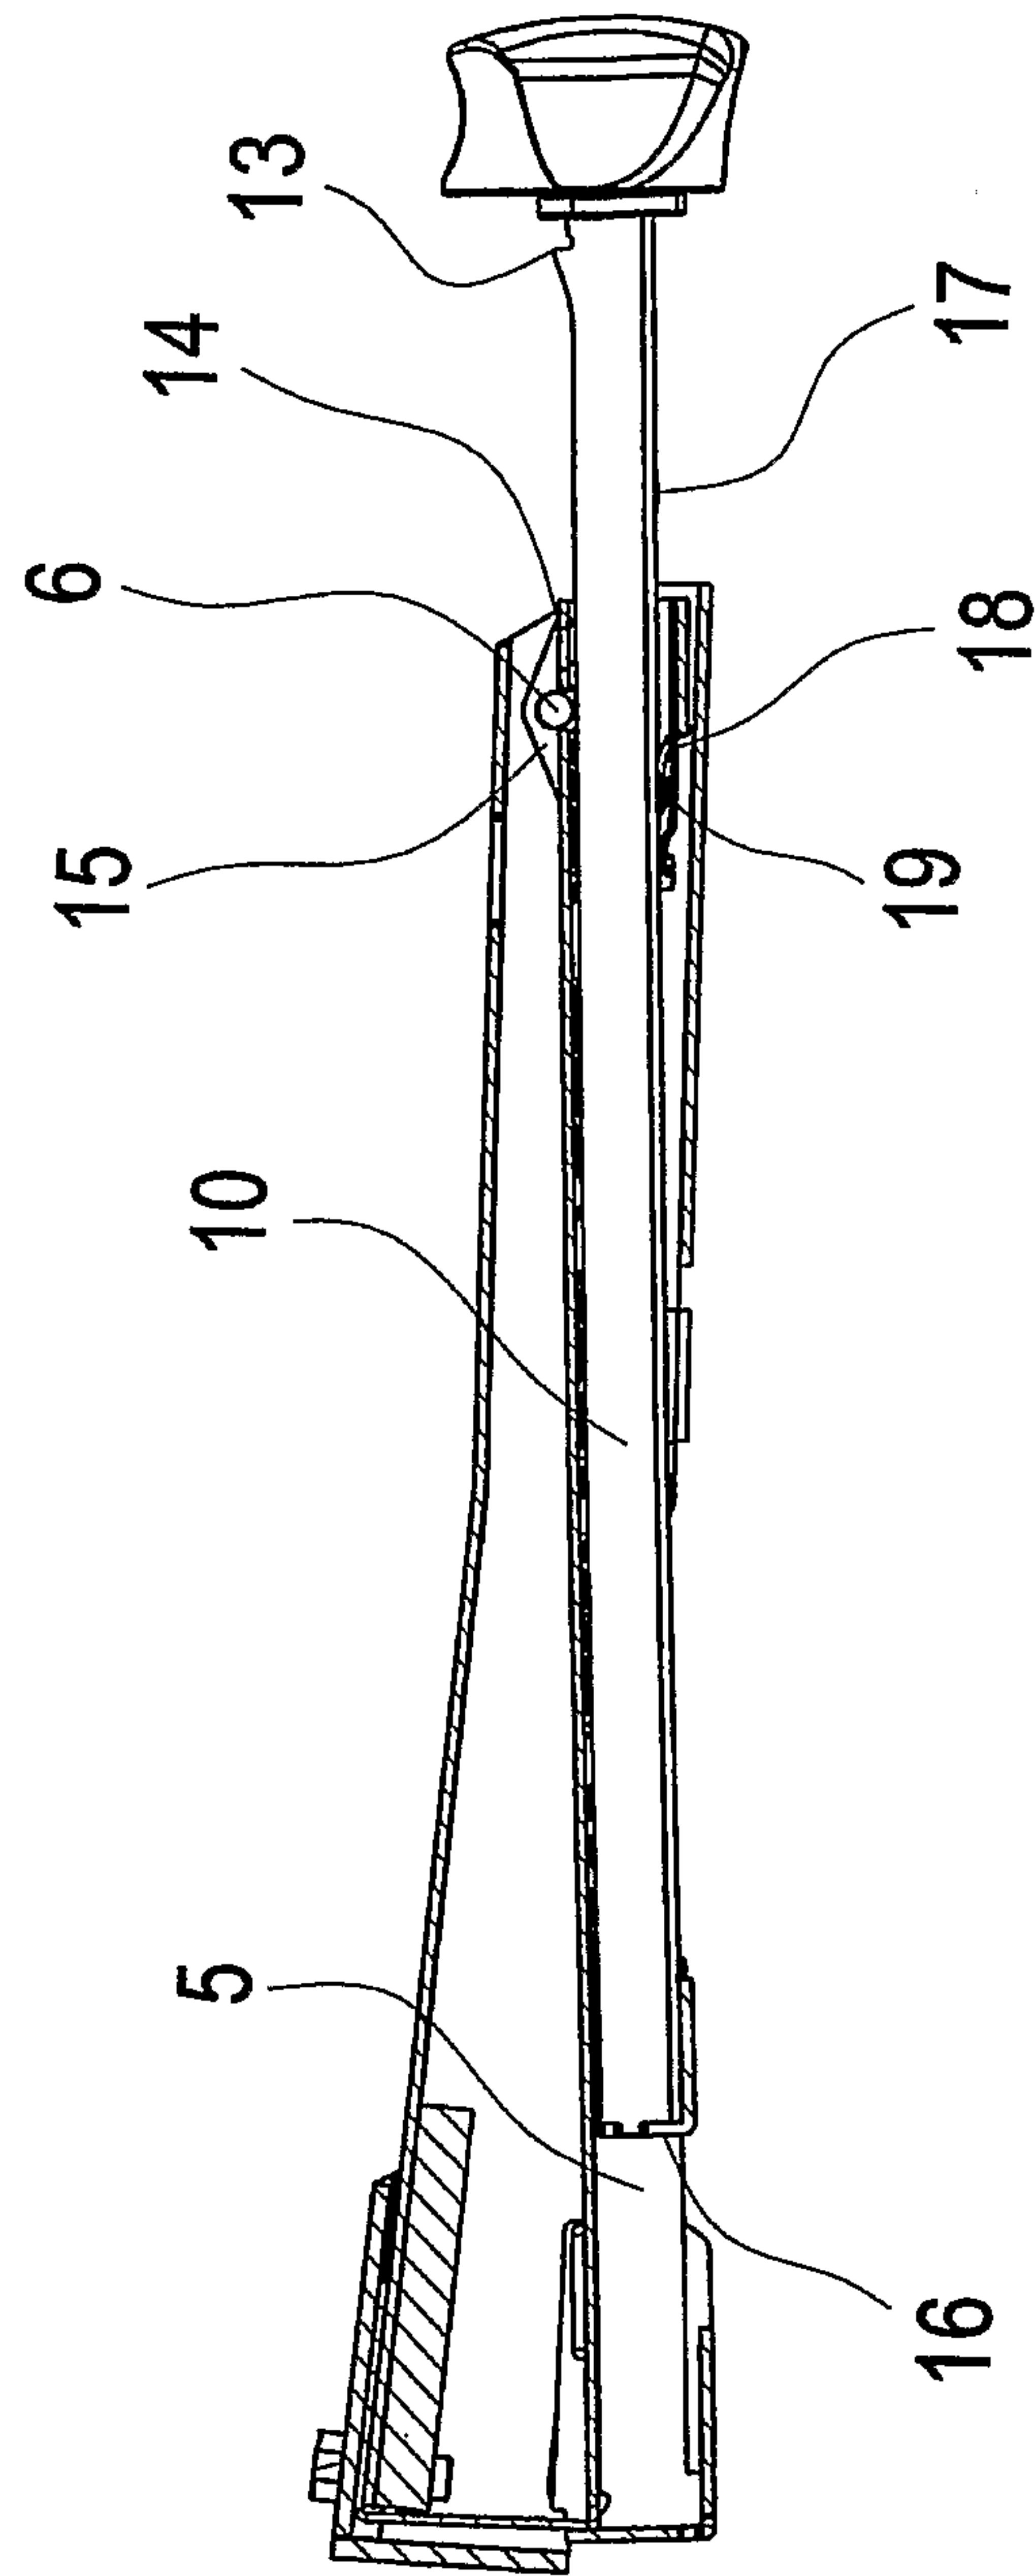


Fig 6

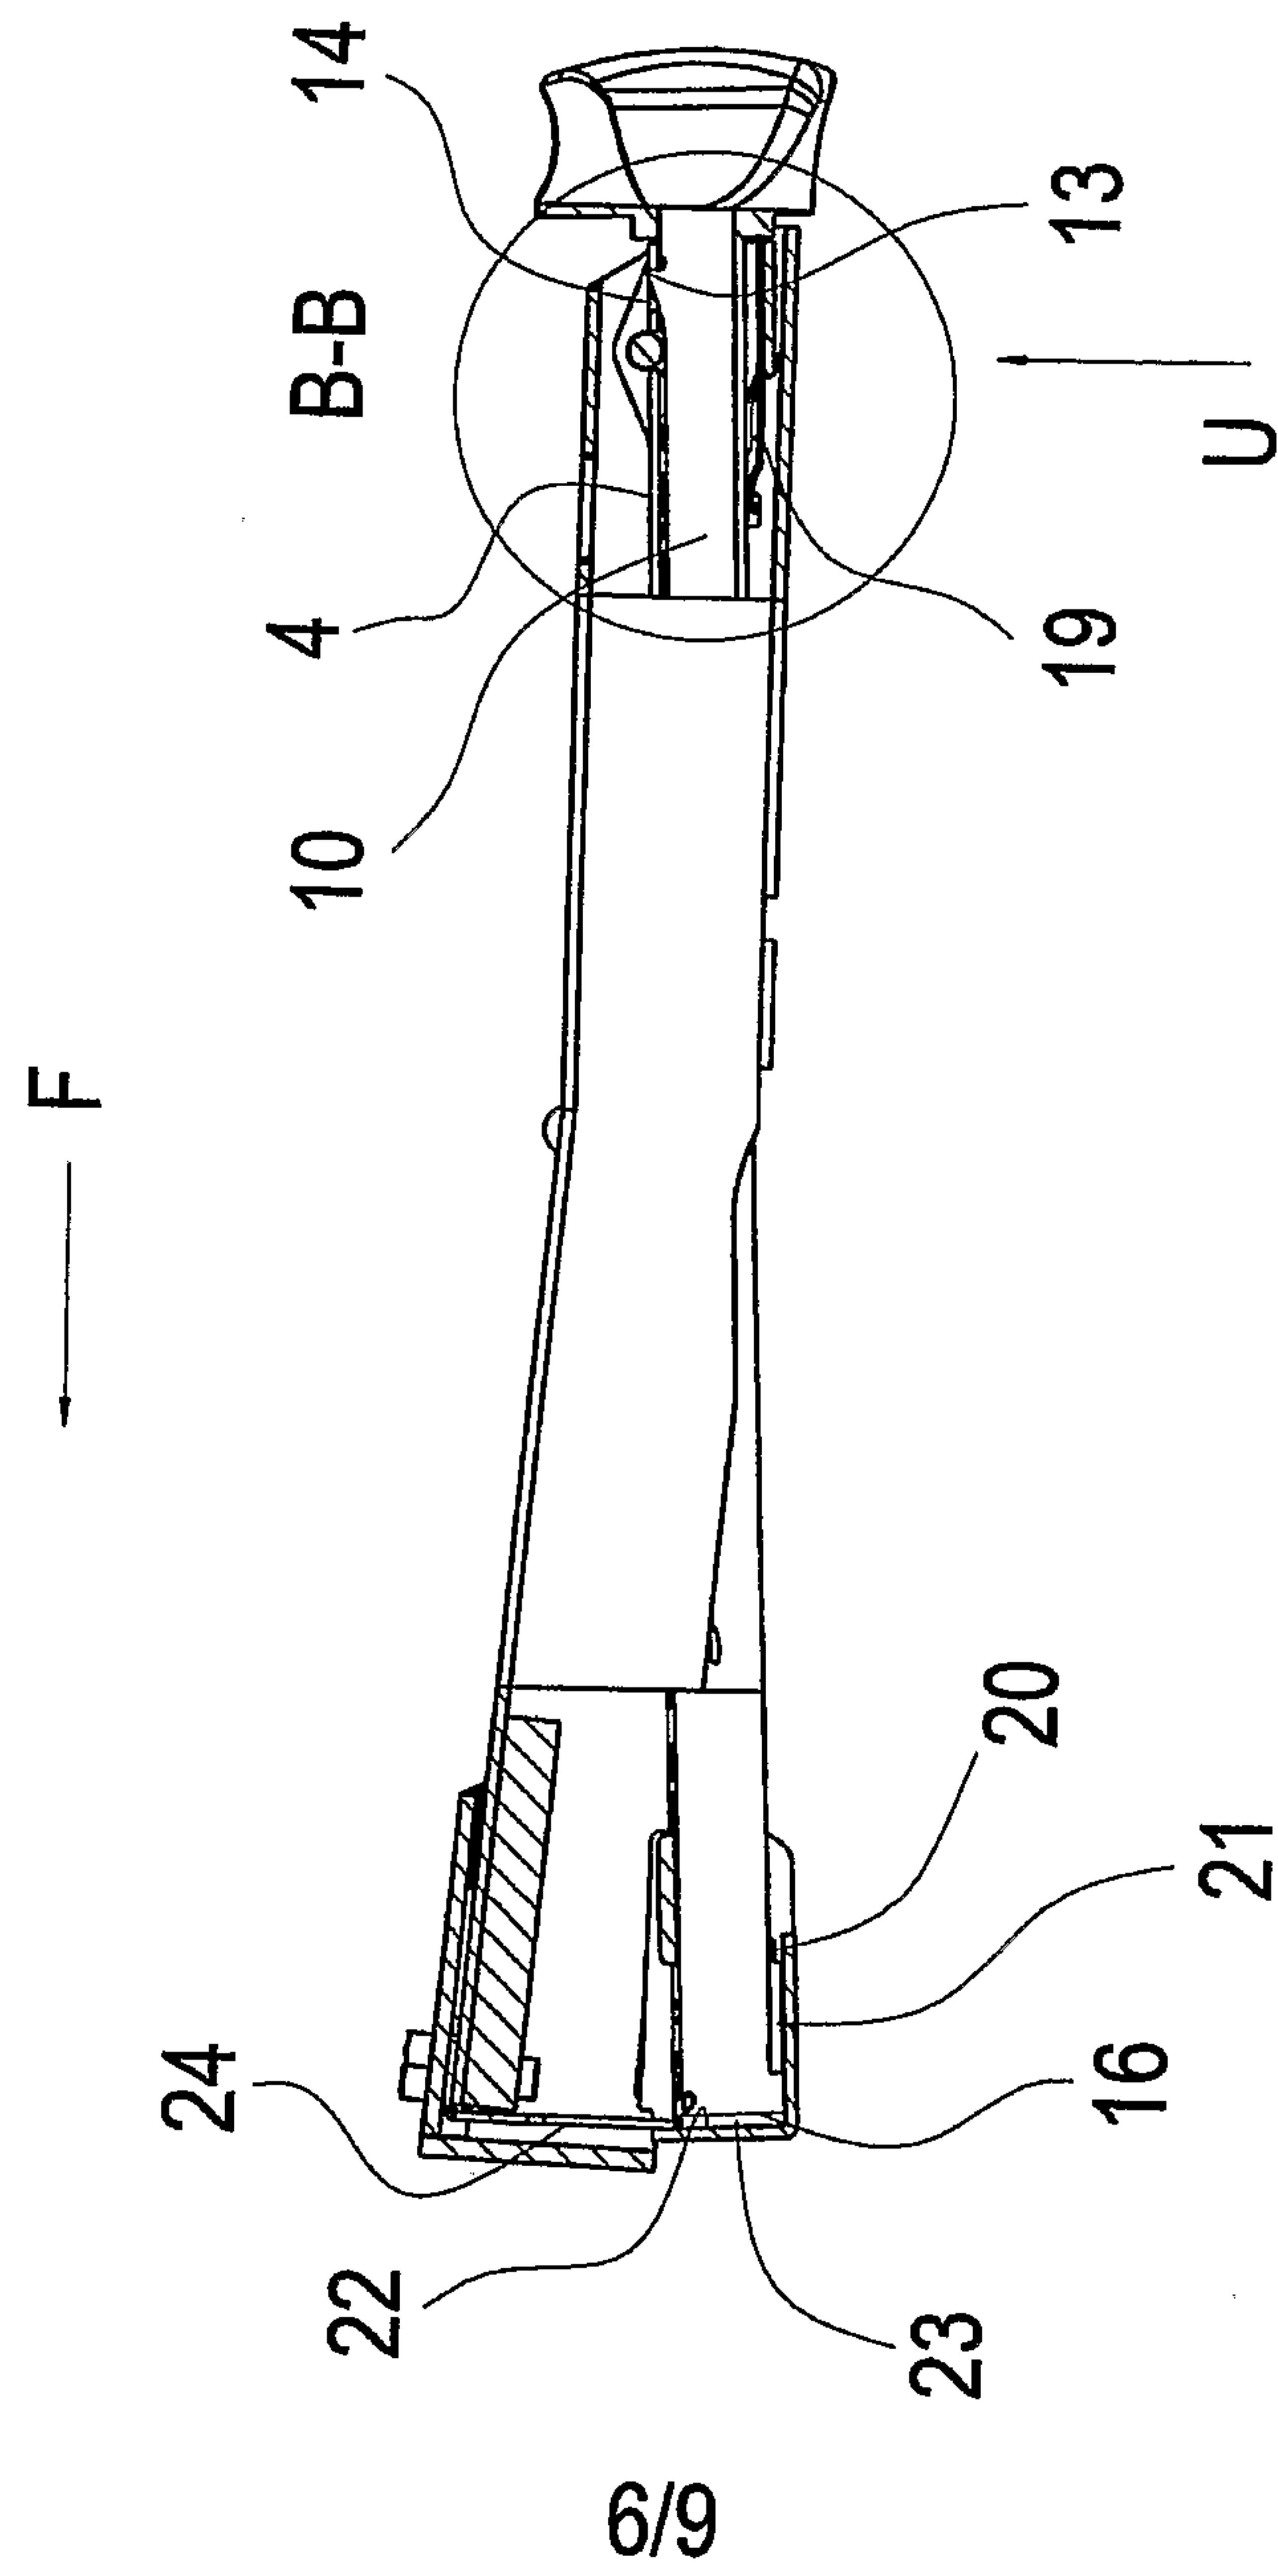


Fig 7

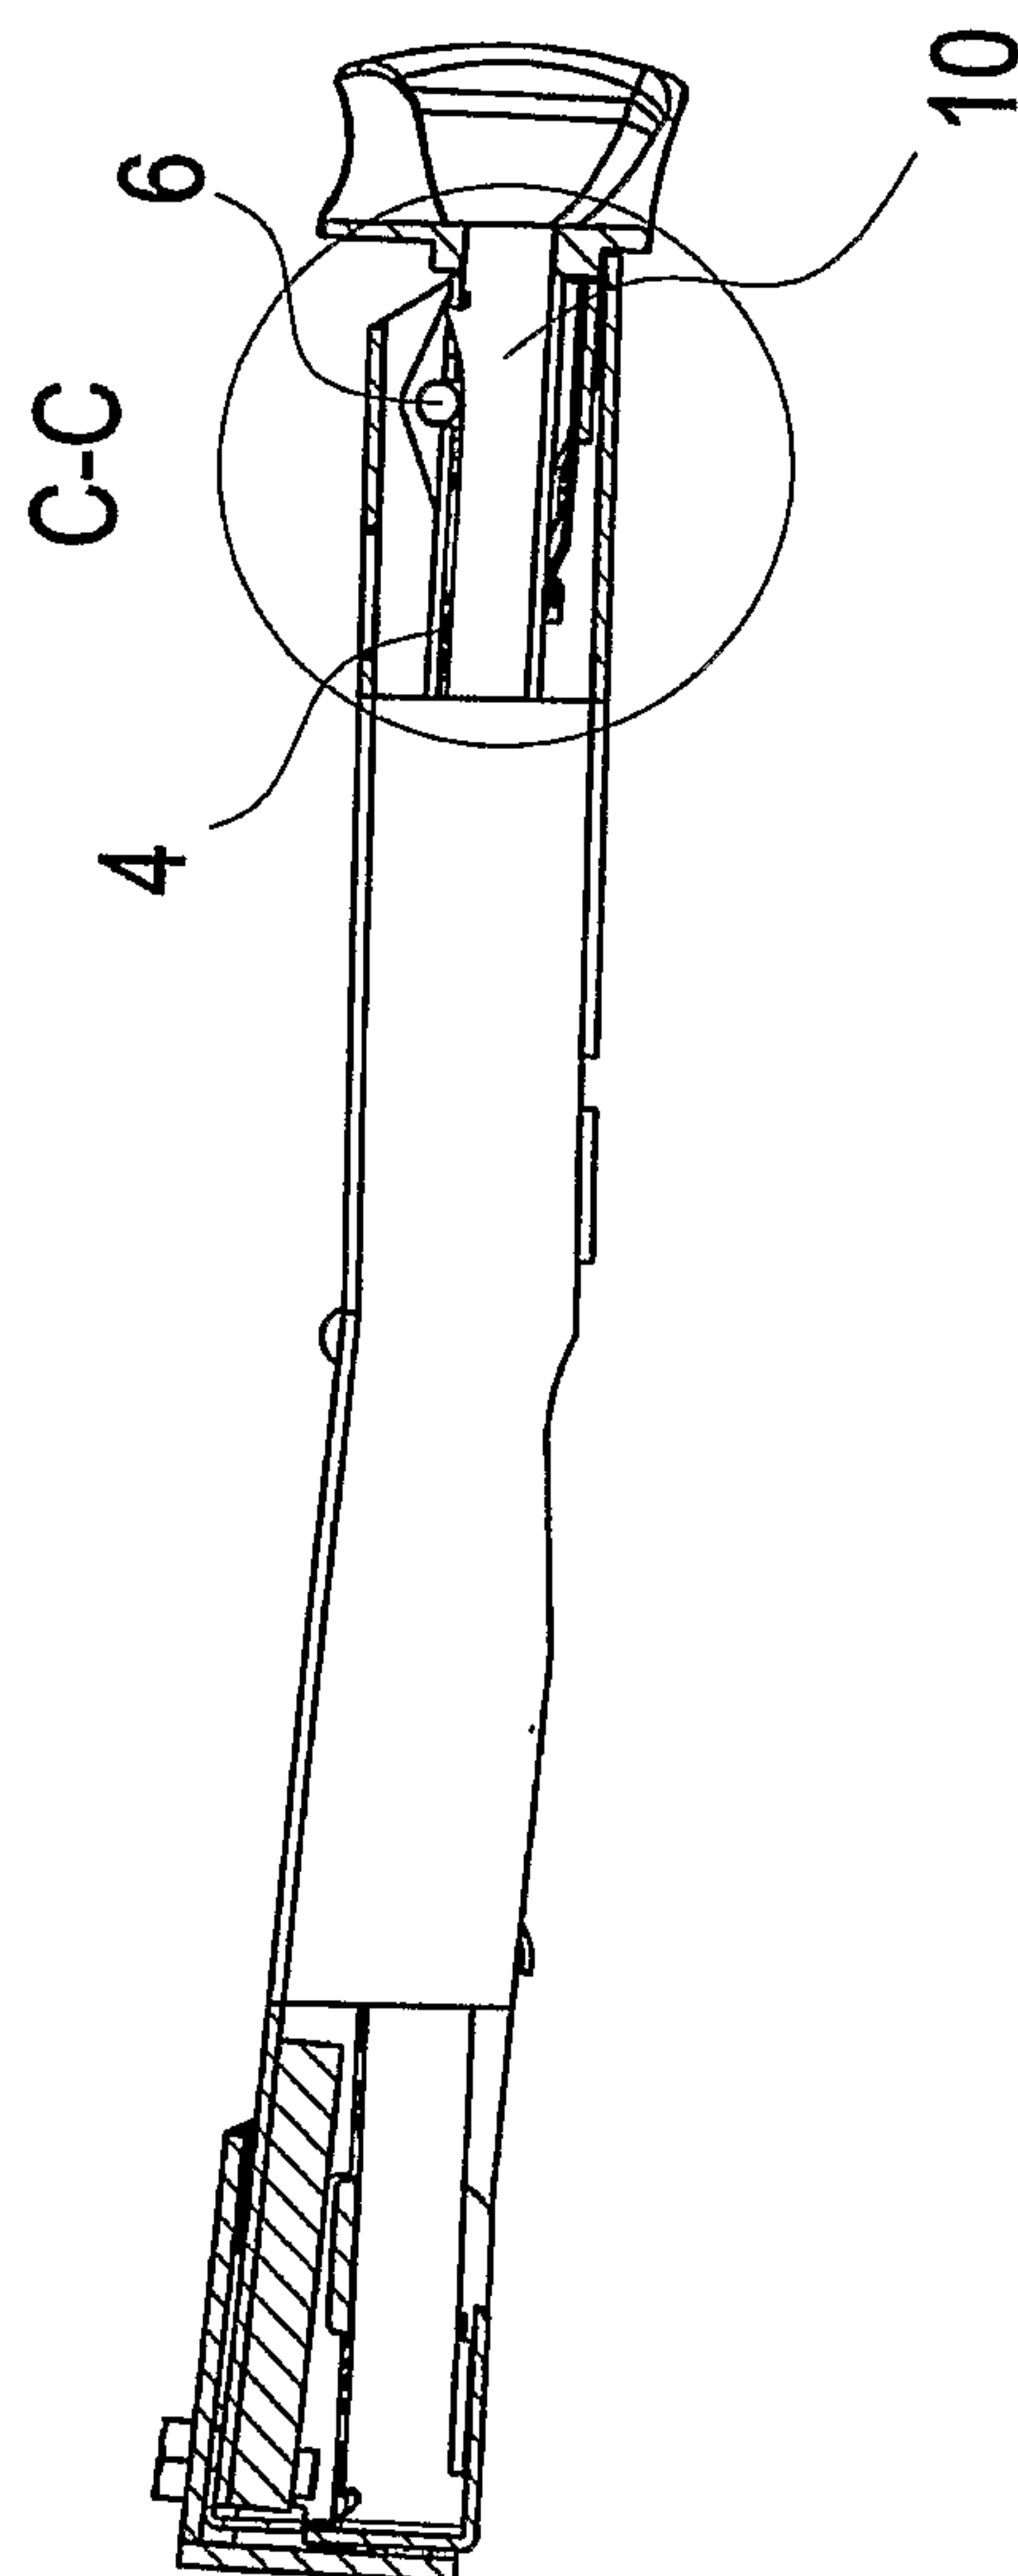
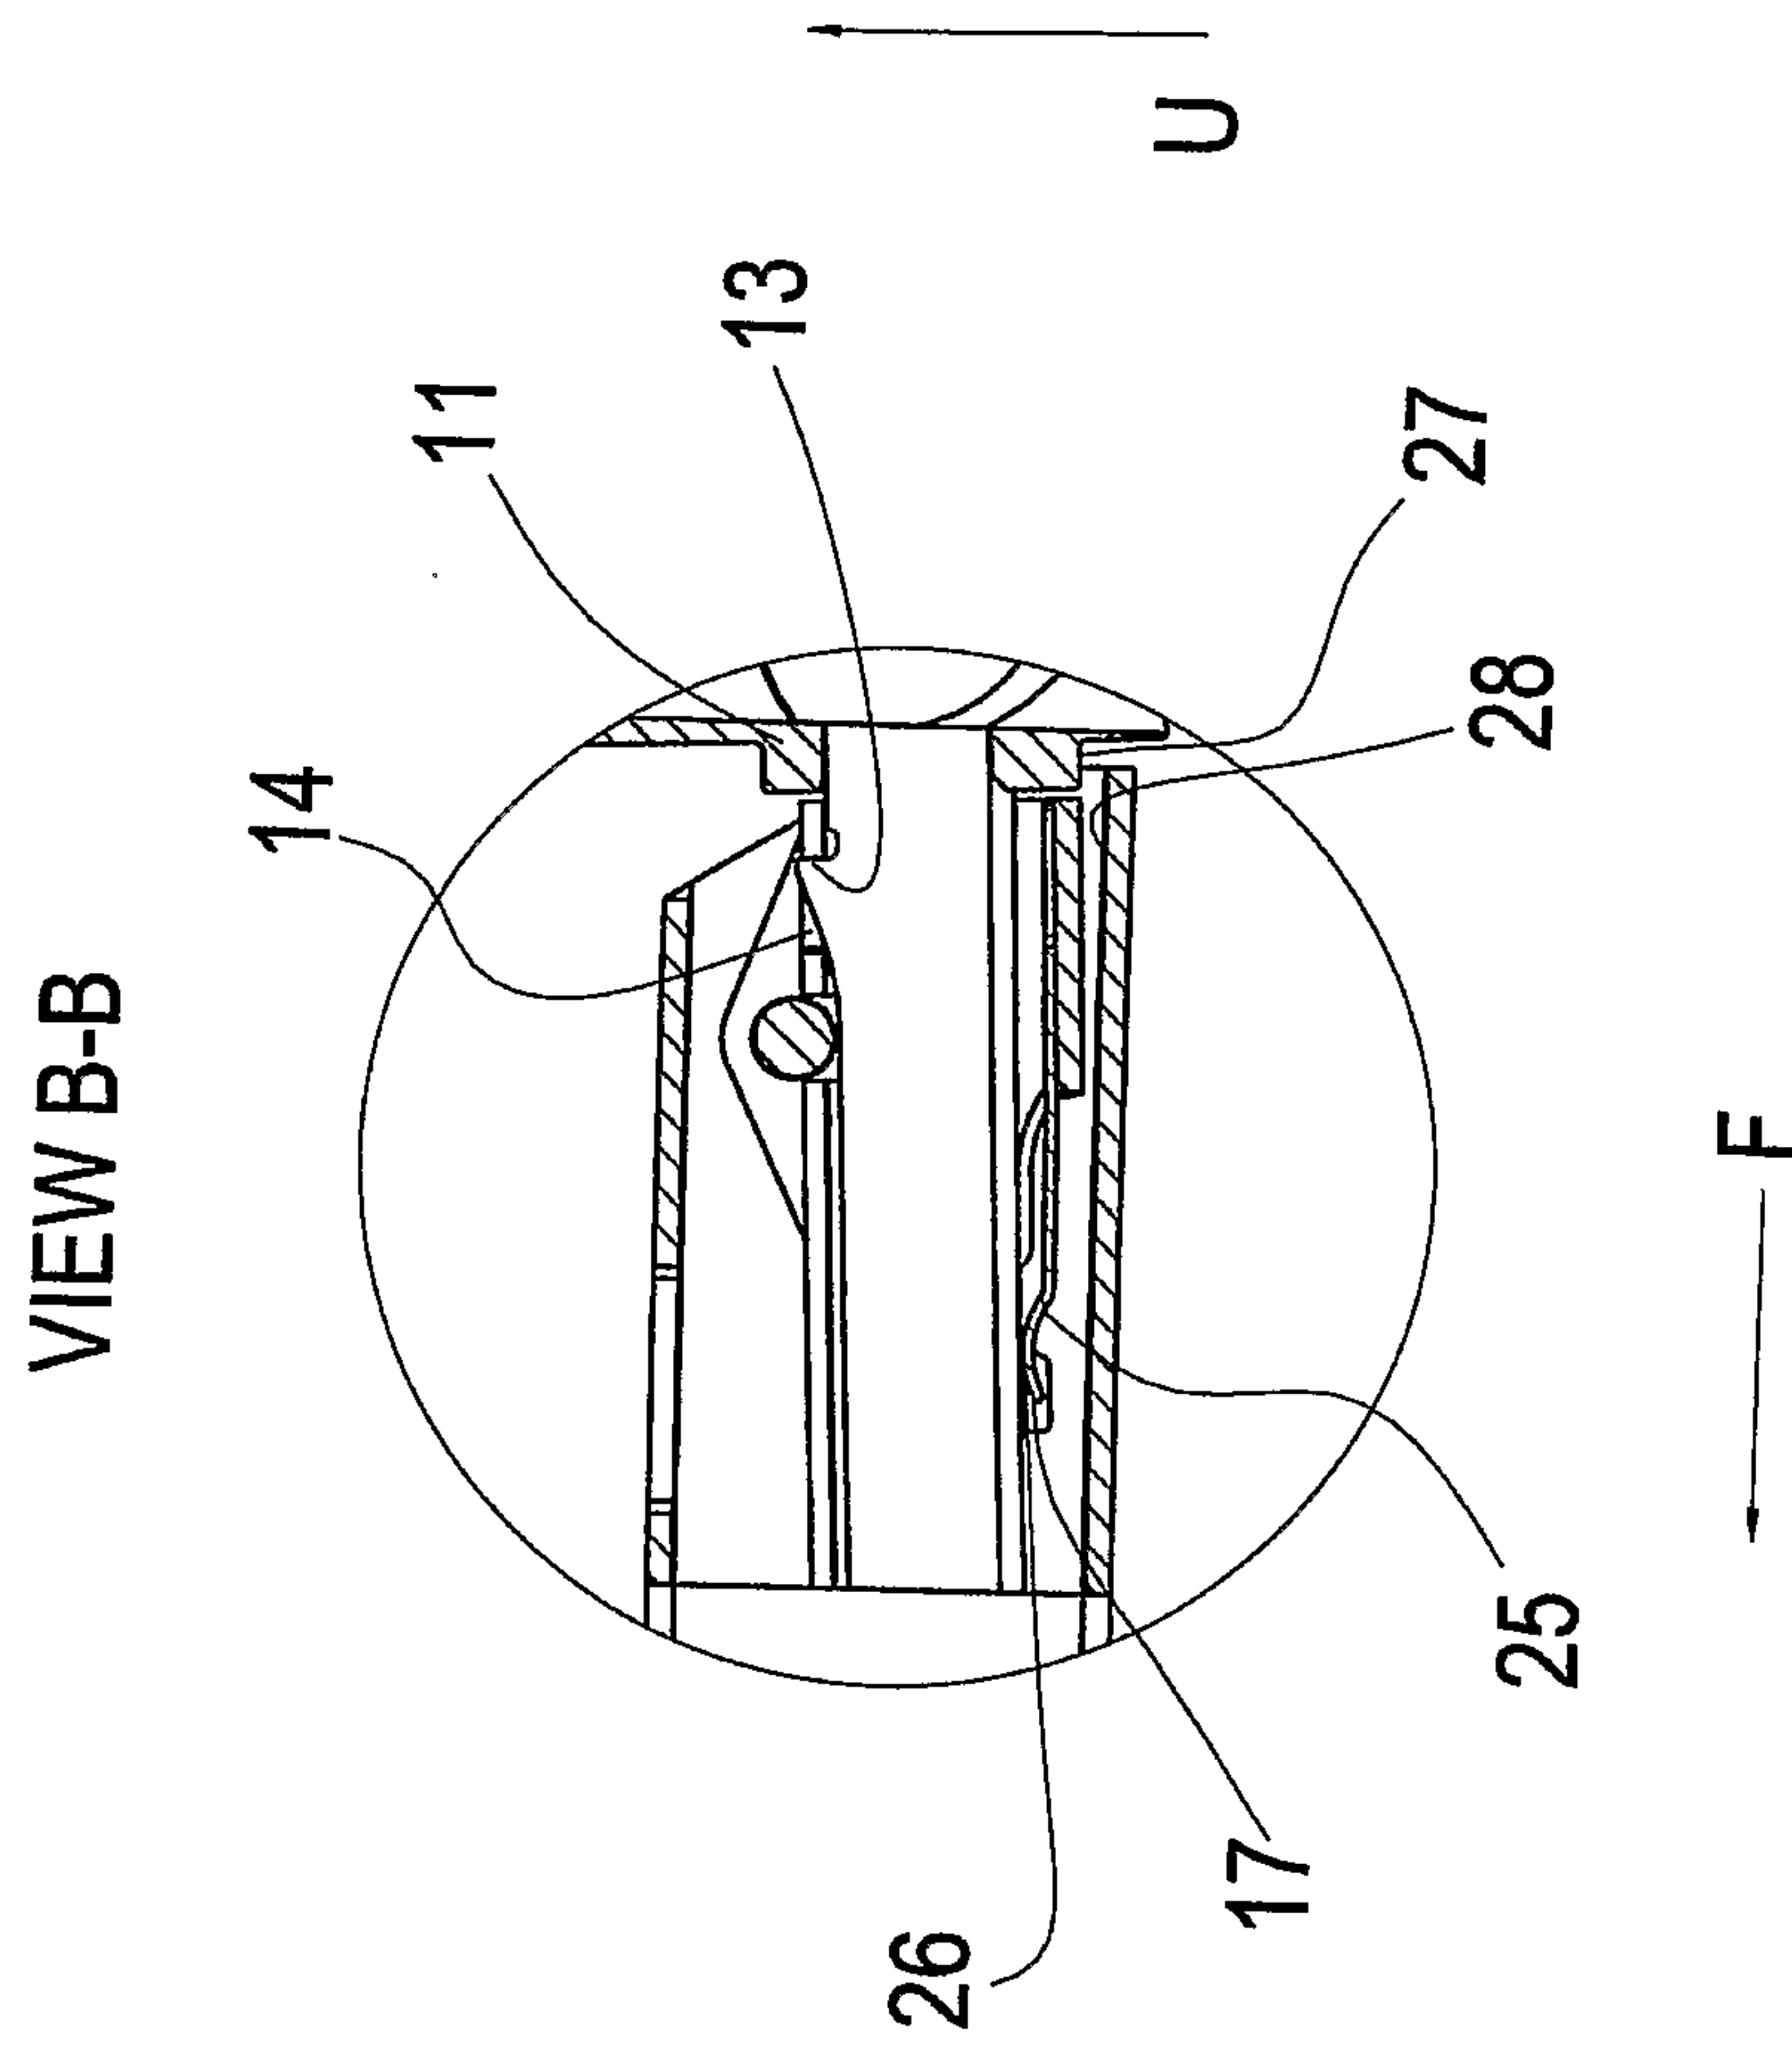


Fig 8



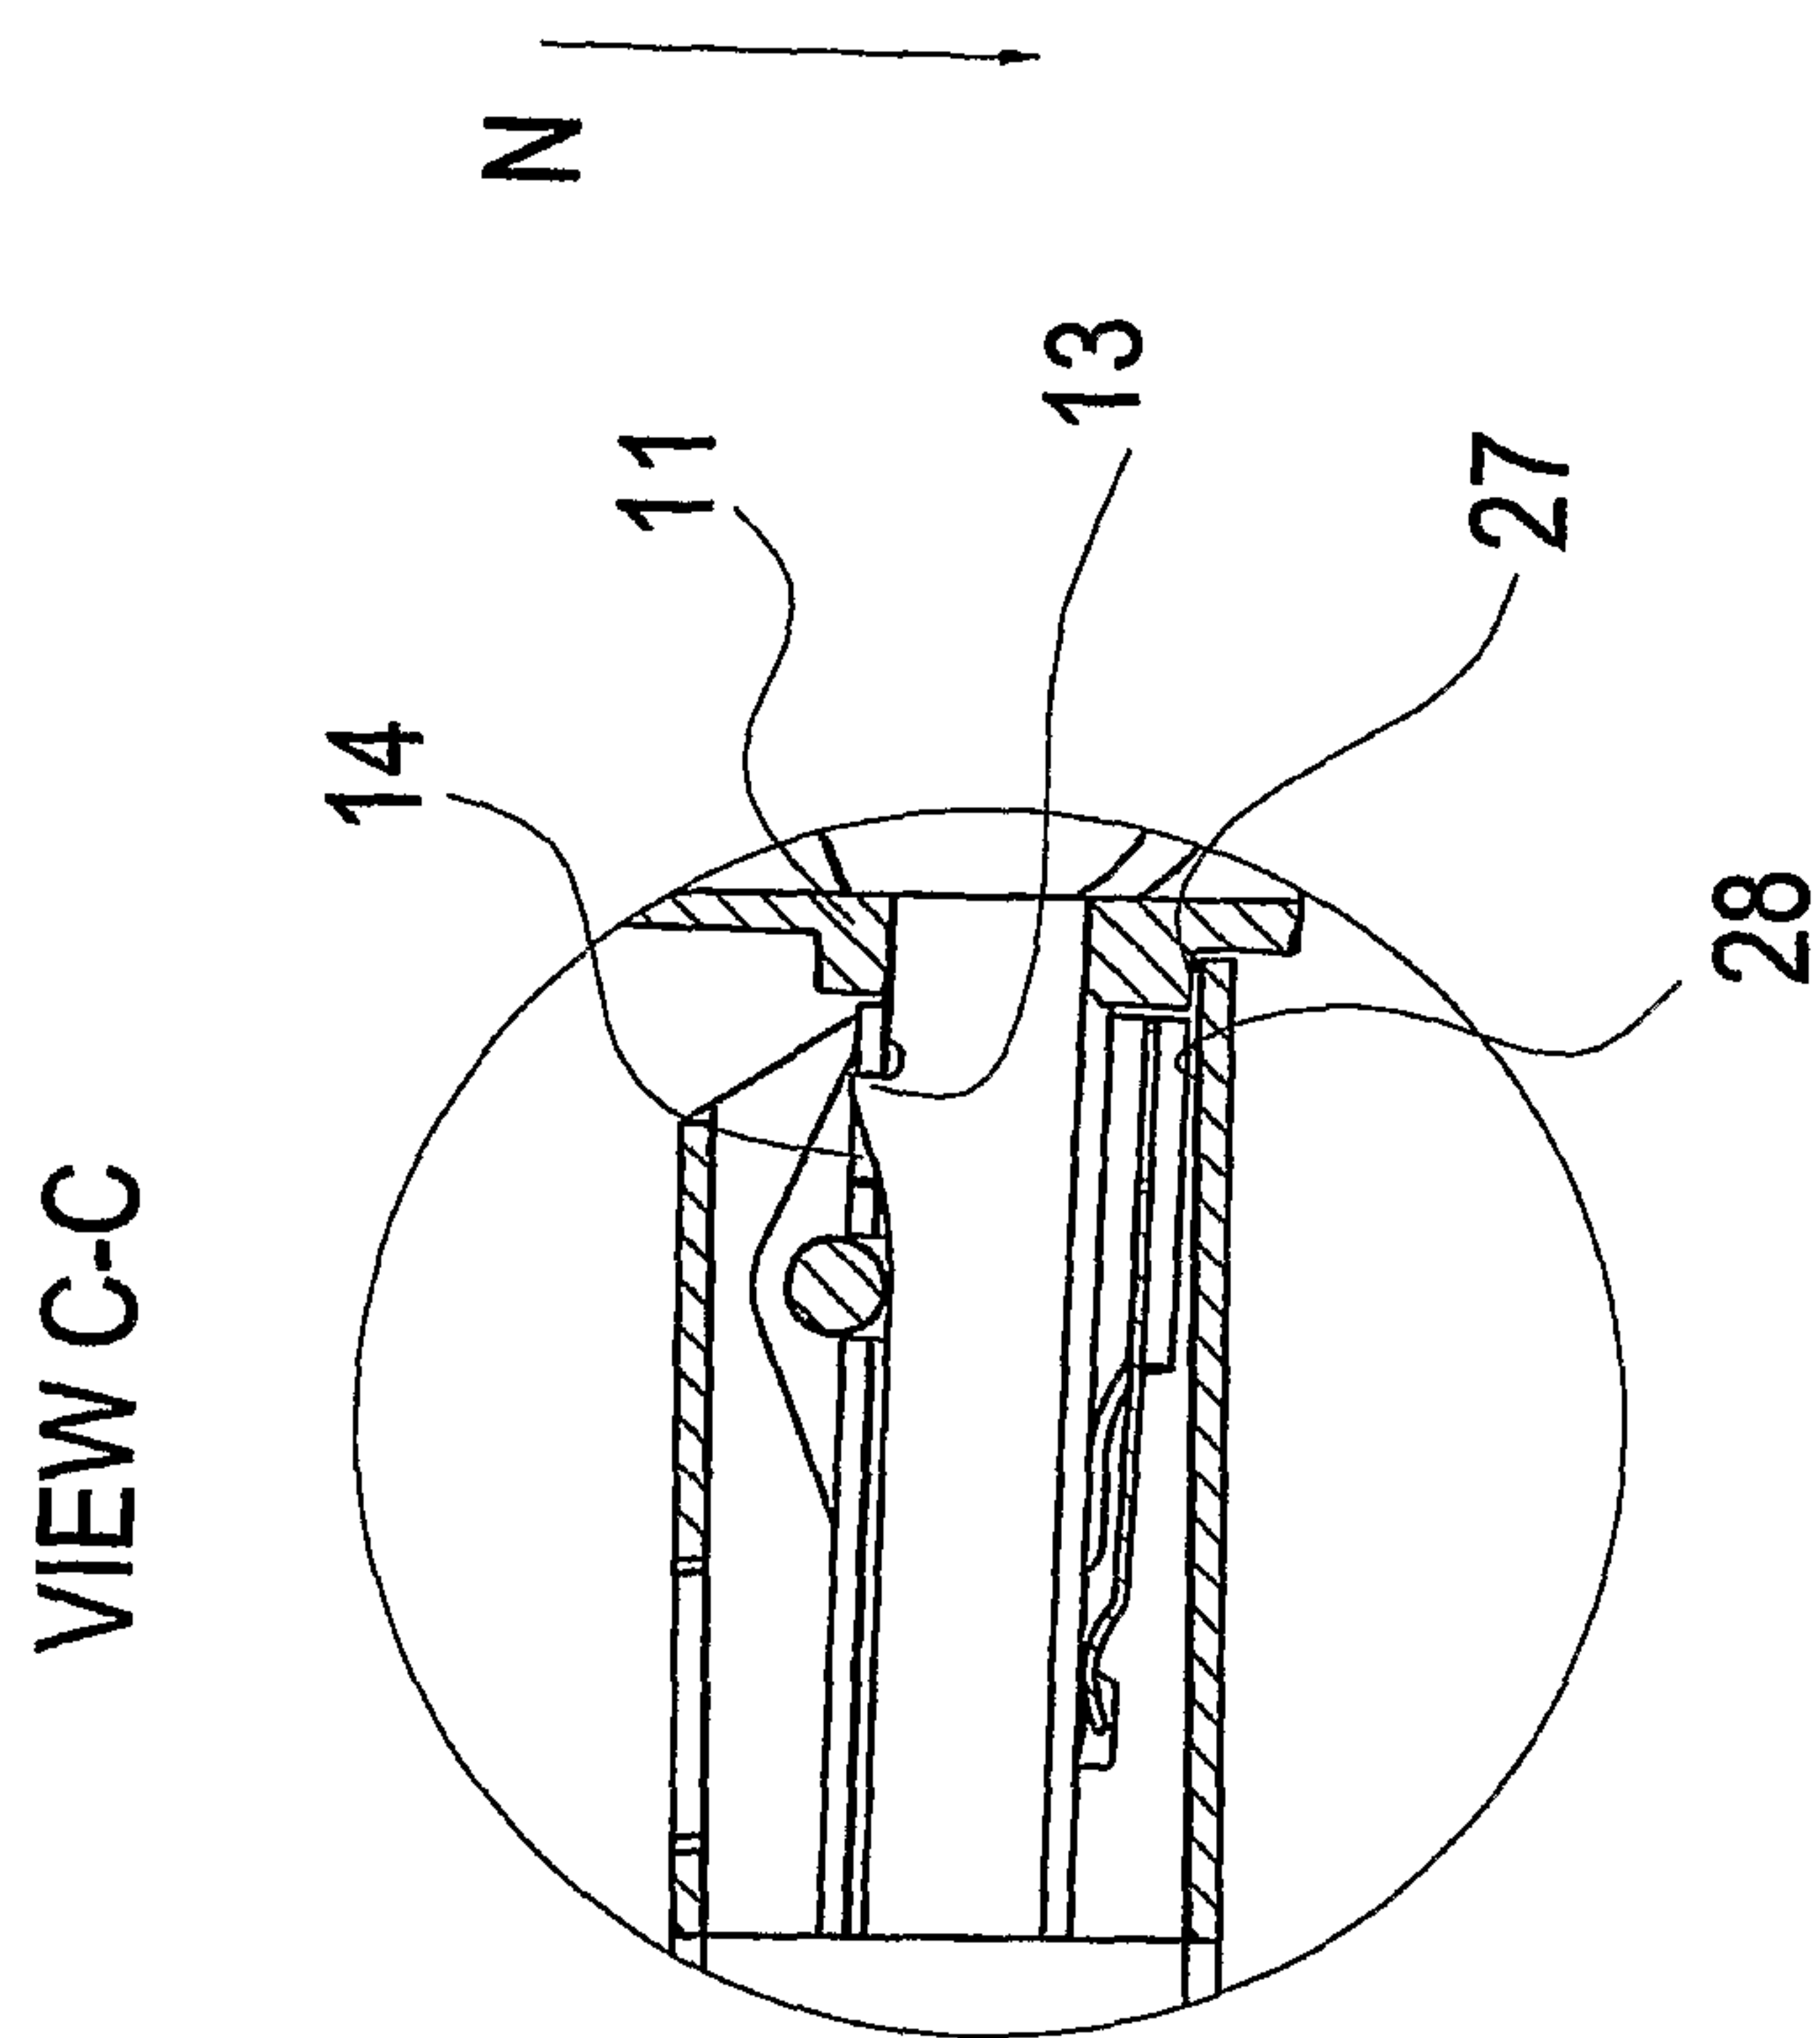


Fig 9

