




- (51) **International Patent Classification:**
B64D 45/02 (2006.01) *F16B 1/00* (2006.01)
- (21) **International Application Number:**
PCT/US2013/077387
- (22) **International Filing Date:**
23 December 2013 (23.12.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/758,539 4 February 2013 (04.02.2013) US
- (71) **Applicant:** **THE BOEING COMPANY** [US/US]; 100 North Riverside Plaza, Chicago, Illinois 60606-2016 (US).
- (72) **Inventors:** **HEETER, Russell J.**; 100 N. Riverside Plaza, Chicago, Illinois 60606 (US). **NGUYEN, Thu A.**; 100 N. Riverside Plaza, Chicago, Illinois 60606 (US). **WARD, John A.**; 100 N. Riverside Plaza, Chicago, Illinois 60606 (US). **PORTER, John R.**; 100 N. Riverside Plaza, Chicago, Illinois 60606 (US). **WILKERSON, Jeffrey A.**; 100 N. Riverside Plaza, Chicago, Illinois 60606 (US).
- (74) **Agents:** **WOO, Euclid** et al.; The Boeing Company, P.O. Box 2515, MC 110-SD54, Seal Beach, California 90740-1515 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) **Title:** CONDUCTIVE SLEEVED FASTENER ASSEMBLY

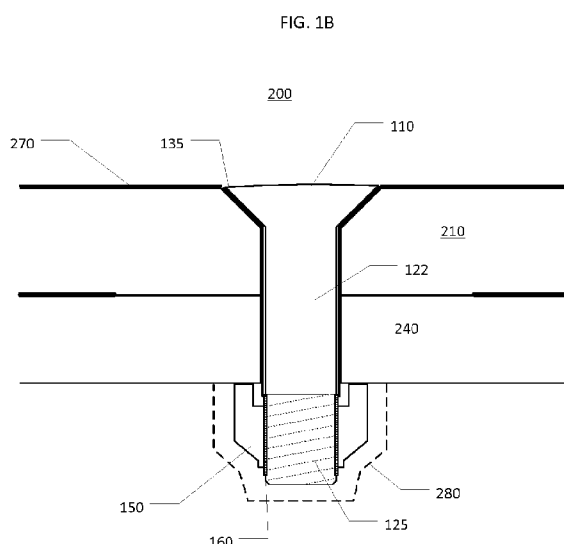

(57) **Abstract:** The present disclosure describes a conductive fastener assembly, system, and method, wherein the fastener assembly comprises a fastener (105), a fastener sleeve (130), a nut (150), and a lubricant coating (160). The lubricant coating is deposited on a distal portion (125) of a fastener shank (120) and is omitted from the rest of the fastener. To overcome the stresses placed on the fastener sleeve by the insertion of the fastener shank largely devoid of a lubricant coating, the fastener sleeve is reinforced by one or more of an increased thickness, a high-strength alloy, and a soft metal coating.

WO 2014/120364 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

CONDUCTIVE SLEEVED FASTENER ASSEMBLY

FIELD

The disclosure relates to fasteners for fastening structures to each other. More particularly, the disclosure relates to a conductive sleeved fastener assembly which provides an electrically-conductive interface between a fastener sleeve and a fastener.

BACKGROUND

In some aerospace applications, it may be desirable to secure structures to each other using a fastener. A fastener having a diameter which is greater than the diameter of a fastener opening provided in the structures to be secured may be forced into the fastener opening to achieve an interference fit of the fastener in the fastener opening. In many cases, a lubricant such as cadmium, for example, may be coated on the fastener shank to provide the necessary lubricity to insert the fastener in the fastener opening. In the case of composite structures and titanium structures, however, it may be desirable to use a sleeved fastener.

In order to reliably install a sleeved fastener into sleeve openings provided in the structures, the fastener is often lubricated with a finish coating such as a pin coating. This coating reduces the risk of a material failure of the fastener sleeve as the fastener is installed into the fastener sleeve. In some applications, multiple lubricants may be applied to lubricate the fastener shank in the sleeve. These lubricant(s) may be applied to the fastener shank and/or to the interior surface of the sleeve. The lubricants may have the effect of electrically insulating the fastener from the fastener sleeve. In some applications, it may be desirable to enhance the electrical conductivity between the fastener and the fastener sleeve while maintaining the integrity of the fastener sleeve.

Therefore, a conductive sleeved fastener assembly which provides an electrically-conductive interface between a fastener sleeve and a fastener that can be installed successfully without a lubricant may be desirable for some applications.

SUMMARY

5 The disclosure is generally directed to a conductive sleeved fastener assembly and system and a method for preparing such. An illustrative embodiment of the sleeved fastener assembly includes a fastener, a fastener sleeve, and a nut attached to a fastener shank of the fastener. The nut is prepared having a counterbore that maintains a desired gap between the nut and the fastener sleeve, in both radial and axial directions.

10 One aspect of the present disclosure provides a conductive sleeved fastener assembly comprising an electrically-conductive fastener, an electrically-conductive fastener sleeve and a nut. The fastener comprises a fastener head and a fastener shank extending from said fastener head, the fastener shank further comprising an attachment portion located at a distal end of the fastener shank. The fastener sleeve is configured to receive the fastener shank, and includes a
15 fastener sleeve flare at a top end of said fastener sleeve. The fastener and fastener sleeve may comprise a countersink configuration. The fastener may be reinforced, such as for example, by the application of a soft metal coating. A lubricant coating is also provided on the fastener where the attachment portion is configured to engage the nut, wherein the lubricant is omitted from a proximal portion of the fastener shank and the fastener head.

20 Another aspect of the present disclosure provides a conductive sleeved fastening assembly comprising an electrically-conductive fastener, and electrically-conductive fastener sleeve, a nut, and a lubricant coating. A finish coating and the lubricant coating are omitted from the fastener head and a proximal portion of the fastener shank. The fastener sleeve comprises a
25 wall having a thickness of greater than or equal to 0.012.

Yet another aspect of the present disclosure provides a method of preparing a conductive sleeved fastening assembly for use. The method comprises the steps of providing an electrically-conductive fastener and fastener sleeve, reinforcing the fastener sleeve, and depositing a
30 lubricant on a distal portion of the fastener shank. The lubricant coating may be omitted from a proximal portion of the fastener shank and from the fastener head.

Other systems, methods, features, and advantages of the present disclosure will be or become apparent to one with skill in the art upon examination of the following drawings and detailed description. The features, functions and advantages that have been discussed can be achieved independently in various configurations of the present disclosure or may be combined
5 in yet other configurations further details of which can be seen with reference to the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Many aspects of the disclosure can be better understood with reference to the following drawings. The components in the drawings are not necessarily to scale, emphasis instead being placed upon clearly illustrating the principles of the present disclosure. Moreover, in the drawings, like reference numerals designate corresponding parts throughout the several views.
15

FIG. 1A is an exploded and partially sectioned view of a conductive fastening system, according to one example of the disclosure;

FIG. 1B is an partially sectioned view of a conductive fastening system, according to
20 another example of the disclosure;

FIG. 2 is a detailed view of an electrically-conductive fastener and an electrically-conductive fastener sleeve, in accordance with another example of the disclosure;

FIG. 3 is a flowchart depicting a method for preparing a fastening system, in accordance
25 with another example of the disclosure; and

FIG. 4 is a block diagram of an aircraft, in accordance with another example of the disclosure.
30

DETAILED DESCRIPTION

In the following description, reference is made to the accompanying drawings, which form a part hereof, and in which is shown, by way of illustration, various configurations of the

present disclosure. It is understood that other embodiments may be utilized and changes may be made without departing from the scope of the present disclosure.

FIGS. 1A and 1B are illustrations depicting an example of a conductive fastening system according to the present disclosure, comprising a conductive fastener assembly 100 as part of a conductive fastener assembly 100. The conductive fastener assembly 100 includes a fastener 105, a fastener sleeve 130, and a nut 150. The fastener 105 comprises a fastener head 110 and a fastener shank 120, the fastener shank being divided into a proximal portion 122 and a distal portion 125 of the fastener shank 120. The fastener sleeve includes a flare 135. The nut 150 is arranged at a distal end of the fastener shank 120. A lubricant 160 may be disposed on the distal portion 125 of the fastener shank 120. FIGS. 1A and 1B further illustrate the arrangement of a first structure 210 and a second structure 240. The first structure 210 further comprises a top surface 215, a first facing surface 220, and a first hole 225. A standard countersink may be formed at the intersection of the top surface 215 and the first hole 225. The second structure 240 comprises a second facing surface 245, a bottom surface 250, and a second hole 255. The assembly may further comprises a faying seal 260, an conductive surface 270, and a bottom layer 241.

FIG. 2 illustrates an electrically-conductive fastener 105 and an electrically-conductive fastener sleeve 130 according to another example of the present disclosure. An electrically-conductive fastener 105 may include a fastener head 110 and a fastener shank 120 which extends from the fastener head 110. The surface of the fastener head 110 may be a bare metal surface without a coating or solid film lubricant. The fastener shank 120 of the fastener 105 may extend through the fastener sleeve 130 and the fastener head 110 may engage the fastener sleeve 130. The fastener head 110 may be in direct engagement with a fastener sleeve flare 135 when the fastener 105 fully engages the fastener sleeve 130. As shown in FIG. 1B, the fastener shank 120 may extend beyond the second structure 240 and may receive a nut 150 which may be tightened against the second structure 240 or a bottom layer 241 disposed thereon.

To improve the conductivity between the sleeve and the fastener, the fastener assembly 100 may be manufactured without the addition of a finish coating 170, which may be a solid film lubricant, applied to the fastener head 110 and sleeve interface, the fastener proximal portion 122 and sleeve interface, or not applied to the the fastener or sleeve altogether. Other examples, as shown in FIG. 2, apply the finish coating 170 to the distal portion 125 of the

fastener shank 120, while omitting the finish coating from the proximal portion 122 and from the fastener head 110.

Similarly, a lubricant coating may be applied to the fastener 105 of the present disclosure.

5 In order to increase the electrical-conductivity between the fastener 105 and the fastener sleeve 130, the present disclosure enables the fastener 105 to be inserted into the fastener sleeve 130 while omitting the lubricant coating 160 from the proximal portion 122 of the fastener shank 120. In the illustrated example, the distal portion 125 of the fastener shank 120 is not in contact with the fastener sleeve 130 when fully assembled. In other examples, however, the lubricant
10 coating 160 and the fastener sleeve 130 have some amount of overlap.

To compensate for the lack of a lubricant or finish coating applied to the fastener head areas the fastener sleeve 130 may be reinforced in accordance with the present disclosure. The reinforcement of the fastener sleeve 130 increases the expected life of the fastener assembly 100
15 by reducing the risk of deformation or failure. The fastener sleeve may be reinforced, for example, by depositing a soft metal coating 140, such as a nickel coating, on the fastener sleeve. FIG. 2 illustrates the soft metal coating 140 on an inside surface of the fastener sleeve 120. The soft metal coating 140 may be placed on the outside of the fastener sleeve 130 in the alternative or in addition to the inside surface. Also, the soft metal coating 140 is illustrated as having been
20 deposited on the fastener sleeve flare 135, but may be omitted from the fastener sleeve flare 135 where desired. The fastener sleeve 130 may also be reinforced by using a high-strength alloy with good electrical-conductivity to form the fastener sleeve 130. Such alloys may include, but are not limited to 6Al-4V titanium, and other alloys with similar performance characteristics. Another example of a way to reinforce the fastener sleeve 130 is to manufacture the part with a
25 greater thickness. For example a typical sleeve, in the prior art, is often manufactured with a wall thickness of 0.008 in. to 0.010 in. In order to increase the longevity and conductivity of the fastener sleeve 130, however, the cost of manufacturing a fastener sleeve 130 to have a greater thickness may be justified. For example, a typical sleeve manufactured in accordance with the present disclosure may be manufactured having a wall thickness of 0.012 in. or more.

30

The fastener head 110 and the fastener sleeve flare 135 may be formed having a countersink configuration, wherein the fastener sleeve flare 135 and the facing surface of the fastener head 110 are placed at an angle that is less than 90° relative to the central axis A.

Alternatively, the fastener sleeve flare 135 may comprise a flange, wherein the fastener sleeve flare 135 is approximately 90° relative to the central axis A.

While the illustrated example depicts a distal portion 125 that comprises an attachment portion that is threaded for mating with the nut 150, the nut 150 and the fastener shank 120 may be configured to employ any appropriate attachment methods known in the art, including those that may be developed. For example, the fastener and nut assembly may comprise a lockbolt and collar type system where the fastener comprises annual grooves and the nut comprises a collar is un-threaded where the inner wall of the caller is designed to flow into the annual grooves of the fastener.

The conductive fastener assembly 100 may be used in wide range of situations, and the figures depict a generic arrangement including two structures. The first structure 210 and second structure 240, may vary in thickness and material. The fastener assembly 100 may further comprise a plurality of structures, wherein the first structure 210 represents the outermost structure, i.e., where the fastener head 110 is arranged, and wherein the second structure 240 represents the innermost structure, i.e., where the nut 150 is located. The first structure 210 and the second structure 240 may be the same material or differing materials, such as a metal and a fiber-reinforced composite material.

A first hole 225 is drilled or otherwise formed in the first structure 210 and a corresponding second hole 255 is formed in the second structure 240. The location of the holes 225, 255 are chosen to result in the desired arrangement of the structures 210, 240 when the fastener assembly 100 is employed. The diameter of the holes 225, 255 is chosen in accordance with the diameter of the fastener sleeve 130, and may be configured to create an interference fit.

Referring again to FIGS. 1A and 1B, the top of the first hole 225 may be formed with a standard countersink 230 that corresponds with the countersink configuration of the fastener assembly 100. As used in the present disclosure, the term “standard countersink” is not intended to indicate a specific angle or diameter, but instead is used to differentiate the countersink illustrated from a “deep countersink” wherein the fastener head 110 would rest substantially below the top surface 215 of the first structure 210. Some examples of the fastener assembly 100 may employ a deep countersink for a particular application, but other features of the design of

the fastener assembly 100 of the present disclosure is intended to reduce the need for a deep countersink for many applications.

The fastener assembly 100 may be assembled with additional features where necessary.

5 For example, FIGS. 1A and 1B depict an conductive surface 270 that may be arranged, for example, on the top surface 215 of the first structure 210. The conductive surface 270 may be arranged on the top surface 215 using an automated process. The advantages of the present disclosure allow thinner and more easily-applied substances, such as, for example, an expanded metal foil or other thin metallic surface such as expanded copper foil, to be used as the
10 conductive surface 270 in applications that previously required a solid copper grid on the top surface 215.

FIGS. 1A and 1B also depict a fay seal 260 disposed between the first facing surface 220 and the second facing surface 245. A fay seal is typically used for fluid exclusion and corrosion
15 resistance and provides containment capability associated with potential sparking in this interface. The fastener assembly 100 of the present disclosure may employ a fay seal 260, and, in some instances, omit the fay seal 260 from an area 265 surrounding the fastener assembly 100. Alternatively, the fay seal 260 may be removed from the assembly where protection from electrical phenomena is not required.

20

Another advantage of the fastener assembly 100 of the present disclosure is that a cap seal 280 is not always required. For this purpose, the cap seal 280, denoted by the dashed outline in FIG. 1B, is shown as missing from the illustrated example.

25

FIG. 3 illustrates a method 300 of preparing a conductive sleeved fastening system for use in accordance with the present disclosure, which method 300 may comprise any or all of the following steps. Step 310 of the method 300 comprises providing a fastener having a fastener head, a fastener shank extending from said fastener head, and a fastener sleeve provided on said fastener shank and a fastener sleeve flare on said fastener sleeve. Step 320 comprises reinforcing
30 the fastener sleeve 130 as described above. Step 330 comprises depositing a lubricant coating 160 on the distal portion of the fastener shank 120. The lubricant coating 160 may further be omitted from the proximal portion 122 of the fastener shank 120 and the fastener head 110. Step 340 comprises arranging a fay seal 260 between the first structure 210 and the second structure 240. The fay seal 260 may be omitted from an area 265 surrounding the fastener assembly 100.

Step 350 comprises arranging an conductive surface 270 on a top surface 215 of a first structure 210.

As shown in FIG. 4, the aircraft 400 produced using the method 300 and/or assembly 100 described herein, may include an airframe 410 with a plurality of systems 450 and an interior 420. Examples of high-level systems 450 include one or more of a propulsion system 455 an electrical system 460, a hydraulic system 470, and an environmental system 475. Any number of other systems may be included. Although an aerospace example is shown, the principles of the invention may be applied to other industries, including, but not limited to, the construction and automotive industries.

The examples provided herein may be used in the context of aircraft manufacturing and service. During pre-production, an exemplary method may include specification and design of the aircraft and material procurement. During production, component and subassembly manufacturing and system integration of the aircraft takes place. Thereafter, the aircraft may go through certification and delivery in order to be placed in service. While in service by a customer, the aircraft may be scheduled for routine maintenance and service (which may also include modification, reconfiguration, refurbishment, and so on).

The various steps of the method 300 described herein may be employed during any one or more of the stages of production and service. For example, components or subassemblies corresponding to production process may be fabricated or manufactured in a manner similar to components or subassemblies produced while the aircraft is in service. Also, one or more apparatus embodiments may be utilized during the production stages, for example, by substantially expediting assembly of or reducing the cost of an aircraft. Similarly, one or more apparatus embodiments may be utilized while the aircraft is in service, for example and without limitation, to maintenance and service.

Further, the disclosure comprises embodiments according to the following clauses:

1. A conductive sleeved fastener assembly, comprising:
an electrically-conductive fastener having a fastener head and a fastener shank extending from said fastener head, the fastener shank further comprising an attachment portion located at a distal end of the fastener shank;

an electrically-conductive fastener sleeve configured to receive said fastener shank of said fastener, the fastener sleeve having a fastener sleeve flare at a top end of said fastener sleeve;

a nut configured to attach to the attachment portion of the fastener; and

5 a lubricant coated on the fastener where the attachment portion is configured to engage the nut, wherein the lubricant is omitted from the fastener shank and fastener head.

2. The conductive sleeved fastener assembly of clause 1, wherein the fastener head and the fastener sleeve flare are formed having a countersink configuration.

10

3. The conductive sleeved fastener assembly of clause 1, wherein a cap seal is omitted from the assembly.

15

4. The conductive sleeved fastener assembly of clause 1, wherein the lubricant is a solid film lubricant.

5. The conductive sleeved fastener assembly of clause 1, wherein the conductive sleeved fastener assembly is configured to attach a first structure to a second structure, and wherein the assembly further comprises an expanded metal foil arranged on said first structure.

20

6. The conductive sleeved fastener assembly of clause 5, further comprising a fay seal disposed between said first structure and said second structure, wherein the fay seal is omitted from an area surrounding the fastener sleeve.

25

7. The conductive sleeved fastener assembly of clause 1, wherein a soft metal coating is applied to the fastener sleeve.

8. A conductive sleeved fastening assembly, comprising:

30

an electrically-conductive fastener having a fastener head and a fastener shank extending from said fastener head;

an electrically-conductive fastener sleeve being configured to receive said fastener shank;

a nut configured to attach to a distal portion of the fastener shank; and

a lubricant coating on the distal portion of the fastener shank;

wherein a finish coating and the lubricant coating are omitted from the fastener head and a proximal portion of the fastener shank.

9. The fastening system of clause 8, wherein the fastener sleeve further comprises a fastener sleeve flare at a top end thereof.
10. The conductive sleeved fastener assembly of clause 9, wherein the fastener head and the fastener sleeve flare are formed having a countersink configuration.
11. The fastening system of clause 8, wherein the fastener head and the fastener sleeve flare are formed having a countersink configuration; and wherein the first hole is prepared with a standard countersink at the top surface.
12. The fastening system of clause 8, wherein the fastener sleeve is characterized by a wall thickness that is greater than or equal to 0.012 inches.
13. The fastening system of clause 8, wherein the fastener sleeve is formed from a high-strength alloy.
14. The fastening system of clause 8, wherein the fastener sleeve comprises a soft metal coating.
15. The fastening system of clause 8, wherein a cap seal is omitted from the system.
16. The conductive sleeved fastener assembly of clause 8, wherein the conductive sleeved fastener assembly is configured to attach a first structure to a second structure, and wherein the assembly further comprises an expanded metal foil arranged on said first structure.
17. A method of preparing a conductive sleeved fastening assembly for use, comprising:
providing a fastener having a fastener head, a fastener shank extending from said fastener head, and a fastener sleeve provided on said fastener shank and a fastener sleeve flare on said fastener sleeve;
depositing a lubricant coating on a distal portion of the fastener shank, wherein the lubricant coating is omitted from a proximal portion of the fastener shank and from the fastener head.

18. The method of clause 17, further comprising the step of reinforcing the fastener sleeve.

19. The method of clause 17, wherein the fastener head and the fastener sleeve flare are
5 formed having a countersink configuration.

20. The method of clause 17, wherein the fastener sleeve is configured to extend through a first structure and a second structure, and further comprising:

arranging a fay seal between the first structure and the second structure, wherein the fay
10 seal is omitted from an area surrounding fastener assembly; and
arranging an expanded metal foil on a top surface of said first structure.

It should be emphasized that the above-described configurations of the present device and process are merely possible examples of implementations and merely set forth for a clear
15 understanding of the principles of the disclosure. Many different configurations of the disclosure described herein may be designed and/or fabricated without departing from the spirit and scope of the disclosure. All these and other such modifications and variations are intended to be included herein within the scope of this disclosure and protected by the following claims. Therefore the scope of the disclosure is not intended to be limited except as indicated in the
20 appended claims.

WHAT IS CLAIMED IS:

1. A conductive sleeved fastener assembly, comprising:
an electrically-conductive fastener (105) having a fastener head (110) and a fastener
5 shank (120) extending from said fastener head (110), the fastener shank (120) further comprising
an attachment portion located at a distal end (125) of the fastener shank (120);
an electrically-conductive fastener sleeve (130) configured to receive said fastener shank
(120) of said fastener (105), the fastener sleeve (130) having a fastener sleeve flare (135) at a top
end of said fastener sleeve (130);
10 a nut (150) configured to attach to the attachment portion of the fastener (105); and
a lubricant (160) coated on the fastener (105) where the attachment portion is configured
to engage the nut (150), wherein the lubricant (160) is omitted from the fastener shank (120) and
fastener head (110).
- 15 2. The conductive sleeved fastener assembly of claim 1, wherein the fastener head (110) and
the fastener sleeve flare (135) are formed having a countersink configuration.
3. The conductive sleeved fastener assembly of any preceding claim, wherein a cap seal
(280) is omitted from the assembly.
- 20 4. The conductive sleeved fastener assembly of any preceding claim, wherein the lubricant
(160) is a solid film lubricant.
5. The conductive sleeved fastener assembly of any preceding claim, wherein the
25 conductive sleeved fastener assembly is configured to attach a first structure (210) to a second
structure (240), and wherein the assembly further comprises an expanded metal foil arranged on
said first structure (210).
6. The conductive sleeved fastener assembly of any preceding claim, further comprising a
30 fay seal (260) disposed between a first structure (210) and a second structure (240), wherein the
fay seal (260) is omitted from an area surrounding the fastener sleeve (130).
7. The conductive sleeved fastener assembly of any preceding claim, wherein a soft metal
coating (140) is applied to the fastener sleeve (130).

8. The conductive sleeved fastener assembly of any preceding claim, wherein the fastener head (110) and the fastener sleeve flare (135) are formed having a countersink configuration; and wherein a first hole (225) is prepared with a standard countersink at a top surface (215).

5

9. The conductive sleeved fastener assembly of any preceding claim, wherein the fastener sleeve (130) is characterized by a wall thickness that is greater than or equal to 0.012 inches.

10. The conductive sleeved fastener assembly of any preceding claim, wherein the fastener sleeve (130) is formed from a high-strength alloy.

11. A method of preparing a conductive sleeved fastening assembly for use, comprising:
providing a fastener (105) having a fastener head (110), a fastener shank (120) extending from said fastener head (110), and a fastener sleeve (130) provided on said fastener shank (120) and a fastener sleeve flare (135) on said fastener sleeve (130);
depositing a lubricant coating (160) on a distal portion (125) of the fastener shank (120), wherein the lubricant coating (160) is omitted from a proximal portion (122) of the fastener shank (120) and from the fastener head (110).

12. The method of claim 11, further comprising the step of reinforcing the fastener sleeve (130).

13. The method of any of claims 11 to 12, wherein the fastener head (110) and the fastener sleeve flare (135) are formed having a countersink configuration.

25

14. The method of any of claims 11 to 13, wherein the fastener sleeve (130) is configured to extend through a first structure (210) and a second structure (240), and further comprising:
arranging a fay seal (260) between the first structure (210) and the second structure (240), wherein the fay seal (260) is omitted from an area surrounding fastener assembly; and
arranging an expanded metal foil on a top surface (215) of said first structure (210).

30

1/5

FIG. 1A


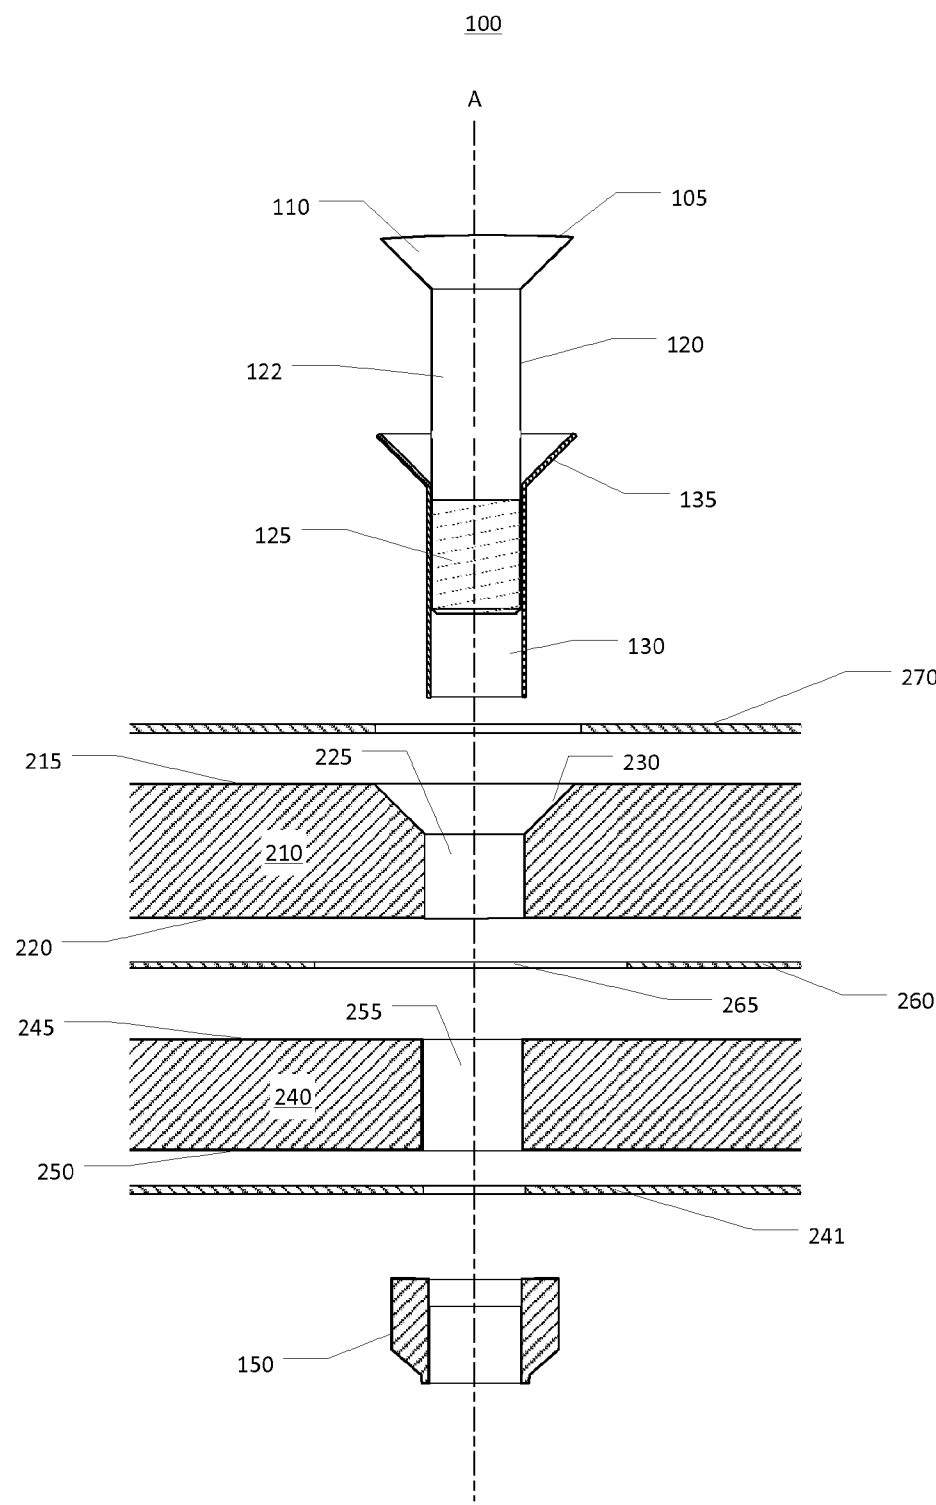


FIG. 1B

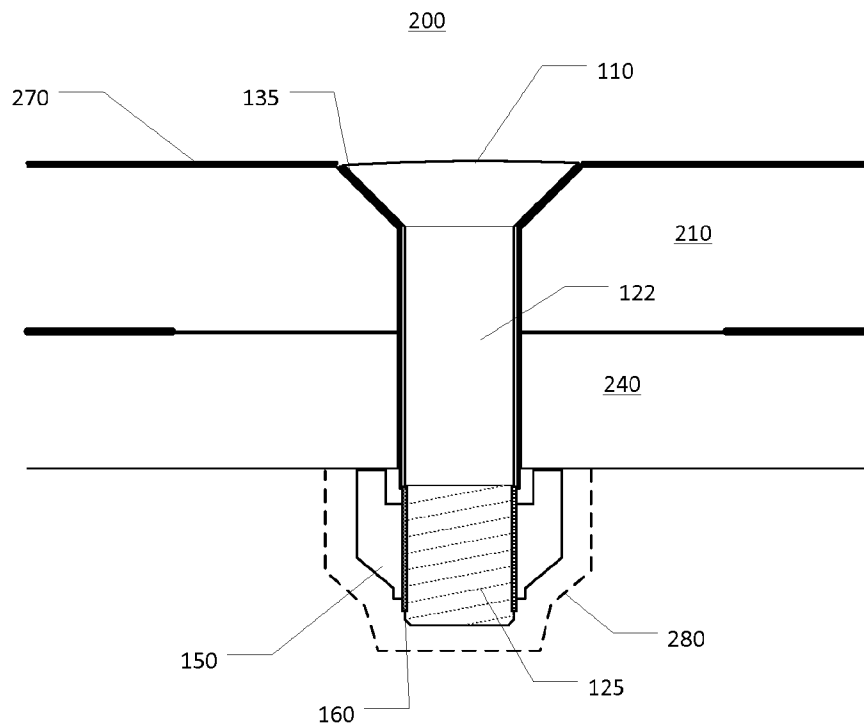

3/5

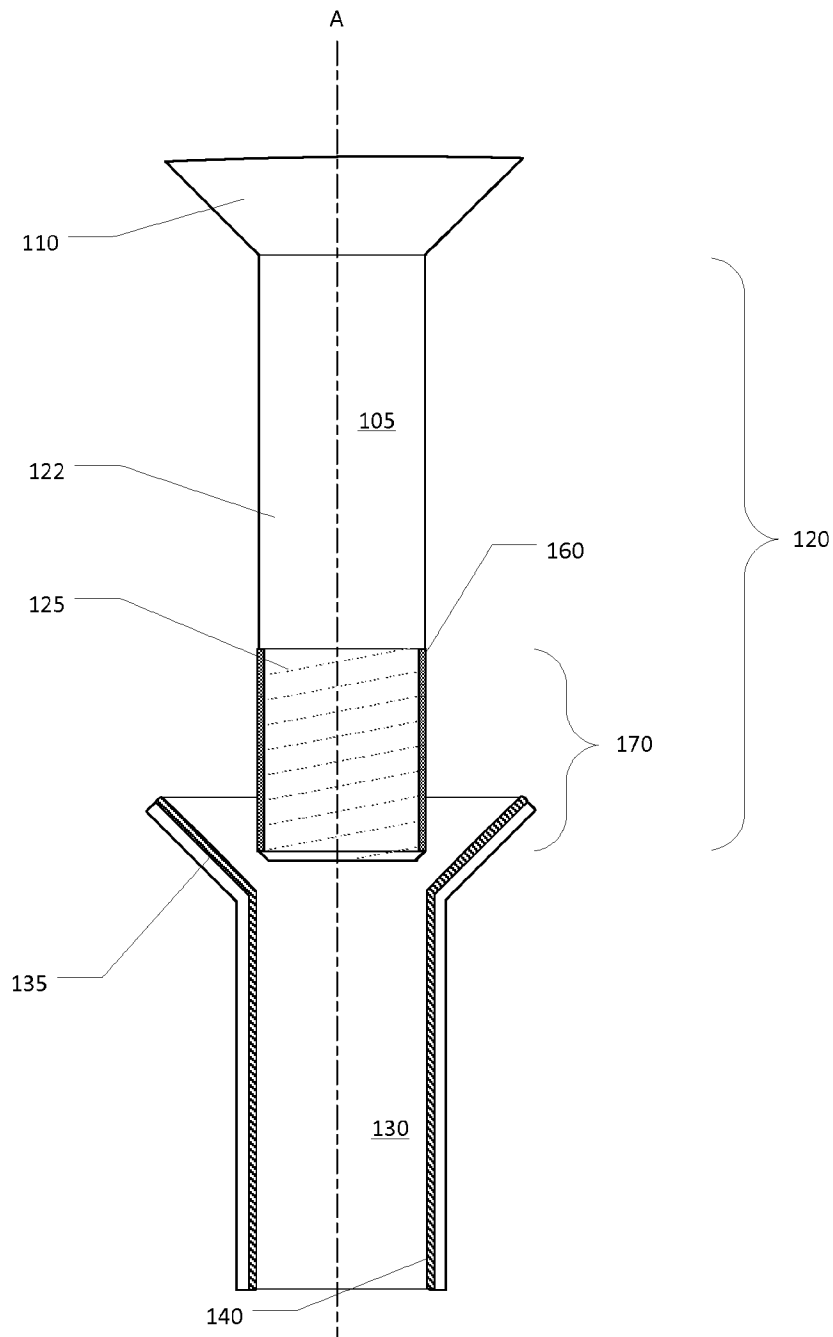


FIG. 2

4/5

FIG. 3


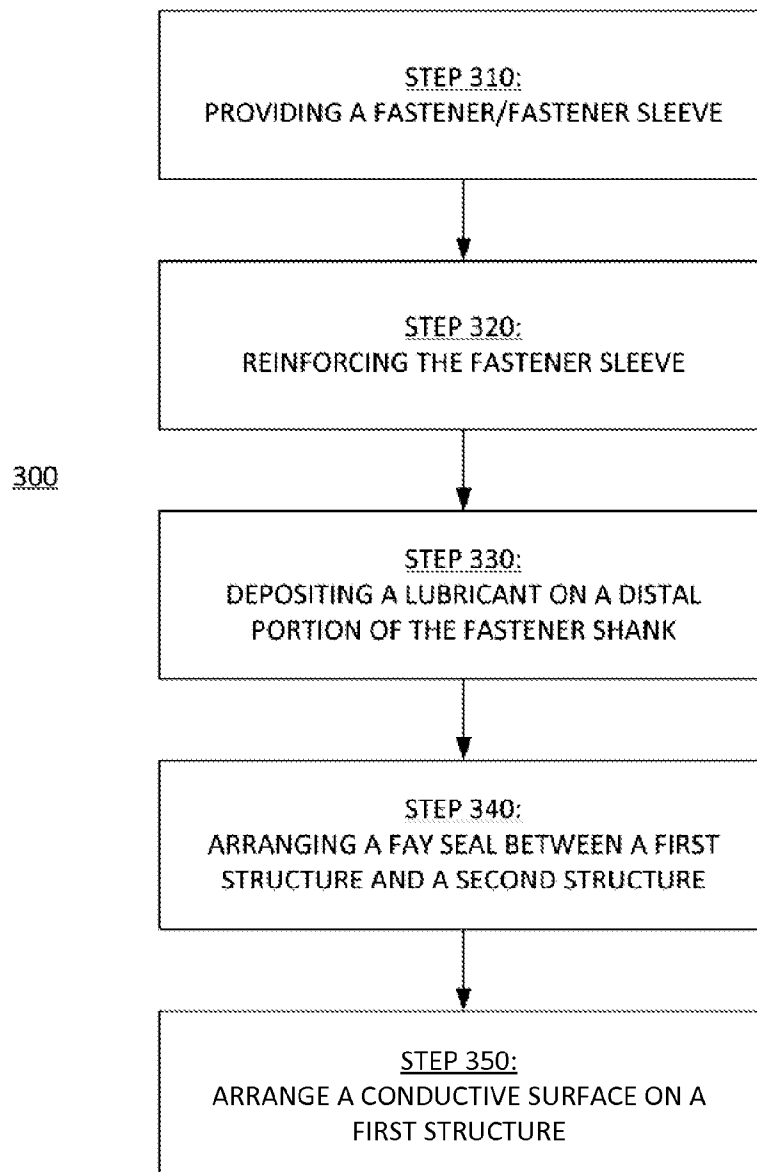


FIG. 4

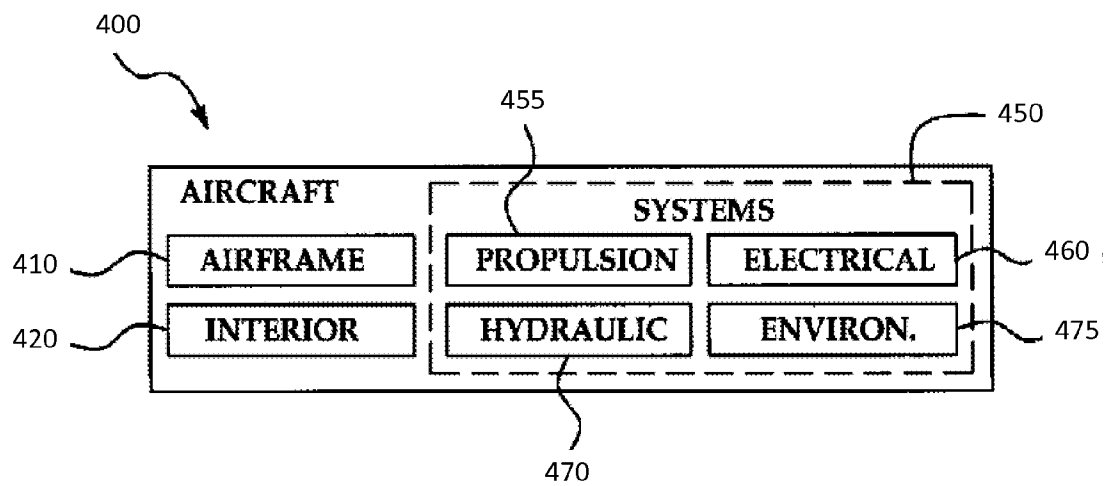

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/077387

A. CLASSIFICATION OF SUBJECT MATTER
INV. B64D45/02 F16B1/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B64D F16B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2011/050040 A1 (ALCOA INC [US]; HAYLOCK LUKE [US]; PINHEIRO RODRIGO [US]; MULAZIMOGLU) 28 April 2011 (2011-04-28) the whole document -----	1-3,5-14
X	US 2010/124472 A1 (NGUYEN THU A [US] ET AL) 20 May 2010 (2010-05-20) the whole document -----	1,3-6,9, 11,14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 March 2014

Date of mailing of the international search report

21/03/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Pedersen, Kenneth

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/077387

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2011050040 A1	28-04-2011	CN 102042288 A CN 202023812 U DE 202010017260 U1 EP 2470798 A1 JP 2013508646 A KR 20120060916 A US 2011142567 A1 WO 2011050040 A1	04-05-2011 02-11-2011 26-08-2011 04-07-2012 07-03-2013 12-06-2012 16-06-2011 28-04-2011
US 2010124472 A1	20-05-2010	US 2010124472 A1 US 2013111742 A1	20-05-2010 09-05-2013