

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 December 2007 (27.12.2007)

PCT

(10) International Publication Number
WO 2007/147431 A1

(51) International Patent Classification:
H04L 12/56 (2006.01)

(74) Agent: VALEA AB; Lindholmospiren 5, S-417 56 Gothenburg (SE).

(21) International Application Number:
PCT/EP2006/011187

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
22 November 2006 (22.11.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0601381-7 21 June 2006 (21.06.2006) SE

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): TELEFONAKTIEBOLAGET L M ERICSSON (publ) [SE/SE]; SE-164 83 Stockholm (SE).


(72) Inventors; and

(75) Inventors/Applicants (for US only): TORSNER, Per, Johan [SE/FI]; Skogstorpssvägen 2 C9, FIN-02430 Masaby (FI). SÅGFORS, Mats, Fredrik [FI/FI]; Ravalsvägen 8 C13, FIN-02400 Kyrkslätt (FI). WAGER, Stefan, Henrik, Andreas [SE/FI]; Gärdsgården 8 H, FIN-02360 Esbo (FI).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND UNIT FOR EFFICIENT REPORTING OF SCHEDULING INFORMATION IN A WIRELESS TELECOMMUNICATIONS SYSTEM

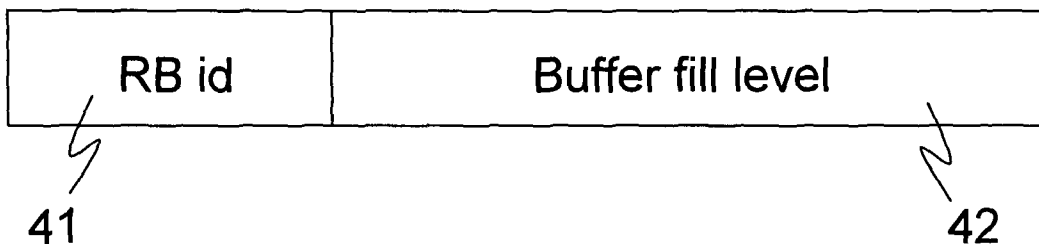

(57) Abstract: The present invention relates to a method and arrangement in a wireless communication system for efficient reporting of scheduling information processed in a unit of said system. The method comprises the steps of adaptively selecting (610) a buffer status report format that is most efficient for the momentary buffer content for indicating the buffer fill levels of the scheduler, and encoding (620) said buffer fill levels such as to minimize the number of bits needed to encode the information.

WO 2007/147431 A1

METHOD AND UNIT FOR EFFICIENT REPORTING OF SCHEDULING INFORMATION IN A WIRELESS TELECOMMUNICATIONS SYSTEM

TECHNICAL FIELD

5 The present invention relates to methods and arrangements in a telecommunication system, in particular to an efficient buffer status encoding.

BACKGROUND

10 In the study item UTRAN long term evolution (LTE) initiated by the 3rd Generation Partnership program (3GPP) it has been decided that a scheduling mechanism similar to the one used in Enhanced D-Channel Handler (E-DCH) shall be adopted for LTE. The scheduler in a Node B schedules resources in both
15 downlink and uplink. In the uplink, the scheduler needs information about the data that is available in the buffers of the user equipments (UE). This is achieved by transmitting scheduling information messages from the user equipment to the Node B. The scheduling information is
20 transmitted as part of the Medium Access Layer Protocol (MAC) and can therefore be either piggybacked with other transmissions (when those are ongoing) or be sent stand alone by creating MAC PDUs just to transfer the scheduling information. The scheduling information in E-DCH has the
25 format depicted in figure 1. HLID denotes the Highest priority Logical channel ID; TEBS denotes the Total E-DCH Buffer Status; HLBS denotes the Highest priority Logical channel Buffer Status (which is a value that is coded relative to TEBS, i.e. a percent of indicated TEBS value);
30 and UPH denotes the UE Power Headroom (which field relates to the power used in the UE). When the scheduling

information is received in the Node B, the scheduler can determine the logical channel that has the highest priority (HLID), how much data that is stored in the UE buffer for this logical channel (HLBS), and the total UE buffer size (TEBS). In total this information is encoded in 13 bits.

In a long-term evolution (LTE-) system there is a desire to employ a finer granularity on the QoS than is possible in E-DCH. The E-DCH solution has some limitations. If the user equipment has data on several logical channels (radio bearers) it is only possible to see the amount of data on the channel with the highest priority. It is, however, not possible to know if the remaining data has rather high, low, or very low priority. It is neither possible to know how the data is distributed between these priorities. This means that it is difficult to achieve service differentiation for any other service than the one with highest priority.

A prior-art solution to this problem is to signal the buffer status per radio bearer (or per priority/QoS class). In order to achieve a reasonable low size of the buffer status message the number of bits for the buffer size of each radio bearer (or priority/QoS class) needs to be rather low, e.g. 2 bits per buffer as will be used in the following. This solution, however, implies the disadvantage that it provides a very poor granularity when it comes to the total buffer size of the user equipment. When assuming, for example, that there is only data available for one radio bearer the total UE buffer is then encoded with only 2 bits, which is not sufficient. Clearly the number of bits per buffer can be increased but that leads to a large buffer status message. One conceivable option could be to encode the total buffer size separately. In that way relatively few bits could be used to encode the buffer size for each radio bearer (e.g. 2 bits) and an additional N bits could be used to encode the

total buffer size. This would result in both a rough view of the buffer size per radio bearer as well as a reasonable accurate indication of the total buffer size. However, this would also lead to a large total buffer status message.

5 Other reasons of having a finer granularity than in the E-DCH scheduling solution, include among others:

1) Starvation between QoS levels within a single UE: Low priority data flows may be starved by higher priority traffic

10 2) Inability for the operator to control cell capacity partitioning between QoS classes: Scheduler can in E-DCH not know which radio bearers that have data (except for the highest priority radio bearer which is indicated explicitly)

15 3) Low-priority traffic hitching a free ride: Low priority data may get a free ride when high priority data is scheduled if the scheduler is not aware how much data that is available on different radio bearers

20 **SUMMARY OF THE INEVNTION**

It is an object of the present invention to provide a method and arrangement for achieving an efficient encoding of the scheduling information (buffer status information) in a wireless system such as, e.g., a LTE-system or a High Speed
25 Packet Access (HSPA) evolution system, to provide - with as few bits as possible - a sufficient indication of the amount of available data on different radio bearers and a fine granularity on the total UE buffer size.

It is thus an advantage of the present invention that it
30 allows for an efficient way to report buffer fill levels in a wireless system, which results, compared to state-of-the-art solutions, in more information to the scheduler and

allowing for service differentiation while not increasing the overhead of the status reports.

Other objects, advantages and novel features of the invention will become apparent from the following detailed description of the invention when considered in conjunction with the accompanying drawings and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

10 Figure 1 illustrates the E-DCH scheduling information format.

Figure 2 illustrates the problem of the prior-art solution.

15 Figure 3 illustrates a buffer format indicator according to the present invention.

Figure 4 illustrates the format for data on a single radio bearer.

20 Figure 5 illustrates the format for data on many radio bearers.

Figure 6 illustrates a block diagram of a method according to the invention.

Figure 7 block diagram of an arrangement according to the invention.

30 DETAILED DESCRIPTION

The present invention provides an adaptive buffer status format where the user equipment autonomously, or by help of appropriate criteria, selects the format that is most efficient for the momentary buffer content. The encoding of

the buffer fill levels for the case of several radio bearers uses the information from the buffers on the individual radio bearers in order to reduce the number of bits needed to encode the information of the total UE buffer size.

5 Generally, the invention relates to a method in a wireless communication systems for efficient reporting of scheduling information processed in a unit of said system, as illustrated in figure 6. The method comprises the steps of: adaptively selecting (610) a buffer status format 615 for
10 indicating the buffer fill levels of the scheduler; and encoding (620) the buffer fill levels. The encoding step is to reduce 625 the number of bits needed to encode the information of the total buffer size.

A first embodiment of the present invention relates to an
15 adaptive buffer status report format. The format of the buffer status report that is efficient to use depends on the momentary buffer fill levels on the individual radio bearers as well as on how many radio bearers are configured, which services are ongoing, etc. The user equipment should
20 therefore be allowed to select (e.g. autonomously) the format of the buffer status report to minimize the number of bits needed (or maximize the information that can be extracted with a fixed number of bits). The basic structure of the buffer status report is depicted in figure 3. The
25 buffer format indicator field 31 (e.g. of length 1 or 2 bits) is used to indicate the format that the rest of the buffer report filed 32 is encoded with.

Below follow a few examples of buffer report formats. In these examples the total number of bits has been chosen as
30 12 but only in order to illustrate the possible relations of the field sizes in the various formats. In practice the different formats can, however, have different lengths since

the receiver of the buffer status report can deduce the length of the format from the buffer format indicator.

In case data is available on only one radio bearer it is efficient to indicate the radio bearer id (RBid) in a field 41, for instance of length 3 bits, and the buffer fill level in a field 42 of a length of, e.g., 9 bits. This is shown in figure 4. It is expected to be a common case that data is only available on a single radio bearer. This format provides a very high granularity of the total buffer size in that common case.

In order to provide service differentiation, it is necessary to report information about the amount of data for different radio bearers, or groups of radio bearers, per QoS class, per traffic priority or a similar criterion. In the following the expression radio bearers is used for reasons of simplicity. In the example depicted in figure 5, four radio bearers are configured. The buffer fill level B_k , denoted B_k , for each configured radio bearer k is encoded into N bit fields 51,52,53,54. Each of the 2^N possible values for B_k is mapped to a buffer fill level interval such that, e.g., $B_k = 01$ means a buffer fill level between 100 and 500 bytes. The mapping between B_k and the buffer fill level interval is most likely hard coded in the specifications but can also be configurable by higher layer signaling.

When encoding the total UE buffer B , denoted B_{tot} , into the field 55, the information extracted from the fields $B_1...B_4$ is used to improve the granularity of the information in the following way: A sufficient estimation of the total UE buffer fill level can be obtained by summarizing the values $B_1...B_4$ such that $B_{estimated} = B_1+B_2+B_3+B_4$. The error in this estimation $Err = B - B_{estimated}$ is encoded into the field B_{tot} . Since the value range of Err is much smaller

than the value range of B the granularity of Btot can be made better with this method. It can be seen that this format gives a rough indication about the buffer fill level on individual radio bearers as well as a medium granularity
5 of the total UE buffer fill level.

An alternative coding for the case of several radio bearers is to first encode the total size of the UE buffer in one field, Btot, and then encode the buffer fill levels for each individual radio bearer Bk as a fraction of the value
10 indicated in Btot. The advantage compared to letting Bk and Btot indicate an absolute buffer fill level is that the value range of Btot is smaller than the value range of the possible buffer fill level.

There are several alternatives for a user equipment to
15 select a buffer status format. It is one possibility that the format can be configured via higher layer signaling protocol (e.g. the RRC) such that a user equipment always uses the same format. This format can then be reconfigured, e.g., depending on the number of services that are
20 configured. According to another possibility the user equipment can autonomously select which format to use. This selection can depend, e.g., on the buffer fill levels of the individual radio bearers. For instance, if data is only
25 available on one radio bearer a certain format is selected while otherwise, i.e. for several radio bearers, another format is selected. Finally, the user equipment can alternate between the formats. This could achieve both a high granularity of the total buffer fill level as well as information about the data on individual radio bearers.

30 Following example gives five configured radio bearers: RRC signaling, SIP, VoIP, Video, Best effort (BE) internet access. In this example a multimedia telephony service is configured with the service components SIP signaling, VoIP

and Video. In addition an RRC signaling radio bearer is configured and a best effort bearer used for internet access. An example of a mapping between QoS indicator and priority order is shown in the table below (in practice the priority order would be a list of radio bearer IDs). The mapping between QoS indicator and priority order would be configured in the UE via RRC signaling.

QoS indicator	Priority order
1	RRC, SIP, VoIP, Video, BE
2	RRC, BE, SIP, VoIP, Video
3	RRC, VoIP, Video, SIP, BE
4	RRC, Video, VoIP, SIP

Table 1

10

In the typical case the scheduler would use QoS indicator 1 which indicates that radio bearers should be scheduled in the default order of priority. In case starving occurs for e.g. the BE internet access bearer this would be detected by the Node B scheduler and scheduling would be performed with QoS indicator 2 for a while, which would give a higher priority to the BE. In a similar manner, QoS indicators 3 or 4 would be used if the radio bearers carrying VoIP or Video needs more resources than their default priority allows. In the last row the BE internet bearer is not even included, which implies that data from this radio bearer is not allowed to be transmitted. As can be seen the RRC signalling always have the highest priority in the example. That is a likely implementation choice but nothing prevents RRC to be down prioritized as well.

25

Figure 7 illustrates an exemplary unit 700 according to the present invention, for example in a UE, comprising a

scheduler 710 for scheduling information processed in one or more buffers 720. The unit further comprises a processing arrangement 730 for adaptively selecting a buffer status format for indicating the fill levels of the scheduler buffers and an encoder 740 for encoding the
5 buffer fill levels such as to reduce the number of bits needed to encode the information of the total buffer size. The unit further comprises a transmitter 750 for transmitting an information element including the buffer
10 status report to other network units. The unit is described very briefly including the functional units essential for carrying out the invention.

CLAIMS

1. A method in a wireless communication system for efficient reporting of scheduling information processed in
5 a unit of said system, c h a r a c t e r i s e d b y
adaptively selecting (610) a buffer status format for indicating the buffer fill levels of the scheduler; and
encoding (620) said buffer fill levels such as to
10 reduce the number of bits needed to encode the information
of the total buffer size.

2. The method according to claim 1, whereby the encoded buffer fill levels are included in a buffer status report.

15

3. The method according to claim 1, whereby the selecting is performed autonomously by said unit.

4. The method according to claim 1, whereby the
20 selecting is configured via higher layer signalling.

5. The method according to claim 1, whereby the selecting is performed by applying a certain criterion.

25 6. The method according to claim 5, whereby the criterion is the momentary buffer fill levels of the individual radio bearers.

7. The method according to claim 5, whereby the
30 criterion is the number of configured radio bearers.

8. The method according to claim 5, whereby the criterion is the applied service.

9. The method according to claim 1, whereby data is available on one radio bearer and the selected data format includes an identification of said radio bearer and the buffer fill level.

5

10. The method according to claim 1, whereby data is available on several radio bearers and the selected data format includes encoded information on the buffer fill levels for each radio bearer and the total buffer size.

10

11. The method according to claim 10, whereby the information on the buffer fill levels for each radio bearer is encoded as a fraction of the total buffer size.

15

12. A unit (700) in a wireless communication system, said unit comprising a scheduler (710) for scheduling information processed in one or more buffers (720), c h a r a c t e r i s e d i n

20

arrangement (730) for adaptively selecting a buffer status format for indicating the fill levels of said scheduler buffers;

encoder (740) for encoding said buffer fill levels such as to reduce the number of bits needed to encode the information of the total buffer size.

25

13. The unit according to claim 12, further comprising a means (750) for transmitting an information element including the buffer status report to a second network unit.

30

14. The unit according to claim 12 or 13 being a user equipment.

35

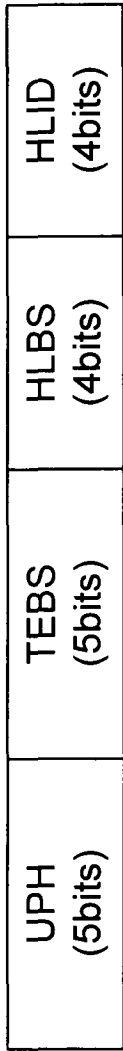


Fig. 1

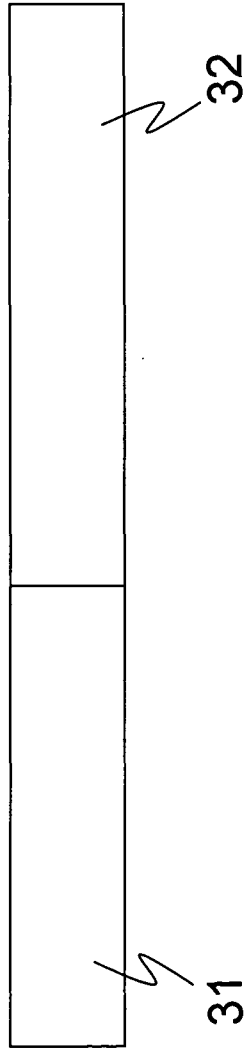


Fig. 3

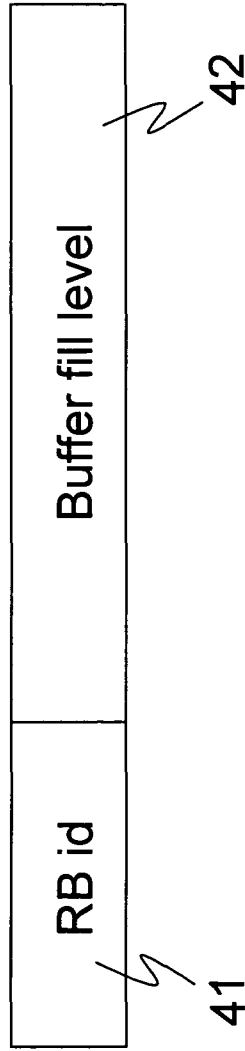


Fig. 4

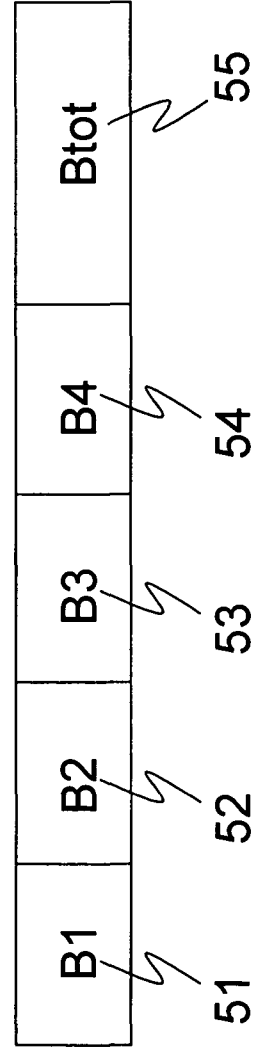


Fig. 5

2/3

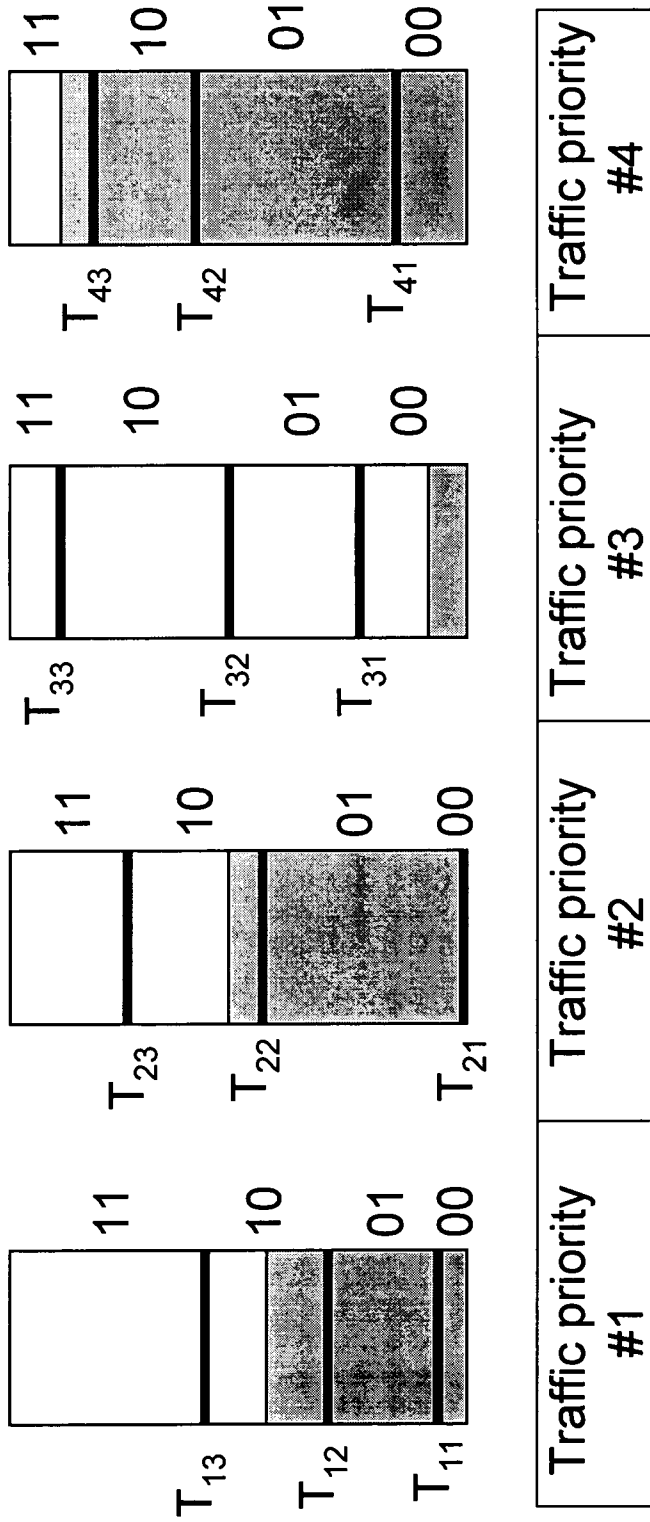


Fig. 2

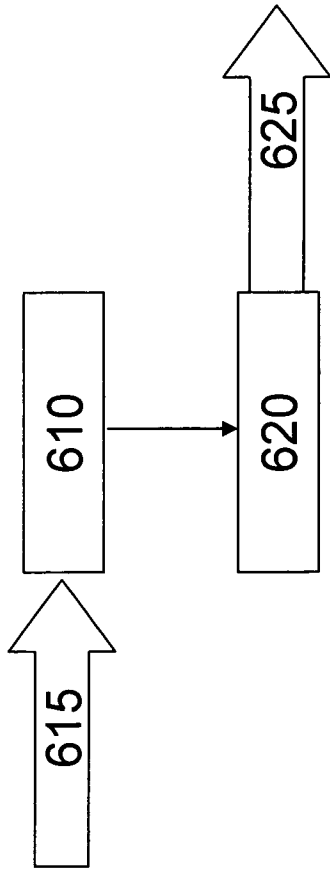


Fig. 6

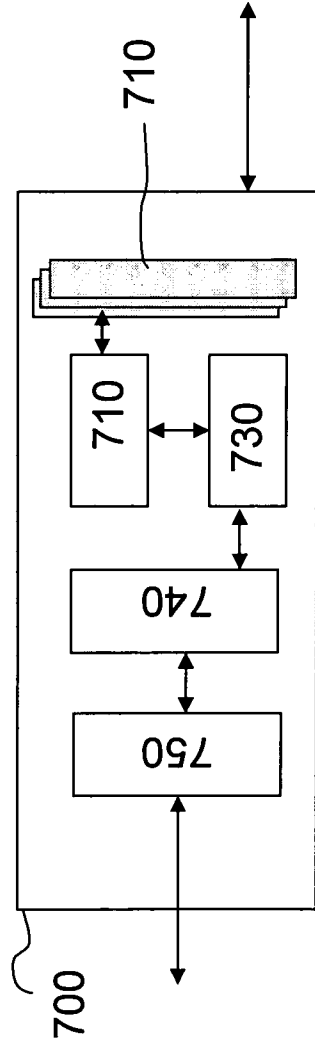


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2006/011187

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1 599 063 A (SAMSUNG ELECTRONICS CO LTD [KR]) 23 November 2005 (2005-11-23) abstract figures 2-5 paragraphs [0013] - [0017] paragraph [0021] paragraphs [0034] - [0040] paragraphs [0054] - [0057] paragraphs [0060] - [0071] paragraphs [0074] - [0076]	1-14
Y	US 2004/224677 A1 (KUCHIBHOTLA RAVI [US] ET AL) 11 November 2004 (2004-11-11) abstract paragraph [0053] paragraph [0034] paragraph [0049] ----- -/--	1-14

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

23 July 2007

Date of mailing of the international search report

31/07/2007

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Möll, Hans-Peter

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2006/011187

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2005/047393 A1 (LIU JUNG-TAO [US]) 3 March 2005 (2005-03-03) paragraphs [0048] - [0053]; table 2 -----	1,12
A	"Universal Mobile Telecommunications System (UMTS)" ETSI STANDARDS, EUROPEAN TELECOMMUNICATIONS STANDARDS INSTITUTE, SOPHIA-ANTIPO, FR, vol. 3-R2, no. V700, March 2006 (2006-03), XP014034285 ISSN: 0000-0001 92.5.3 "UL Scheduling information" -----	1,12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2006/011187

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1599063	A	US 2005259662 A1	24-11-2005
US 2004224677	A1	CN 1784844 A EP 1620962 A2 JP 2006525775 T KR 20060013529 A WO 2004102981 A2	07-06-2006 01-02-2006 09-11-2006 10-02-2006 25-11-2004
US 2005047393	A1	NONE	