




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H04Q 3/66, 3/00</p>	A1	<p>(11) International Publication Number: WO 99/65254</p> <p>(43) International Publication Date: 16 December 1999 (16.12.99)</p>
<p>(21) International Application Number: PCT/US99/12418</p> <p>(22) International Filing Date: 3 June 1999 (03.06.99)</p> <p>(30) Priority Data: 09/093,554 8 June 1998 (08.06.98) US</p> <p>(71) Applicant: EXCEL SWITCHING CORPORATION [US/US]; 255 Independence Drive, Hyannis, MA 02601 (US).</p> <p>(72) Inventors: GHAI, Rajat; Unit #F4, 193 Camp Street, West Yarmouth, MA 02673 (US). HEBERT, Mark, P.; 34 Har- vest Drive, Kingston, MA 02364 (US). SILVA, Michael; 95 Willis Street, South Dartmouth, MA 02748 (US).</p> <p>(74) Agents: ATTAYA, Michael, E. et al.; Cesari and McKenna, LLP, 30 Rowes Wharf, Boston, MA 02110 (US).</p>	<p>(81) Designated States: AL, AU, BA, BB, BG, BR, CA, CN, CU, CZ, EE, GD, GE, HR, HU, ID, IL, IN, IS, JP, KP, KR, LC, LK, LR, LT, LV, MG, MK, MN, MX, NO, NZ, PL, RO, SG, SI, SK, SL, TR, TT, UA, UZ, VN, YU, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: FLEXIBLE CALL ROUTING SYSTEM

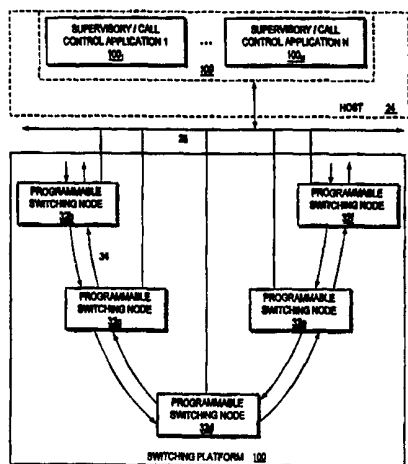

ROUTE No	ROUTE PROPERTY	ROUTE GROUP	CRITERIA TYPE	CRITERIA DATA LENGTH	CRITERIA DATA	MARK	TLV COUNT	TLV DATA
202	201	200	208	210	212	211	210	210
1	1	2	01	14	0023327	200200200 250200200 250	1	10 01 101
2	1	1	01	14	0021000	200200200 2500000	3	10 01 00 10 01 101 10 01 110
3	1	3	04	0	00100	***	2	10 01 110 10 01 112
4	1	3	04	0	10000	***	2	10 01 111 10 01 113
5	1	5	01	20	00000000 00	200200200 00000000	4	10 01 00 10 01 04 10 01 02 10 01 107
6	1	4	07	2	0	*	1	10 01 106
...								
X								

ROUTING TABLE 201

ROUTER STATE MACHINE 200

ROUTER - 200

(57) Abstract

The principle object of the present invention, is to provide flexibility in the routing functions performed in the switching system. Another object is to provide a router (200) that can be centralized in a host computer (24) or distributed among various switching nodes (32b-32f). The router is easily programmable by the system operator to provide different routing algorithms for various calls. The router can be used in a system with a single switching node. However, it is particularly adopted for use in a multiple-switching-node system, either as a central, host resident unit, or as a distributed router resident on the switching nodes. A router embodying the invention uses router tables (201) that are readily configurable by the system operator to route calls based on predefined routing criterion in the incoming or outgoing call.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

FLEXIBLE CALL ROUTING SYSTEM

TECHNICAL FIELD

The invention relates generally to a router for a telecommunications switching system that is easily programmable to provide different routing algorithms for various calls and is particularly adopted for use in a multiple switching node system either as a central, host resident unit, or as a distributed router resident in the switching nodes.

BACKGROUND OF THE INVENTION

An example of a switching system to which the present invention applies is described in U.S. Patent No. 5,544,163, Expandable Telecommunications System, the contents of which are incorporated by reference herein. A telecommunication switching node described therein has line cards with multiple ports connected to subscriber's telephone lines or to other devices such as PSTN trunks. The switching node also includes a switch/matrix card and at least two system buses for switching calls received on one port to another port in the system. One of these buses is an incoming bus that passes messages from the line cards to the matrix card and the other is an outgoing bus which transmits messages from the matrix card to the line cards. In order to perform switching on calls, the switching node receives information from and transmits information to line card ports over the system buses at predetermined times known as time slots. Each time slot generally corresponds with a port on the switch. The time slots assigned to each port and the software applications that manage calls on those time slots are generally termed "channels."

Overall control of the system is exercised by the host, i.e., a group of software applications that typically reside on a computer. The switching nodes are interconnected by an internodal switching network. A second network termed the "host network," interconnects the switching nodes and the host computer for supervisory control.

- 2 -

The host, the switching nodes and the line cards include their own software protocol applications which instruct them on how to handle incoming calls. A Layer 5 (L5) protocol application in the host manages calls at the system level; Layer 3 (L3) protocol applications in the line cards handle calls at the line card level of the system and a Layer 4 protocol application (L4) i.e. a Central Call Processing(CPP) application
5 in the switch, manages calls at the switch level.

In an example of a switching system to which the present invention applies the L4 application is programmable by the system operator and this enables the system operator to decide which call processing operations will be managed by the L5 applications and which operations will be managed by the L4 application. The L4 application
10 is separated into software objects that function as state machines that are separately dedicated to specific tasks for each port in the switching node. The term "channel" thus encompasses the data paths between each port and the switch/matrix and the software objects in the switch/matrix that directly supervise the use of these paths. The primary
15 software objects in the L4 application are a channel state machine (CH), a call management state machine (CM) and a physical connection state machine (PC). Each channel in the node includes a static instance of these primary objects. The L4 application also includes secondary software objects which include an Interworking state machine, a DSP Manager state machine, a Switch Manager state machine, a Conference
20 Manager state machine and a Distributed Router state machine.

The CH in the L4 application is a programmable protocol language (PPL) object which manages channel state information for its associated channel. Channel state information includes information about the state of each of the other objects in the channel. The L4 CM is a PPL object which manages information about the state of any call
25 in the associated channel. The PC is a software object which manages PCM switch connection information for its channel. The PC maintains information on whether a channel has a voice path connection active with another channel.

The Interworking State Machine helps to support internal information routing and it gives the user the capability to specify the call model on a channel by channel
30 basis. An instance of the Interworking object is dynamically created as it is needed for each channel. The DSP Manager state machine allocates DSP resources, routes DSP

- 3 -

requests to the appropriate DSPs and reports the results to the CH. The Switch Manager state machine and its data structures also manage simple connect and disconnect requests from the PC for all switching types, including local time slot switching and ring switching. The Conference Manager State Machine manages conference calls by managing the DSP resources and issuing commands to the DSP resources. The conference manager also manages channel connections to the DSP. The Distributed Router state machine is an object that fields requests to route information based on a number of parameters in the message. Information routing in the switching system is an important function, especially in the use of external resources such as PSTN, long distance service, etc.

A conventional router arrangement can be used to provide the routing functions. However, since the layer 4 software is now highly flexible, in that it can be readily modified by the system operator, it is highly desirable that the operator be given similar flexibility in structuring the routing functions.

SUMMARY OF THE INVENTION

Therefore, the principle object of the present invention, is to provide flexibility in the routing functions performed in the switching system. Another object is to provide a router that can be centralized in a host computer or distributed among various switching nodes. The router is easily programmable by the system operator to provide different routing algorithms for various calls. The router can be used in a system with a single switching node. However, it is particularly adopted for use in a multiple-switching-node system, either as a central, host resident unit, or as a distributed router resident on the switching nodes. A router embodying the invention uses router tables that are readily configurable by the system operator to route calls based on predefined routing criteria in the incoming or outgoing call.

Specifically in the preferred embodiment of the invention, the routing table entries include fields that enable the operator to logically combine various parameter values to determine how each call is to be routed. Calls may be routed based on the incoming port, a resource group (group of channels that connect to the same external

- 4 -

service), an identifier of the calling or called party, the time of day or other desired criteria. Each entry in the routing table includes a field containing a route group ID, which is a key for routes having certain common criteria, a field containing a system-operator-selected, predefined criteria such as called party number; and a logic field that
5 contains an identification of a call-termination channel group and/or a specification of a logical combination of other entries in the routing table. The field values in each entry maybe entered by the system operator through a conventional software tool with display screens. The field values maybe compiled into application programming interface (API) messages and downloaded into the router. Alternatively, the router may interpret
10 the entries without prior compilation. Thereafter, when the CH receives a request to route a call from a line card port, the CH through the CM provides the router with routing criteria for the call and the router uses the compiled routing table to determine how to process the call.

BRIEF DESCRIPTION OF THE DRAWINGS

15 The invention description below refers to the accompanying drawings, of which:

Fig. 1 is a diagram of a call switching system incorporating the invention;

Fig. 2 is a diagram of the router and the routing table used by the router;

Fig. 3 is a diagram of the typical route criteria types used in the routing table;

20 Fig. 4 is a diagram of the logical data field in the routing table;

Fig. 5 illustrates some of the logical tags that may be included in a logical data field in the routing table;

Fig. 6 is a diagram of how is a call is processed when the host originates the call by using a router to select and connect to the terminating port;

25 Fig. 7 is another diagram of how a call in is processed when the host originates the call using a router; and

Fig. 8 shows how a call is processed in a distributed router in the switching nodes.

- 5 -

DETAILED DESCRIPTION OF AN ILLUSTRATIVE EMBODIMENT

Fig. 1 is a diagram of a communications network that is configured to process calls to, from and within a switching platform in accordance with the present invention. The switching platform includes switching nodes 32b-32f that are connected by a ring-like internodal switching network 34 to pass among them the various messages handled by the switching platform. Each switching node is associated with a plurality of network/line interfaces (not shown) which provide connections between the switching system and subscribers' lines, for example, and also with other switching systems such as the PSTN. These interfaces also provide access to system resources such as DSP resources and voice mail functions. The communications network also includes a host computer 24 that runs host supervisory applications 100₁- 100_N. The supervisory applications 100₁- 100_N provide overall supervision, i.e. control and monitoring, of the switching functions of the network. The host computer 24 is linked to the switching nodes 32b-32f by a host network 26.

The host computer, the switching nodes and the line cards include their own software protocol applications which handle calls in their respective layers. A Layer 5 application in the host manages calls at the host level, a Layer 4 application in the switching node handles call-management functions in the switching node and Layer 3 applications in the line cards manage calls at the line card level. In the present invention, the Layer 4 application has been expanded to include a router 200. The router 200 contains a state machine 203 that retrieves information from a routing table 201 in determining how to route each call.

The preferred illustrative routing table 201 is shown in Fig. 2. Each entry includes a route number field 202, a route property field 204, a route group ID field 206, a criterion type field 208, a criterion data length field 210, a criterion data field 212 plus a mask field 214 when applicable, a logical data count 216 and a logical data field 218. The route number field 202 is an index into the route table; the route property field 204 is a route type mask or route type range; the route group ID field 206 is a key for routes having certain common criteria; the criterion type field 208 and the criterion data length field 210 describe the data contained in the criteria data field 212 and the mask field

- 6 -

214; the criteria data field 212 and the mask field 214, when applicable, are used to match the entry in the table to information received from the call-originating channel; the logical data count field 216 specifies the number of logical data entries in the logical data field 218 and the logical data field 218 defines the routing logic for the call and may also contain identification of the destination channel.

Typical route criteria types 304 are defined in Fig. 3. They include the time of day; the incoming-channel identity; a resource group identifier; an identifier of the calling or called party; a least-cost route criterion; a fastest-route criterion; and other desired criteria. Each criterion type 304 is assigned a criterion tag 302. These tags 302 are the entries in the criterion type field 208.

Fig. 4 illustrates the data in the logical data field 218 entries. Each logical data field 218 contains one or more sets of logical data. The logical data count field 216 indicates the number of data sets in the field 218. Each logical data set 218 has three parts. The first part is a logical tag 402 which identifies the kind of data in the logical data set. The second part 404 indicates the length of the data and the third part 406 is the data itself. Fig. 5 illustrates some of the logical tags 502 that may be included in a logical data entry 218. They include a resource group identifier, a span and channel or node address, a route group number that contains one of the valid route group identifiers, embedded logical data, coupled multi-criteria where subsequent route entries are coupled to one route entry, and a coupled multi-route group identifier where additional route group identifiers are coupled to one route group identifier.

Fig. 2 is an example of the use of the routing table 201 to route a call. For example, if a call to the number 862 3592 is received in the channel from a line card port, the CH associated with that port sends the call to the router 200 through the CM. Since criterion tag sixty one is assigned to the called party criterion type, the router 200 selects all entries in the table where the value in the criterion type 208 is equal to sixty one. From these entries the router 200 selects entries one, two, and five. The router 200 then checks the criteria data 212 and mask 214 fields in the selected entries to find the most specific value that fits the called number. The numbers in the mask field 214 instruct the router on which numbers in the criterion data field 212 to consider during a

- 7 -

search. There is a one to one relationship between the numbers in the mask field 214 and the numbers in the criterion data field 212. The router 200 considers every number in the criterion data field 212 that corresponds to the number 255 in the mask field 214 and ignores the numbers that correspond to the number zero in the mask field 214. The
5 router 200 therefore selects entry two, since its criterion data value 212 includes the called number. Thereafter, the router 200 checks the logical data count 216 to determine how many sets logical data 218 entries it has to process. In entry two, the logical data count 216 is three. The first tag 402 in the logical data field 218 is a route group identifier 206 and the data value is three. The second and third tags 402 are resource
10 groups identifiers 502 and the values are 101 and 110. The router 200 next moves to the entries where the route group identifier 206 is three. The router thus selects entries three and four in the routing table. The criteria types 208 in those entries are time of day tags 302. Thus if the time of the call is between 9:00 and 19:00 hours the router 200 chooses entry three and if the time of the call is between 19:00 and 9:00 hours the
15 router chooses entry four. If the criterion in the third entry is met, i.e., the time of day is between 9:00 and 19:00 hours, the router will examine the logical data field 218 in the entry three. This field 218 specifies resource groups 110 and 112. Group 110 is the only resource group common to both entries two and three. This group is therefore selected by the router. If the time of day meets the criterion in entry four, the router will
20 examine the logical data field 218 in entry four. This field 218 specifies resources groups 111 and 113. Since there is no resource group common to entries two and four, the router will choose one of the resource groups for the call.

After the router 200 selects a resource group, if the router is on the host, it selects an idle channel in the resource group. If the router 200 is distributed on the
25 switching nodes, it determines if the group is on its node. The router on each node has a map of the idle channels in each group on its node. If the group is on its node, the router selects an idle channel for the call. If the group is on another switching node, the router 200 sends a route request to the router and the other node and the router on the other node selects the idle channel. Thereafter, the router returns the address for the

- 8 -

destination channel to the CM in the originating channel and sends a message to the CM on the idle channel. The CM then processes the call.

Fig. 6 is a diagram of how a call is processed when the router is used by the host to select a port for call termination. The host sends a route control message to the CH component in channel A. Upon receiving the route control message, the CH sends a Call Service Route Request (CSRR) to the CM and the CM sends the CSRR to the Router. From this point on, the call is processed in the same manner as an internal routing for an incoming call. This allows the host to use API messages to invoke the router and connect to the selected port.

Fig. 7 is another diagram of how a call may be processed when the router is used by the host for port selection. The host sends a route control message to the router state machine. Upon receiving the route control message, the router 200 uses the routing table 201 to parse the message and the router 200 derives a route, i.e., selects a channel, based on the passed parameters. If there is a successful route, the router will send the route control message to the selected channel's CH component. The remote/selected CH component will send a setup-network message to the layer 3 interface. The message includes a bit that tells the L3 application to direct its response to the switching node rather than to the host. Upon receiving a response from the L3 interface, the remote CH passes the response to the router. The router then acknowledges the route control message to the host by indicating which channel, i.e., span or channel address has been selected.

Fig. 8 shows how a call is processed in a distributed router in the switching nodes. The distributed router in the originating channel, channel A, accepts a call service route request from the originating CH through the CM. The router attempts to find a route based on information in the route table 201. If a route is found in node, the router sends messages to the destination channel's CM and to the originating channel's CM. However, if a route is found on another node, the router on channel A sends a request to a router on a remote channel, channel B. If the remote router finds the route of its channel, the remote router sends a message to the remote CM component. If a route

- 9 -

cannot be found, or if the remote channel's CM component rejects the request, a rejection message is returned to the original channel's CM component.

The foregoing description has been directed to specific embodiments of this invention. It will be apparent, however, that other variations and modifications may be
5 made to the described embodiments, with the attainment of some or all of their advantages. Therefore, it is the object of the appended claims to cover all such variations and modifications as come within the true spirit and scope of the invention.

What is claimed is:

CLAIMS

- 1 1. A communications network comprising:
- 2 A) a plurality of switching nodes each of which contains:
- 3 1. line cards with multiple ports for connections between the communications
- 4 network and subscriber lines or other switching systems, and
- 5 2. objects for processing call on channels associated with each port;
- 6 B) an internal network interconnecting the switching nodes for conveying
- 7 switched telecommunications data between them;
- 8 C) a host computer that includes software applications which exercise su-
- 9 pervisory control over the nodes;
- 10 D) a host network linking the host computer with the switching nodes;
- 11 E) a programmable router that utilizes a configurable routing table to route
- 12 calls based on predefined routing criteria, said routing table including
- 13 multiple entries each having multiple fields, a first field in each entry
- 14 specifying one of a set of routing criteria, a second field in each entry
- 15 specifying a group of ports to which a call may be routed and/or one or
- 16 more of the other entries whose first fields are examined to determine
- 17 whether call parameters match the criteria in those fields;
- 18 F) means for logically combining values in routing table fields based on the
- 19 results obtained by examining the other entries identified by the second
- 20 field.
- 1 2. The communications network of claim 1 wherein the router may be centralized
- 2 on the host computer or distributed among various switching nodes.

- 11 -

1 3. The communications network of claim 2 wherein each entry in the router table
2 comprises a field containing a route group identifier for identifying routes having cer-
3 tain common criteria.

1 4. The communications network of claim 3 wherein each entry of the router table
2 further comprises:

- 3 A) a route number field for indexing the routing table;
- 4 B) a route property field for identifying a route type mask or range;
- 5 C) the first field which is a criterion type field for specifying one of a set of
6 routing criteria types;
- 7 D) a criterion data length field for storing the length of routing criteria data
8 and mask;
- 9 E) a routing criteria data field for storing predefined routing criteria data;
- 10 F) a criterion data mask field for specifying which digits in the routing cri-
11 teria data field to consider when routing a call;
- 12 G) a logical data count field for specifying the number of sets of logical
13 data in the logical data field; and
- 14 H) the second field which is a logical data field for storing sets of logical
15 data which identify a call-termination channel group, said logical data
16 field may also specify other entries in the routing table.

1 5. The communications network of claim 4 wherein each criterion type is assigned
2 a criterion tag, the criterion tag is placed in the criterion type field in each entry with the
3 matching criterion data.

- 12 -

1 6. The communications network of claim 5 wherein each logical data field com-
2 prises one or more sets of logical data and each logical data set comprises:

3 A) a logical tag which identifies the kind of data in the logical data set;

4 B) the length of the logical data in the set; and

5 C) the logical data itself.

1 7. The communications network of claim 6 wherein the router on the host selects
2 an idle channel based on the call-termination channel group identified by the logical
3 data field.

1 8. The communications network of claim 6 wherein the router on a switching node
2 has a map of idle channels in each call-termination channel group on that node and se-
3 lects an idle channel in the call-termination channel group.

1 9. The communications network of claim 8 wherein the router sends a route re-
2 quest to a router on another switching node if the call-termination channel group identi-
3 fied by the logical data field is on the other switching node and the router on the other
4 switching node selects an idle channel in the call-termination channel group on the that
5 switching node.

1 10. The communications network of claim 9 wherein the router returns the address
2 for the destination channel to an object in a originating channel for the call and sends a
3 message to an object in the idle channel.

- 1 11. A switching node which contains:
- 2 A) line cards with multiple ports for connections between switching node
3 and subscriber lines or other switching systems;
- 4 B) objects for processing call on channels associated with each port;
- 5 C) a programmable router that utilizes a configurable routing table to route
6 calls based on predefined routing criteria, said routing table including
7 multiple entries each having multiple fields, a first field in each entry
8 specifying one of a set of routing criteria, a second field in each entry
9 specifying a group of ports to which a call may be routed and/or one or
10 more of the other entries whose first fields are examined to determine
11 whether call parameters match the criteria in those fields;
- 12 D) means for logically combining values in routing table fields based on the
13 results obtained by examining the other entries identified by the second
14 field.
- 1 12. The switching node of claim 11 wherein each entry in the router table comprises
2 a field containing a route group identifier for identifying routes having certain common
3 criteria.
- 1 13. The switching node of claim 12 wherein each entry of the router table further
2 comprises:
- 3 A) a route number field for indexing the routing table;
- 4 B) a route property field for identifying a route type mask or range;
- 5 C) the first field which is a criterion type field for specifying one of a set of
6 routing criteria types;

- 14 -

- 7 D) a criterion data length field for storing the length of routing criteria data
8 and mask;
- 9 E) a routing criteria data field for storing predefined routing criteria data;
- 10 F) a criterion data mask field for specifying which digits in the routing cri-
11 teria data field to consider when routing a call;
- 12 G) a logical data count field for specifying the number of sets of logical
13 data in the logical data field; and
- 14 H) the second field which is a logical data field for storing sets of logical
15 data which identify a call-termination channel group, said logical data
16 field may also specify other entries in the routing table.

1 14. The switching node of claim 13 wherein each criterion type is assigned a crite-
2 rion tag, the criterion tag is placed in the criterion type field in each entry with the
3 matching criterion data.

1 15. The switching node of claim 14 wherein each logical data field comprises one
2 or more sets of logical data and each logical data set comprises:

- 3 A) a logical tag which identifies the kind of data in the logical data set;
- 4 B) the length of the logical data in the set; and
- 5 C) the logical data itself.

1 16. The switching node of claim 15 wherein the router has a map of idle channels in
2 each call-termination channel group and the router selects an idle channel in the call-
3 termination channel group.

1 17. The switching node of claim 16 wherein the router sends a route request to a
2 router on another switching node if the call-termination channel group identified by the
3 logical data field is on the other switching node and the router on the other switching
4 node selects an idle channel in the call-termination channel group on the that switching
5 node.

1 18. The switching node of claim 17 wherein the router returns the address for the
2 destination channel to an object in a originating channel for the call and sends a mes-
3 sage to an object in the idle channel.

1 19. A method for routing calls in a communications network, the network compris-
2 ing at least one switching node, said switching node comprising (a) line cards with
3 multiple ports each of which has an associated channel and (b) a router that utilizes a
4 configurable routing table to route calls based on predefined routing criteria, said rout-
5 ing table including multiple entries each having multiple fields, a first field in each en-
6 try specifying one of a set of routing criteria, a second field in each entry specifying a
7 group of ports to which a call may be routed and/or one or more of the other entries
8 whose first fields are examined to determine whether call parameters match the criteria
9 in those fields, said method comprising the steps of:

- 10 A. receiving incoming data in the channel from the associated line card port;
- 11 B. sending the incoming data to the router;
- 12 C. selecting each entry in the routing table where a criterion tag is associated
13 with criterion type in the incoming data;
- 14 D. checking a criteria data field and a mask field in the selected entries to find
15 the most specific value that fits the criterion data in the incoming data;

- 16 -

- 16 E. selecting the entry that best matches the criterion data and checking a logic
17 data count field to determine the number of logical data sets in a logical data
18 field;
- 19 F. checking a tag in each logical data set to determine the group of ports to
20 which a call may be routed and/or one or more of the other entries whose
21 first fields are examined to determine whether call parameters match the
22 criteria in those fields.

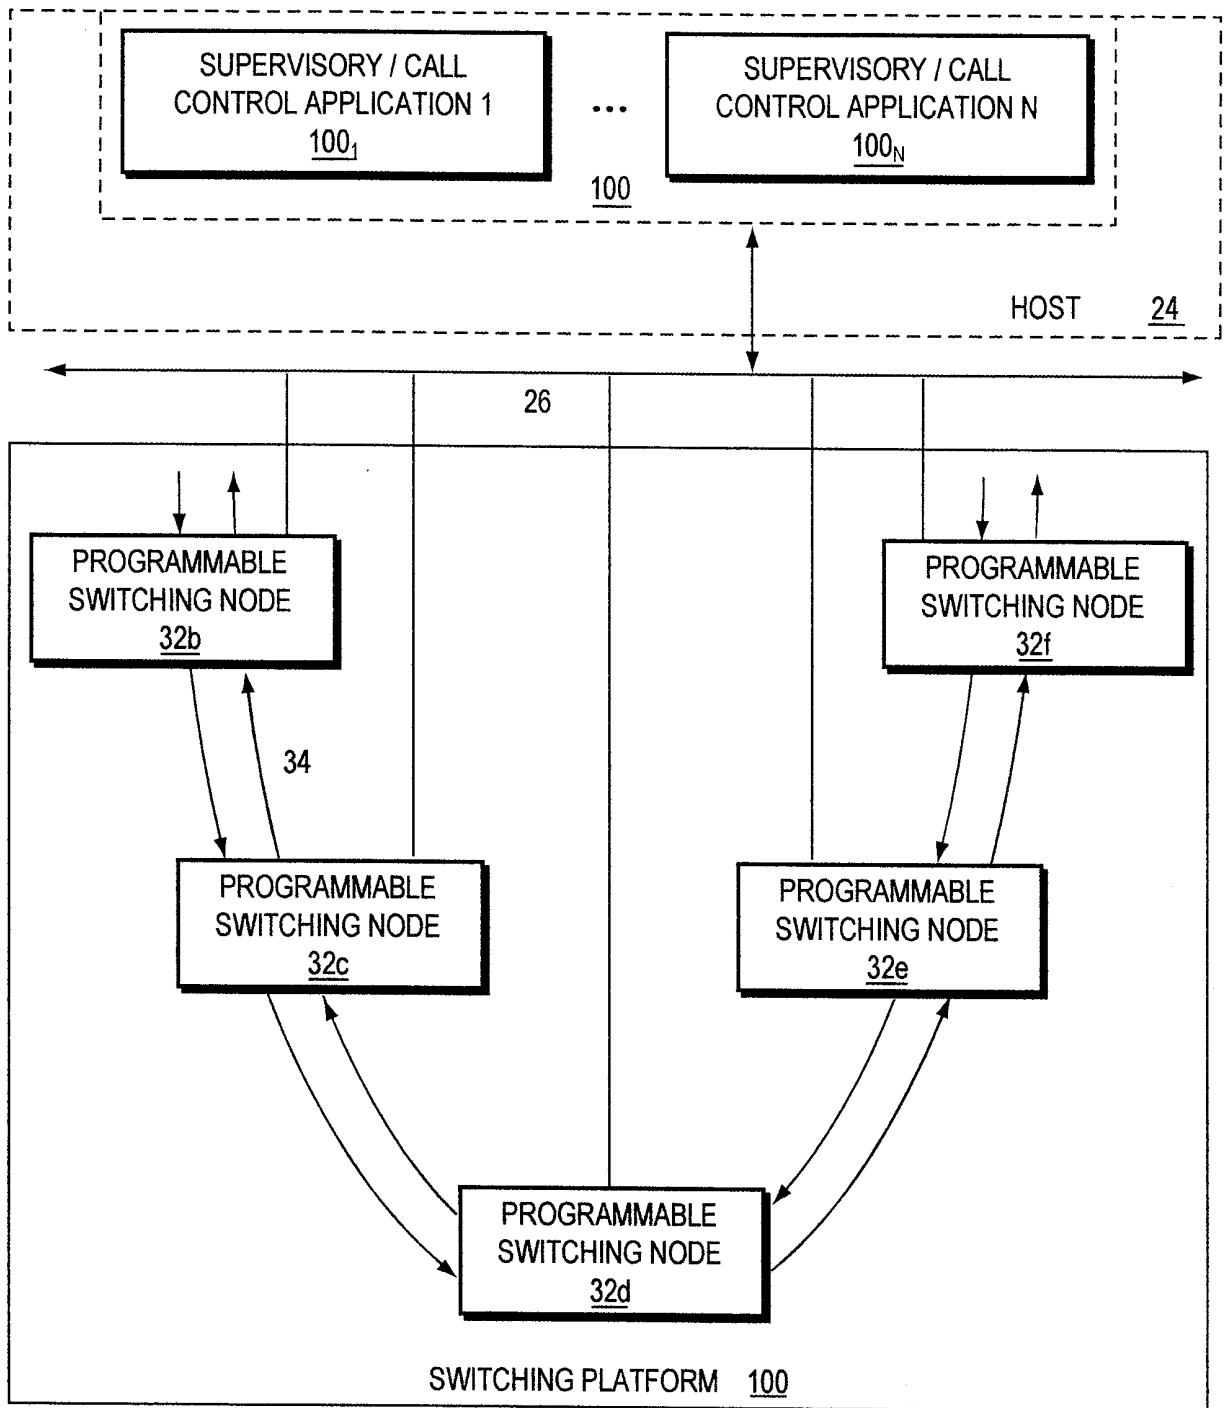


FIG. 1

ROUTE No	ROUTE PROPERTY	ROUTE GROUP	CRITERIA TYPE	CRITERIA DATA LENGTH	CRITERIA DATA	MASK	TLV COUNT	TLV DATA
<u>202</u>	<u>204</u>	<u>206</u>	<u>208</u>	<u>210</u>	<u>212</u>	<u>214</u>	<u>216</u>	<u>218</u>
1	1	2	61	14	8.6.2.3.3.2.7	255.255.255. 255.255.255. 255	1	15 01 101
2	1	1	61	14	8.6.2.3.0.0.0	255.255.255. 255.0.0.0	3	19 01 03 15 01 101 15 01 110
3	1	3	64	8	9.0.19.0	****	2	15 01 110 15 01 112
4	1	3	64	8	19.0.9.0	****	2	15 01 111 15 01 113
5	1	5	61	20	5.0.8.0.0.0.0.0. 0.0	255.255.255 0.0.0.0.0.0.0	4	19 01 03 19 01 04 19 01 02 15 01 107
6	1	4	67	2	10	*	1	15 01 106
...								
X								

ROUTING TABLE 201

ROUTER STATE MACHINE 203

ROUTER - 200

FIG. 2

3/6

CRITERIA TAG <u>302</u>	CRITERIA TYPE <u>304</u>
61	CALLED PARTY NUMBER
62	ANI DIGITS
63	CALL CATEGORY
64	TIME OF DAY
65	INCOMING CHANNEL OR SPAN
66	LEAST COST ROUTE
67	FASTEST GROUP
	...

FIG. 3

TAG <u>402</u>	LENGTH <u>404</u>	DATA <u>406</u>
15	01	101
19	01	03

FIG. 4

CRITERIA TAG <u>502</u>	CRITERIA TYPE <u>504</u>
0 x 15	RESOURCE GROUP ID
0 x 09	SPAN AND CHANNEL/NODE ADDRESS
0 x 19	ROUTE GROUP ID FOR ROUTE HUNTING
0 x 11	EMBEDDED LOGICAL DATA
0 x 0C	COUPLED MULTI CRITERIA
0 x 0d	COUPLED MULTI ROUTE GROUP ID
	...

FIG. 5

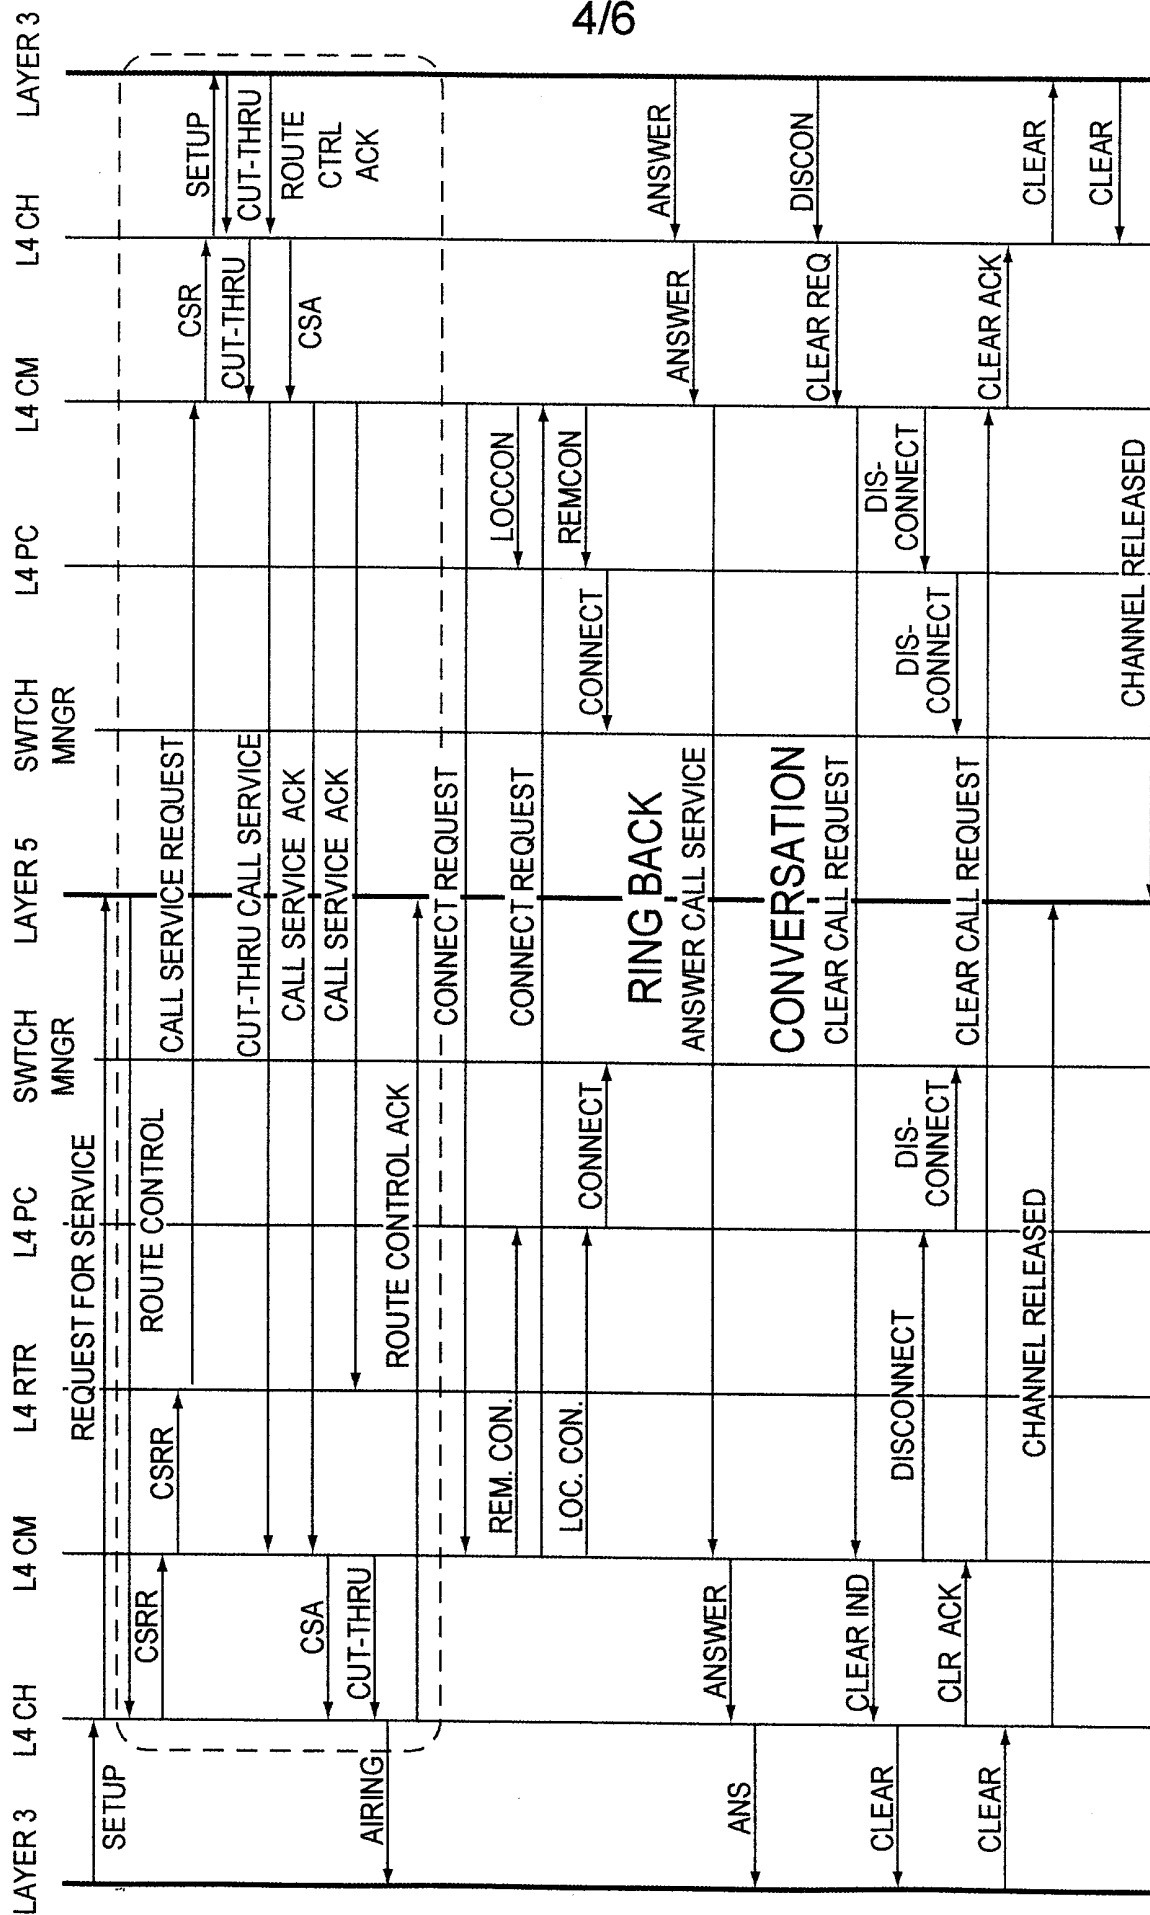


FIG. 6

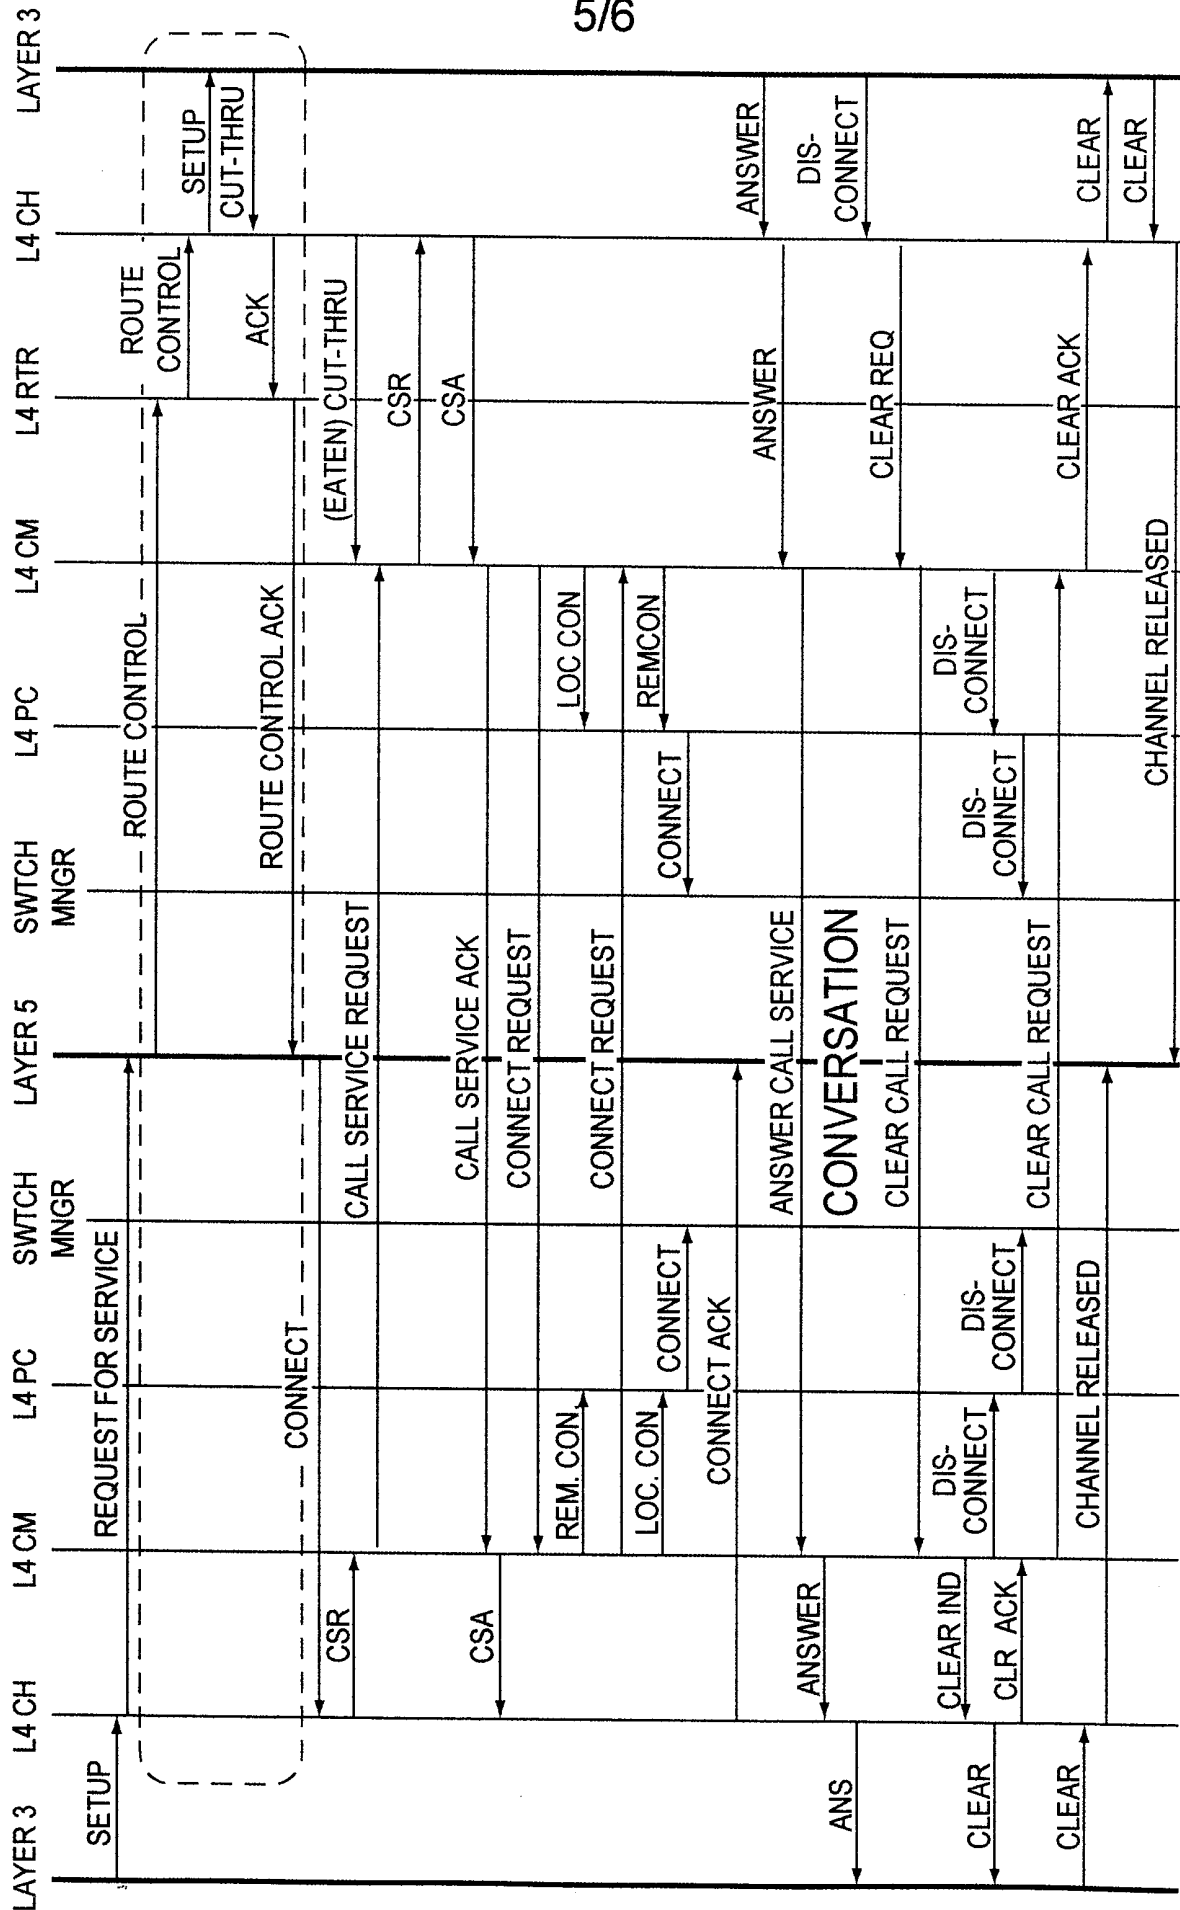


FIG. 7

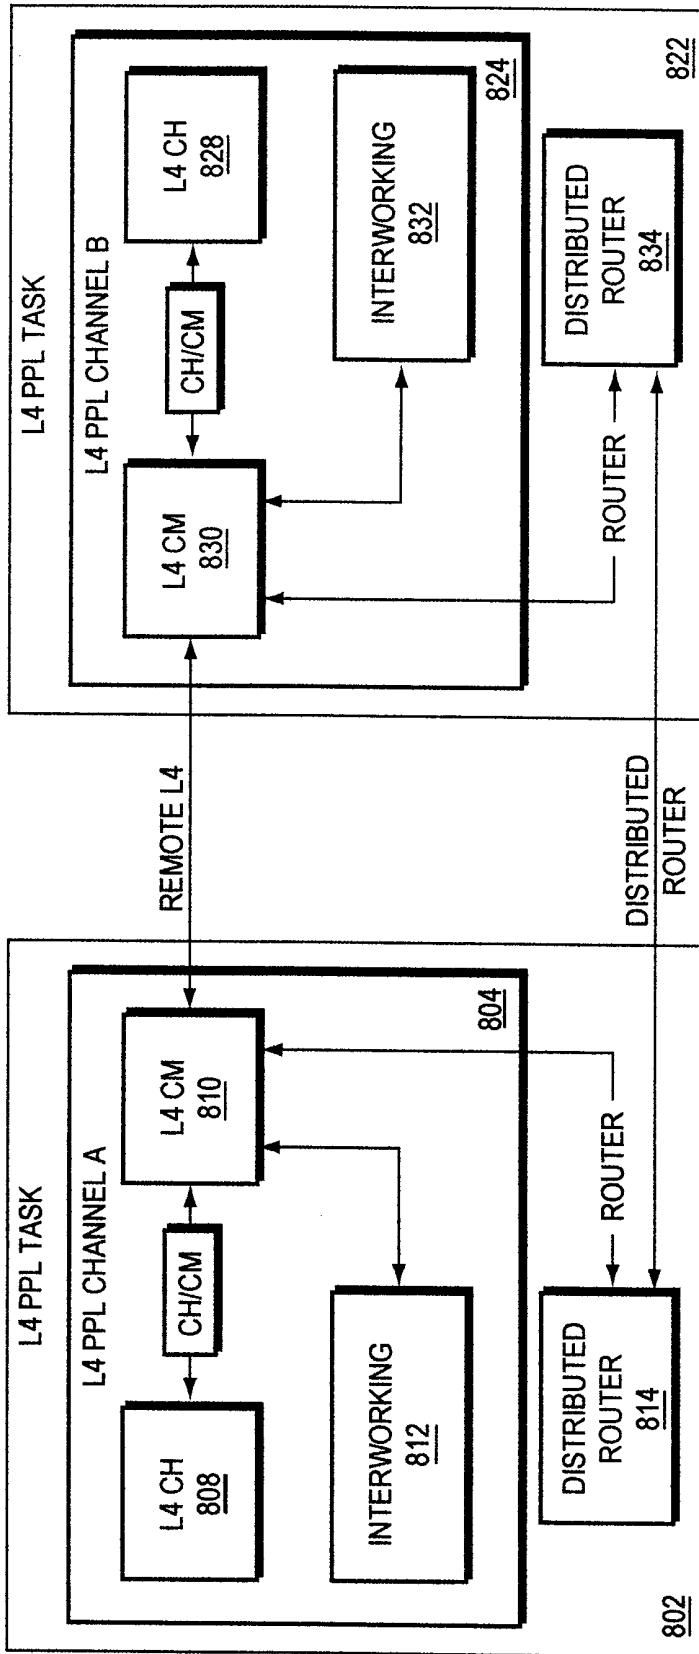


FIG. 8

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/12418

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 6 H04Q3/66 H04Q3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	W0 97 38536 A (DSC TELECOM L P) 16 October 1997 (1997-10-16) page 1, line 2 - line 5 page 4, line 5 - line 11 page 6, line 12 -page 7, line 19 page 20, line 4 -page 26, line 22 ---	1, 2, 11 3-10, 12-19
X A	US 5 694 463 A (CHRISTIE J M ET AL) 2 December 1997 (1997-12-02) column 1, line 7 - line 10 column 6, line 51 -column 9, line 39 ---	1, 2, 11 3-10, 12-19
	-/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

6 October 1999

Date of mailing of the international search report

14/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Vercauteren, S

INTERNATIONAL SEARCH REPORT

International Application No
 PCT/US 99/12418

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	WO 99 34619 A (ALCATEL USA SOURCING L P) 8 July 1999 (1999-07-08) the whole document ---	1-3, 11
A	FUJIOKA M ET AL: "UNIVERSAL SERVICE CREATION AND PROVISION ENVIRONMENT FOR INTELLIGENT NETWORK" IEEE COMMUNICATIONS MAGAZINE, vol. 29 (1991) January, no. 1, pages 44-51, XP000203320 ISSN: 0163-6804 paragraph "Overall Flow of Service Creation and Provision" -----	1-19

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/12418

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9738536 A	16-10-1997	US 5940487 A AU 2446097 A CN 1221539 A EP 0893033 A	17-08-1999 29-10-1997 30-06-1999 27-01-1999
US 5694463 A	02-12-1997	NONE	
WO 9934619 A	08-07-1999	NONE	