

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
3 October 2002 (03.10.2002)

PCT

(10) International Publication Number  
**WO 02/077349 A1**


- (51) International Patent Classification<sup>7</sup>: **D04H 13/00**
- (21) International Application Number: PCT/US02/00838
- (22) International Filing Date: 11 January 2002 (11.01.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/816,822 23 March 2001 (23.03.2001) US
- (71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (72) Inventor: **SETH, Jayshree**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (74) Agents: **BOND, William J.** et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: FLUID MANAGEMENT COMPOSITE

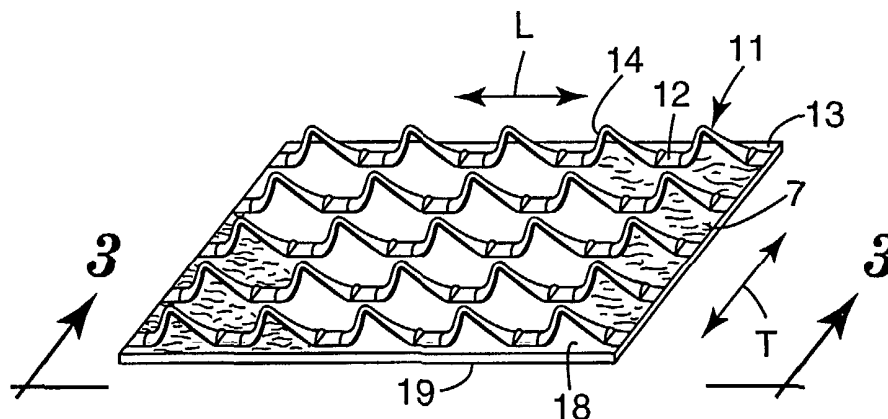

(57) Abstract: A composite fabric for use in dewatering high solids content fluid materials comprising a multiplicity of corrugated strands of compression resistant material, and one or more sheets of porous material bonded along its length at sheet bonding locations to the strands, some of which strands have arcuate portions projecting from the strands between those sheet bonding locations. The sheet-like composite may be incorporated where there is a need to dewater high solids content fluids such as in disposable garments such as diapers or training pants.

WO 02/077349 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## FLUID MANAGEMENT COMPOSITE

5

### Background of the Invention

The present invention relates to a liquid permeable fluid management nonwoven composite fabric for use in filtration, fluid transfer and absorption, for example, in disposable absorbent articles such as diapers, adult incontinence products, sanitary napkins and the like. The invention further relates to methods of producing such liquid permeable composite fabrics.

It is known, for example, in European Patent No. 963 747, that it is desirable to provide a fluid management member in a disposable absorbent article which is able to collect and retain low viscosity, high solid materials such as fecal matter, while still permitting passage of liquids such as urine. In order to manage low viscosity fecal matter the patent document proposes a structure where a fluid permeable support has a plurality of fibers woven into the support, which fibers project outwardly from the support. The support is described variously as nonwoven webs, breathable films, microporous films, apertured nonwoven webs and the like. The fibers woven into the supporting member extend generally greater than 1 mm above the support member, preferably higher. The individual fibers are preferably from 15 to 30 denier and are woven in regular intervals into arc-like forms. The woven fibers provide the laminate composite structure with a compression resistance of at least 30% under an applied pressure of about 1,000 newtons per cm<sup>2</sup>, most preferably, at least 50% under this applied pressure. Also the materials are able to resume its shape after being subjected to this type of pressure after about 30 seconds to recover by at least 50 to 85%. The fluid management member is provided to minimize the amount of low viscosity fecal material on the skin of the wearer, preventing movement of the fecal material and also separating the fecal material into its solid and liquid components allowing the liquid components to be transported to the underlying absorbent structure.

A similar-like structure is described in U.S. Patent No. 5,705,249. In this patent, the composite material described includes a nonwoven onto which filaments having a diameter of 0.05 to 5 mm are deposited. The filaments can be preformed or directly

extruded onto the nonwoven. Following this, the filaments are intermittently bonded to the nonwoven resulting in bulges, which are created by elastic deformation of the large diameter filaments where they are not bonded. These filaments separate the nonwoven fabric from the wearer's skin. However no discussion of fecal management is described relative to this material. This material is designed solely to increase the comfort of the wearer by separating a liquid absorbent layer or fluid transport nonwoven from the wearer's skin.

U.S. Patent No. 5,976,665 describes another approach to address the problems faced by the above 5,705,249 patent. A nonwoven fluid transport layer or absorbent is separated from a wearer's skin by attaching a corrugated perforated film or nonwoven. The corrugated material is formed into a series of wave-crests and wave-troughs. The wave-crests contact the wearer's skin and reduce the perceived wetness of the article. However in this patent the wave-like structure is also stated as useful in handling the solid discharges in a diaper or menstrual discharges in a sanitary appliance by trapping the solids in the wave-troughs. The corrugated layer is corrugated between the annealing surfaces of two mutually engaging corrugating cylinders and for example, thermally bonded to the underlying layer.

It is also known in the filtration area to provide netting or like material prior to a porous filter for dewatering high solid content materials. Such an approach is described in U.S. Patent No. 5,776,567, where a multilayer laminate of flexible filter material is separate by polymeric netting that serves as a dewatering layer for high solids content material. The filter and nesting materials are simply laid up against one another and placed in a framing device.

European Patent No. 976 375 describes a fecal management member where the material structure is similar to that described in the 5,976,665 patent above. A sheet of fibers, preferably a nonwoven web, is corrugated and attached to an additional liquid permeable web. For example, a nonwoven sheet of fibers is fed between the enmeshed engaging portions of the mating corrugating members and joined to a second nonwoven web by thermally bonding the corrugated nonwoven. Additional fibers are deposit on top of the corrugated web.

Although these various designs for fecal and fluid management members are advantageous, there remains a need for methods and materials that can do at least one, or

more, of directly producing a fluid management member which is flexible, allows for good bonding between the separation member and the fluid transport member, creates a low outer surface contact area and/or can function effectively to separate high solids materials from liquids.

5

#### Disclosure of the Invention

The present invention provides improved fluid management composites and their method of manufacture comprising a multiplicity of corrugated strands of resilient material and one or more sheets of porous material intermittently bonded to the corrugated strands. The corrugated strands have arcuate portions projecting from the porous material between portions of the strands that are bonded to the porous material. These corrugated strands are resistant to compression. These fluid management composites provides advantages when used in disposable garments such as diapers, training pants, adult incontinence briefs or sanitary napkin products or for dewatering high solid content fluids.

10

The present invention also provides novel methods for making the fluid management composites. The fluid management composites are well constructed for their intended end uses and yet simple and inexpensive to manufacture. The method is also flexible affording versatility in selecting characteristics of the fluid management composites to be produced without major modifications of the equipment.

15

According to the present invention there is provided a method for forming a fluid management composite which comprises (1) providing at least a sheet of porous material (e.g., a perforated polymeric film, or a sheet of woven natural or polymeric fibers, or a coherent nonwoven web of natural or polymeric fibers); (2) extruding spaced generally parallel elongate strands of molten thermoplastic material that are resilient when cooled (e.g., polyolefins); (3) forming the extruded strands to have arcuate portions projecting in the same direction from spaced anchor portions of the extruded strands; and (4) attaching the anchor portions of the extruded strands to form a porous laminate material with the arcuate portions of the extruded strands projecting outward from the porous material.

20

By this method there is provided a novel fluid management composite comprising a multiplicity of corrugated strands of resilient thermoplastic material extending in a generally parallel spaced relationship. The corrugated strands have anchor portions bonded

25

30

at first strand bonding locations to longitudinally spaced sections of the porous material. The strands have arcuate portions projecting between the strand bonding locations.

Extruding the strands between opposing corrugating members generally causes the strands to flatten and form into corrugations having arcuate portions. The spaced apart anchor portions when joined to the porous material at the bonding locations are flattened further or indented along the parts of the strand's surfaces that are closely adjacent the anchor portions. The solidified strands generally have uniform morphology along their lengths, however the bonding locations can see a different thermal history and have a slightly different morphology. The strands can be pressed against the surfaces of the porous material at the bonding locations of the anchor portion so that the strands have a greater width between the opposite elongate side surface portions of the strands along the bonding locations than between the bonding locations to provide very firm attachment between the porous material and the strands.

In the method described above for forming a fluid management composite the forming step can comprise the steps (which can be performed in any order and may omit some steps) of (1) providing first and second generally cylindrical corrugating members each having an axis and including a multiplicity of spaced ridges defining the periphery of the corrugating member, the ridges having outer surfaces and defining spaces between the ridges adapted to receive portions of the ridges of the other corrugating member in meshing relationship with the multiple strand material therebetween; (2) mounting the corrugating members in axially parallel relationship with portions of the ridges in meshing relationship; (3) rotating at least one of the corrugating members; (4) extruding the multiple strand material onto at least one corrugating member so that the strands are fed between the meshed portions of the ridges to generally conform the strand material to the periphery of a first corrugating member to form the arcuate portions of the strand material in the spaces between the ridges of the first corrugating member and the anchor portions of the strand material along the outer surfaces of the ridges of the first corrugating member; and (5) retaining the formed strand material along the periphery of one of the first corrugating members for a predetermined distance after movement past the meshing portions of the ridges. The extruding step includes providing an extruder that, through a die with spaced openings, extrudes the spaced strands of molten thermoplastic material along the periphery of a first corrugating member within the predetermined distance. This

method allows the diameter of the strands to be easily varied by either changing the pressure in the extruder by which the strands are extruded (e.g., by changing the extruder screw speed or type) and/or by changing the speed at which the first corrugating member, is moved (i.e., for a given rate of output from the extruder, increasing the speed the

5 corrugating member is moved will decrease the diameter of the strands, whereas decreasing the speed at which the corrugating member is moved will increase the diameter of the strands). Also, the die through which the extruder extrudes the thermoplastic material can have an easily changeable die plate in which are formed a row of spaced openings through which the strands of molten thermoplastic material are extruded. Such

10 die plates with openings of different diameters and different spacings can relatively easily be formed by electrical discharge machining or other known methods to afford different spacings and diameters for the strands. Varied spacing and/or diameters for the openings along the length of the row of openings in one die plate can be used, for example, to produce a fluid management composite which will have greater or less compression

15 resistance as may be required for a given end use. Different effects can be achieved by shaping and or modifying the die to form hollow strands, strands with shapes other than round (e.g., square or cross-shaped) or bi- or multi-component strands.

As indicated above, the fluid management composite according to the present invention can further include a second set of strand material having anchor portions

20 thermally bonded at second sheet bonding locations to longitudinally spaced portion of the porous material along corresponding second elongate surface portions thereof, and having arcuate portions projecting from the second elongate surface portions of the elastic strands between the second sheet bonding locations.

Using the method described above, such a second set of strand material can be

25 provided in the fluid management composite in at least two different ways. One way is to form the second set of strand material to have arcuate portions projecting in the same direction from spaced anchor portions of the second set of strand material; and positioning the spaced anchor portions of the second set of strand material in closely spaced opposition to the spaced anchor portions of the first set of strand material with the arcuate

30 portions of the first and second set of strand material projecting in opposite directions so that the porous material is fed between the anchor portions of both the first and second sets of strand material to bond simultaneously to the anchor portions of both the first and

second sets of strand material. Another way is to provide a second set of strand material after the first set of strand material is bonded to the porous material and bond the second set of strand material to at least some of the spaced apart bond portion of the porous material.

5           The porous material in the fluid management composite can be any porous material that would allow the passage of fluid into the porous material and optional into and through the porous material. The porous material could be a (1) polymeric perforated film (e.g., polypropylene, polyethylene or polyester); (2) conventional woven, knitted, stitch bonded or like fibrous material; (3) nonwoven fibrous materials or laminates of a  
10 porous material to a second needle punched porous material or nonporous material. The nonwoven fibrous material can be stabilized by bonding or entangling the fibers each to the other such by hydroentangling, spunbonding, thermal bonding or bonding by various types of chemical bonding such as latex bonding, powder bonding, etc. Alternatively the fibers could be bonded externally to a second sheet material that has at least some  
15 mechanical stability. The fibers can be formed of any suitable polymer or other fiber forming materials such as of polypropylene, polyethylene, polyester, nylon, cellulose, superabsorbent fibers or polyamides Also bi- or multi- component fibers can be used, for example, a core of polyester and a sheath of polypropylene can be used which provides relatively high strength due to its core material and is easily bonded due to its sheath  
20 material. The fibers can also be mixed or blended with particles or other fibers of different materials or material combinations.

          The fluid management composite can be conveniently included in a disposable garment (e.g., a disposable diaper or training pants, adult incontinence brief or sanitary napkin product) at a location where there is encountered fluid discharge. The fluid  
25 management composite can be adhered to an external surface or placed in a structure between a fluid transport cover layer and a further layer such as an absorbent layer.

#### Brief Description of the Drawings

          The present invention will be further described with reference to the accompanying  
30 drawing wherein like reference numerals refer to like parts in the several views, and wherein:

FIG. 1 is a schematic view illustrating a first embodiment of a method and equipment according to the present invention for making a first embodiment of a fluid management composite according to the present invention;

FIG. 2 is a perspective view of an embodiment of the fluid management composite according to the present invention made by the method and equipment illustrated in FIG. 1 and 5;

FIG. 3 is a fragmentary enlarged sectional view taken approximately along line 3A--3A of FIG. 2;

FIG. 4 is a fragmentary enlarged top view of FIG. 2;

FIG. 5 is a schematic view illustrating a second embodiment of a method and equipment according to the present invention for making a second embodiment of a fluid management composite according to the present invention;

#### Detailed Description of the Invention

Referring now to FIG. 1 of the drawing, there is schematically illustrated a first embodiment of a method and equipment according to the present invention for making a first embodiment of a fluid management composite 11 according to the present invention which is illustrated in FIGS. 2 and 3.

Generally the method illustrated in FIG. 1 involves providing a sheet of porous material 7; extruding spaced generally parallel elongate strands 13 of molten thermoplastic material on a first rotating corrugating roll 4 forming the plurality of extruded strands 11 to have arcuate portions 14 projecting in the same direction from spaced anchor portions 13 of the plurality strand material; thermally bonding the anchor portions 13 of strand material to the porous material with the arcuate portions 14 of the strand material projecting from corresponding elongate side surface portions of the porous material 7.

As illustrated in FIG. 1, the equipment for performing the method includes first and second generally cylindrical corrugating members 4 and 5 each having an axis and including a multiplicity of spaced ridges 9 defining the periphery of the corrugating member 4 or 5, the ridges 9 having outer surfaces and defining spaces between the ridges adapted to receive portions of the ridges 9 of the other corrugating member in meshing relationship with the strand material 3 therebetween; means for mounting the corrugating members 4 and 5 in axially parallel relationship with portions of the ridges 9 in meshing

relationship; means for rotating at least one of the corrugating members 4 or 5 so that when the strand material 3 is fed between the meshed portions of the ridges 9 the strand material will generally conform to the periphery of one of the corrugating members 4 or 5 to form arcuate portions 14 of the strand material in the spaces between the ridges 9 of a corrugating member 4 or 5 and to form anchor portions 13 of the strand material along the outer surfaces of the ridges 9 of a first corrugating member 4 or 5; optionally means (e.g., including a surface of a corrugating member 4 or 5 being roughened by being sand blasted or chemically etched or being heated to a temperature generally in the range of 25 to 150 Fahrenheit degrees above the temperature of the first sheet 12 of flexible material) for retaining the strand material along the periphery of a corrugating member 4 or 5 for a predetermined distance after movement past the meshing portions of the ridges 9; means in the form of an extruder feeding a die with a changeable die plate 2 (see FIG. 1) with spaced through openings for extruding thermoplastic material to form a multiplicity of generally parallel elongate molten strands 13 of the thermoplastic material extending in generally parallel spaced relationship and for positioning the molten strands 13 along the periphery of a corrugating member 4 within the predetermined distance. Also, that equipment further includes a feed means such as roll 10 for feeding the porous material to a nip between the generally cylindrical bonding roll 6 having an axis and the corrugation member 5 carrying the strands 3; means for rotatably mounting the bonding roll 6 in axially parallel relationship with the corrugating members 4 and 5 with the periphery of the bonding roll 6 closely spaced from and defining a nip with the periphery of the corrugating member 5 at a predetermined distance from the meshing portions of the ridges 9; optionally the bonding roll and/or the corrugating roll can be supplied with heating means to assist in bonding the strands to the porous material 7; and means including a nipping roller 25 for moving the sheet-like composite 10 for a predetermined distance around the periphery of the cooling roll 24 past the nip with the strands 16 in contact with the cooling roll 24 to cool and solidify the strands 16.

The structure of the sheet-like composite 10 made by the method and equipment illustrated in FIG. 1 is best seen in FIGS. 2, 3 and 4. The fluid management composite 11 comprises the multiplicity of generally parallel elongate strands 3 of thermoplastic material extending in generally parallel spaced relationship. Each of the strands 3 is generally a flattened cylindrical or oval-like shape that is spaced from and is adjacent

another strand. The spaced anchor portions 13 of the strand are thermally bonded at strand bonding locations 12 to longitudinally spaced sections of the porous material 7 along its first surface 18, and the arcuate portions 14 of the strand material project from the first surface 18 of the porous material 7 between the strand bonding locations 12. The first strand bonding 17 locations are spaced about at predetermined distances from each other and aligned in generally parallel rows extending transverse to the strands 3 to form continuous rows of the arcuate portions 14 projecting at a predetermined first distance from the first surface 18 of the porous material. Because the strands 13 have been extruded in molten form the anchor portions 13 of the strand material can generally be pressed onto the first surface 18 of the porous material the ridges 9 on the corrugating member 5 and the periphery of the bonding roll 6, in which case the still mobile thermoplastic polymer strands 16 form around and are indented by the ridges 9. The bonds between the strand 3 anchor portions 13 and the porous material 7 at the first strand bonding locations extend along the entire part of the strand's surfaces that are closely adjacent the ridges 9. As is illustrated in FIG. 4, those parts of the strand's surfaces that are closely adjacent the ridge 9 are widened along the surfaces of the anchor portions 13 by indentations of the strands 16 by the ridges 9. Thus the areas of bonding between the strands 3 and the porous material can advantageously be made wider at the strand bonding locations to increase bond levels.

Alternative structures that could be provided for the fluid management composite include spacing the ridges 9 around the corrugating members 4 and 5 to produce repetitive patterns of different spacings between the anchor portions 13 of the strands 3, thereby causing the continuous rows of the arcuate portions 14 to project at different distances from the first surface 18 of the porous material 7.

FIG. 5 illustrates a second embodiment of a method and equipment according to the present invention for making a second embodiment of a fluid management composite 31 according to the present invention, which is generally identical in structure to the fluid management composite shown in FIGS. 2-4. The method illustrated in FIG. 5 is somewhat similar and uses much of the same equipment as is illustrated in FIG. 1, and similar portions of that equipment and product have been given the same reference numerals and perform the same functions as they do in the equipment illustrated in FIG. 1. In addition to the general method steps described above with reference to FIG. 1, the

method illustrated in FIG. 5 further generally includes the step of directly extruding the strand material 3 into the nip formed by corrugating members 4 and 5. This decreases the distance from the extruder to the bonding roll 6 reducing or eliminating the need for additional heat to be supplied to bonding roll 6 and/or corrugating member 5. However, additional heat can of course be supplied if needed to increase the bond level to a desired level. The structure of the fluid management composite 3 made by the method and equipment illustrated in FIG. 5 is identical to that seen in FIGS. 2-4.

The fluid management composite fabric is used primarily in dewatering high solids content fluid materials in low flow conditions. The product is also generally disposable where the basis weight of the porous media and the fiber denier of the filaments or strands are low to enhance bondability at low heat bonding levels. These conditions are found often in personal hygiene products such as incontinence products, baby diapers or menstrual pads. Low flow high solids content conditions are also possible in fluid filtration such as pool drain filters, medical filters or the like.

The porous backing layer is preferably a nonwoven fibrous web formed of thermoplastic fibers such as a bonded carded web, a spunlace fabric, a melt blown web, a spun bond web, a needletacked nonwoven or the like. Generally the porous backing and preferably the nonwoven fibrous web has a basis weight of from 10 to 200 g/m<sup>2</sup>, preferably from 20 to 100 g/m<sup>2</sup>. At higher basis weights the web can become difficult to bond to the corrugated strands and provides lower fluid passthrough. At lower basis weights the web becomes difficult to handle and unstable in its final use form. However additional porous support webs can be used if desired and joined to the porous backing layer.

The filaments or strands generally are any resilient thermoplastic material capable of being extruded, such as polyesters, polyamides or polyolefins with polyolefin such as polyethylenes or polypropylene polymers (including copolymers or blends) being preferred.

The filaments can also be multi-component filaments such as sheath core filaments where the sheath layers have a melting or softening point less than the core layer material. This can aid in bonding difficult to bond or incompatible strand or filament material. Preferably the filament is formed at least in part of a polymer having a softening point less than the softening point of the fiber forming the porous backing layer. The composite

fabric in a preferred embodiment is one where the filament is a polyolefin fiber and the back layer is a polyolefin.

The parallel longitudinally oriented thermoplastic filaments are bonded to the fibrous backing layer at spaced apart bonding locations along the lengths of the filaments where the filament form compression resistant arcuate portions between the bonding locations. The arcuate portion of the filaments will generally have a height from the front surface of the backing layer of greater than 0.2 mm but less than 4 mm, preferably from 0.5 mm to 3 mm. The filaments generally will have a diameter of from 10 mil to 100 mil, preferably from 10 mil to 50 mil. The web should be compression resistant such that it retains at least 50% of its initial caliper under a load of one pound per square inch.

### Examples

#### Example 1

A nonwoven filter sheet composite similar to the sheet-like composite 17 illustrated in FIG. 2 was made using equipment similar to that illustrated in FIG. 1. A thermoplastic ethylene-propylene impact copolymer (8 MFI) commercially available under the designation 7C50 from the Union Carbide Corporation of Danbury, Connecticut was placed in a 51 mm single screw extruder to form the filaments 3. About 4.7 filaments per centimeter of the 7C50 copolymer were extruded at a melt temperature of about 238° C through 0.76 mm orifices at 17 RPM onto an upper corrugating roll 4. The upper corrugating roll was machined to have 4 axially parallel ridges per centimeter located completely around the periphery of the roll with a groove between each ridge. Each ridge was machined to have a flat top-surface having a width of about 0.7 mm. The upper corrugating roll was at about 88° C. The partially cooled strands were then corrugated in a nip formed by the upper corrugating roll and a lower corrugating roll 5. The lower corrugating roll (113° C) was machined with the same ridge and groove geometry as the upper corrugating roll and was in meshing relationship with the upper roll. A nip pressure of 100 pounds per lineal inch was used with a line speed of about 7.6 meters per minute. The corrugated strands were then bonded to a 30 gram per square meter spunbonded type polypropylene nonwoven 7 (available from Amoco Fabrics and Fibers Company of Atlanta, Georgia, under the designation 'RFX') in a nip formed by the lower corrugating roll 5 and a smooth metal chill roll 6. The chill roll was maintained at about 150° C. A nip

pressure of 300 pounds per lineal inch was used to bond the strands to the nonwoven. The resulting nonwoven filter sheet composite had a basis weight of 58 grams per square meter with arcuate strand portions 11 of about 15mm in height projecting from the nonwoven sheet 13. The composite had a compression resistance of 93% measured as a ratio of  
5 initial caliper and caliper under a load of one pound per square inch.

We Claim:

1. A composite fabric comprising:
  - (a) a porous backing layer; and
  - 5 (b) a plurality of mutually parallel thermoplastic filaments extending in a first direction bonded to the porous backing layer at spaced apart bonding locations along the lengths of the filaments where the filaments form compression resistant arcuate portions between the bonding locations.
- 10 2. The composite fabric of claim 1 wherein the porous backing layer is a nonwoven fibrous web formed of thermoplastic fibers.
3. The composite fabric of claim 2 wherein the fibrous backing layer is a bonded carded web.
- 15 4. The composite fabric of claim 2 wherein the nonwoven fibrous web has a basis weight of from 10 to 20 g/m<sup>2</sup>.
5. The composite fabric of claim 2 wherein the nonwoven fibrous web has a  
20 basis weight of from 20 to 100 g/m<sup>2</sup>.
6. The composite fabric of claim 2 wherein the arcuate portions of the filaments have a height from the front surface of the backing layer of greater than 0.2 mm.
- 25 7. The composite fabric of claim 6 wherein the arcuate portions of the filaments have a height from the front surface of the backing layer of less than 4.0 mm.
8. The composite fabric of claim 6 wherein the filaments diameter is from 10 to 100 mils.
- 30 9. The composite fabric of claim 6 wherein the filaments diameter is from 10 to 50 mils.

10. The composite fabric of claim 8 wherein the filaments are homogeneous polymers or polymer blends.

5 11. The composite fabric of claim 8 wherein the filaments are multi-component filaments.

12. The composite fabric of claim 11 wherein the filaments are sheath core filaments.

10

13. The composite fabric of claim 12 wherein the multicomponent filaments have sheath layers have a melting or softening point less than the core layer material.


14. The composite fabric of claim 8 wherein the filament is formed at least in part of a polymer having a softening point less than the softening point of the fiber forming the backing layer.

15


15. The composite fabric of claim 14 wherein the filament is a polyolefin fiber and the backing layer is a polyolefin.

20


16. The composite fabric of claim 8 wherein the filaments have a compression resistance such that it retains at least 50% of its initial caliper under a load of at least one pound per square inch.

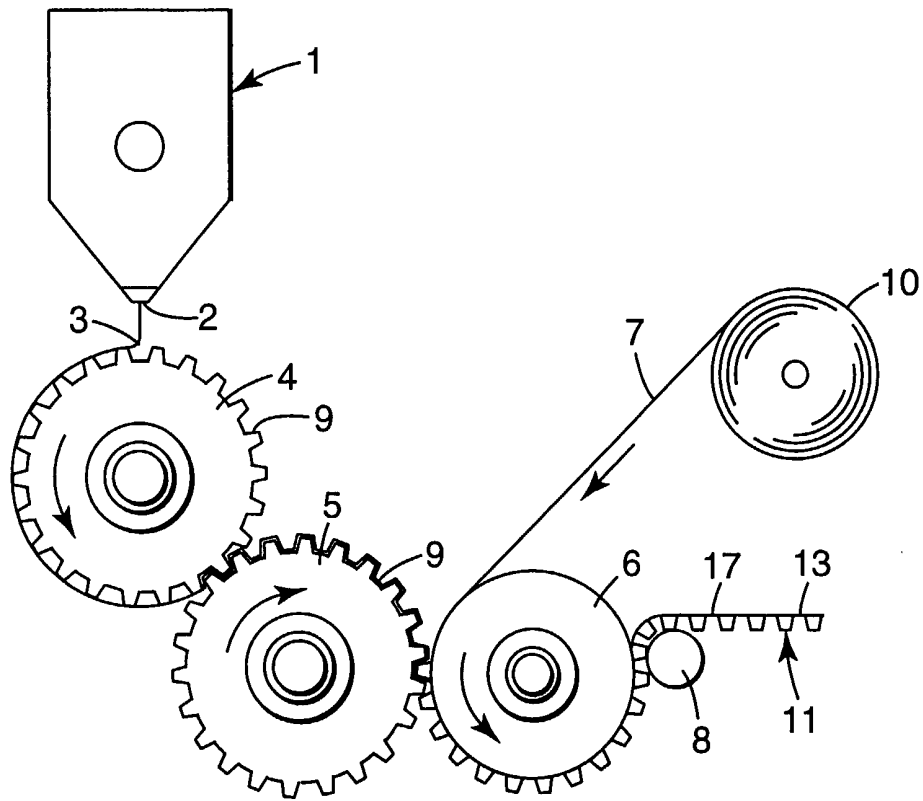


**Fig. 1**

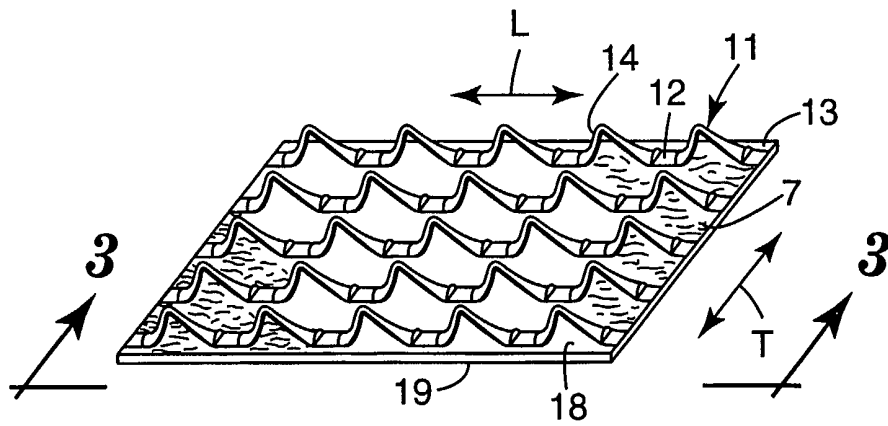


**Fig. 2**

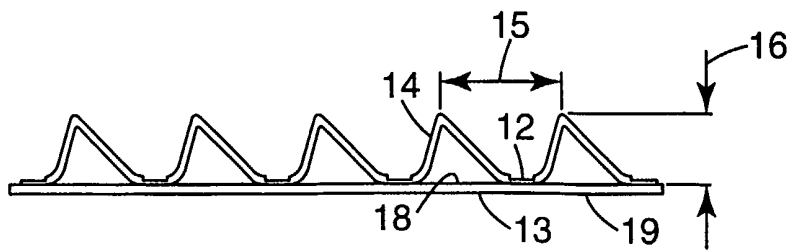

**Fig. 3**

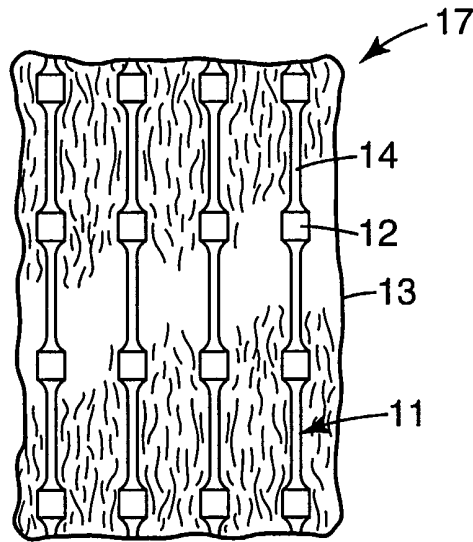

**Fig. 4**

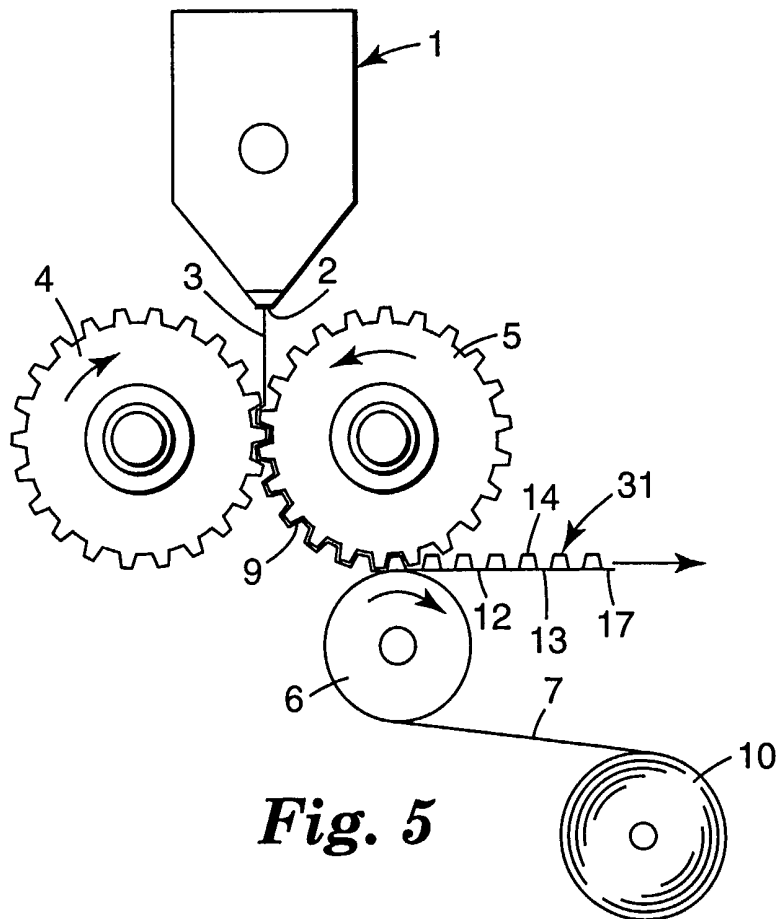

**Fig. 5**

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 02/00838

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 D04H13/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 D04H B32B A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	EP 1 138 471 A (UNI CHARM CORP) 4 October 2001 (2001-10-04) column 2, line 49 -column 4, line 48 ---	1-10, 15
X	EP 0 882 828 A (COROVIN GMBH) 9 December 1998 (1998-12-09) column 2, line 29 -column 3, line 54 ---	1-10
A	EP 0 341 993 A (MINNESOTA MINING & MFG) 15 November 1989 (1989-11-15) page 4, line 37 - line 56 ---	15
X	EP 0 341 993 A (MINNESOTA MINING & MFG) 15 November 1989 (1989-11-15) page 4, line 37 - line 56 ---	1, 2, 6-10, 15
A	EP 0 341 993 A (MINNESOTA MINING & MFG) 15 November 1989 (1989-11-15) page 4, line 37 - line 56 ---	3, 5
X	US 5 705 249 A (TAKAI HISASHI ET AL) 6 January 1998 (1998-01-06) cited in the application column 2, line 45 -column 4, line 9 --- -/--	1-10

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\* & \* document member of the same patent family

Date of the actual completion of the international search

2 September 2002

Date of mailing of the international search report

12/09/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

V Beurden-Hopkins, S

## INTERNATIONAL SEARCH REPORT

Original Application No  
PCT/US 02/00838

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 963 747 A (PROCTER & GAMBLE) 15 December 1999 (1999-12-15) cited in the application column 6, line 9 -column 7, line 36 -----	1

## INTERNATIONAL SEARCH REPORT

 International Application No  
 PCT/US 02/00838

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1138471	A	04-10-2001	JP 2001270018 A	02-10-2001
			AU 2641701 A	04-10-2001
			BR 0101271 A	06-11-2001
			CN 1320415 A	07-11-2001
			EP 1138471 A1	04-10-2001
			US 2001044250 A1	22-11-2001
-----				
EP 0882828	A	09-12-1998	DE 19722748 A1	03-12-1998
			EP 0882828 A1	09-12-1998
-----				
EP 0341993	A	15-11-1989	AU 622171 B2	02-04-1992
			AU 3378389 A	16-11-1989
			BR 8902225 A	02-01-1990
			CA 1333952 A1	17-01-1995
			DE 68908468 D1	23-09-1993
			DE 68908468 T2	03-03-1994
			EP 0341993 A1	15-11-1989
			ES 2043010 T3	16-12-1993
			IL 90159 A	08-07-1993
			JP 2018036 A	22-01-1990
			JP 2896159 B2	31-05-1999
			KR 9613457 B1	05-10-1996
			MX 173200 B	08-02-1994
			US 5354591 A	11-10-1994
			US 5616394 A	01-04-1997
			US 5643397 A	01-07-1997
			US 5256231 A	26-10-1993
			US 5611791 A	18-03-1997
			US 5254194 A	19-10-1993
			ZA 8903577 A	30-01-1991
-----				
US 5705249	A	06-01-1998	JP 3012475 B2	21-02-2000
			JP 8196568 A	06-08-1996
			AU 704330 B2	22-04-1999
			AU 4201796 A	01-08-1996
			KR 124762 Y1	15-09-1998
-----				
EP 0963747	A	15-12-1999	EP 0963747 A1	15-12-1999
			AU 3842399 A	20-12-1999
			EP 1089692 A1	11-04-2001
			WO 9962446 A1	09-12-1999
			JP 2002516715 T	11-06-2002