



(51) International Patent Classification:

B60C 11/00 (2006.01) B60C 7/10 (2006.01)

(21) International Application Number:

PCT/US2020/012150

(22) International Filing Date:

03 January 2020 (03.01.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/788,681 04 January 2019 (04.01.2019) US

(71) Applicant: **BRIDGESTONE AMERICAS TIRE OPERATIONS, LLC** [US/US]; 200 4th Avenue, South, Nashville, Tennessee 37201 (US).

(72) Inventors: **NESBITT, Adam K.**; 200 4th Avenue South, Nashville, Tennessee 37201 (US). **GRIEBEL, Jared James**; 4309 Brainard Road, Orange Village, Ohio 44022 (US). **NELSON, Brandon Paul**; 5455 Serra Vista Court, Stow, Ohio 44224 (US). **RIMAI, Benjamin Emanuel**; 4177 Meadowcreek Lane, Copley, Ohio 44231 (US).

PLOTNER, Bradley Steven; 2989 Villa Glen Circle NW, Canton, Ohio 44708 (US).

(74) Agent: **FOX, Shaun J.** et al.; 10 East Firestone Blvd., Akron, Ohio 44317 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: TIRE TREAD WITH A BAND LAYER

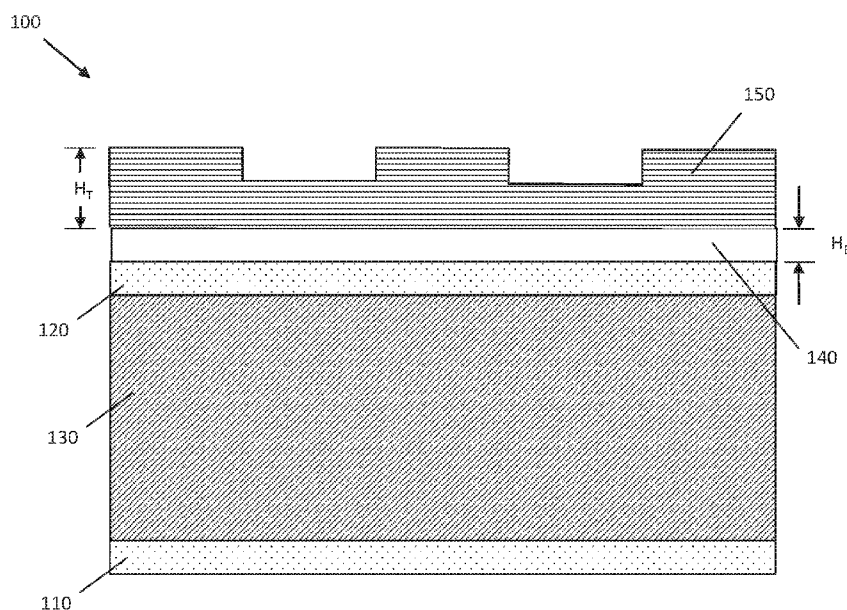


Fig. 3

(57) Abstract: A non-pneumatic tire includes an inner ring having an axis of rotation and an outer ring coaxial with the inner ring. The non-pneumatic tire further includes support structure extending from the inner ring to the outer ring and a circumferential tread extending about the outer ring. The circumferential tread includes a band layer constructed of a single material and a tread rubber layer directly attached to the band layer.

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *with amended claims (Art. 19(1))*

TIRE TREAD WITH A BAND LAYER

FIELD OF INVENTION

[0001] The present disclosure relates to a tire tread, and a method of making the same. More particularly, the present disclosure relates to a tire tread with a band layer attached to a tread rubber layer, and a method of making the same.

BACKGROUND

[0002] Various tire constructions have been developed which enable a tire to run in an uninflated or underinflated condition. Non-pneumatic tires do not require inflation, while “run flat tires” may continue to operate after receiving a puncture and a complete or partial loss of pressurized air, for extended periods of time and at relatively high speeds. Non-pneumatic tires may include a plurality of spokes, a webbing, or other support structure that connects an inner ring to an outer ring. In some non-pneumatic tires, a circumferential tread may be wrapped about the outer ring of the tire.

[0003] The circumferential tread may contain a shear element having an elastic region disposed between upper and lower inelastic regions. The shear element may also be referred to as a shear band, a tread band, or a thin annular high strength band element. When used in a pneumatic tire, the shear element acts as a tension member when the tire is pressurized. When used in a non-pneumatic tire, or a pneumatic tire in an unpressurized or partially pressurized state, the shear element acts as a structural compression member.

SUMMARY OF THE INVENTION

[0004] In one embodiment, a non-pneumatic tire includes an inner ring having an axis of rotation and an outer ring coaxial with the inner ring. The non-pneumatic tire further includes support structure extending from the inner ring to the outer ring and a circumferential tread extending about the outer ring. The circumferential tread includes a band layer constructed of a single material and a tread rubber layer directly attached to the band layer.

BRIEF DESCRIPTION OF DRAWINGS

[0005] In the accompanying drawings, structures are illustrated that, together with the detailed description provided below, describe exemplary embodiments of the claimed invention. Like elements are identified with the same reference numerals. It should be understood that elements shown as a single component may be replaced with multiple components, and elements shown as multiple components may be replaced with a single component. The drawings are not to scale and the proportion of certain elements may be exaggerated for the purpose of illustration.

[0006] **Figure 1** is a side view of an undeformed non-pneumatic tire;

[0007] **Figure 2** is a side view of the non-pneumatic tire of **Figure 1** being deformed when subjected to a load;

[0008] **Figure 3** is a schematic drawing illustrating a partial cross-section of one embodiment of a non-pneumatic tire;

[0009] **Figure 4** is a schematic drawing illustrating a partial cross-section of an alternative embodiment of a non-pneumatic tire;

[0010] **Figure 5** is a schematic drawing illustrating a partial cross-section of another alternative embodiment of a non-pneumatic tire;

[0011] **Figure 6** is a schematic drawing illustrating a partial cross-section of yet another alternative embodiment of a non-pneumatic tire;

[0012] **Figure 7** is a graph illustrating a band layer thickness versus a band layer modulus;

[0013] **Figure 8A** is a cross-sectional view of one embodiment of a reverse flow forming system for forming a cylinder;

[0014] **Figure 8B** is a front view of the reverse flow forming system of **Figure 8A**;

[0015] **Figure 9A** is a perspective view of one embodiment of a metal spinning system showing a metal plate in various stages of deformation; and

[0016] **Figure 9B** is a perspective view of the metal spinning system of **Figure 9A** showing the metal plate in a final form.

DETAILED DESCRIPTION

[0017] **Figures 1 and 2** illustrate one embodiment of a non-pneumatic tire **10**. The non-pneumatic tire **10** is merely an exemplary illustration and is not intended to be limiting. In the illustrated embodiment, the non-pneumatic tire **10** includes a generally annular inner ring **20** that engages a rim (not shown) to which the tire **10** is mounted. The generally annular inner ring **20** has an internal surface **23** and an external surface **24** and can be made of an elastomeric material or metal.

[0018] The non-pneumatic tire **10** further includes a generally annular outer ring **30** surrounding an interconnected web **40**, which is a support structure connected to the generally annular inner ring **20**. In alternative embodiments, a plurality of spokes or other support structure connects the inner ring to the outer ring. The outer ring **30** can be configured to deform in an area **48** around and including a footprint region **32** (see **Figure 2**), which decreases vibration and increases ride comfort.

[0019] In one embodiment, the generally annular inner ring **20** and the generally annular outer ring **30** are made of the same material as interconnected web **40**. In an alternative embodiment, at least one of the generally annular inner ring, the generally annular outer ring, and the interconnected web are made of a different material. As shown in **Figure 1**, the generally annular outer ring **30** can have a radially external surface **34** to which a tread carrying layer **70** is attached. Attachment can be done adhesively or using other methods commonly available in the art.

[0020] In the illustrated embodiment, the interconnected web **40** has at least two radially adjacent layers **56, 58** of web elements **42** that define a plurality of generally polygonal openings **50**. In other embodiments (not shown), other web configurations may be employed. In another embodiment (not shown), spokes or other support structure may be employed instead of a web.

[0021] **Figure 3** is a schematic drawing illustrating a partial cross-section of one embodiment of a non-pneumatic tire **100**. In this embodiment, the non-pneumatic tire **100** includes a tire structure having an inner ring **110**, an outer ring **120**, and a support structure **130** extending from the inner ring to the outer ring. In

one embodiment, the support structure **130** is a webbing, such as the webbing shown in **Figures 1** and **2**. In an alternative embodiment, the support structure includes a plurality of spokes. It should be understood, however, that any support structure may be employed.

[0022] The non-pneumatic tire **100** includes a circumferential tread having the same width as the outer ring **120**. The circumferential tread includes a band layer **140** constructed of a single material. A tread rubber layer **150** is directly attached to the band layer **140**.

[0023] The illustrated structure carries an applied load by resisting bending about its neutral axis. Bending of the band layer **140** assists in carrying a load on the non-pneumatic tire **100**. If metal or other lossless materials are used for the band layer **140**, rolling resistance and heat generation of the assembly can be reduced. This is a departure from prior polymeric shear layers having plies of steel cords. Such polymeric shear layers provide load carrying capability, at the expense of high rolling resistance and heat generation.

[0024] The single material of the band layer **140** may be a composite, or blend of multiple materials, but the band layer **140** is not formed of distinct layers of materials. In one embodiment, the band layer **140** is constructed of steel. In one specific embodiment, the band layer **140** is constructed of ultra high strength steel. Other exemplary materials include, without limitation, rubber, other metals such as aluminum, brass, copper, and stainless steel, or polymeric materials including polyurethane, polyester, and polyvinyl chloride (PVC).

[0025] Favorable performance may be achieved with a band layer constructed of a material having a high ultimate tensile strength and a surface finish with low surface roughness. In one embodiment, the band layer is constructed of a material having an ultimate tensile strength of at least 60,000 pounds of force per square inch (*i.e.*, 60 ksi or 410 MPa). In another embodiment, the band layer is constructed of a material having an ultimate tensile strength of at least 120,000 pounds of force per square inch (*i.e.*, 120 ksi or 830 MPa). In yet another embodiment, the band layer is constructed of a material having an ultimate tensile strength of at least 200,000 pounds of force per square inch (*i.e.*, 200 ksi or 1400 MPa). A band layer

constructed of a material having a high ultimate tensile strength has a better fatigue life.

[0026] Additionally, in one embodiment, the band layer is constructed of a material having an average surface roughness of less than 1000 micro inches (*i.e.*, 25 microns). In another embodiment, the band layer is constructed of a material having an average surface roughness of less than 64 micro inches (*i.e.*, 1.6 microns). In yet another embodiment, the band layer is constructed of a material having an average surface roughness of less than 32 micro inches (*i.e.*, 0.8 microns). While a rougher finish may be better for adhesion, it has been found that a finer finish is better for fatigue life.

[0027] The ultimate tensile strengths and average surface roughnesses identified above may be found in high strength steel that has been prepared through a shot peening or laser shock peening process. The high strength steel may be specialty steel and may receive special heat treatment. Aluminum and titanium may also exhibit the ultimate tensile strengths and average surface roughnesses identified above.

[0028] In the illustrated embodiment, the band layer **140** has a band height (*i.e.*, a band thickness) **H_B**, and the tread rubber layer **150** has a tread height (*i.e.*, a tread thickness) **H_T** that is greater than the band height **H_B**. In one known embodiment, the band height is between 0.010 inches and 0.300 inches (0.254 mm to 7.62 mm). However, other arrangements may be employed. **Figure 4** is a schematic drawing illustrating a partial cross-section of an alternative embodiment of a non-pneumatic tire **200**. The non-pneumatic tire **200** is substantially the same as the non-pneumatic tire **100** described herein, except for the differences noted below. Like reference numerals are used for like elements.

[0029] In this embodiment, the circumferential tread includes a band layer **210** and a tread rubber layer **220**. Here the band layer **210** has a band height **H_B**, and the tread rubber layer **220** has a tread height **H_T** that is equal to the band height **H_B**.

[0030] **Figure 5** is a schematic drawing illustrating a partial cross-section of another alternative embodiment of a non-pneumatic tire **300**. The non-pneumatic tire **300** is substantially the same as the non-pneumatic tires **100**, **200** described

herein, except for the differences noted below. Like reference numerals are used for like elements.

[0031] In this embodiment, the circumferential tread includes a band layer **310** and a tread rubber layer **320**. Here the band layer **310** has a band height H_B , and the tread rubber layer **320** has a tread height H_T that is less than the band height H_B .

[0032] **Figure 6** is a schematic drawing illustrating a partial cross-section of yet another alternative embodiment of a non-pneumatic tire **400**. The non-pneumatic tire **400** is substantially the same as the non-pneumatic tires **100**, **200**, **300** described herein, except for the differences noted below. Like reference numerals are used for like elements.

[0033] In this embodiment, the circumferential tread includes a band layer **410** and a tread rubber layer **420**. Here the band layer **310** has a band height H_B , and the tread rubber layer **320** has a tread height H_T that is less than the band height H_B , similar to the tire **300**. In this embodiment, the tread rubber layer **420** also has a width that is less than the width of the band layer **410**.

[0034] In another alternative embodiment (not shown), the tread rubber layer has a width less than the width of the band layer, and a height equal to the height of the band layer. In yet another alternative embodiment (not shown), the tread rubber layer has a width less than the width of the band layer, and a height greater than the height of the band layer.

[0035] The heights of the band layer and the tread layer may be selected to provide desirable performance of the non-pneumatic tire. For example, it may be desirable to balance the bending stiffness of the band layer with the thickness of the band layer to regulate a bending moment about the neutral axis to carry a desired load at a desired deflection. As shown in **Figure 7**, a relationship can be established between the thickness of the band layer and the modulus of the band layer needed to support a specific load at a specific vertical deflection.

[0036] Selecting the heights of the band layer and the tread rubber layer also allows the tire designer to select the location of a neutral axis of the circumferential tread. For example, the neutral axis location may be selected such that the circumferential tread would have different bending stiffness in different directions.

If the neutral axis is closer to an outer diameter of the tire, the lead and trailing edge of the footprint will be harder to bend, thus increasing load carrying capacity. However, if the tire rolls over an object, it would have a lower bending stiffness in that direction thus allowing for easier envelopment and a more comfortable ride.

[0037] In selecting the materials and heights of each layer, other factors may be considered. For example, it may be desirable to reduce the band layer thickness to reduce volume and weight, as well as the amount of heat generated during rotation of the tire. It may also be desirable, however, to increase band layer thickness to reduce stress in the band layer.

[0038] Additionally, it may be desirable to select the thickness and stiffness of the tread rubber layer and the band layer to regulate footprint length.

[0039] It has been found that a band in the form of a seamless, metal cylinder yields good results. Such cylinders may have a diameter between 20–50 inches (50–130 cm). In more specific embodiments, the cylinder has a diameter between 30–40 inches (75–100 cm). In one specific embodiment, the cylinder has a diameter of 36 inches (91 cm).

[0040] As noted above, the cylinder thickness may be between 0.010 inches and 0.300 inches (0.254 mm to 7.62 mm). In more specific embodiments, the cylinder thickness is between 0.020 inches and 0.150 inches (0.50 mm to 3.8 mm). In one specific embodiment, the cylinder thickness is 0.145 inches (3.68 mm).

[0041] As noted above, the seamless cylinder may be made of steel. Exemplary steel includes ultra high strength steel, 4340 steel, or 1080 steel. Alternatively, the seamless cylinder may be formed of an alloy.

[0042] In one embodiment, the seamless cylinder is made by a rough forging process, which may produce a cylinder with a desired diameter. However, it is difficult to forge a cylinder having a diameter between 20–50 inches and a thickness between 0.010 inches and 0.300 inches. Forging a cylinder with such dimensions may result in cracks, micro-cracks, or other irregularities.

[0043] Therefore, in an alternative embodiment, a seamless cylinder with a diameter between 20–50 inches and a thickness between 0.300 inches to 1 inch is made by a rough forging process. The cylinder is then machined or lathed to a

desired thickness of between 0.010 inches and 0.300 inches. The machining or lathing may be performed in multiple steps. The cylinder may also be subjected to heat treatment steps and polishing steps. Such a process may be time intensive, and may produce undesirable waste.

[0044] In another alternative embodiment, a seamless cylinder with a diameter between 20–50 inches and a thickness between 0.300 inches to 1 inch is made by a rough forging process. The thickness of the cylinder is then reduced by a cold forming process. Exemplary cold forming processes include deep drawing, closed die-forging, metal spinning, and flow forming (including reverse flow forming). In one specific embodiment, a seamless cylinder with a diameter of 36 inches and a thickness of 0.5 inches is formed by a rough forging process and then the thickness is reduced to between 0.010 inches to 0.300 inches by a cold forming process.

[0045] The cold forming process both reduces the thickness and increases the length of the cylinder. Thus, in one embodiment, a cylinder is rough forged with a length that is shorter than desired, and the cold forming process elongates the cylinder to a desired length. In another embodiment, the cold forming process elongates the cylinder to a greater than desired length. In such an embodiment, the cold formed cylinder may be cut into two or more cylinders.

[0046] The cold forming process also increases the hardness of the cylinder. In one known embodiment, a steel cylinder has a hardness of 45–60 on the Rockwell C scale after a cold forming process. Alternatively, the steel cylinder may have a hardness of less than 45 of the Rockwell C scale after a cold forming process. Likewise, the steel cylinder may have a hardness of greater than 45 of the Rockwell C scale after a cold forming process.

[0047] A seamless cylinder may be formed by a rough forging and cold forming process without performing a heat treatment. In other embodiments, however, a heat treatment may still be performed. In one specific embodiment, a specialized heat treatment process known as vacuum inert gas quench hardening is employed. This process achieves the same properties as a standard furnace heat treatment followed by an oil, water, or ethylene glycol quench but has the distinct benefit of preventing oxidation to the steel during the process. Steps of stress relieving,

hardening, and tempering may be performed fully under vacuum to prevent oxidation to the steel. Because there is little to no oxidation during such a heat treatment process, additional processing such as grinding or polishing may be omitted.

[0048] The cold forming process also smooths the outer surface of the cylinder. Thus, a seamless cylinder may be formed by a rough forging and cold forming process without polishing the cylinder. In other embodiments, a polishing step may still be performed.

[0049] In one embodiment, the cold forming process is a reverse flow forming process, as illustrated in **Figures 8A,B**. **Figure 8A** illustrates a cross-sectional view of a reverse flow forming system **500**, while **Figure 8B** illustrates a front view of the reverse flow forming system **500**. In this system, a seamless cylinder **510** is placed on a mandrel **520** having a spindle **530**. The seamless cylinder **510** is open ended and may be referred to as a preform. The seamless cylinder **510** may be constructed of one of the materials identified above and may be formed by a rough forging process.

[0050] After the seamless cylinder **510** is placed on the mandrel **520**, the spindle **530** rotates the mandrel **520** and the seamless cylinder **510** in a first direction. A plurality of rollers **540** engage the seamless cylinder **510** and the rollers **540** rotate in a second direction opposite the first direction. A tailstock **550** provides support for the system.

[0051] The rollers **540** then move towards the spindle, reducing the thickness of the seamless cylinder **510**, and causing the material of the cylinder to move in a direction opposite to the travel direction of the rollers **540**. In the illustrated embodiment, three cylinders are employed. In alternative embodiments, any number of rollers may be employed.

[0052] In one embodiment, the rollers **540** are spaced from the mandrel **520** by a distance equal to the desired thickness of the finished cylinder. Thus, in such an embodiment, the thickness of the cylinder **510** is reduced to the desired thickness by a single pass of the rollers **540**. In an alternative embodiment, the rollers **540** are first spaced by a distance greater than the desired thickness of the finished

cylinder. In such an embodiment, after a first pass of the rollers **540**, the rollers **540** are returned to an axial starting position and the distance between the rollers **540** and the mandrel **520** is reduced. A second pass of the rollers is then performed. If the thickness of the cylinder is still greater than desired, the process can be repeated for as many passes as desired.

[0053] In all embodiments, the rollers **540** may be staggered both axially and radially.

[0054] In an alternative embodiment, the seamless cylinder is formed by a metal spinning process. **Figure 9A** illustrates a perspective view of a metal spinning system **600** showing a metal plate **610** in various stages of deformation. **Figure 9B** illustrates a perspective view of the metal spinning system **600** showing the metal plate in a final form.

[0055] In the illustrated embodiment, the plate **610** is placed against a mandrel **620** and held in place by a tail stock **630**. The mandrel **620** and tail stock **630** then rotate in a first direction, causing the plate **610** to rotate in the same direction. A roller **640** then engages the plate **610** and rotates in a second direction opposite the first direction. The roller **640** then moves away from the tail stock **630** causing the plate **610** to deform as shown in **Figure 9A** and take the shape of the mandrel **620**.

[0056] After the roller **640** completes its pass, the deformed plate **610** has a closed shape having a cylindrical end. The cylindrical end of the deformed plate **610** can then be cut or otherwise separated.

[0057] In one embodiment, the circumferential tread is pre-formed by first assembling the band layer and the tread rubber layer. The circumferential tread is then attached to the outer ring **120** with an adhesive, by welding or brazing, or by a chemical bond, such as by heating the components to create a bond.

[0058] In an alternative embodiment, the circumferential tread may be built layer by layer onto the outer ring **120**. The building process would include placing the band layer about the outer ring **120**, and then placing the tread rubber layer about the band layer. In one embodiment, the layers are attached to each other at each step, such as with an adhesive, by welding or brazing, or by a chemical bond, such as by heating the components to create a bond. In an alternative embodiment, the

tire is heated after all of the layers are assembled, such that the layers bond to each other.

[0059] While the band layer and tread rubber layer have been described with respect to non-pneumatic tires, it should be understood that they may also be employed in pneumatic tires, such as run-flat pneumatic tires.

[0060] To the extent that the term “includes” or “including” is used in the specification or the claims, it is intended to be inclusive in a manner similar to the term “comprising” as that term is interpreted when employed as a transitional word in a claim. Furthermore, to the extent that the term “or” is employed (e.g., A or B) it is intended to mean “A or B or both.” When the applicants intend to indicate “only A or B but not both” then the term “only A or B but not both” will be employed. Thus, use of the term “or” herein is the inclusive, and not the exclusive use. See, Bryan A. Garner, *A Dictionary of Modern Legal Usage* 624 (2d. Ed. 1995). Also, to the extent that the terms “in” or “into” are used in the specification or the claims, it is intended to additionally mean “on” or “onto.” Furthermore, to the extent the term “connect” is used in the specification or claims, it is intended to mean not only “directly connected to,” but also “indirectly connected to” such as connected through another component or components.

[0061] While the present application has been illustrated by the description of embodiments thereof, and while the embodiments have been described in considerable detail, it is not the intention of the applicants to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art. Therefore, the application, in its broader aspects, is not limited to the specific details, the representative apparatus and method, and illustrative examples shown and described. Accordingly, departures may be made from such details without departing from the spirit or scope of the applicant’s general inventive concept.

CLAIMS

What is claimed is:

1. A non-pneumatic tire comprising:
 - an inner ring having an axis of rotation;
 - an outer ring coaxial with the inner ring;
 - support structure extending from the inner ring to the outer ring; and
 - a circumferential tread extending about the outer ring, the circumferential tread including a band layer constructed of a single material and a tread rubber layer directly attached to the band layer.
2. The non-pneumatic tire of claim 1, wherein the band layer is directly attached to the outer ring.
3. The non-pneumatic tire of claim 1, wherein the single material of the band layer is a metal material.
4. The non-pneumatic tire of claim 1, wherein the single material of the band layer is a polymeric material.
5. The non-pneumatic tire of claim 1, wherein the single material has an ultimate tensile strength of at least 410 MPa.
6. The non-pneumatic tire of claim 1, wherein the single material has an ultimate tensile strength of at least 830 MPa.
7. The non-pneumatic tire of claim 1, wherein the single material has an ultimate tensile strength of at least 1400 MPa.
8. The non-pneumatic tire of claim 1, wherein the single material has a surface with an average surface roughness of less than 25 microns.
9. The non-pneumatic tire of claim 1, wherein the single material has a surface with an average surface roughness of less than 1.6 microns.

10. The non-pneumatic tire of claim 1, wherein the single material has a surface with an average surface roughness of less than 0.8 microns.
11. A method of making a non-pneumatic tire, the method comprising:
 - providing an assembly with an inner ring, an outer ring coaxial with the inner ring, and support structure extending from the inner ring to the outer ring;
 - providing a seamless cylinder about the outer ring, the seamless cylinder being constructed of a single material; and
 - providing tread rubber about the seamless cylinder.
12. The method of claim 11, wherein the providing of the seamless cylinder includes rough forging a seamless cylinder, then cold forming the seamless cylinder to thin a wall of the seamless cylinder.
13. The method of claim 12, wherein the cold forming of the seamless cylinder includes reverse flow forming the seamless cylinder.
14. The method of claim 11, wherein the providing of the seamless cylinder includes providing a plate and metal spinning the plate to form the seamless cylinder.
15. The method of claim 11, further comprising heat treating the seamless cylinder.



AMENDED CLAIMS
received by the International Bureau on 09 June 2020 (09.06.20)

What is claimed is:

1. A non-pneumatic tire comprising:
 - an inner ring having an axis of rotation;
 - an outer ring coaxial with the inner ring;
 - support structure extending from the inner ring to the outer ring; and
 - a circumferential tread extending about the outer ring, the circumferential tread including a seamless cylinder constructed of a single material and a tread rubber layer directly attached to the seamless cylinder.
2. The non-pneumatic tire of claim 1, wherein the seamless cylinder is directly attached to the outer ring.
3. The non-pneumatic tire of claim 1, wherein the single material of the seamless cylinder is a metal material.
4. The non-pneumatic tire of claim 1, wherein the single material of the seamless cylinder is a polymeric material.
5. The non-pneumatic tire of claim 1, wherein the single material has an ultimate tensile strength of at least 410 MPa.
6. The non-pneumatic tire of claim 1, wherein the single material has an ultimate tensile strength of at least 830 MPa.
7. The non-pneumatic tire of claim 1, wherein the single material has an ultimate tensile strength of at least 1400 MPa.
8. The non-pneumatic tire of claim 1, wherein the single material has a surface with an average surface roughness of less than 25 microns.
9. The non-pneumatic tire of claim 1, wherein the single material has a surface with an average surface roughness of less than 1.6 microns.

10. The non-pneumatic tire of claim 1, wherein the single material has a surface with an average surface roughness of less than 0.8 microns.
11. A method of making a non-pneumatic tire, the method comprising:
 - providing an assembly with an inner ring, an outer ring coaxial with the inner ring, and support structure extending from the inner ring to the outer ring;
 - providing a seamless cylinder about the outer ring, the seamless cylinder being constructed of a single material; and
 - providing tread rubber about the seamless cylinder.
12. The method of claim 11, wherein the providing of the seamless cylinder includes rough forging a seamless cylinder, then cold forming the seamless cylinder to thin a wall of the seamless cylinder.
13. The method of claim 12, wherein the cold forming of the seamless cylinder includes reverse flow forming the seamless cylinder.
14. The method of claim 11, wherein the providing of the seamless cylinder includes providing a plate and metal spinning the plate to form the seamless cylinder.
15. The method of claim 11, further comprising heat treating the seamless cylinder.

1 / 8

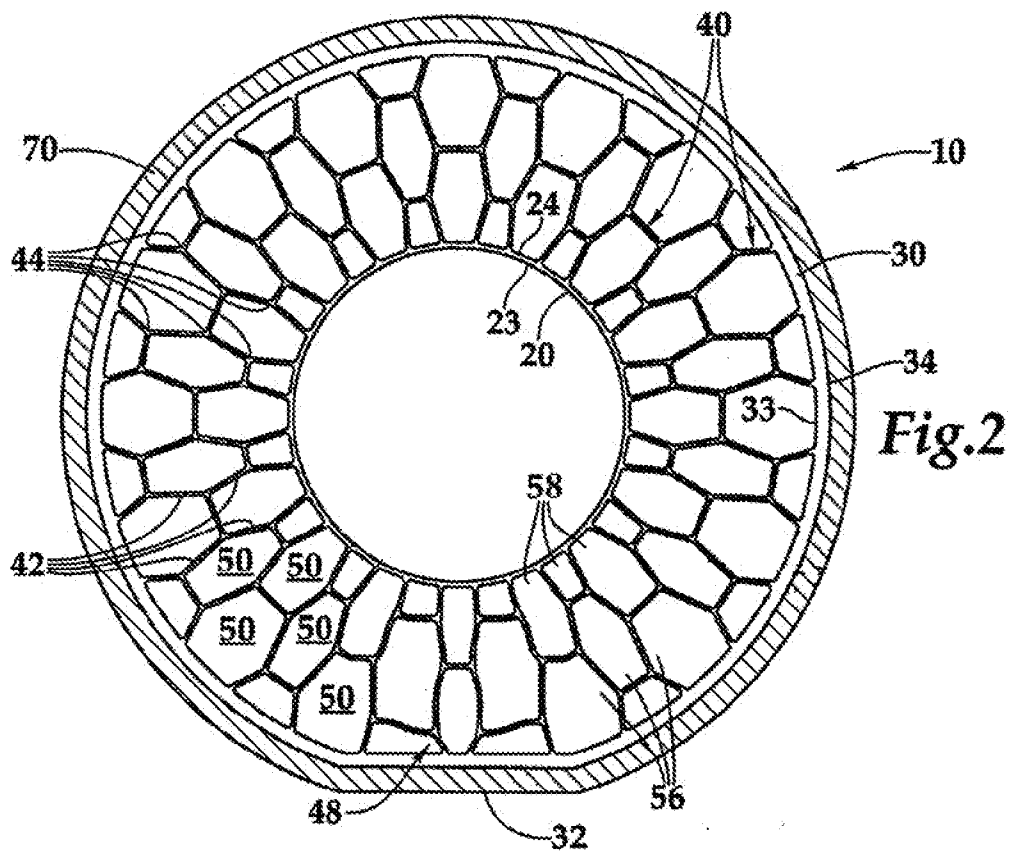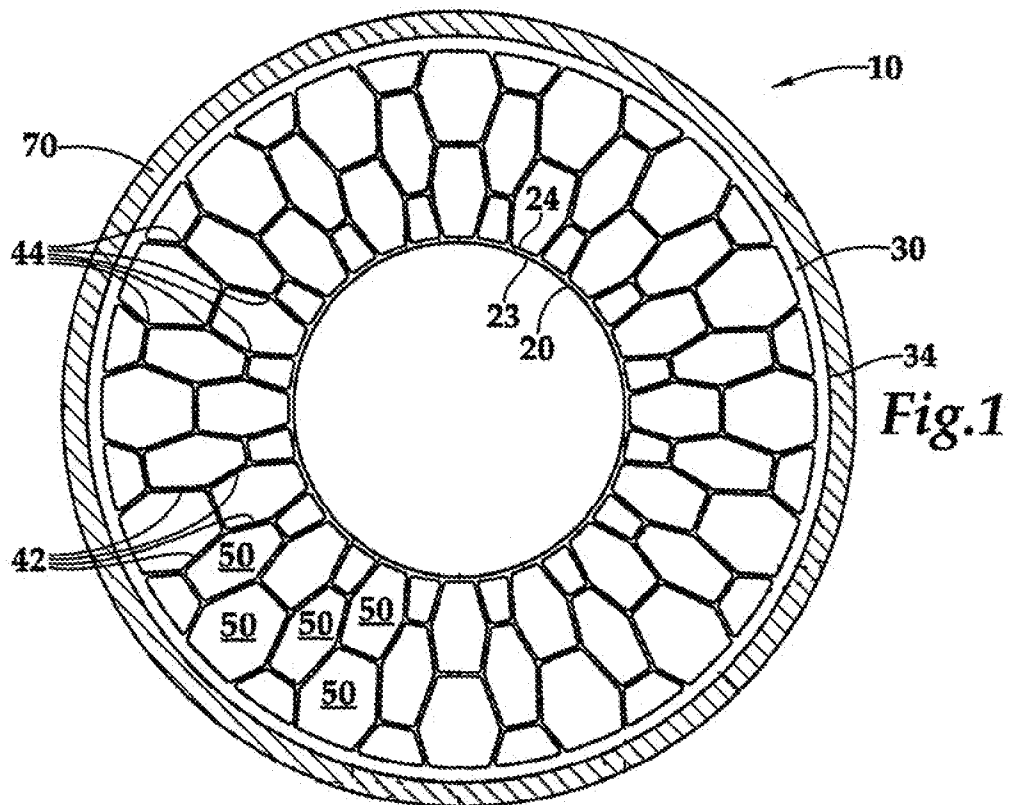

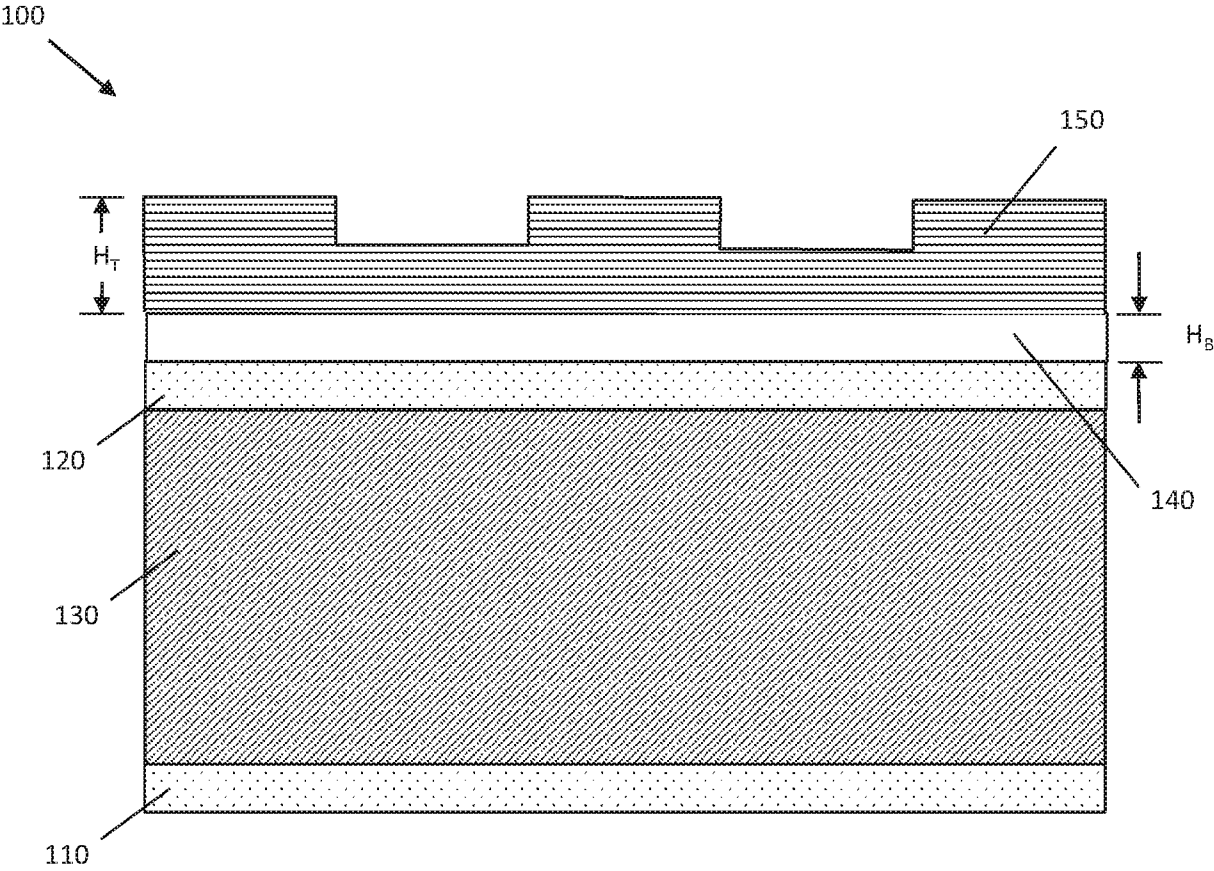


Fig. 3

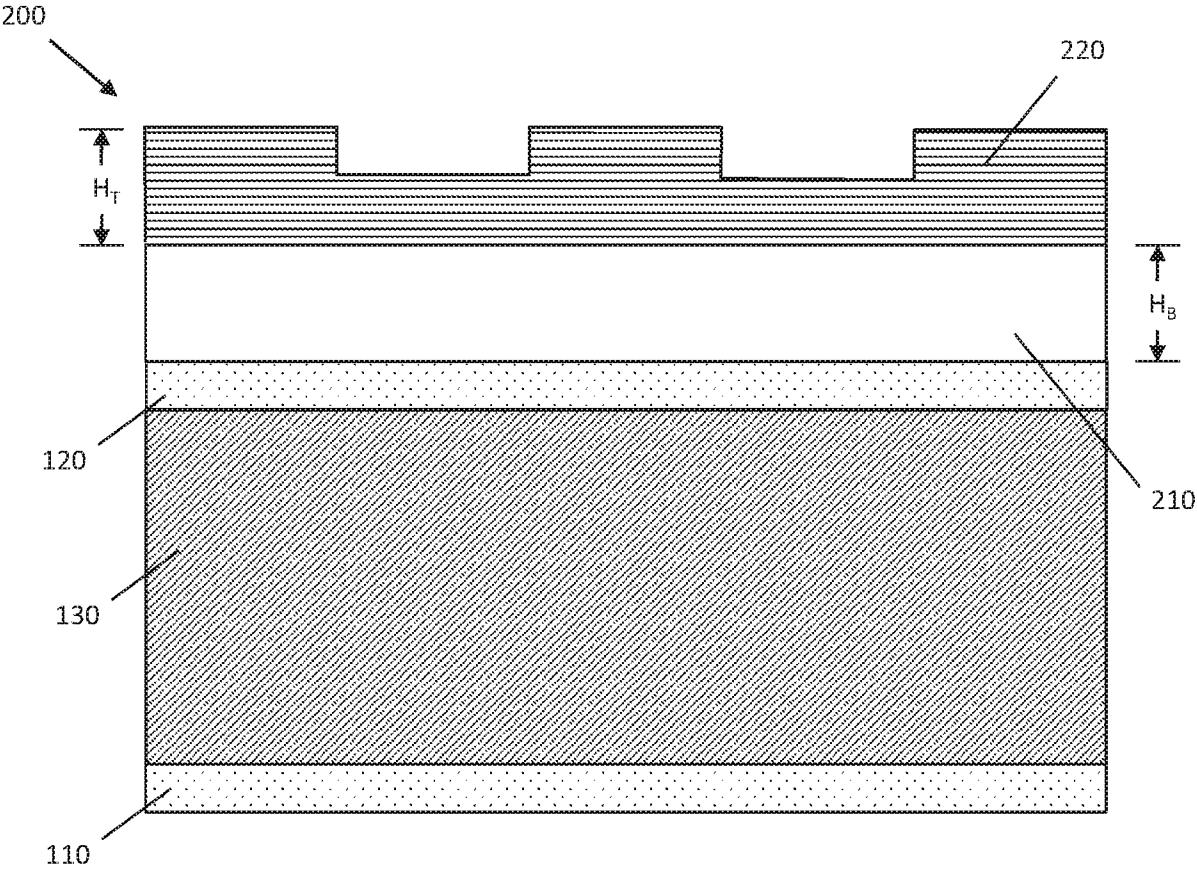


Fig. 4

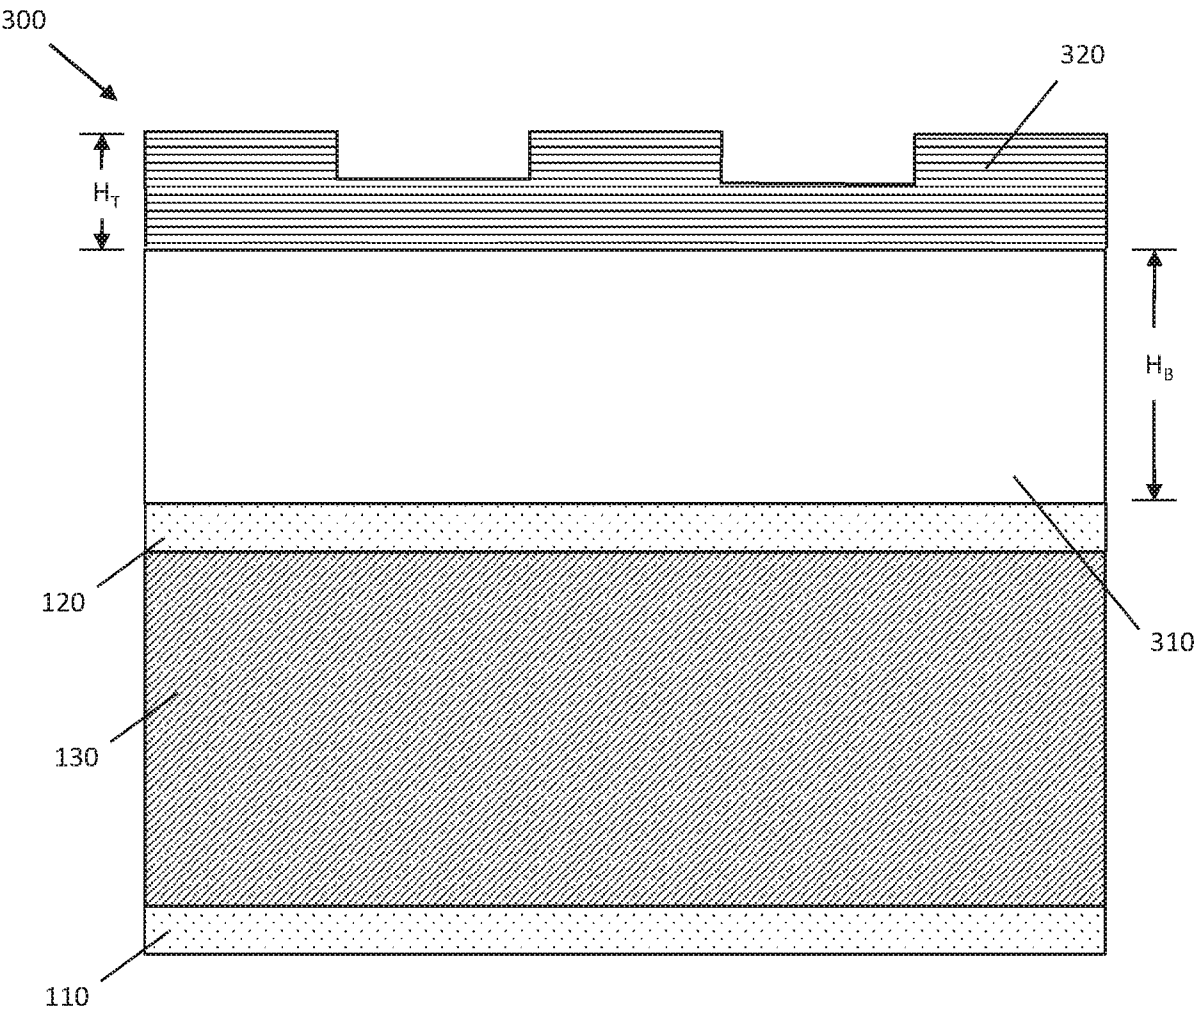


Fig. 5

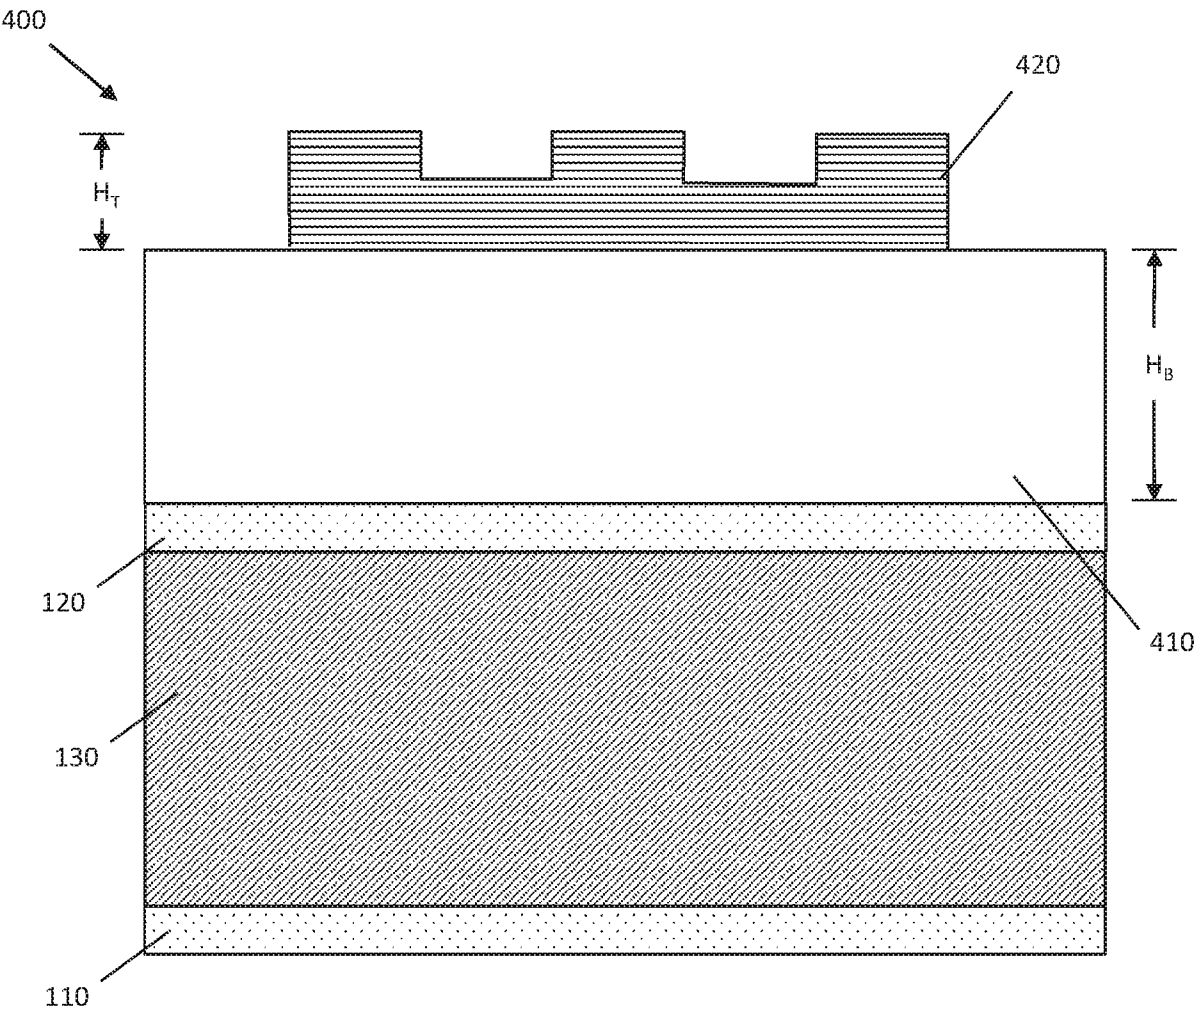


Fig. 6

6/8

Band Thickness vs. Modulus to Carry a Specific Load at a Specific Vertical Deflection


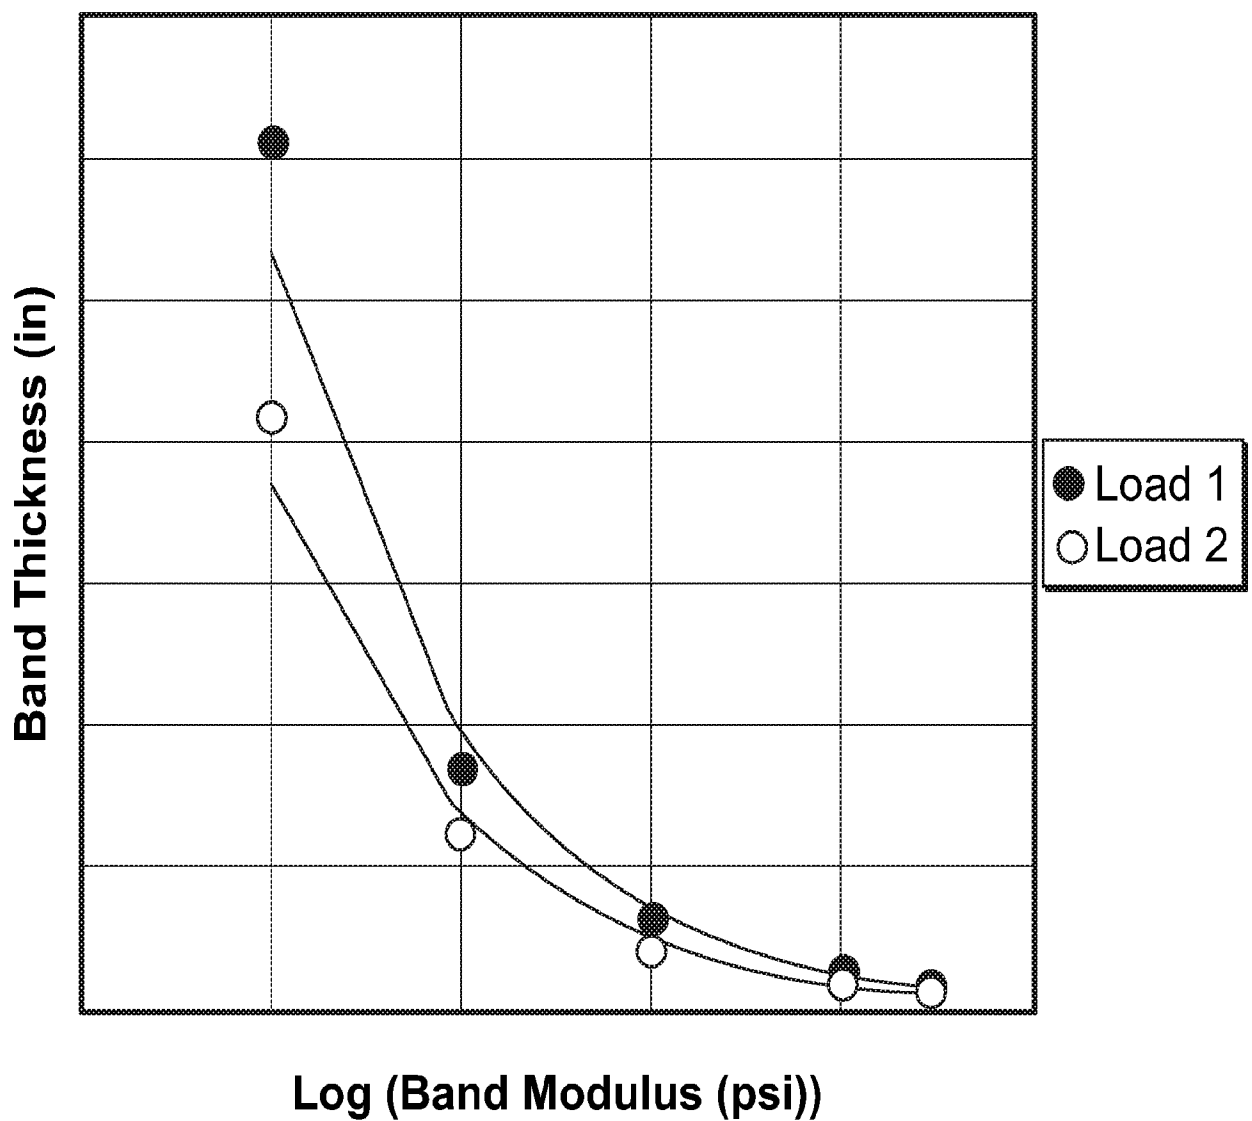


Fig. 7

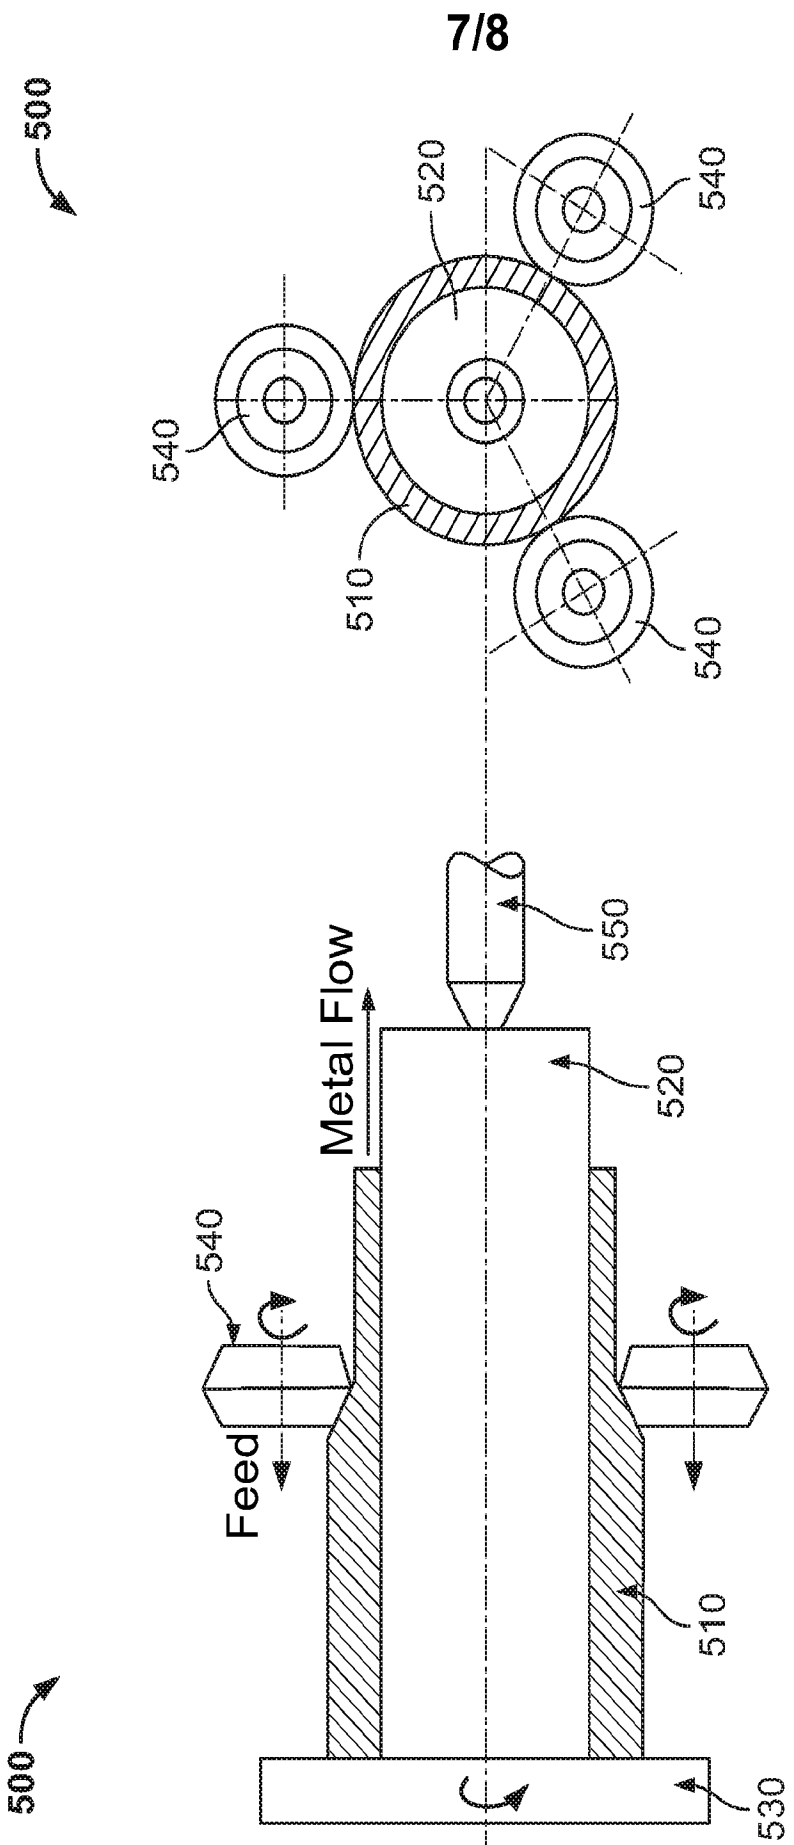

8/8

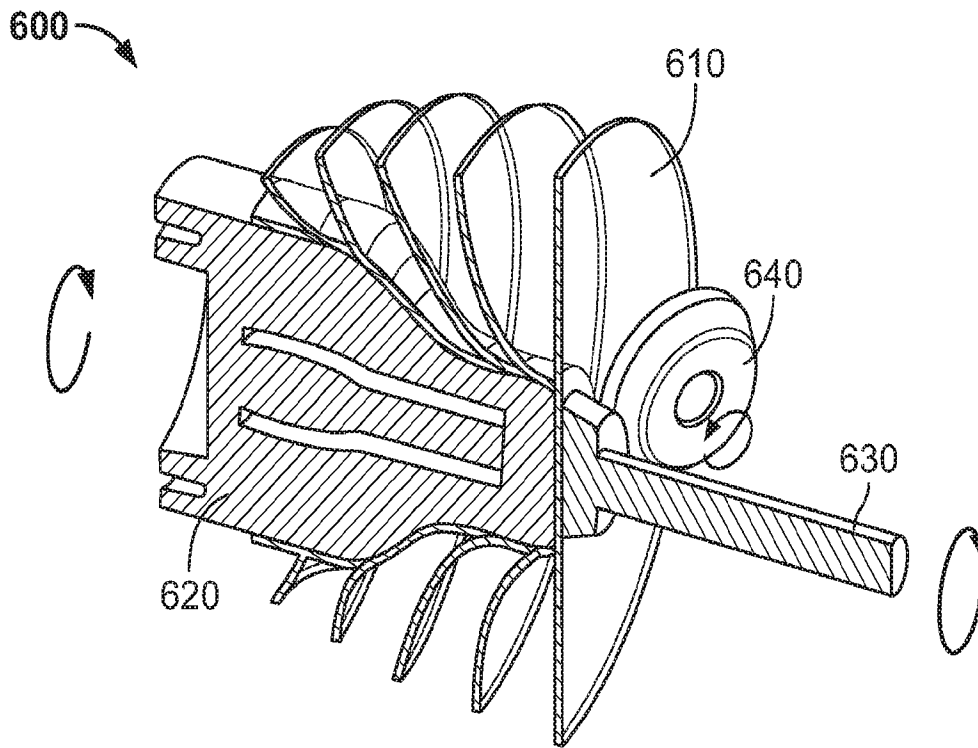


Fig. 9A

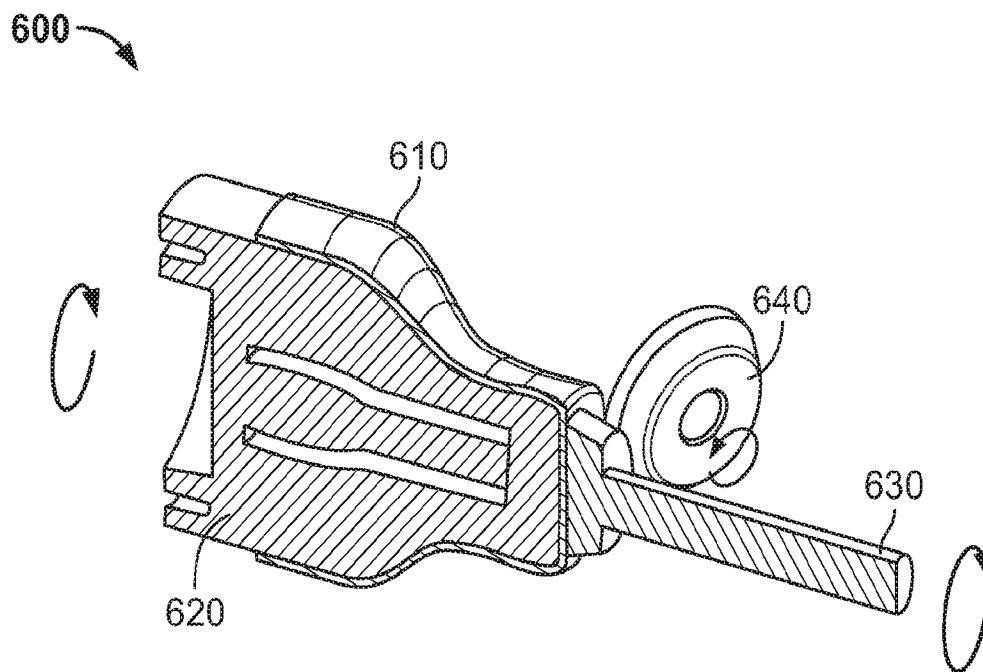


Fig. 9B

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2020/012150**A. CLASSIFICATION OF SUBJECT MATTER****B60C 11/00(2006.01)i, B60C 7/10(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B60C 11/00; B21B 37/58; B29D 30/30; B60B 1/04; B60C 7/10; B60C 7/14; B60C 7/22; B60C 9/18; B60C 9/10; B60C 99/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: non-pneumatic tire, ring, band layer, tread, seamless cylinder

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	KR 10-2014-0001048 A (HANKOOK TIRE CO., LTD.) 06 January 2014 paragraphs [0029]–[0039] and figures 1–3	1–11, 15
Y		12–14
Y	US 6012313 A (PERSICO, GIUSEPPE) 11 January 2000 claim 1 and figure 1	12–14
A	US 2018-0086142 A1 (BRIDGESTONE CORPORATION) 29 March 2018 paragraphs [0064]–[0067] and figures 1–5	1–15
A	US 2015-0122385 A1 (COMPAGNE GENERALE DES ETABLISSEMENTS MICHELIN et al.) 07 May 2015 paragraphs [0044]–[0050] and figures 1–3	1–15
A	US 6354349 B1 (VANNAN, JR., FREDERICK FORBES) 12 March 2002 claim 1 and figures 3A–4	1–15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 April 2020 (28.04.2020)

Date of mailing of the international search report

28 April 2020 (28.04.2020)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

HWANG, Chan Yoon

Telephone No. +82-42-481-3347



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2020/012150

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
KR 10-2014-0001048 A	06/01/2014	CN 103507571 A	15/01/2014
		CN 103507571 B	01/06/2016
		EP 2679406 A1	01/01/2014
		EP 2679406 B1	01/04/2015
		JP 2014-008958 A	20/01/2014
		JP 5588046 B2	10/09/2014
		KR 10-1378436 B1	27/03/2014
		US 2014-0000777 A1	02/01/2014
		US 9387726 B2	12/07/2016
US 6012313 A	11/01/2000	IT 1291952 B1	21/01/1999
		IT RM960628 A1	16/03/1998
US 2018-0086142 A1	29/03/2018	CN 107405953 A	28/11/2017
		EP 3275696 A1	31/01/2018
		EP 3275696 B1	13/11/2019
		JP 2016-179731 A	13/10/2016
		WO 2016-152887 A1	29/09/2016
US 2015-0122385 A1	07/05/2015	BR 112012008836 A2	09/08/2016
		BR 112012008836 B1	22/01/2019
		CA 2774927 A1	21/04/2011
		CA 2774927 C	24/03/2015
		CN 102574347 A	11/07/2012
		CN 102574347 B	20/01/2016
		EP 2488355 A1	22/08/2012
		EP 2488355 B1	16/12/2015
		EP 2910388 A1	26/08/2015
		EP 2910388 B1	19/09/2018
		JP 2013-507296 A	04/03/2013
		JP 5628329 B2	19/11/2014
		KR 10-1493303 B1	13/02/2015
		KR 10-2012-0049400 A	16/05/2012
		KR 10-2014-0133886 A	20/11/2014
		MX 2012004176 A	28/06/2012
		RU 2497677 C1	10/11/2013
		US 2012-0216932 A1	30/08/2012
		US 8960248 B2	24/02/2015
		US 9493045 B2	15/11/2016
US 6354349 B1	12/03/2002	WO 2011-046553 A1	21/04/2011
		ZA 201202051 B	30/01/2013
		AU 3402797 A	04/01/1999
		BR 9714806 A	27/06/2000
		CA 2293668 A1	30/12/1998
		CZ 295407 B6	17/08/2005
		CZ 9904632 A3	12/06/2002
		DE 69722269 T2	19/02/2004
		EP 1011962 A1	28/06/2000

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2020/012150Patent document
cited in search reportPublication
datePatent family
member(s)Publication
date

EP 1011962 B1	21/05/2003
ES 2199363 T3	16/02/2004
KR 10-2001-0013937 A	26/02/2001
PL 337486 A1	28/08/2000
TR 199903081 T2	22/05/2000
WO 98-58794 A1	30/12/1998