

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(10) International Publication Number

WO 2018/163056 A1

(43) International Publication Date
13 September 2018 (13.09.2018)(51) International Patent Classification:
A61F 2/852 (2013.01) *A61F 2/90* (2013.01)(72) Inventor: **BORTONE, Alessandro Santo**; Via Roberto da Bari, 59, I-70122 BARI (IT).(21) International Application Number:
PCT/IB2018/051425(74) Agent: **CRIPPA, Paolo Ernesto** et al.; c/o JACOBACCI & PARTNERS S.p.A., Via Senato, 8, I-20121 MILANO (IT).(22) International Filing Date:
06 March 2018 (06.03.2018)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language:

Italian

(26) Publication Language:

English

(30) Priority Data:
102017000024729 06 March 2017 (06.03.2017) IT
102017000024763 06 March 2017 (06.03.2017) IT(71) Applicant: **CARDIOVASCULAR LAB S.P.A. O BREVEMENTE CV LAB S.P.A. [IT/IT]**; Corso Galileo Ferraris, 64, I-10129 TORINO (IT).

(54) Title: MULTILAYER LUMINAL ENDOPROSTHESIS ASSEMBLY AND MANUFACTURING METHOD

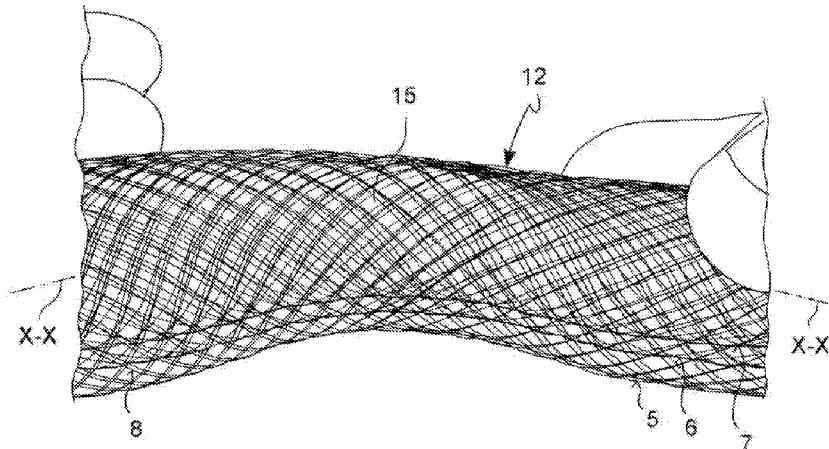


FIG.3

(57) **Abstract:** The present invention relates to a luminal endoprosthesis assembly (1) which at least partially delimits a prosthesis lumen (2), suitable for implantation in an anatomical structure (3) which at least partially defines at least one cavity (4) and comprises at least one pathological portion (13), said luminal endoprosthesis (1) comprising two or more layers (5, 6, 7), wherein at least one layer (5 or 6 or 7) of said two or more layers (5, 6, 7) comprises at least one threadlike element (8) forming an armor (9); said luminal endoprosthesis (1) comprises at least one anchoring portion (10), suitable for anchoring to an anatomical portion (11) of the walls of the cavity (4) of the anatomical structure (3), and at least one working portion (12), suitable for facing the pathological portion (13) of the anatomical structure (3); wherein said two or more layers (5, 6, 7) are separated from each other at least in said working portion (12) of the luminal endoprosthesis (1), avoiding to provide connecting elements between one layer (5 or 6 or 7) and at least one adjacent layer.



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

DESCRIPTION**"Multilayer luminal endoprosthesis assembly and manufacturing method"****[0001]. Field of the invention**

[0002]. The present invention relates to a luminal endoprosthesis assembly.

[0003]. In particular, the present invention relates to a multilayer luminal endoprosthesis.

[0004]. An endoprosthesis according to the present invention is particularly suitable, but not univocally intended, for the treatment of aneurysms.

[0005]. Background art

[0006]. Luminal endoprostheses are used for the treatment of cardiovascular diseases such as aneurysms. An aneurysm substantially consists of a pathological dilation of the section of a portion of a blood vessel, for example an artery such as the aorta, which is the main artery of the cardiovascular system, to form a sac called aneurysmal sac. From the hemodynamic point of view, the blood stream at such a dilation of the passage section tends to flow in turbulent regime and at the same time to exert a pressure of increased intensity on the walls of the blood vessel compared to that which is found in healthy blood vessels. This causes an unstoppable increase in the section of the vessel which corresponds to a reduction in the thickness of the wall thus causing, according to Laplace's law, a chronic expansion of the aneurysmal sac which can lead to the rupture of the vessel wall.

[0007]. In particular, a wall tension develops in the aneurysmal sac, at equal pressure, higher than that of the healthy vessel, which by the Laplace law is twice inversely proportional to the radius of the sac, and the flow, which is turbulent rather than laminar, has a whirling effect which creates an inflow of blood from the vessels surrounding the aneurysmal sac as well as a laminar flow from the aorta to the neighboring vessels. This over-expands the aneurysmal dilatation leading to the rupture of the aorta due to the vascular tension no longer contained by the external tunica adventitia, since the muscle-elastic tunica media is already degenerated and therefore has given rise to the aneurysmal dilation itself.

By the implantation of a luminal endoprosthesis in a blood vessel, it is possible to locally influence the fluid dynamics inside the vessel and it is therefore possible to reduce the turbulence of the blood stream. This phenomenon is known as flow diversion. Due to the known structural features, luminal endoprostheses are able to channel the blood stream excluding it from the aneurysmal sac. In this way, the transport phenomena within the sac due to the blood stream are substantially eliminated and at the same time, the stress imparted by the blood on the walls of the aneurysmal sac is reduced, thus preventing the rupture of the sac walls and leading to a progressive filling of the aneurysmal sac with clots of blood.

[0008]. Known luminal endoprostheses usually include a release system for the insertion and positioning of the endoprosthesis in the lumen of the blood vessel astride of the inlet collar of the

aneurysmal sac, a self-expanding metal armor (stent) capable of anchoring itself by pressing against the walls of the blood vessel affected by the aneurysm, a tissue (graft) to form the endoprosthesis wall to reconstruct a duct for the blood stream astride of the inlet collar of the aneurysmal sac which excludes the aneurysm. Endoprostheses of this type are described for example by documents **EP-2397112** and **US-2015-282967**.

[0009]. Known types of endoprostheses can be variously shaped. For example, from documents **WO-90-04982** and **US-5354309**, endoprostheses are known having proximal and distal ends of greater caliber than the central portion of the endoprosthesis. Endoprostheses can be manufactured by laser cutting of the stitches starting from sheets of shape-memory alloys or by means of a plurality of metal or polymeric threads around a spindle, as described for example by document **US-5718159**.

[0010]. Luminal endoprostheses are intended to remain implanted within blood vessels, usually arteries, such as the aorta, which are subjected to a pulsatile flow regime during the cardiac cycle and usually include deformable blood vessel walls which describe a curved and sometimes tortuous path. This phenomenon is particularly relevant for the treatment of aneurysms of the descending stretch of the aorta, i.e. the portion of the aorta artery distal to the aortic arch and comprising the aortic isthmus, the thoracic aorta, and the abdominal aorta and collateral blood vessels that branch off it. The blood stream of the aorta, being the artery in which the blood coming out of the left heart is conveyed, may be affected

in normal physiological conditions by turbulent phenomena and is usually characterized by a substantially spiral advancement motion, which correspondingly causes the alignment of the endothelial cells of the aorta wall in an inclined direction with respect to the longitudinal direction of development of the vessel.

[0011]. The wall of the arteries includes three layers: the adventitial tunica, which is the outermost layer fed by the so-called "vasa vasorum", the tunica media, formed by muscle-elastic fibers to exploit the elastic return to the nominal diameter following the expansion due to the systolic wave in order to promote blood circulation, and the tunica intima, which is the innermost layer suitable for promoting the diffusion of nutrients between the lumen and the tunica media. Thus, during the cardiac cycle, the artery wall is usually subjected to cycles of expansion and contraction of its nominal diameter, as well as flexion-torsional deformations in the three dimensions of the space.

[0012]. For example, documents **US-8192484**, **EP-1357857** and **US-8048139** describe luminal endoprostheses comprising only an interleaved multilayer metal armor where each layer is formed by the interleaving of a plurality of metal filaments, and where filaments of each layer intersect with the filaments of adjacent layers causing a widespread integration or interpenetration between the various layers of the armor of the endoprostheses.

[0013]. Although advantageous from some points of view and particularly in the ability of locally reducing the turbulence of the blood stream, these solutions have quite a few drawbacks and do

not fully solve the problem.

[0014]. In fact, while the multilayer construction is capable of increasing the radial pressure that the stent exerts on the inner walls of the blood vessel, such a construction having interpenetrated layers is extremely rigid and therefore unsuitable for effectively adhering to the walls of a curved or "compliant" portion of the blood vessel. In other words, the implantation of a rigid structure, the endoprosthesis, in a pulsatile and compliant system, the large artery, necessarily generates an incompatibility that results in poor adherence of the endoprosthesis to the artery walls, at least in the first period following implantation, with the risk of early implant failure and undesired endoprosthesis migration.

[0015]. In addition, the interpenetrated layers of such endoprosthesis solutions, when they successfully achieve anchoring, become an ideal substrate for the regeneration of vascular endothelial cells of the artery wall, with the result that the layers are incorporated into the wall of the artery, and often also the layers of the endoprosthesis portion facing the aneurysmal sac, are incorporated into the artery wall, thus excluding the aneurysmal sac from the blood stream and also occluding the collateral vessels branching off the artery at the implant site. In some sporadic cases, the growth of vascular endothelial cells on the armor of the endoprosthesis may fortunately avoid covering the entire portion of the endoprosthesis facing the aneurysmal sac, maintaining the patency of the collateral vessels, particularly if large caliber.

[0016]. Other endoprostheses solutions are known from WO2016124235A1, US 2016/0158037, EP1946721 A1, US 2015/216684, US 2013/218255, US 2013/245745, US 2009/270974, US 6 689 162 and BR202013033688-U2.

[0017]. In particular, the solutions so far proposed create a mismatch between the vessel wall and the flow as they are formed by interleaved and rigid multi-stent systems that do not conform to the optimal transmission of the flexion-torsional forces and therefore fail to re-establish a laminar flow, the absence of the inevitably leads to thrombosis and to the lack of perfusion of collateral vessels.

[0018]. The need to provide a luminal endoprostheses solution capable of adhering to the walls of the blood vessel in which it is implanted also during the physiological deformations of the vessel is therefore strongly felt.

[0019]. Furthermore, the need is felt to provide a luminal endoprostheses solution capable of providing a diversion of the blood flow, greatly reducing the turbulence thereof and at the same time capable of maintaining the patency of the collateral blood vessels branching off the vessel in which the luminal endoprostheses is implanted in a controlled and predictable manner.

[0020]. Known luminal endoprostheses of the type described above form a barrier which substantially encapsulates the pathological portion of the blood vessel, for example the aneurysm, and isolates it from the blood stream which is conveyed into the lumen of the endoprostheses. From the clinical point of view, the effect of these

endoprostheses is to promote the accumulation of blood clots, or thrombi, inside the aneurysmal sac.

[0021]. Therefore, the known luminal endoprostheses solutions do not clearly recognize the need to provide a luminal endoprostheses solution capable of promoting the progressive recovery of the blood vessel function affected by pathological conditions, such as an aneurysm.

[0022]. At the same time, the need to restore the response of a healthy wall through the implantation of a luminal endoprostheses is felt.

[0023]. Furthermore, the need to restore the dynamic and structural behavior of the blood vessel wall affected by the pathological condition is strongly felt in order to intervene where the structure and dynamics of the vessel has been compromised, recovering it.

[0024]. Solution

[0025]. It is an object of the present invention to obviate the drawbacks of the prior art mentioned above and to provide a solution to the requirements mentioned with reference to the prior art.

[0026]. This and other objects are achieved by an endoprostheses assembly according to claim 1.

[0027]. Some advantageous embodiments are the subject of the dependent claims.

[0028]. According to an aspect of the invention, a luminal endoprostheses, at least partially delimiting a prostheses lumen, is suitable for the implant in an anatomical structure that at least partially defines at least one cavity, forming at least one

pathological portion. This luminal endoprosthesis comprises two or more endoprosthesis layers. At least one layer of said two or more layers comprises at least one filiform element or threadlike element forming an framework or armor.

[0029]. Said luminal endoprosthesis comprises at least one anchoring portion, suitable for being anchored to an anatomical portion of the walls of the cavity of the anatomical structure, and at least one working portion, suitable for facing towards the pathological portion of the anatomical structure.

[0030]. Advantageously, said two or more layers are separated from each other at least in said working portion of the luminal endoprosthesis, thus avoiding to provide connecting elements between one layer (5 or 6 or 7) and at least one adjacent layer.

[0031]. The multilayer luminal endoprosthesis or device has the advantage of being conformable or extremely flexible and therefore of being able to be implanted in any type of vessel curvature. Its architecture is such as to return a new tunica media and then to restore and transmit in an optimal manner the normal flexion-torsional forces, with a normal sliding of the layers, for example of the three layers of which it is made in the three spatial axes, and thus re-establish the laminar flows not only in the aorta but also in the collateral vessels that branch off it without thrombosis neither of the device nor of the aneurysmal sac, which will therefore undergo a depressurization and therefore an effect of reabsorption and fibrosis of the aneurysm, called shrinkage, with an endothelialization of the spin-shape device that allows the laminar

flow in all collateral vessels and the normal endocrine and antithrombotic function of the endothelium itself.

[0032]. Figures

[0033]. Further features and advantages of the endoprosthesis and of the method according to the invention will be readily apparent from the following description of preferred embodiment examples thereof, provided purely by way of a non-limiting example, with reference to the accompanying figures, in which:

[0034]. - figure 1 shows a lateral or vertical elevation view of a luminal endoprosthesis;

[0035]. - figures 2A, 2B and 2C show each a vertical elevation view of a layer of a multilayer endoluminal prosthesis;

[0036]. - figure 3 shows a multilayer luminal endoprosthesis flexibly deformed by an operator;

[0037]. - figure 4 shows a diagram showing a longitudinal section of a portion of a multilayer luminal endoprosthesis;

[0038]. - figure 5 shows a luminal endoprosthesis implanted in an implantation site comprising a pathological portion;

[0039]. - figure 6 shows a vertical elevation view of a luminal endoprosthesis, according to one embodiment;

[0040]. - figures 7 and 8 schematically show some possible steps of a process of delivery and delivery of a luminal endoprosthesis in an implantation site comprising a pathological portion;

[0041]. - figures 9, 10, 11 and 12 schematically show some possible steps of a manufacturing method of a luminal endoprosthesis, according to a possible mode of operation;

[0042]. - figure 13 shows a portion of an armor of a layer of a multilayer luminal endoprosthesis, according to one embodiment;

[0043]. - figure 14 shows a portion of a luminal endoprosthesis, according to one embodiment;

[0044]. - figures 15, 16, 17 and 18 show some possible steps of a manufacturing method of a luminal endoprosthesis, according to a possible mode of operation;

[0045]. - figure 19 shows a cross-section of a support device which receives a release device which mounts an armor of a layer of a luminal endoprosthesis in a radially contracted form;

[0046]. - figure 20 shows a vertical elevation view of a luminal endoprosthesis, according to one embodiment;

[0047]. - figure 21 shows an isometric view with partially sectional parts for clarity, a possible step of a manufacturing method of a luminal endoprosthesis, according to a possible mode of operation;

[0048]. - figure 22 schematically shows a connecting element of a luminal endoprosthesis, according to one embodiment;

[0049]. - figure 23 schematically shows a possible step of a manufacturing method of a luminal endoprosthesis, according to a possible mode of operation;

[0050]. - figure 24 schematically shows, with partially sectional parts for clarity, a possible step of a manufacturing method of a luminal endoprosthesis, according to a possible mode of operation;

[0051]. - figure 25 shows five examples of cross-section of the threadlike element with which the armor of the layer of the luminal endoprosthesis assembly is made;

[0052]. - figure 26 shows a further cross-section of a threadlike element comprising a core of a first material covered by a second material;

[0053]. - figure 27 shows two details of armors made with a threadlike element which forms said armors with its interlacing, according to two embodiments of said interlacing;

[0054]. - figure 28 shows a detail of the armor made with two threadlike elements which form said armor with their interlacing, according to an embodiment of said interlacing;

[0055]. - figure 29 shows a detail of the armor made with two threadlike elements which form said armor with their interlacing, according to an embodiment of said interlacing and at two different time points of the assembly;

[0056]. - figure 30 shows a longitudinal portion of a layer of the assembly in which the detail of armors made with a threadlike element is shown, forming said armors with its interlacing at mutually different winding angles;

[0057]. - figure 31 shows windows of three superimposed layers which form the overall porosity of the luminal endoprosthesis assembly;

[0058]. - figure 32 shows windows of three superimposed layers which form the overall porosity of the luminal endoprosthesis assembly consisting of two threadlike elements and at two different time points of the assembly;

[0059]. - figure 33 shows a schematic view of four different longitudinal sections of luminal endoprosthesis assemblies made with three layers of different transversal dimensions which create

different clearances or cavities between one layer and the adjacent layer;

[0060]. - figure 34 schematically shows three further and different longitudinal sections of luminal endoprostheses assemblies made with three layers of different transversal dimensions which create different clearances or cavities between one layer and the adjacent layer;

[0061]. - figure 35 schematically shows a cross-sectional view of the longitudinal axis of a luminal endoprostheses assembly made of three layers of different cross-sections which create clearances or cavities between one layer and the adjacent layer;

[0062]. - figure 36 schematically shows a luminal endoprostheses assembly made of layers having two mutually telescoping components and a stent delivery system for delivering said assembly in a vessel and releasing said assembly by regulating with a sequential opening of the sheaths the desired length of the telescopic assembly;

[0063]. - figure 37 shows a longitudinal section view of a luminal endoprostheses assembly made with layers having identical geometry;

[0064]. - figure 38 shows a detail of the armor made with a threadlike element which forms said armor with its interlacing, according to one embodiment;

[0065]. - figure 39 schematically shows an isometric view of a longitudinal stretch of a layer of said assembly in which the angle at the center of development of a window of the interlacing forming said armor is shown;

[0066]. - figures 40 and 41 show a flow test of a blood vessel having

an aneurysmal pathology in which initially the luminal endoprostheses assembly in figure 40 is not present and the endoprostheses assembly in figure 41 is present, highlighting a strong reduction and regularization of the flow.

[0067]. Description of some preferred embodiment examples

[0068]. According to a general embodiment, a luminal endoprostheses 1 is provided.

[0069]. According to a preferred embodiment, said luminal endoprostheses 1 comprises a stent.

[0070]. According to a preferred embodiment, said luminal endoprostheses is a stent.

[0071]. Said luminal endoprostheses 1 delimits at least partially a prosthesis lumen 2 and is suitable for the implant in an anatomical structure 3 which at least partially defines at least one cavity 4. According to an embodiment, said anatomical structure 3 is a blood vessel, for example an artery, for example the aorta, said cavity 4 is a vascular lumen of said blood vessel and said luminal endoprostheses 1 is a vascular luminal endoprostheses suitable for endovascular implantation. According to an embodiment, said luminal endoprostheses 1 has a substantially tubular shape.

[0072]. Said luminal endoprostheses 1 is particularly suitable, but not univocally intended, for the treatment of an aneurysm 17. According to an embodiment, said luminal endoprostheses 1 is particularly suitable, but not univocally intended, for the treatment of aneurysms of the aortic arch 18, or of the descending aorta 19, for example of the thoracic aorta 20, of the abdominal

aorta 21 or of the aortic isthmus 22.

[0073]. According to an embodiment variant, said anatomic structure 3 is an esophagus and said cavity 4 is the lumen of the esophagus.

[0074]. In said luminal endoprosthesis 1 a longitudinal direction X-X is defined, substantially parallel to or coinciding with the longitudinal axis of development of said luminal endoprosthesis 1, a radial direction R-R, orthogonal to the longitudinal direction X-X, and a circumferential or tangential direction, orthogonal to both the longitudinal direction X-X and to the radial direction R-R. An external radial direction RE is also defined, directed along the radial direction away from the longitudinal axis of development of the luminal endoprosthesis 1 and an internal radial direction, opposite to said external radial direction RE.

[0075]. Said luminal endoprosthesis 1 is a multilayer luminal endoprosthesis and comprises two or more layers 5, 6, 7.

[0076]. According to a preferred embodiment, said two or more layers are exactly three layers 5, 6, 7.

[0077]. According to a preferred embodiment, said luminal endoprosthesis 1 comprises three armors 9 which form said three layers 5, 6, 7.

[0078]. The layers, for example but not necessarily the three layers of which the endoprosthesis or device is made, according to an embodiment, are separated from each other, for example in the portion thereof facing the pathological region, for example in rest conditions or nominal conditions they have a space or a predefined distance between them, i.e. between each layer, for example variable

between 0.1 mm and 3 mm, to allow the continuous oscillation thereof and the reciprocal sliding, as occurs in the tunica media of a normal subject. Said space is a space with no interruption at least along the entire working portion 12 of the endoprosthesis. According to an embodiment, the distance between the layers is defined in such a way that the endothelial cells never adhere between the layers, preventing them from forming a bridge-like connection between the layers, to prevent a compaction thereof and thus avoiding that the flow in the collateral vessels that branch off the aorta is prevented, always ensuring the patency of these collateral vessels.

[0079]. According to a preferred embodiment, said two or more layers comprise a first layer 5 having a predetermined nominal caliber of first layer D1, a second layer 6 having a predetermined nominal caliber of second layer D2 smaller than said nominal caliber of first layer D1, and a third layer 7, having a predetermined nominal caliber of third layer D3 smaller than both said nominal caliber of first layer (D1) and said nominal caliber of second layer D2. According to an embodiment, said two or more layers are coaxial.

[0080]. At least one layer 5 or 6 or 7 of said two or more layers 5, 6, 7 comprises at least one threadlike element 8, 38, 48 forming an armor 9. According to an embodiment, each layer 5 or 6 or 7 of said two or more layers 5, 6, 7 comprises said at least one threadlike element 8.

[0081]. According to an embodiment, said first layer 5 comprises a first threadlike element 8, said second layer 6 comprises a second threadlike element 38 and said third layer comprises a third

threadlike element 48.

[0082]. According to a preferred embodiment, at least one layer 5 or 6 or 7 of said two or more layers 5, 6, 7 comprises a single threadlike element 8, 38, 48 forming an armor 9. In this way, it is possible to make a layer with a single threadlike element 8, 38, 48. According to an embodiment, each layer 5 or 6 or 7 of said two or more layers 5, 6, 7 comprises a single threadlike element 8, 38, 48.

[0083]. According to a preferred embodiment, said armor 9 is an interlaced armor which forms a lattice.

[0084]. According to an embodiment, said at least one threadlike element 8, 38, 48 develops in a substantially helical manner in said armor 9.

[0085]. According to an embodiment, said armor 9 is an interlaced armor which forms a fabric, according to an embodiment, a fabric of the weft and warp type, or of the open-mesh type, in which two opposite ends 28, 29 of said at least one threadlike element 8, 38, 48 are alternately crossed at crossing sites 30. According to an embodiment, some crossing sites 30 have a first threadlike element end 28 arranged radially outwardly to a second threadlike element end 29 and some crossing sites 30 have a second threadlike element end 29 arranged radially outwardly to a first threadlike element end 28.

[0086]. According to an embodiment, said first threadlike element end 28 and said second threadlike element end 29 form a crossing angle α with respect to the longitudinal axis of the luminal

endoprosthesis 1. According to an embodiment, said crossing angle α is between 30° and 60° . According to an embodiment, said crossing angle α is between 40° and 50° , and according to an embodiment, said crossing angle α is substantially equal to 45° . Due to the provision of said crossing angle α , it is possible to mimic the alignment of the endothelial cells of the wall of a native blood vessel, for example of a portion of the native aorta. In fact, as is known, endothelial cells of a wall of a native blood vessel are aligned with the mean blood stream direction during the systolic phase, and the blood stream during the systolic phase can proceed substantially helix- or spiral-wise.

[0087]. According to an embodiment, said two opposite ends 28, 29 of a single threadlike element 8, 38, 48 are connected to each other by means of an end connecting device 25. According to an embodiment, the end connecting device 25 is suitable for forming a rigid connection between said two opposite ends 28, 29.

[0088]. Said luminal endoprosthesis 1 comprises at least one anchoring portion 10, suitable for anchoring to an anatomical portion 11 of the walls of the cavity 4 of the anatomical structure 3. Said anchoring portion 10 is suitable for forming a substrate which favors the adhesion of the newly formed vascular endothelial tissue, similar to a scaffold.

[0089]. Said luminal endoprosthesis 1 comprises at least one working portion 12, suitable for facing a pathological portion 13 of the anatomical structure 3. For example, said pathological portion 13 is an aneurysmal sac.

[0090]. Due to the provision of at least one anchoring portion 10 and at least one working portion 12, said luminal endoprosthesis 1 is capable of anchoring to a substantially healthy portion of the anatomical structure 13. Due to the provision of at least one anchoring portion 10 and at least one working portion 12, said luminal endoprosthesis 1 protrudes along said pathological portion said working portion 12 to reform a caliber equivalent to the healthy diameter of the vessel in which the endoprosthesis is implanted.

[0091]. According to an embodiment, said anchoring portion 10 is longitudinally disjointed from said working portion 12. In other words, moving along said endoprosthesis in the longitudinal direction, said anchoring portion 10 is first encountered and then said working portion 12.

[0092]. Advantageously, said two or more layers 5, 6, 7 are separated from each other, according to an embodiment radially separated, at least in said working portion 12 of the luminal endoprosthesis 1. This prevents having to provide connecting elements in said working portion 12 between one layer 5 or 6 or 7 and an adjacent layer.

[0093]. According to an embodiment, said working portion 12, when not radially stressed, has a diameter or caliber D1 similar or equal to the healthy diameter D1 of the corresponding anatomical portion in which it is intended to be implanted. For example, said endoprosthesis has a working portion with a radial diameter or caliber D1 equal to the internal mean average diameter D1 of the healthy portion of aorta in which the endoprosthesis must be implanted when an aneurysm is formed in this portion of the aorta.

[0094]. The provision of such a luminal endoprosthesis 1 allows to make two or more layers 5, 6, 7 which in said working portion 12 are substantially independent from each other. According to an embodiment, in the at least one anchoring portion 10, said two or more layers 5, 6, 7 are next to one another and constrained one to the at least one other.

[0095]. Due to the provision of two or more layers 5, 6, 7 separated from each other in said working portion 12, it is possible to provide a space between adjacent layers 16, suitable for allowing the flow at least in the a substantially longitudinal direction X-X of a fluid, example blood, between two adjacent layers 5, 6, 7. According to an embodiment, said space between adjacent layers 16 is substantially of annular cylindrical in shape to surround delimited by two adjacent layers.

[0096]. Due to the provision of two or more layers 5, 6, 7 separated from each other in said working portion 12, the relative movement is allowed between said two or more layers 5, 6, 7 even after the implant of the luminal endoprosthesis 1. In this way, the adhesion and growth of vascular endothelial cells is prevented at least on the one or more layers 6, 7 having smaller caliber D2, D3, and, according to an embodiment on all the layers 5, 6, 7 of the working portion 12 of the luminal endoprosthesis 1. For example, said two or more layers 5, 6, 7 separated from each other in said working portion 12 can move both longitudinally and circumferentially and radially with respect to one another. This imparts improved flexibility, including torsional flexibility, to the luminal

endoprosthesis 1. In this way, a prolonged service life is allowed, compared to known solutions.

[0097]. Due to the provision of two or more layers 5, 6, 7 separated from one another in said working portion 12, a luminal endoprosthesis 1 of improved flexibility is provided which is suitable for implantation in tortuous anatomical structures 3, such as for example the aortic isthmus 22.

[0098]. According to an embodiment, such a luminal endoprosthesis 1 is suitable for embodiments having an increased longitudinal extension compared to known solutions.

[0099]. According to an embodiment, said at least one threadlike element 8 is made of superelastic material. According to an embodiment, said at least one threadlike element 8 is made of material suitable for maintaining the memory of a predefined shape and reacquire it when it undergoes thermal variations and/or mechanical stresses. According to an embodiment, said at least one threadlike element 8 is at least partially made of nitinol. According to an embodiment, said at least one threadlike element 8 is at least partially made of nitinol suitable for reacquiring the predefined shape when heated and/or mechanically stressed. According to an embodiment, said at least one threadlike element 8 comprises a coating suitable for regulating the biological interaction between the luminal endoprosthesis 1 and the walls of the implant anatomical structure 3.

[00100]. According to a preferred embodiment, said at least one threadlike element 8, 38, 48 of the armor 9 of each layer 5, 6, 7

defines a plurality of windows 15 suitable for putting the prosthesis lumen 2 in fluidic communication with the pathological portion 13, such as an aneurysmal sac, of the anatomical structure 3.

[00101]. According to an embodiment, the armor 9 formed by the at least one threadlike element 8, 38, 48 of one layer is circumferentially or angularly offset with respect to the armor of one or more adjacent layers by a predetermined amount of offset smaller than the circumferential distance between two successive crossing sites 30 and according to an embodiment, by an amount of offset smaller than one third of the circumferential distance between two successive crossing sites 30. In this way, said plurality of windows 15 of one layer is substantially offset with the plurality of windows 15 of one or more adjacent layers but at the same time, the windows 15 of adjacent layers are substantially aligned so that said luminal endoprosthesis 1 is suitable for putting said prosthesis lumen 2 in fluidic communication with the pathological portion 13 of the anatomical structure 3. According to an embodiment, the alignment between the windows 15 of adjacent layers is selected in such a way as to filter the elements of greater size, for example thrombi, to prevent them from moving, by convection or diffusion, from the prosthesis lumen towards the pathological portion 13, for example the aneurysmal sac.

[00102]. According to an embodiment, said space between adjacent layers 16 is in fluidic communication with said prosthesis lumen 2 through the plurality of windows 15 of the layers 6, 7 radially

internal to said space between adjacent layers 16. In this way, the flow of fluid, for example blood, is allowed to flow from the prosthesis lumen 2 to the pathological portion 13, for example an aneurysmal sac, and vice versa from the pathological portion 13, for example an aneurysmal sac, towards the prosthesis lumen 2.

[00103]. Due to the provision of two or more layers 5, 6, 7 separated from each other in said working portion 12, it is possible to mimic or reproduce the behavior of the structure of the tunica media of a native blood vessel.

[00104]. Due to the provision of such a luminal endoprosthesis 1, it is possible to generate a flow diversion that strongly reduces the turbulence of the blood stream in the aneurysmal sac, allowing the pressure on the walls of the aneurysmal sac to be reduced, thus preventing the rupture of the walls of the aneurysmal sac and thus favoring the reabsorption of the aneurysm. The provision of said plurality of windows 15 allows to make the blood stream into the aneurysmal sac substantially laminar and at the same time allows to maintain the patency of the aneurysmal sac as well as the collateral vessels 23 distally branching off it, where present. In this way, it is possible to still feed the biological tissues facing the aneurysmal sac, albeit in a weakened manner.

[00105]. According to an embodiment, said at least one anchoring portion 10 comprises at least one layer connecting device 24 between said two or more layers 5, 6, 7. According to an embodiment, said layer connecting device 24 between said two or more layers 5, 6, 7 forms a rigid connection, thus being not suitable for allowing the

relative movement between adjacent layers in said anchoring portion 10. According to an embodiment, said layer connecting device 24 and said end connecting device 25 are the same connecting element 24, 25, for example a metal element, for example a sleeve for pressure or crimping connection. According to an embodiment, at least one of said layer connecting device 24 and said end connecting device 25 is made of radio-opaque material, so as to make the luminal endoprosthesis 1 detectable by bioimaging acquisition equipment, for example radiological equipment, after implantation in the anatomical structure 3.

[00106]. According to an embodiment, said at least one anchoring portion 10 of said luminal endoprosthesis comprises at least two, and according to an embodiment at least three, connecting elements 24, 25 equally spaced in a circumferential direction and placed substantially at the same height along the longitudinal direction X-X.

[00107]. According to a preferred embodiment, said luminal endoprosthesis comprises at least two anchoring portions 10 longitudinally opposite with respect to said at least one working portion 12. According to an embodiment, said at least two opposite anchoring portions 10 are located at opposite ends 26, 27 of said luminal endoprosthesis 1. Said opposite ends 26, 27 comprise a proximal end 26 and a distal end 27. According to a preferred embodiment, said at least one anchoring portion 10 has a smaller longitudinal extension with respect to said working portion 12.

[00108]. According to a preferred embodiment, said at least one

anchoring portion 10 has a larger caliber with respect to said at least one working portion 12. According to a preferred embodiment, all the layers 5, 6, 7 of said at least one anchoring portion 10 have a larger caliber with respect to said at least one working portion 12.

[00109]. The provision of said anchoring portion 10 allows a radial thrust to act on the walls of the anatomical portion 11 which maintains the luminal endoprosthesis 1 in position in the anatomical structure 3 in which it is implanted. According to an embodiment, said at least one anchoring portion 10 is of size and material suitable for exerting a radial preload on the walls of the anatomical portion 11.

[00110]. According to a preferred embodiment, said luminal endoprosthesis 1 has a shape substantially as a dog bone, comprising opposite ends 26, 27 larger than the portion of the luminal endoprosthesis 1 longitudinally interposed between said two opposite ends 26, 27.

[00111]. According to an embodiment, said working portion 12 has a substantially frustoconical shape. In this way, said luminal endoprosthesis 1 is suitable for mimicking the shape of the wall of a blood vessel, for example an artery, having a caliber that is distally reduced. According to an embodiment, said distal end 27 has smaller caliber than said proximal end 26.

[00112]. According to an embodiment, said anchoring portion 10 has a substantially frustoconical shape having taper which increases towards an end of the endoprosthesis 1.

[00113]. According to an embodiment, said at least one threadlike element 8, 38, 48 is a thread.

[00114]. According to an embodiment, said at least one threadlike element 8, 38, 48 is substantially in the form of a tape or strip having a transversal dimension that is significantly larger than its thickness.

[00115]. According to an embodiment, said luminal endoprosthesis 1 is a stent-no-graft. In other words, it is a luminal endoprosthesis without textile fibers.

[00116]. According to an embodiment variant, at least one layer of said two or more layers 5, 6, 7 comprises a graft fabric to form at least a portion of said luminal endoprosthesis 1. According to an embodiment, said graft fabric is associated with the armor 9 of a layer. According to an embodiment, said graft fabric is associated with said anchoring portion 10 by at least one connecting element 24, 25.

[00117]. According to an embodiment, said luminal endoprosthesis 1 comprises a bifurcation of the prosthesis lumen 2, so as to be suitable for implants in anatomical structures 3 comprising a pathological portion 13 which are provided with bifurcations, such as for example the bifurcation of the iliac arteries distal to the descending stretch of the aorta.

[00118]. According to a preferred embodiment, said luminal endoprosthesis is self-expanding. Said luminal endoprosthesis 1 is suitable for being delivered and released into a predefined implantation site within said anatomical structure 3 by a release

device 31, for example a catheter, on which it is mounted in a radially contracted configuration. For example, said release device 31 comprises a guiding element 41 and a loading cannula 46 suitable for receiving said luminal endoprosthesis 1, as well as the armor 9 of at least one layer of said luminal endoprosthesis 1.

[00119]. A method of manufacturing a multilayer luminal endoprosthesis according to any one of the previously described embodiments will be described below.

[00120]. A method of manufacturing a multilayer luminal endoprosthesis 1 comprises at least the following steps.

[00121]. A. Arranging a work bench comprising at least one spindle 14.

[00122]. B. Repeatedly wrapping said at least one first threadlike element 8 around said at least one spindle 14, to form the armor 9 of said first layer 5.

[00123]. C. Dissociating the armor 9 of said first layer 5 from said at least one spindle 14. This step can be carried out, for example, by elastically deforming the armor 9.

[00124]. D. Repeatedly wrapping said at least one second threadlike element 38 around said at least one spindle 14, to form the armor 9 of said second layer 6. According to an embodiment, the spindle 14 used to interlace the armor 9 of said second layer 6 has a smaller caliper than the spindle used to form the armor 9 of said first layer 5, although it may be, for example, the same spindle 14 with caliber adaptation capability, for example by removing an overspindle.

[00125]. E. Dissociating the armor 9 of said second layer 6 from said at least one spindle 14. This step can be carried out by elastically deforming the armor 9

[00126]. F. Fitting the armor 9 of said first layer 5 on the armor of said second layer 6.

[00127]. According to a possible mode of operation, before step C. it is possible to provide a heat treatment to make the armor 9 of said first layer 5 acquire a memory of the shape in which it is on the spindle.

[00128]. According to a possible mode of operation, before step E. it is possible to provide a heat treatment to ensure that the armor 9 of said second layer 6 acquires a memory of the shape in which it is on the spindle.

[00129]. According to a possible mode of operation, said method provides for the step of repeating steps B to F for a third layer 7.

[00130]. According to a possible mode of operation, said step F comprises at least one, but also all, of the following sub-steps.

[00131]. G. By means of a release device 31, or deployment device, the armor 9 of said first layer 5 in a support device 32 having support walls suitable for making at least partially, but for example entirely, the armor 9 of said first layer 5 adhere. According to an embodiment, said support device 32 is an openable support device comprising reversible closing means 45. For example, said support device 32 is a sleeve which delimits a device cavity favorably shaped to replicate the shape of the armor of a layer 5,

6, 7, so as to facilitate the extraction of the armors of two or more layers 5, 6, 7 from the support device cavity. According to an embodiment, said support device 32 is substantially cup-shaped and comprises a bottom wall 36 provided with a centering hole 40 suitable for receiving a portion of the guiding element 41 of the release device 31, to provide certainty of radial positioning of the release device 31 within the support device 32. According to an embodiment, said guide element 41 comprises a stop portion 37, having a larger caliber than the centering hole 40 to provide certainty of longitudinal positioning of the release device 31 within the support device 32. According to a further step, releasing the armor 9 of said first layer 5 in said support device 32.

[00132]. H. Conveying by means of a release device 31 the armor 9 of said second layer 6 in said support device 32 in which the armor 9 of said first layer 5 has been received.

[00133]. According to a further step, releasing the armor 9 of said second layer 6 in said support device 32 where said armor of said first layer 5 is already present.

[00134]. I. Adjusting, for example by means of an adjustment device 33, for example optical, the relative position of the threadlike elements 8, 38 of the armors 9 of said first layer 5 and of said second layer 6, before their release into said support device 32. For example, said adjustment device 33 comprises a graduated element 34 provided on said support device 32 which cooperates with an indicator 35 provided on said release device 31. For example, said step I allows the armors 9 of two adjacent layers 5, 6, 7 to be

angularly or circumferentially offset by a predetermined angular quantity.

[00135]. J. Connecting together, according to an embodiment but not necessarily crimping, at least a stretch, for example in the connecting portion between the at least one working portion 12 and the at least one anchoring portions 10, of said at least one threadlike element 8 of the armor 9 of said first layer 5 with the at least one threadlike element 8 of the armor 9 of said second layer 6, to form at least one anchoring portion 10. According to an embodiment but not necessarily, this step is carried out by using a crimping tool 39.

[00136]. According to a possible mode of operation, said step J is carried out by opening said support device 32 and extracting the at least two mutually associated layers. According to an embodiment, the extraction of the at least two mutually associated layers is carried out after having fitted and temporarily fixed said at least two layers on an expandable element 38, for example a balloon for stents, associated with a release device 31.

[00137]. According to an embodiment, said step B is carried out by using at least one return and winding device 42 movable with respect to said spindle 14 and associated with said at least one threadlike element 8, 38, 48. For example, said return and winding device 42 is a shuttle adapted to move at least longitudinally and circumferentially with respect to said spindle 14. According to an embodiment, said return and winding device 42 comprises at least two separate shuttles movable independently of one another and

movable at least longitudinally and circumferentially with respect to said spindle 14. According to an embodiment, said spindle 14 is a movable element, for example suitable for rotating about the longitudinal axis thereof. According to an embodiment, said return and winding device 42 is integrally associated with a support structure 46 movable with respect to said spindle 14.

[00138]. According to an embodiment, said step B is carried out by winding two opposite ends 28, 29 of a single threadlike element 8, 38, 48, to form an interleaved armor 9.

[00139]. According to an embodiment, said step B is carried out by winding two opposite ends 28, 29 of a single threadlike element 8, 38, 48 in a circumferentially opposite direction, to form an interleaved armor 9 which forms a weft-warp type fabric.

[00140]. According to an embodiment, said spindle 14 comprises a spindle stem 43, for example in a dog bone shape, from which return fingers 44 project cantilevering, suitable for acting as return elements for said at least one threadlike element 8, 38, 48, during at least step B and/or step D.

[00141]. By such a method, it is possible to fit said two or more layers on each other in a predictable and precise manner, and it is possible to implement a luminal endoprosthesis 1 having two or more coaxial layers.

[00142]. Those skilled in the art may make several adjustments and replacements of elements with others which are functionally equivalent to the embodiments described above in order to meet incidental and specific needs, without departing from the scope of

the following claims.

[00143]. According to an embodiment, a luminal endoprosthesis assembly 1 delimits at least partially a prosthesis lumen 2. This endoprosthesis assembly is suitable for an implant in an anatomical structure 3 which at least partially defines at least one cavity 4 and comprises at least one treatment portion 13.

[00144]. According to an embodiment, said luminal endoprosthesis assembly 1 comprises at least three layers 5, 6, 7, arranged coaxially and having, in undeformed conditions, a prevalent extension along a longitudinal direction X-X and defining a radial direction R-R orthogonal to said longitudinal direction X-X and an annular or substantially circumferential direction C-C orthogonal to said longitudinal X-X and radial R-R directions.

[00145]. According to an embodiment, each layer 5 or 6 or 7, in an undeformed condition, is substantially entirely superimposed on the adjacent layers 5, 6, 7.

[00146]. According to an embodiment, each layer 5 or 6 or 7 of said three layers 5, 6, 7 comprises at least one threadlike element 8 forming an interleaved armor 9 limited to said at least one layer 5 or 6 or 7.

[00147]. According to an embodiment, said luminal endoprosthesis 1 comprises at least one working portion 12, suitable for facing at least the treatment portion 13 of the anatomical structure 3.

[00148]. According to an embodiment, said luminal endoprosthesis 1 comprises at least one anchoring portion 10, suitable for anchoring to anatomical portions 11 of the walls of the cavity 4 of the

anatomical structure.

[00149]. According to an embodiment, said at least three layers 5, 6, 7 are geometrically identical to each other.

[00150]. According to an embodiment, said at least three layers 5, 6, 7 are separated from each other at least in said working portion 12, of the luminal endoprosthesis assembly 1, thus avoiding to provide connecting elements between one layer 5 or 6 or 7 and at least one adjacent layer.

[00151]. According to an embodiment, said at least one working portion 12 only includes said at least one threadlike element 8 which forms said armor 9 with its interlacement, or interleaving, which remains only inside the same layer 5 or 6 or 7 avoiding to connect adjacent layers.

[00152]. According to an embodiment, said working portion 12 of each layer 5 or 6 or 7, with the exception of a possible support thereof in the radial direction R-R to the adjacent layers 5 or 6 or 7, when the assembly is in undefomed condition, is structurally and geometrically separated from the adjacent layers 5 or 6 or 7, so as to be free to move with respect to the adjacent layers 5 or 6 or 7.

[00153]. According to an embodiment, said at least one threadlike element 8, 38, 48 of the armor 9 of each layer 5, 6, 7 defines a plurality of windows 15 suitable for putting the prosthesis lumen 2 in fluidic communication with the treatment portion 13 of the anatomical structure 3.

[00154]. According to an embodiment, said at least one working portion 12 of each layer 5, 6, 7, when in an undefomed condition,

has said plurality of windows 15 substantially identical to each other and identical to each other in all the layers 5, 6, 7.

[00155]. According to an embodiment, said at least one working portion 12 of each layer 5, 6, 7, when in undeformed conditions, has an extension in radial direction R-R or transverse to said longitudinal direction X-X, or diameter D1, D2, D3, smaller than the extension transverse to said longitudinal direction X-X, or diameter D4, of the at least one anchoring portion 10.

[00156]. According to an embodiment, said at least three layers 5, 6, 7, when in undeformed conditions, are mutually offset from each other along said circumferential direction C-C around said longitudinal direction X-X.

[00157]. According to an embodiment, at least one of said anchoring portions 10 of each layer 5, 6, 7 is connected to the adjacent anchoring portion 10 of the adjacent layer 5, 6, 7.

[00158]. Due to the above-mentioned embodiments, blood stream regularization is induced within the aneurysm zone, producing immediately after implantation the reduction of stress on the aneurysmal wall and, in the medium-long term, the remodeling of the aneurysmal wall itself.

[00159]. According to an embodiment, said at least one working portion 12 of each layer 5, 6, 7 has said plurality of windows 15. Said plurality of windows 15 are, when said assembly is in an undeformed condition, identical in shape and size in each layer of said layers 5, 6, 7.

[00160]. According to an embodiment, said at least three layers 5,

6, 7, when in undeformed conditions, are also identical in their transversal dimensions $D_1 = D_2 = D_3$, along said radial direction R-R, resulting when fitted one into the other, substantially resting against each other and avoiding a substantial radially directed action R-R if not that of support, and therefore substantially free to move at least along said longitudinal and circumferential directions X-X; C-C with respect to each other.

[00161]. According to an embodiment, at least one of said at least three layers 5, 6, 7, when in undeformed conditions, has a section transverse to its longitudinal direction X-X of non-circular shape 47.

[00162]. According to an embodiment, at least one of said at least three layers 5, 6, 7, when in undeformed conditions, has a section transverse to its longitudinal direction X-X of an ellipse or lenticular shape, or trilobed 49, or quadrilobed so as to maintain portions of its circumferential extension C-C separated and detached from at least one adjacent layer 5, 6, 7.

[00163]. According to an embodiment, said at least one layer of said at least three layers 5, 6, 7 which, when in undeformed conditions, has a section transverse to its longitudinal direction X-X of non-circular shape, has its cross-section which changes its angular orientation, or angular phasing, along the longitudinal extension X-X of the layer, defining precisely the clearance present between each layer along its whole longitudinal extension X-X or at least along the longitudinal extension X-X of its working portion 12.

[00164]. According to an embodiment, at least one of said at least

three layers 5, 6, 7, when in undeformed conditions, has a section transverse to its longitudinal direction X-X of variable dimensions along the longitudinal extension X-X of said layer 5, 6, 7.

[00165]. According to an embodiment, said at least three layers 5, 6, 7, when in undeformed conditions, are aligned angularly along said circumferential direction C-C aligning the plurality of windows 15 suitable for putting the prosthesis lumen into fluidic communication 2 with the treatment portion 13 of the anatomical structure 3, so that under deformed conditions of the assembly implanted in the vessel to be treated, the windows are offset between each layer, ensuring the desired porosity of the assembly.

[00166]. According to an embodiment, said threadlike element 8 has a circular section transverse to its longitudinal extension 50.

[00167]. According to an embodiment, said threadlike element 8 has an elliptical section transverse to its longitudinal extension 51; or elliptic section 51 with a diagonal of the ellipse directed substantially in the circumferential direction C-C of the assembly; or square section 52; or rectangular section 53; or rectangular section 53 with the longer side of the rectangle directed substantially in the circumferential direction C-C of the assembly; or polynomial section, for example hexagonal 54.

[00168]. According to an embodiment, said threadlike element 8 has a multilayer body, in which each layer is made of a different material.

[00169]. According to an embodiment, said threadlike element 8 has a multilayer body, in which the innermost layer, or core, is made

of metallic material 55, for example made of superelastic material, for example of nitinol®, and the outermost layer 56 is of a different material, for example made of bioabsorbable or bio-erodible material.

[00170]. According to an embodiment, said threadlike element 8 comprises at least one portion thereof of nitinol®.

[00171]. According to an embodiment, said threadlike element 8 comprises at least one portion thereof of a chromium-cobalt alloy.

[00172]. According to an embodiment, said threadlike element 8 comprises at least one portion thereof of MP35N.

[00173]. According to an embodiment, said threadlike element 8 comprises at least one portion thereof of Elgiloy®.

[00174]. According to an embodiment, said threadlike element 8 comprises at least one portion thereof of a polymeric material.

[00175]. According to an embodiment, said threadlike element 8 comprises at least one portion thereof of a bio-erodible polymeric material.

[00176]. According to an embodiment, said threadlike element 8 comprises at least one portion thereof of a bio-erodible polymeric material loaded with a drug, for example one or more drugs dispersed in polymeric matrices.

[00177]. According to an embodiment, said armor 9 interleaved with a threadlike element 8 has a weft and warp interleaving pattern obtained with a thread and simple interleaving with passage of each thread 8 over and then under the threads which said threadlike element 8 crosses, along said threadlike element 8.

[00178]. According to an embodiment, said armor 9 interleaved with a threadlike element 8 has a weft and warp interleaving pattern obtained with a single thread and simple interleaving with passage of each thread 8 above and then below the threads which said threadlike element 8 crosses, along said threadlike element 8.

[00179]. According to an embodiment, said armor 9 interleaved with a threadlike element 8 has a weft and warp interleaving pattern obtained with a thread and interleaving with passage of each thread 8 twice over and then twice under the threads which are crossed along said thread 8.

[00180]. According to an embodiment, said armor 9 interleaved with a threadlike element 8 has a weft and warp interleaving pattern obtained with a first thread 8 interleaved with a second thread 57 having a section larger than the first thread.

[00181]. According to an embodiment, said armor 9 interleaved with a threadlike element 8 has a weft and warp interleaving pattern obtained with a first thread 8 interleaved with a second thread 57, where said second thread 58 comprises at least one portion thereof of bioerodible material.

[00182]. According to an embodiment, said armor 9 interleaved with a threadlike element 8 has a weft and warp interleaving pattern obtained with a first thread 8 interleaved with a constant interleaving angle of the thread stretches, when said assembly is in undeformed condition.

[00183]. According to an embodiment, said armor 9 interleaved with a threadlike element 8 has a weft and warp interleaving pattern

obtained with at least one thread 8 interleaved with a constant interleaving angle of the thread stretches by 45° with respect to the circumferential direction C-C, when said assembly is in undeformed conditions.

[00184]. According to an embodiment, said armor 9 interleaved with a threadlike element 8 has a weft and warp interleaving pattern obtained with at least one thread 8 interleaved with a constant interleaving angle of the thread stretches smaller than 45° with respect to the circumferential direction C-C, when said assembly is in undeformed conditions.

[00185]. According to an embodiment, said armor 9 interleaved with a threadlike element 8 has a weft and warp interleaving pattern obtained with at least one thread 8 interleaved with a constant interleaving angle of the thread stretches greater than 45° with respect to the circumferential direction C-C, when said assembly is in undeformed conditions.

[00186]. According to an embodiment, said armor 9 interleaved with a threadlike element 8 has a weft and warp interleaving pattern obtained with at least one interleaved thread 8, forming a plurality of windows 15 having a predefined width in a direction parallel to the longitudinal direction X-X of 3 mm, in undeformed conditions of the assembly.

[00187]. According to an embodiment, said assembly of said at least three layers 5, 6, 7 each comprising said armor 9 interleaved with a threadlike element 8, having a weft and warp interleaving pattern obtained with at least one interleaved thread 8, forms a plurality

of windows 15 which, when the three layers are superimposed and in undeformed conditions, form superimposed windows having an overall free width of assembly in a direction parallel to the longitudinal direction X-X of 1 mm.

[00188]. According to an embodiment, said assembly of layers 5, 6, 7 each comprising said armor 9 interleaved with a threadlike element 8, having a weft and warp interleaving pattern obtained with at least one interleaved thread 8, forms a plurality of windows 15 which, when the layers are superimposed and in undeformed conditions, form superimposed windows having overall free width of assembly in a direction parallel to the predefined longitudinal direction X-X; where in the single layer 5, 6, 7, the number of windows 15 of the single layer is given by the following relationships:

[00189]. $N_{cl} = \pi\bar{\Phi}/N_l \times D_c$ and

[00190]. $S_l = 360/N_{cl} \times N_l$

[00191]. where

[00192]. N_{cl} : number of windows 15 of the single layer 5, 6, 7

[00193]. $\bar{\Phi}$: diameter of the working portion 12 of the assembly

[00194]. N_l : number of layers 5, 6, 7 forming the assembly

[00195]. D_c : diagonal of the window resulting from the overlap superposition and angular offset of the layers

[00196]. S_l : angular offset between the layers in the assembly.

[00197]. According to an embodiment, said armor 9 interleaved with a threadlike element 8 has a weft and warp interleaving pattern obtained with at least one interleaved thread 8, said interleaving

is obtained, in at least some interleaving, by pulling or tensioning thread 8 during weaving.

[00198]. According to an embodiment, at least one layer of said layers 5, 6, 7 comprises a first telescopic layer portion 59 housed in a second telescopic layer portion 60 mutually movable in a longitudinal direction X-X.

[00199]. According to an embodiment, the thread used for making a layer is characterized by a circular section. Various types of sections other than the circular one can be configured to provide the layers, or some of them, with particular features, such as: greater radial or axial rigidity; greater coverage of the vessel surface or interface with the aneurysm; specific fluid dynamic effects.

[00200]. According to an embodiment, the characterizing element of the thread is the material of which it is made. A preferred solution provides the use of a nitinol® thread. The following may be considered as alternative materials: other highly elastic metal alloys (CoCr alloys, MP35N, Elgiloy®, etc.), polymers, bioerodible polymers or bioerodible polymers loaded with drugs.

[00201]. The layers can be made with threads of different materials, to obtain particular functional performances. In particular, the introduction of bioerodible polymer threads for making one or more layers, or of a part of the layer, allows to have assemblies provided with a variable porosity over time. From this point of view, a particularly interesting shape for making the thread is that which provides, for example, a metal core coated with a bioerodible

polymer.

[00202]. According to an embodiment, the adoption of drugs dispersed in polymeric matrices would allow to implement diversified and customized therapeutic solutions.

[00203]. According to an embodiment, the interleaving of the threads in the preferred embodiment is characterized by a simple weft-warp interleaving pattern, obtained with a single thread, and with 45° crossings with respect to the longitudinal axis of the assembly. The interleaving of the threads and its features are fundamental elements for defining the porosity and conformability, in a broad sense, of the device. The possible variation factors identified are:

[00204]. - the weaving scheme and/or

[00205]. - the diameter and the shape of the interleaved threads and/or

[00206]. - the materials of the woven threads and/or

[00207]. - the crossing angle of the interleaved threads and/or

[00208]. - the tensioning of the interleaved threads and/or

[00209]. - the mix of two or more of the aforesaid factors.

[00210]. According to an embodiment, the interleaving pattern adopted in the formation of the layers can confer to the assembly, with the same diameter and material of the threads, specific mechanical features, in particular as regards the conformability and the possibility for the threads of performing micro-movements when exposed to the blood stream. These two features can be obtained in an isotropic or anisotropic way, always playing on the interleaving patterns.

[00211]. According to an embodiment, the use of threads of different diameters and/or shapes can result in layers of specific conformability and specific porosity. These embodiments differ in the choice of having a single thread that forms the entire layer.

[00212]. According to an embodiment, solutions are adopted in which metal threads variably alternating are interleaved with threads of bioerodible polymer to obtain low initial porosities, intended to increase with the dissolving of the polymer meshes.

[00213]. According to an embodiment, another design lever for varying the isotropic and/or anisotropic porosity and conformability is represented by the interleaving angles of the threads. Winding angles with respect to the longitudinal axis of the assembly which are very large or very small will provide low porosities (other factors being equal). Small winding angles will provide low radial resistance, conversely for large winding angles.

[00214]. According to an embodiment, the tensioning imparted to the threads at the time of weaving allows to obtain layers with more tensioned threads characterized by lower conformability and possibility of movement for the threads.

[00215]. According to an embodiment, the great design flexibility is given by the mix of the interleaving variants listed above. Two examples of particular interest are given by solutions with a variable angle interleaving, for radially more rigid ends and a more conformable working part, or with the creation of a central area with low porosity at the aneurysmal part (possibly using biodegradable threads).

[00216]. According to an embodiment, the preferred design of the assembly provides for the use of 3 equal layers, equally offset from each other in a circumferential angular direction.

[00217]. According to an embodiment, a fundamental parameter of the device is the measurement of the diagonal D_c of the single window or cell of the assembly or stent, as a result of the superposition of a plurality of equal layers. This diagonal D_c is important because it measures the porosity of the device. It basically represents the preferable porosity of the assembly.

[00218]. According to an embodiment, the same value of diagonal D_c can be obtained by superimposing many layers consisting of single windows or large cells, or a few layers made up of individual small cells. The fundamental relationships that regulate these geometries are the following:

[00219]. - number of cells of the single layer:

[00220]. $N_{cl} = \pi\Phi / (N_l \times D_c)$

[00221]. - angular offset between layers in the complete device:

[00222]. $S_l = 360 / (N_{cl} \times N_l)$

[00223]. where:

[00224]. N_{cl} : number of cells of the single layer;

[00225]. Φ : diameter of the working part of the complete stent;

[00226]. N_l : number of layers forming the complete stent;

[00227]. D_c : diagonal of the cell resulting from the superposition and offset of the layers;

[00228]. S_l : angular offset between layers in the complete device.

[00229]. According to an embodiment, D_c is 1 mm; N_l is 3; Φ is 20

mm; then $N_{cl} = 20$ and $S_l = 6^\circ$

[00230]. The same value of D_c can be obtained with 4 layers, but having $N_{cl} = 16$ and $S_l = 5.6^\circ$

[00231]. Achieving the same final porosity value D_c with many layers of loose meshes rather than few with thicker meshes can give the stent a greater conformability and possibility of movement for the individual threads but increasing the risk of inhomogeneity in tortuous areas.

[00232]. Another variant to the design obtainable playing on the layers is represented by the possibility of creating, along the axis, zones with more or less layers.

[00233]. According to an embodiment, the use of different layers according to the thickness of the mesh, the diameter and shape of the thread, the material of the thread, the winding angle of the thread, allows a considerable flexibility of production. These variations allow to obtain many nuances of performances in terms of mechanical behavior and conformability.

[00234]. In this perspective, the possibility of introducing bioerodible polymer layers to give the stent a variable porosity over time, appears to be of particular interest.

[00235]. According to an embodiment, the individual layers can be connected to each other by crimped bushings, as in the basic design, or by crimped bands, welds, ties, dedicated anchoring systems.

[00236]. According to an embodiment, the number of connection points can be varied: more "linked" layers result in stiffer, more flexibly rigid, less conformable stents, with less mobility of the threads

but more precise and homogeneous in terms of porosity. The effects of the connection can be suitably distributed depending on the functionality to be achieved.

[00237]. An interesting implementation option based on the interconnection pattern between layers can be as follows. If the various layers are connected to each other, as in the preferred design, only at the ends and without oversizing with respect to each other, the layers in the working area will have a certain degree of relative circumferential freedom. This freedom will give rise to a local alteration of the resulting porosity, especially in situations of tortuous or in any case winding implant conditions. In particular, again in the basic design which provides three offset layers so as to obtain at least a minimum initial resulting porosity, the alteration caused by curves and tortuosities will lead to unavoidably higher local porosity with respect to the undeformed condition (wider meshes). Overturning this observation, that is, keeping the connection between layers at the ends only, but with perfectly phased layers, there will be an initial undeformed condition with large mesh. In tortuous or winding conditions, the resulting relative movement between layers will inevitably produce smaller resulting meshes, i.e. lower porosities. Such a device can be useful for devices intended for curved implantation, with aneurysm to the extrados, because the porosity of the area facing the aneurysm itself will be lower than the original one, and therefore capable of enhancing the desired flow laminarization effect.

[00238]. In the preferred design, the three layers are "gently in contact" with each other, that is, they touch each other without a significant exchange of radial forces. By playing with the differences in diameter between layers, it is possible to confer specific functions to the stent as a whole: layers that touch with significant radial force exchange will produce stiffer, less conformable stents, and with less possibility of micro-movements of the individual threads under the action of the blood stream; conversely with non-touching layers. Some of the variants that can be devised are represented herein.

[00239]. The layers can be separated from one another only by virtue of the difference in diameter, or by separators.

[00240]. A solution of particular interest for having separate layers, at a stable and controlled distance, without using separators, consists in providing one or more layers of polygonal shapes. For example, in a three-layer version, the central one has a vaguely triangular shape. By playing with the magnitude of this triangularization, different distances can be obtained between the outer and inner layers. Other polygonal shapes can also serve the purpose.

[00241]. The generatrixes in contact between the layers can be rectilinear, that is, parallel to the axis of the stent, or follow specific shapes, for example a helix, to give particular trajectories to the intra-layer blood stream.

[00242]. The axial shape of the layers can also be subjected to variations in order to obtain specific functionalities, for example

with progressive curvature to avoid the "dog bone" effect at the ends, following the implantation, or an intermediate curved layer to create special fluidic effects.

[00243]. The preferred design provides a stent which, although made up of layers, is monolithic as a whole. It is possible to imagine a solution with two telescopic stents for implant to achieve the optimal coverage of long lesions.

[00244]. With the solutions described above, the luminal endoprosthesis assembly allows multiple clinical applications:

[00245]. a) treatment of aneurysms in aortic stretches;

[00246]. b) treatment of aneurysms in peripheral vessels;

[00247]. c) treatment of aortic dissections.

REFERENCE LIST

- 1 Luminal endoprosthesis
- 2 Prosthetic lumen
- 3 Anatomical structure
- 4 Anatomical structure cavity
- 5 First layer
- 6 Second layer
- 7 Third layer
- 8 Threadlike element, or first threadlike element
- 9 Armor
- 10 Anchoring portion of the endoprosthesis
- 11 Anatomical portion of the anatomical structure
- 12 Working portion of the endoprosthesis
- 13 Pathological portion of the anatomical structure
- 14 Spindle
- 15 Windows
- 16 Space between adjacent layers
- 17 Aneurysm
- 18 Aortic arch
- 19 Descending aorta
- 20 Thoracic aorta
- 21 Abdominal aorta
- 22 Aortic isthmus
- 23 Collateral vessels
- 24 Layer connection device, or connection element
- 25 End connection device, or connection element
- 26 Proximal endoprosthesis end

- 27 Distal endoprosthesis end
- 28 First threadlike element end
- 29 Second threadlike element end
- 30 Crossing site
- 31 Release device
- 32 Support device
- 33 Adjustment device
- 34 Graduated element of the adjustment device
- 35 Indicator of the adjustment device
- 36 Bottom wall of the support device
- 37 Stop portion
- 38 Second threadlike element
- 39 Crimping tool
- 40 Centering hole
- 41 Guiding element of the adjustment device
- 42 Return and winding device
- 43 Spindle stem
- 44 Spindle fingers
- 45 Reversible closing means
- 46 Support structure
- 47 Circular cross-section at the longitudinal extension of the single layer
- 48 Third threadlike element
- 49 Trilobed cross-section at the longitudinal extension of the single layer
- 50 Circular cross-section of the thread
- 51 Elliptical cross-section of the thread

52 Square cross-section of the thread
53 Rectangular cross-section of the thread
54 Hexagonal cross-section of the thread
55 Metallic core of the thread
56 Outer layer of the threads of bioerodible material
57 Second thread larger than the first thread
58 Second thread of bioerodible material
59 First telescopic layer portion
60 Second telescopic layer portion
61 Stent delivery system
62 First release sheath
63 Second release sheath
Ncl Number of windows of the single layer
 Φ diameter of the working portion of the assembly
Nl number of layers forming the assembly
Dc diagonal of the window resulting from the overlap
superposition and angular offset of the layers
S1 angular offset between the layers in the assembly
D1 First layer caliber or nominal diameter
D2 Second layer caliber or nominal diameter
D3 third layer caliber or nominal diameter
D4 Caliber or nominal diameter of the anchoring portion
X-X Longitudinal direction
R-R Radial direction
C-C Circumferential direction
RE External radial direction

CLAIMS

1. A luminal endoprosthesis assembly (1) which at least partially delimits a prosthesis lumen (2), suitable for an implant in an anatomical structure (3) which at least partially defines at least one cavity (4) and comprises at least one treatment portion (13), wherein

- said luminal endoprosthesis assembly (1) comprises at least three layers (5, 6, 7), arranged coaxially and having, in undeformed conditions, a prevalent extension along a longitudinal direction (X-X) and defining a radial direction (R-R) orthogonal to said longitudinal direction (X-X) and an annular or substantially circumferential direction (C-C) orthogonal to said longitudinal (X-X) and radial (R-R) directions;
- each layer (5 or 6 or 7), in an undeformed condition, is substantially entirely superimposed on the adjacent layers (5, 6, 7);
- each layer (5 or 6 or 7) of said at least three layers (5, 6, 7) comprises one threadlike element (8) forming an armor (9) limitedly interlaced to said at least one layer (5 or 6 or 7);
- said luminal endoprosthesis (1) comprises at least one working portion (12), suitable for facing at least the treatment portion (13) of the anatomical structure (3), and wherein
- said luminal endoprosthesis (1) comprises at least two anchoring portions (10), longitudinally opposite with respect to said at least one working portion (12) and suitable for being anchored to anatomical portions (11) of the walls of the cavity (4) of the

anatomical structure (3);

wherein

- said at least three layers (5, 6, 7) are geometrically and structurally identical to each other; and wherein
- said at least three layers (5, 6, 7) are separated from each other, at least in said working portion (12), of the luminal endoprosthesis assembly (1), thus avoiding to provide connecting elements between one layer (5 or 6 or 7) and at least one adjacent layer; and wherein
- said at least one working portion (12) only includes said at least one threadlike element (8) which forms said armor (9) with its interleaving which remains only inside the same layer (5 or 6 or 7) avoiding to connect adjacent layers and avoiding the presence of other fabrics or structures or grafts; and wherein
- said working portion (12) of each layer (5 or 6 or 7), with the exception of a possible support thereof in the radial direction (R-R) to the adjacent layers (5 or 6 or 7), when the assembly is in undeformed condition, is structurally and geometrically separated from the adjacent layers (5 or 6 or 7) so as to be free to move with respect to the adjacent layers (5 or 6 or 7); and wherein
- said at least one filiform or threadlike element (8, 38, 48) of the armor (9) of each layer (5, 6, 7) defines a plurality of windows (15) suitable for putting the prosthesis lumen (2) in fluidic communication with the treatment portion (13) of the anatomical structure (3); and wherein
- said at least one working portion (12) of each layer (5, 6, 7), when in an undeformed condition, has said plurality of windows (15)

substantially identical to each other and identical to each other in all the layers (5, 6, 7); and wherein

- said at least one working portion (12) of each layer (5, 6, 7), when in undeformed conditions, has an extension in radial direction (R-R) or transverse to said longitudinal direction (X-X), or diameter (D1, D2, D3), smaller than the extension transverse to said longitudinal direction (X-X), or diameter (D4), of the at least two anchoring portions (10); and wherein
- said at least three layers (5, 6, 7), when in undeformed conditions, are mutually offset from each other along said circumferential direction (C-C) around said longitudinal direction (X-X); and where
- at least one of said anchoring portions (10) of each layer (5, 6, 7) is connected to the adjacent anchoring portion (10) of the adjacent layer (5, 6, 7).

2. A luminal endoprosthesis assembly (1) according to claim 1, having a shape substantially as a dog bone, comprising opposite ends (26, 27) larger than the portion of the luminal endoprosthesis (1) longitudinally interposed between said two opposite ends (26, 27); and/or wherein

said at least one anchoring portion (10) is larger than said at least one working portion (12).

3. A luminal endoprosthesis assembly (1) according to claim 1 or 2, wherein said at least one anchoring portion (10) comprises at

least one connecting device (24) between said three layers (5, 6, 7).

4. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein each layer (5 or 6 or 7) of said three layers (5, 6, 7) comprises a single threadlike element (8, 38, 48).

5. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein said three layers (5, 6, 7), in said working portion (12), are mutually spaced by a predetermined distance, said distance between the layers is equal to or greater than the distance that prevents the endothelial cells from adhering, thereby connecting the layers, preventing said endothelial cells from forming a bridge-like connection between the layers, for preventing a compaction thereof, and wherein said distance between the adjacent layers forms a space which extends without interruption at least along the whole working portion (12) of the endoprosthesis.

6. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein said three layers are coaxial; and/or wherein

said three layers comprise a first layer (5) having a predetermined nominal caliber of first layer (D1), a second layer (6) having a predetermined nominal caliber of second layer (D2) smaller than said nominal caliber of first layer (D1), and a third layer (7), having a predetermined nominal caliber of third layer (D3) smaller than

both said nominal caliber of first layer (D1) and said nominal caliber of second layer (D2); and/or wherein said luminal endoprosthesis (1) comprises three armors (9) which form said three layers (5, 6, 7).

7. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein said first threadlike element end (28) and said second threadlike element end (29) form a crossing angle (α) with respect to the longitudinal axis of the luminal endoprosthesis (1); and/or wherein said crossing angle (90) is of between 0.05 mm and 0.3 mm; and/or wherein said crossing angle (90) is of between 40° and 50°.

8. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein said crossing angle (α) is substantially equal to 45°.

9. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein the armor (9) formed by the at least one threadlike element (8, 38, 48) of one layer is circumferentially offset with respect to the armor of one or more adjacent layers by a predetermined amount of offset smaller than the circumferential distance between two successive crossing sites (30) and/or by an amount of offset smaller than one third of the circumferential distance between two successive crossing sites (30).

10. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein said at least one threadlike element (8, 38, 48) is made of a super-elastic and/or shape memory material; and/or wherein

 said at least one threadlike element (8, 38, 48) is at least partially made of nitinol; and/or wherein

 said at least one threadlike element (8, 38, 48) is made of material suitable for maintaining the memory of a predefined shape and reacquire it when it undergoes thermal variations and/or mechanical stresses; and/or wherein

11. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein said luminal endoprosthesis (1) is a stent-no-graft.

12. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein said working portion (12) has a substantially frustoconical shape.

13. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein said luminal endoprosthesis (1) comprises a bifurcation of the prosthesis lumen (2).

14. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein

 - said plurality of windows (15) are, when said assembly is in an

undeformed condition, identical in shape and size in each layer of said layers (5, 6, 7).

15. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein

- said at least three layers (5, 6, 7), when in undeformed conditions, are also identical in their transversal dimensions (D1 = D2 = D3), along said radial direction (R-R), resulting when fitted one into the other, substantially resting against each other and avoiding a substantial radially directed action (R-R) if not that of support, and therefore substantially free to move at least along said longitudinal and circumferential directions (X-X; C-C) with respect to each other.

16. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein

- at least one of said at least three layers (5, 6, 7), when in undeformed conditions, has a section transverse to its longitudinal direction (X-X) of non-circular shape (47);

and/or wherein

- at least one of said at least three layers (5, 6, 7), when in undeformed conditions, has a section transverse to its longitudinal direction (X-X) of an ellipse or lenticular shape, or trilobed (47), or quadrilobed so as to maintain portions of its circumferential extension (C-C) separated and detached from at least one adjacent

layer (5, 6, 7);

and/or wherein

said at least one layer of said at least three layers (5, 6, 7) which, when in undefomed conditions, has a section transverse to its longitudinal direction (X-X) of non-circular shape, has its cross-section which changes its angular orientation, or angular phasing, along the longitudinal extension (X-X) of the layer[defining precisely the clearance present between each layer along its whole longitudinal extension (X-X) or at least along the longitudinal extension (X-X) of its working portion (12);

and/or wherein

- at least one of said at least three layers (5, 6, 7), when in undefomed conditions, has a section transverse to its longitudinal direction (X-X) of variable dimensions along the longitudinal extension (X-X) of said layer (5, 6, 7).

17. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein

- said threadlike element (8) has a circular section transverse to its longitudinal extension (50);

and/or wherein

- said threadlike element (8) has an elliptical section transverse to its longitudinal extension (51); or elliptic section (51) with a diagonal of the ellipse directed substantially in the circumferential direction (C-C) of the assembly; or square section

(52); or rectangular section (53); or rectangular section (53) with the longer side of the rectangle directed substantially in the circumferential direction (C-C) of the assembly; or polynomial section, for example hexagonal (54).

18. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein

- said threadlike element (8) has a multilayer body, in which each layer is made of a different material;

and/or wherein

- said threadlike element (8) has a multilayer body, in which the innermost layer, or core, is made of metallic material (55), for example made of superelastic material, for example of nitinol®, and the outermost layer (56) is of a different material, for example made of bioabsorbable or bio-erodible material;

and/or wherein

- said threadlike element (8) comprises at least one portion thereof of nitinol®; and/or wherein

- said threadlike element (8) comprises at least one portion thereof of a chromium-cobalt alloy; and/or wherein

- said threadlike element (8) comprises at least one portion thereof of MP35N; and/or wherein

- said threadlike element (8) comprises at least one portion thereof of Elgiloy®; and/or wherein

- said threadlike element (8) comprises at least one portion thereof

of a polymeric material; and/or wherein

- said threadlike element (8) comprises at least one portion thereof of a bioerodible polymeric material; and/or wherein
- said threadlike element (8) comprises at least one portion thereof of a bioerodible polymeric material loaded with a drug, for example one or more drugs dispersed in polymeric matrices.

19. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein

- said armor (9) interleaved with a threadlike element (8) has a weft and warp interleaving pattern obtained with a thread and simple interleaving with passage of each thread (8) over and then under the threads which said threadlike element (8) crosses, along said threadlike element (8);

and/or wherein

- said armor (9) interleaved with a threadlike element (8) has a weft and warp interleaving pattern obtained with a single thread and simple interleaving with passage of each thread (8) above and then below the threads which said threadlike element (8) crosses, along said threadlike element (8);

and/or wherein

- said armor (9) interleaved with a threadlike element (8) has a weft and warp interleaving pattern obtained with a thread and interleaving with passage of each thread (8) twice over and then twice under the threads which are crossed along said thread (8);

and/or wherein

- said armor (9) interleaved with a threadlike element (8) has a weft and warp interleaving pattern obtained with a first thread (8) interleaved with a second thread (57) having a section larger than the first thread;

and/or wherein

- said armor (9) interleaved with a threadlike element (8) has a weft and warp interleaving pattern obtained with a first thread (8) interleaved with a second thread, where said second thread (58) comprises at least one portion thereof of bioerodible material;

and/or wherein

- said armor (9) interleaved with a threadlike element (8) has a weft and warp interleaving pattern obtained with a first thread (8) interleaved with a constant interleaving angle of the thread stretches, when said assembly is in undeformed condition;

and/or wherein

- said armor (9) interleaved with a threadlike element (8) has a weft and warp interleaving pattern obtained with at least one thread (8) interleaved with a constant interleaving angle of the thread stretches by 45° with respect to the circumferential direction (C-C), when said assembly is in undeformed conditions;

and/or wherein

- said armor (9) interleaved with a threadlike element (8) has a weft and warp interleaving pattern obtained with at least one thread (8) interleaved with a constant interleaving angle of the thread

stretches smaller than 45° with respect to the circumferential direction (C-C), when said assembly is in undeformed conditions; and/or wherein

- said armor (9) interleaved with a threadlike element (8) has a weft and warp interleaving pattern obtained with at least one thread (8) interleaved with a constant interleaving angle of the thread stretches larger than 45° with respect to the circumferential direction (C-C), when said assembly is in undeformed conditions; and/or wherein
- said armor (9) interleaved with a threadlike element (8) has a weft and warp interleaving pattern obtained with at least one interleaved thread (8), forming a plurality of windows (15) having a predefined width in a direction parallel to the longitudinal direction (X-X) of 3 mm, in undeformed conditions of the assembly.

20. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein

- said assembly of said at least three layers (5, 6, 7) each comprising said armor (9) interleaved with a threadlike element (8), having a weft and warp interleaving pattern obtained with at least one interleaved thread (8), forms a plurality of windows (15) which, when the three layers are superimposed and in undeformed conditions, form superimposed windows having an overall free width of assembly in a direction parallel to the longitudinal direction (X-X) of 1 mm;

and/or wherein

- said assembly of layers (5, 6, 7) each comprising said armor (9) interleaved with a threadlike element (8), having a weft and warp interleaving pattern obtained with at least one interleaved thread (8), forms a plurality of windows (15) which, when the layers are superimposed and in undeformed conditions, form superimposed windows having an overall free width of assembly in a direction parallel to the predefined longitudinal direction (X-X); wherein
- in the single layer (5, 6, 7), the number of windows (15) of the single layer is given by the following relationships:

$$N_{cl} = \pi \Phi / (N_l \times D_c) \text{ and}$$

$$S_l = 360 / (N_{cl} \times N_l)$$

where

N_{cl} : number of windows (15) of the single layer (5, 6, 7);

Φ : diameter of the working portion (12) of the assembly;

N_l : number of layers (5, 6, 7) forming the assembly;

D_c : diagonal of the window resulting from the overlap superposition and angular offset of the layers;

S_l : angular offset between the layers in the assembly.

21. A luminal endoprosthesis assembly (1) according to any one of the preceding claims, wherein

- said armor (9) interleaved with a threadlike element (8) has a weft and warp interleaving pattern obtained with at least one interleaved thread (8), said interleaving is obtained, in at least

some interleaving, by pulling or tensioning thread (8) during weaving.

1/20

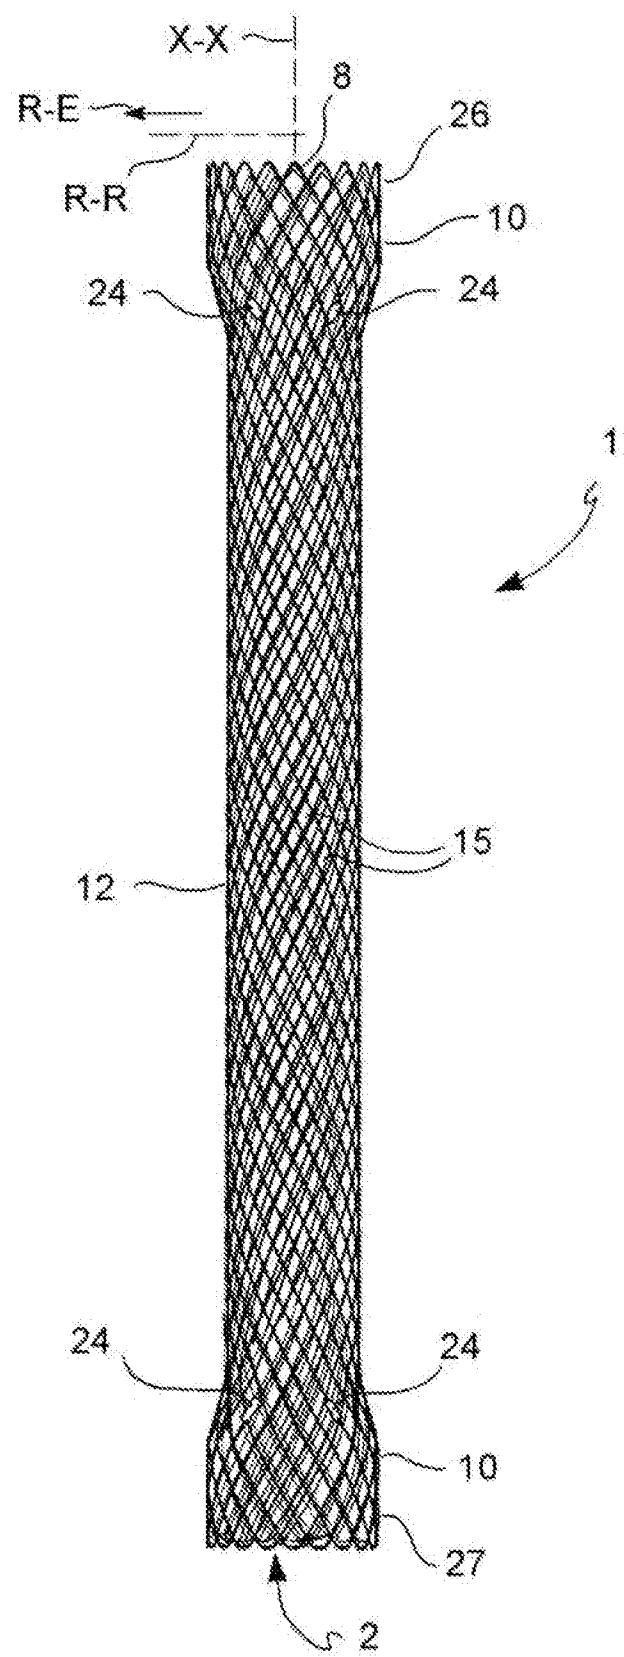


FIG.1

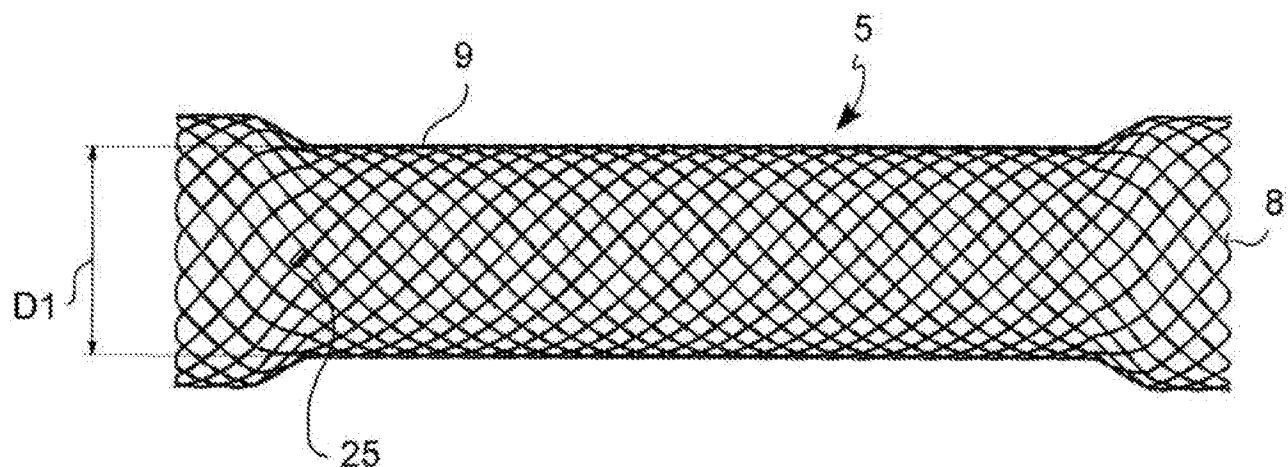


FIG. 2A

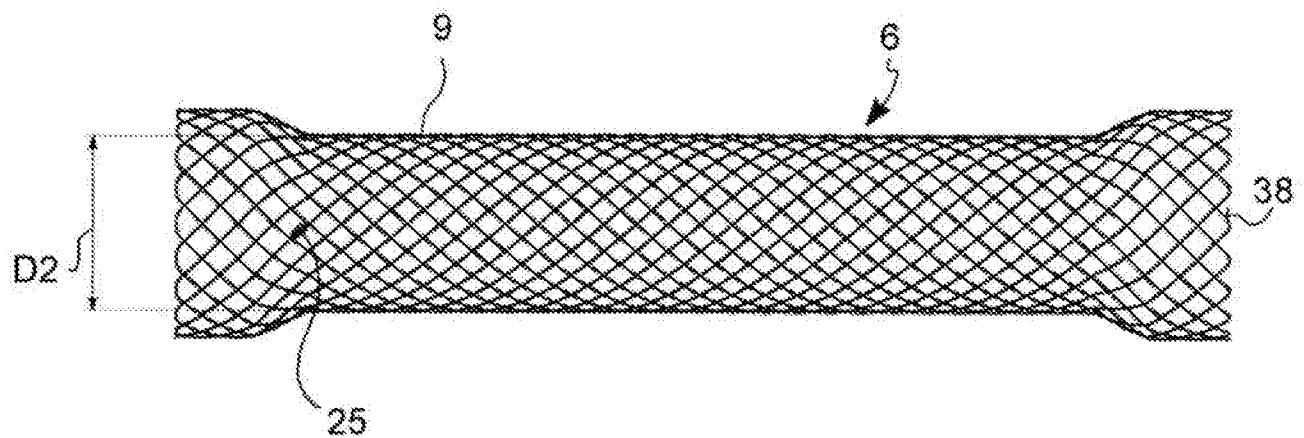


FIG. 2B





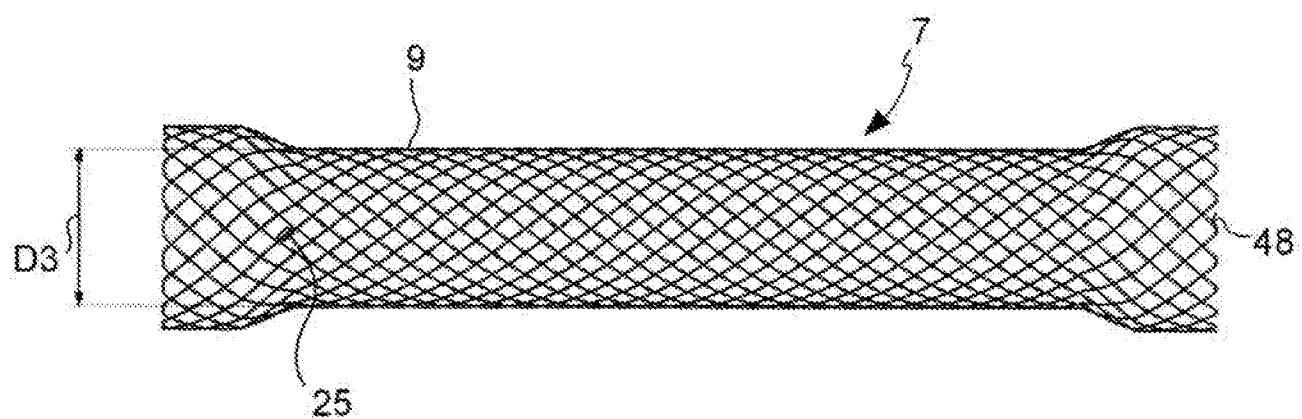


FIG. 2C

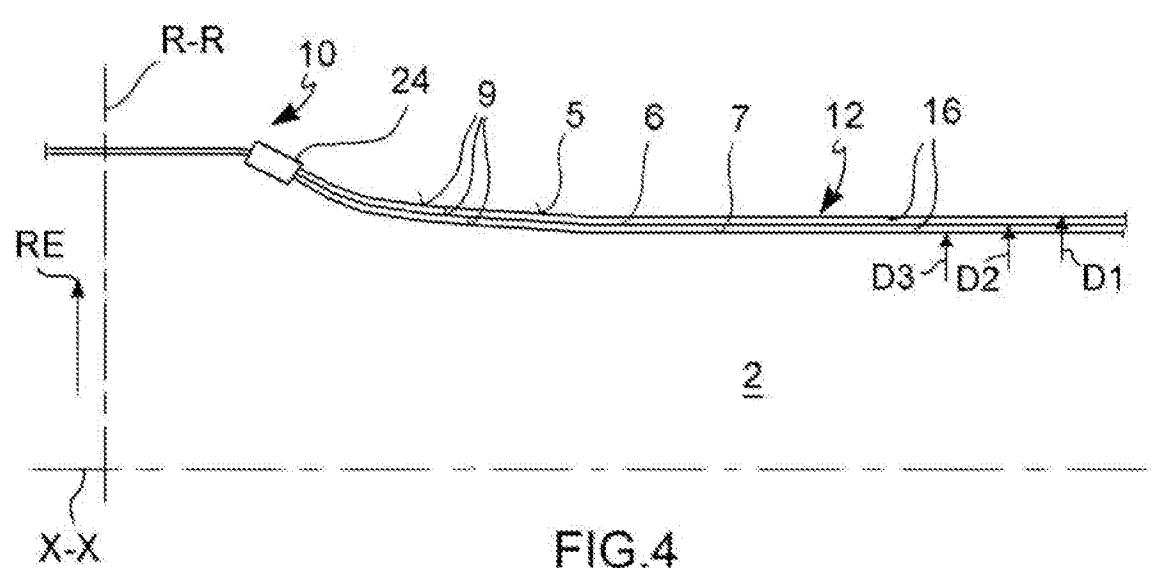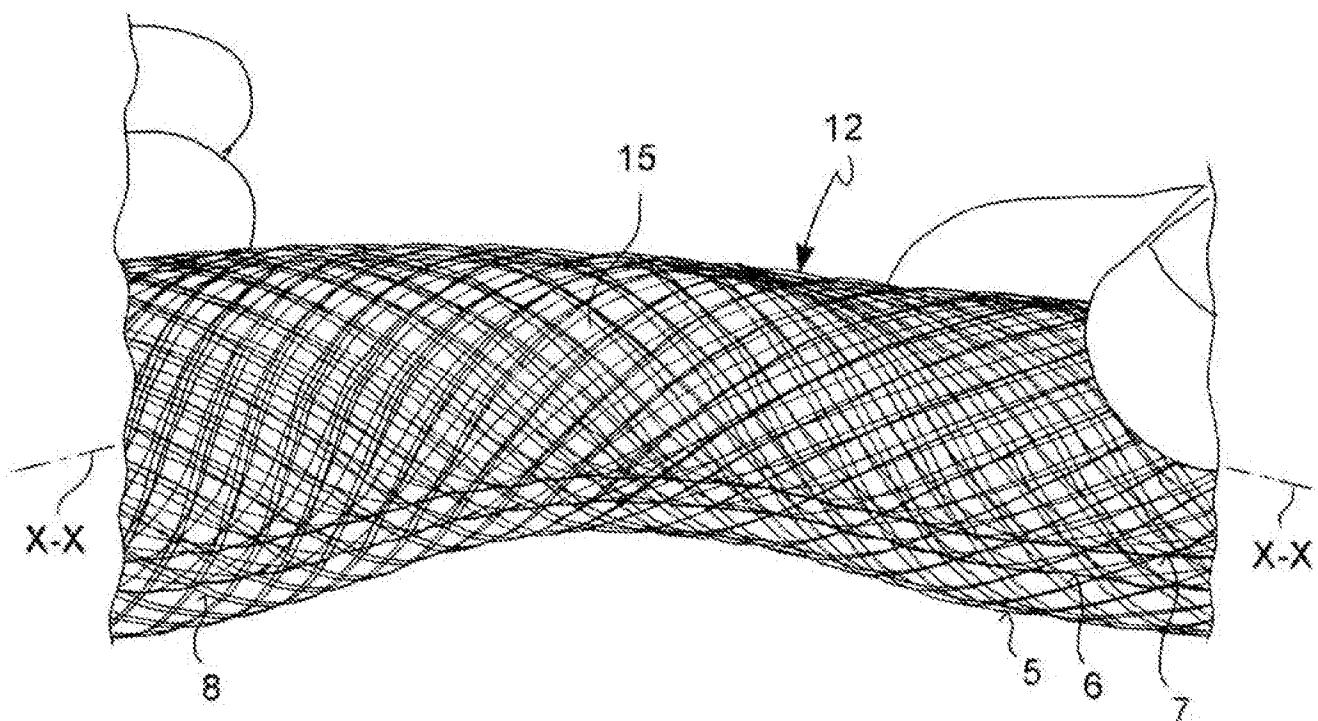

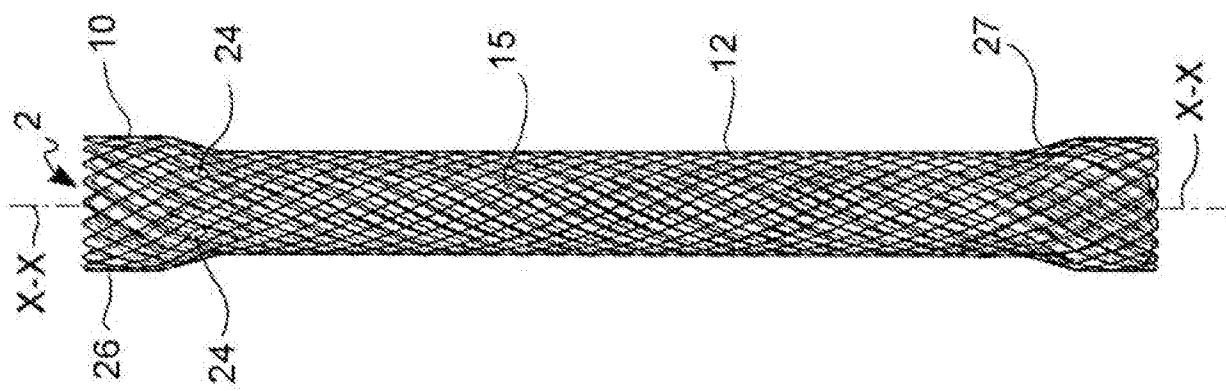

四

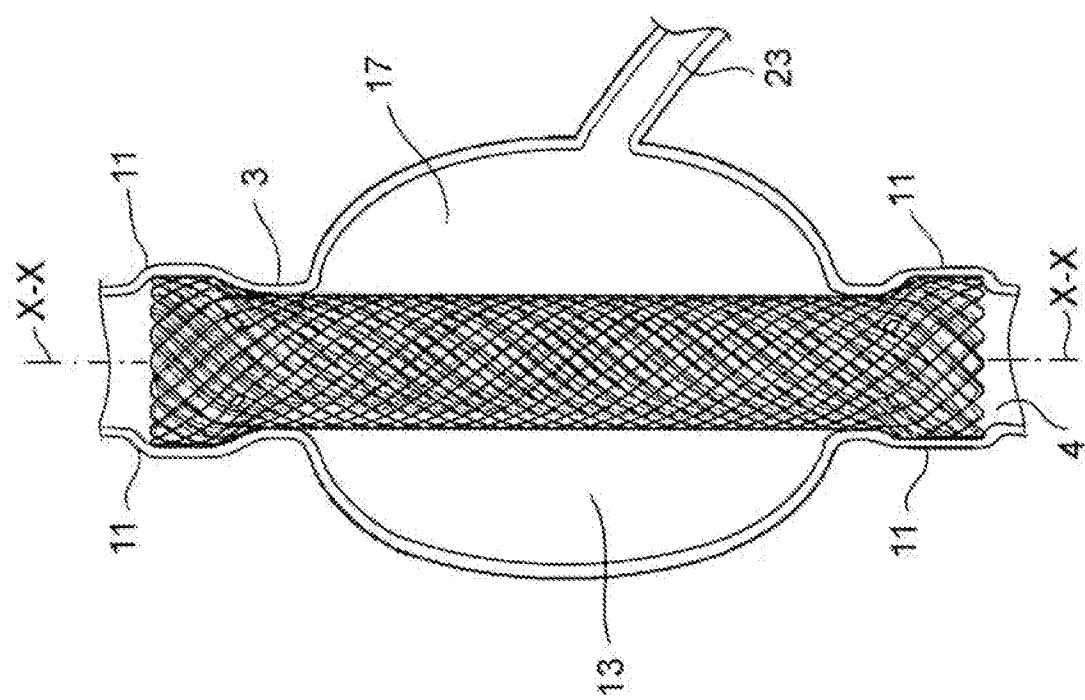

५६

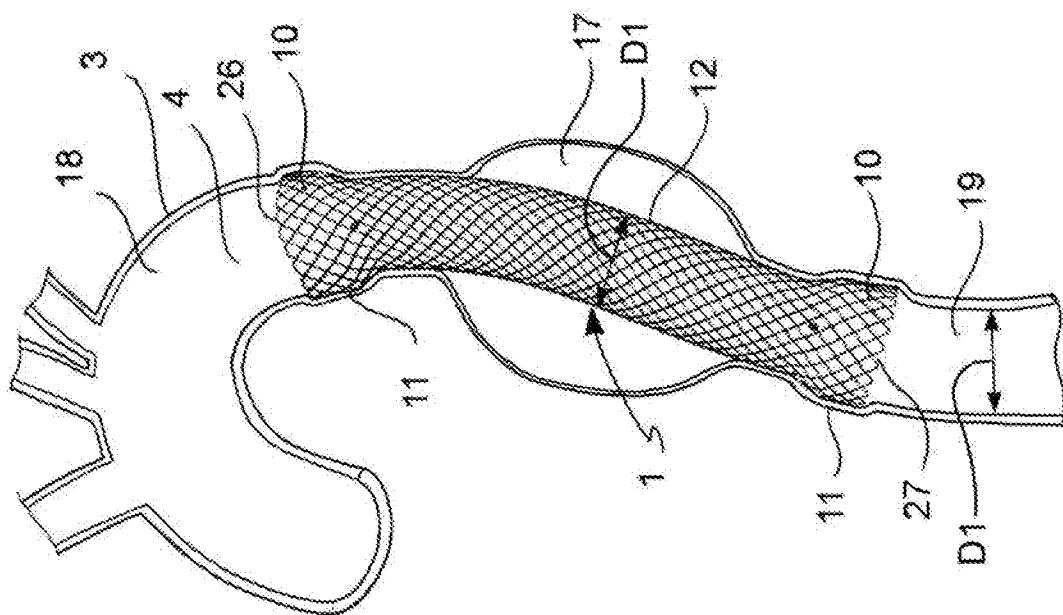


FIG. 8

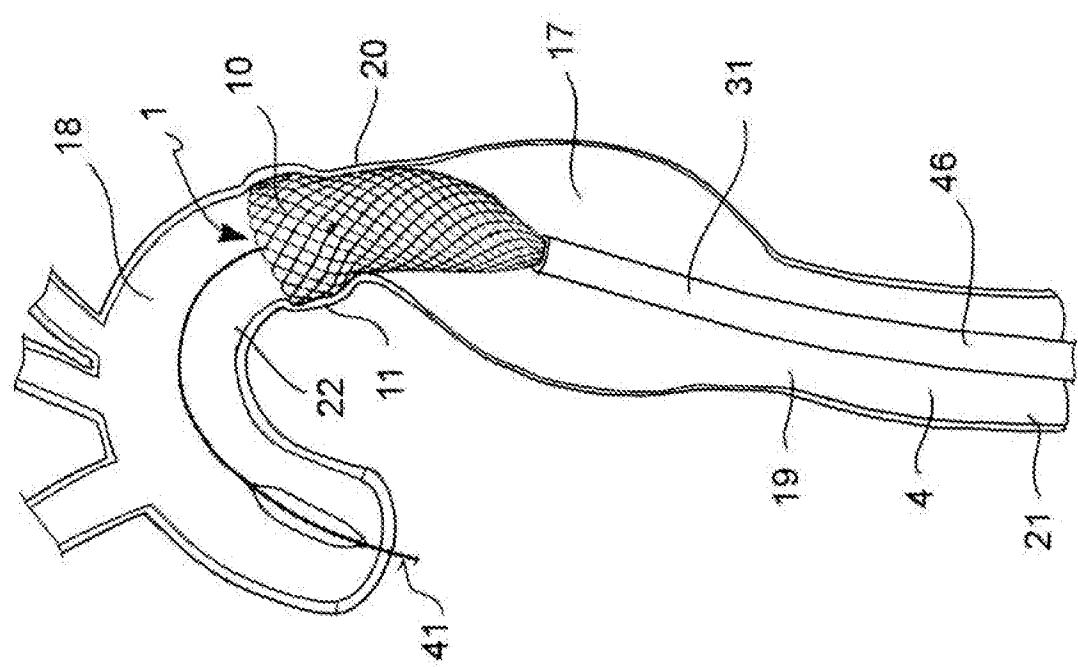


FIG. 7

6/20

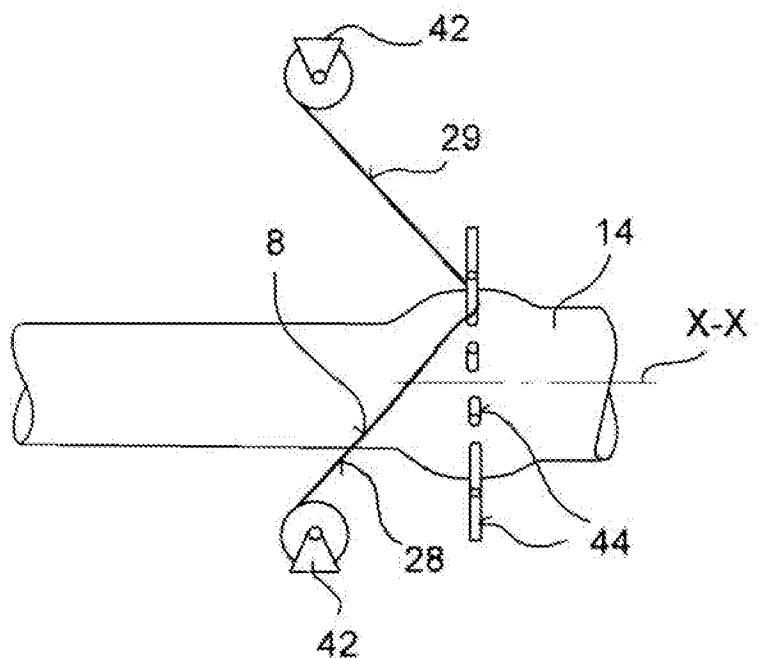


FIG. 9



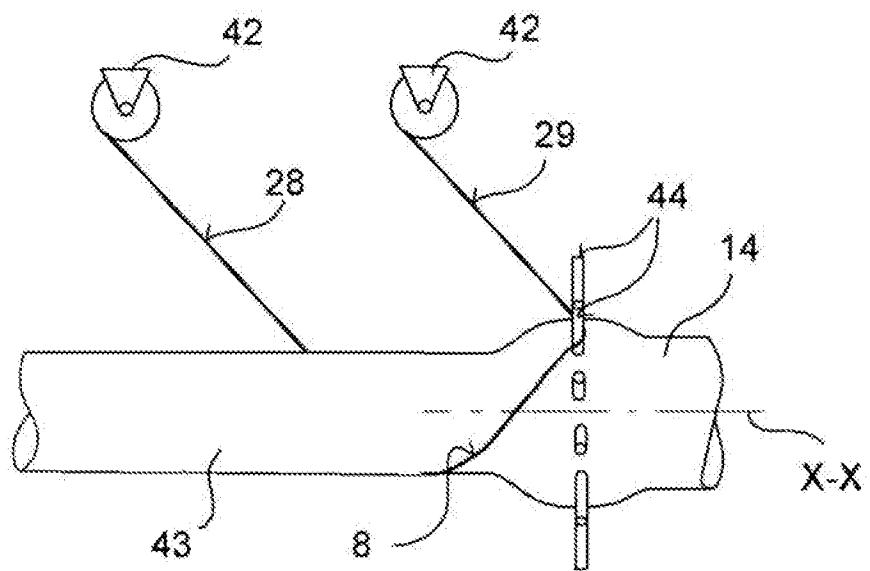


FIG. 10

7/20

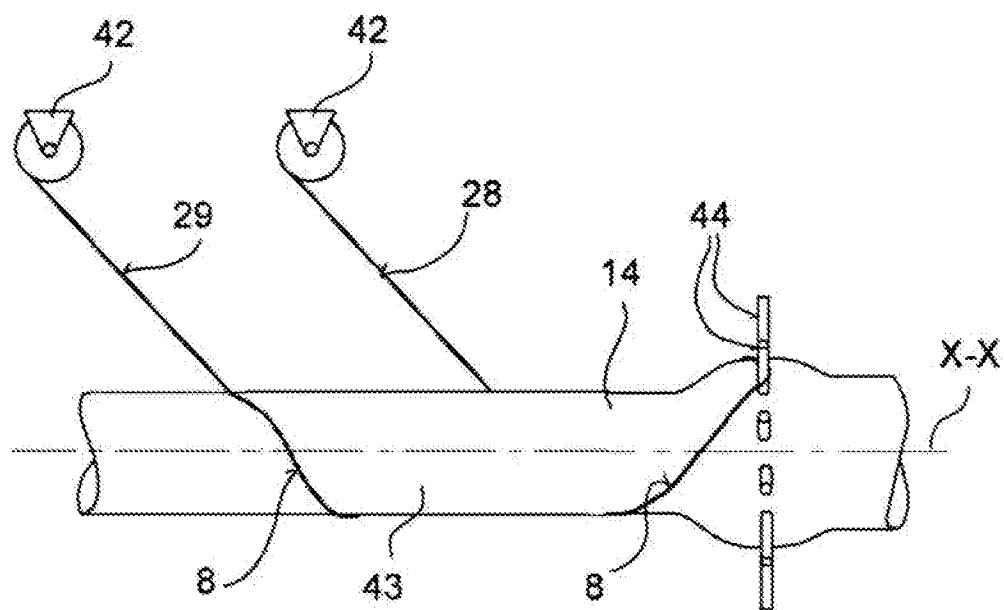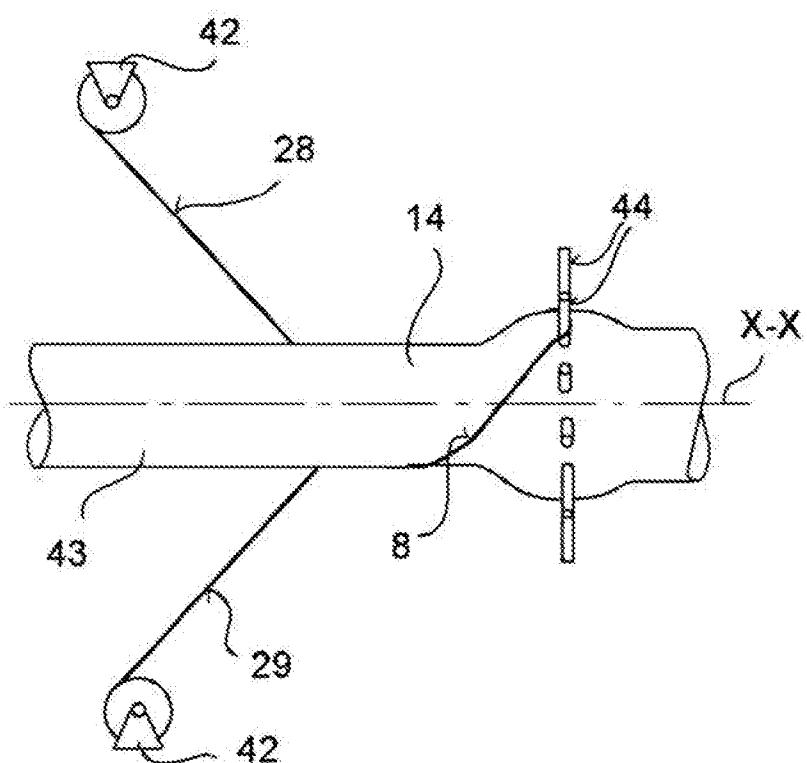

8/20

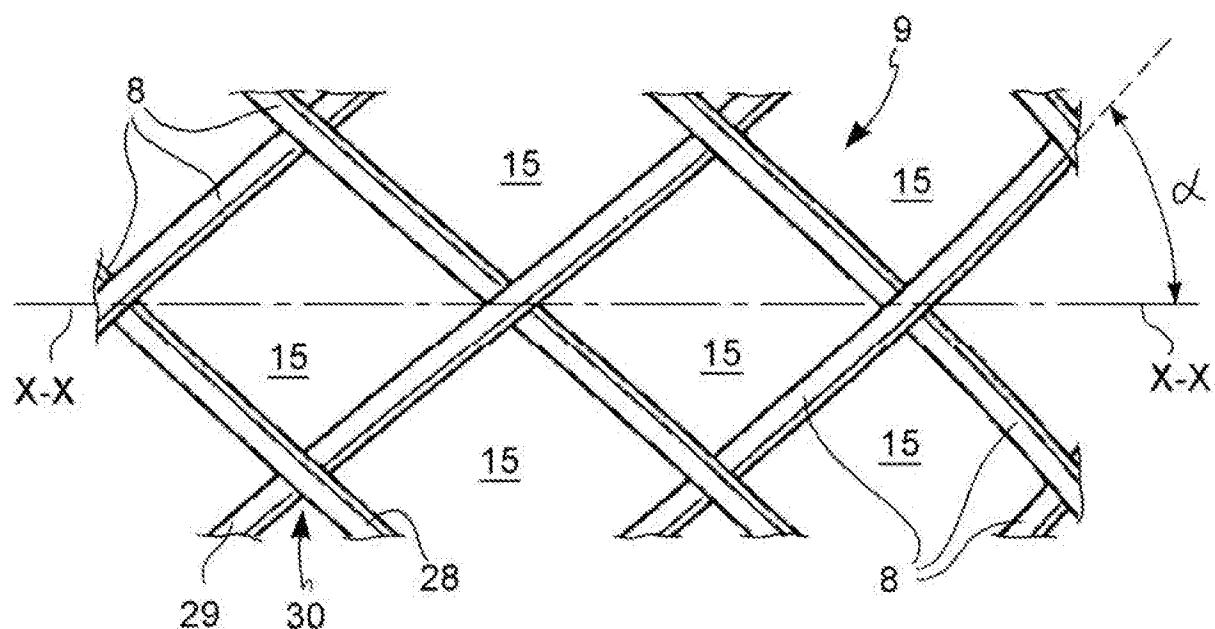


FIG. 13

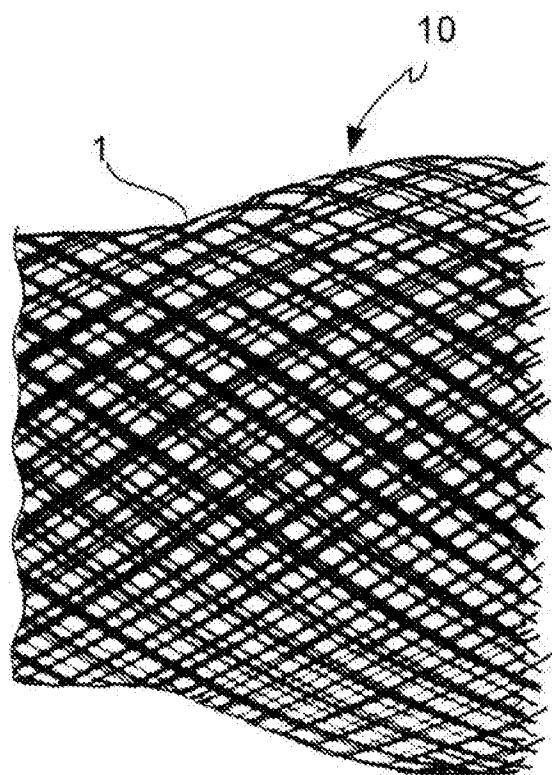


FIG. 14

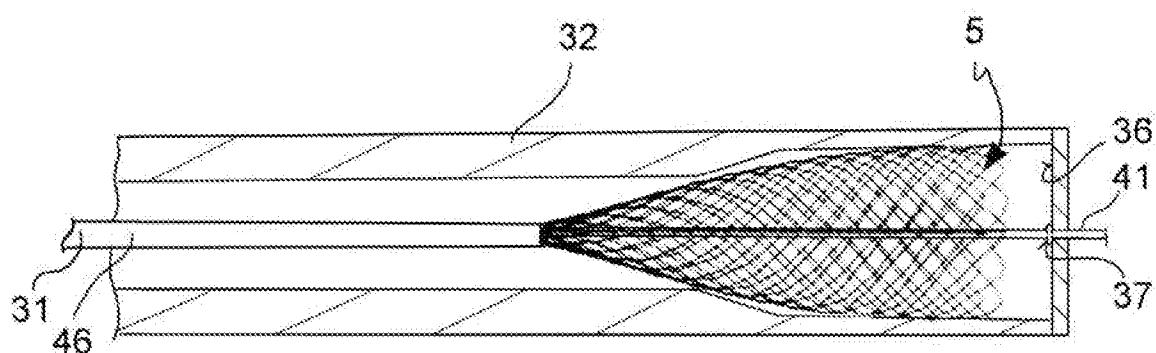


FIG. 15

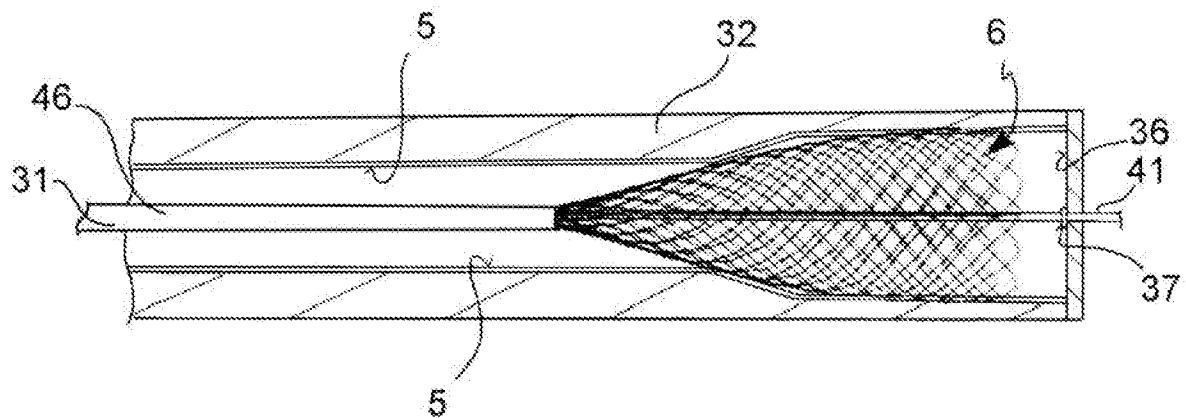


FIG. 16

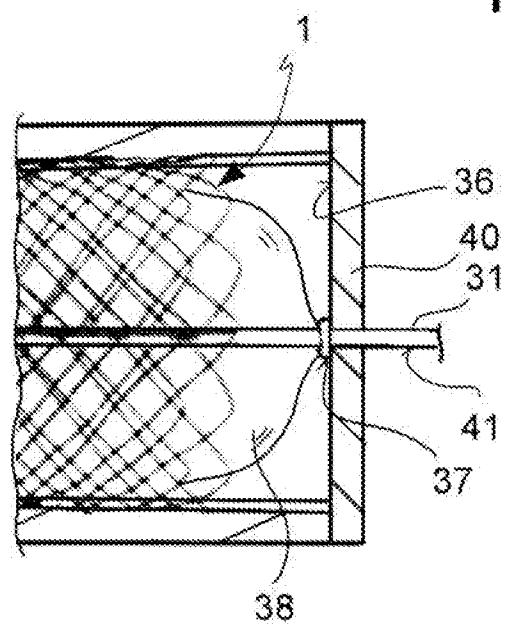


FIG. 17

10/20

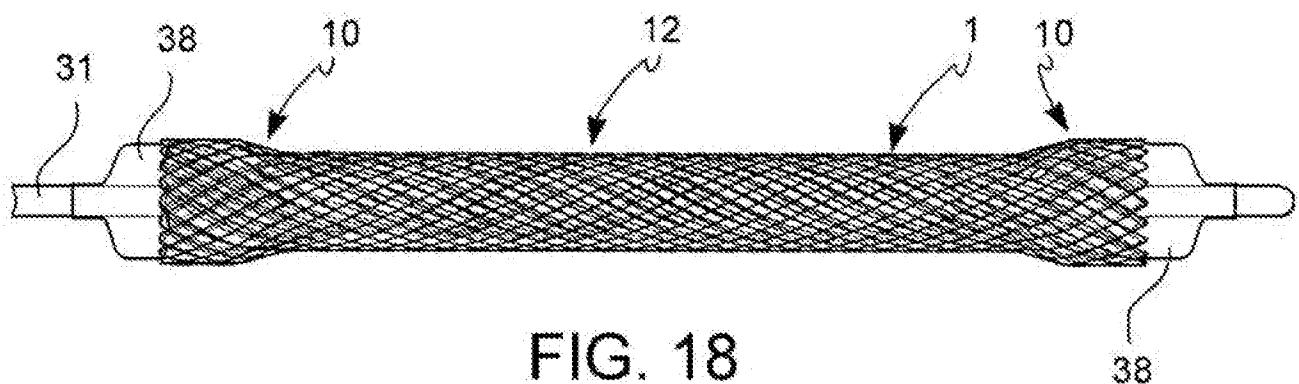


FIG. 18

FIG. 19

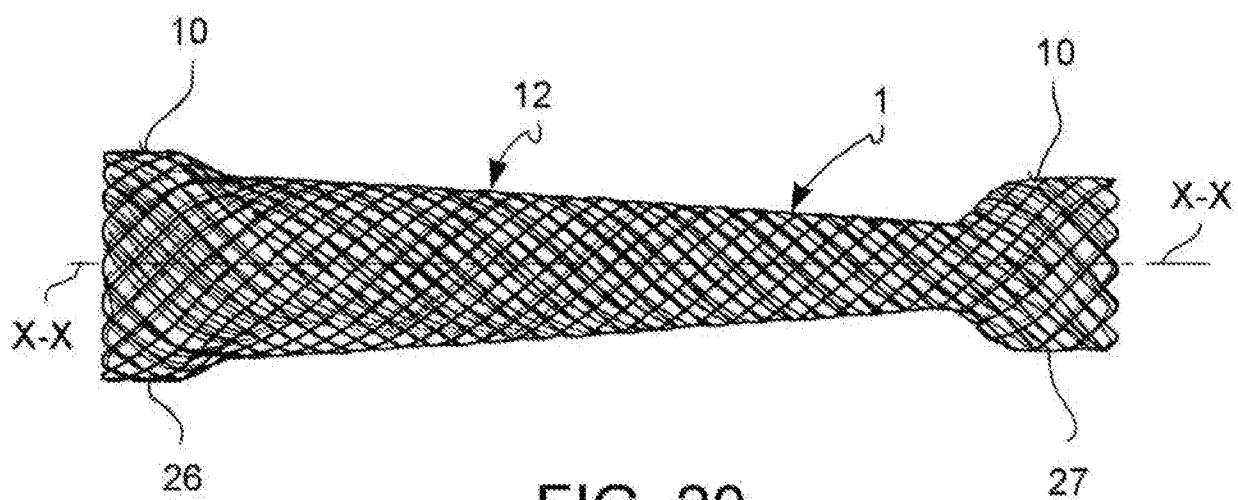
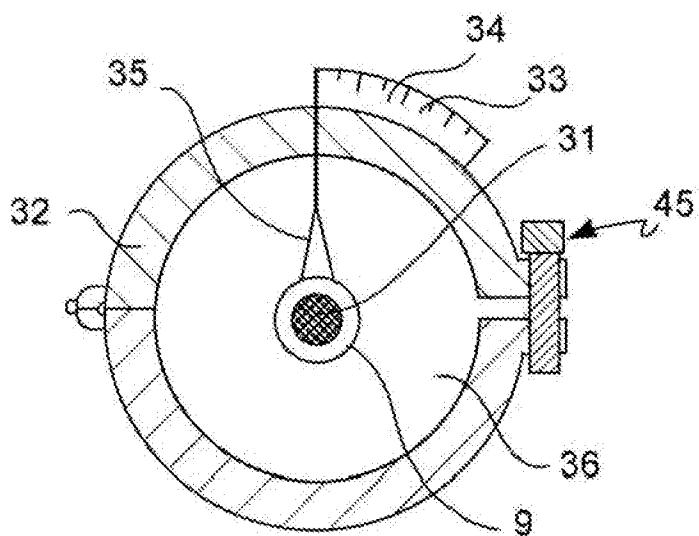


FIG. 20

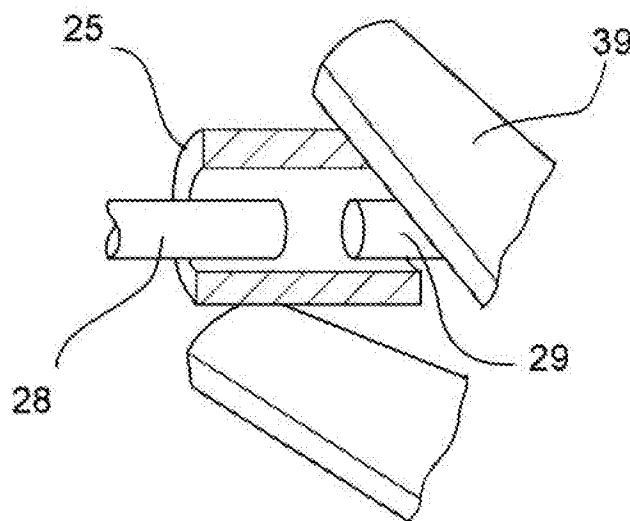
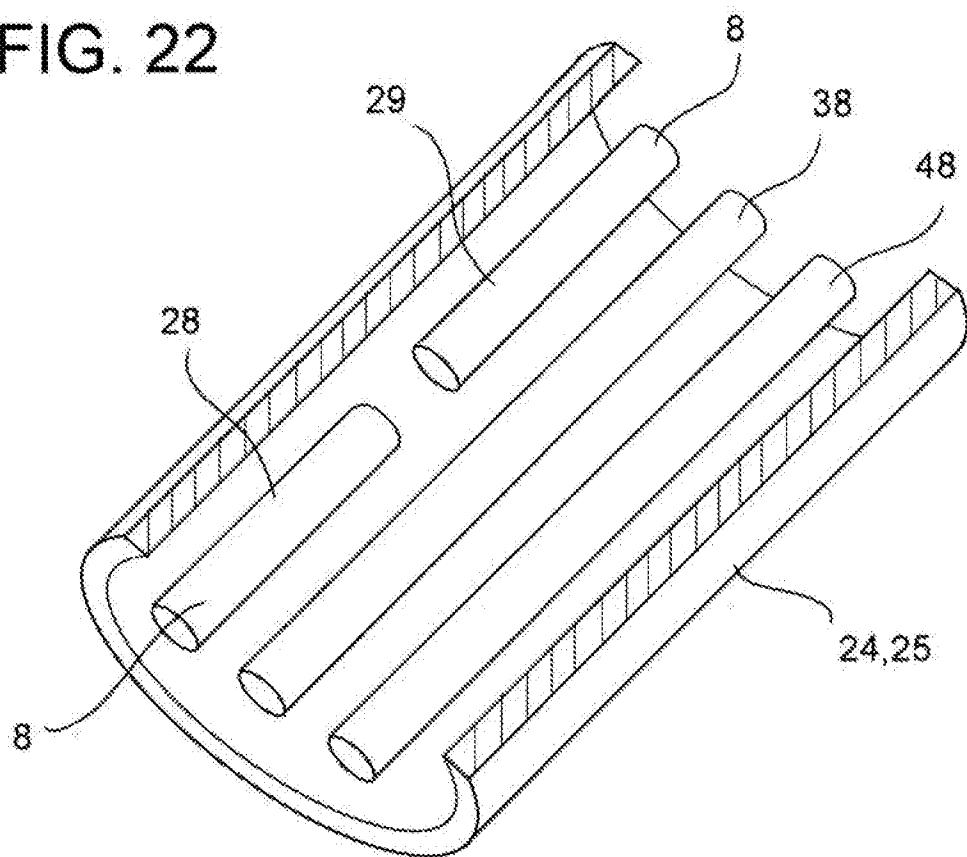


FIG. 21

FIG. 22



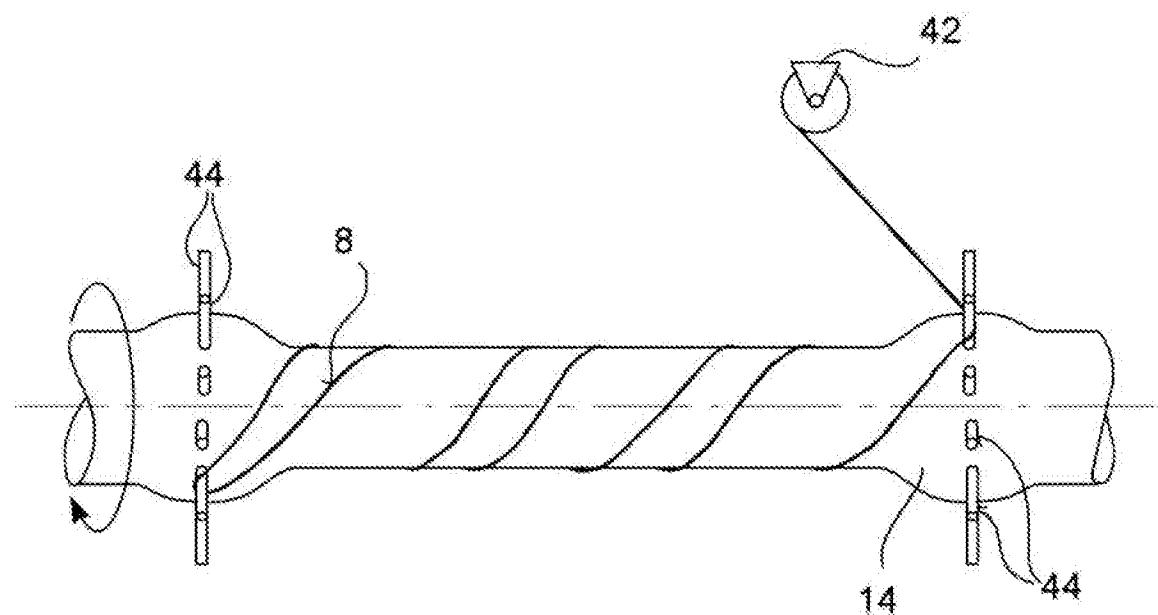


FIG. 23

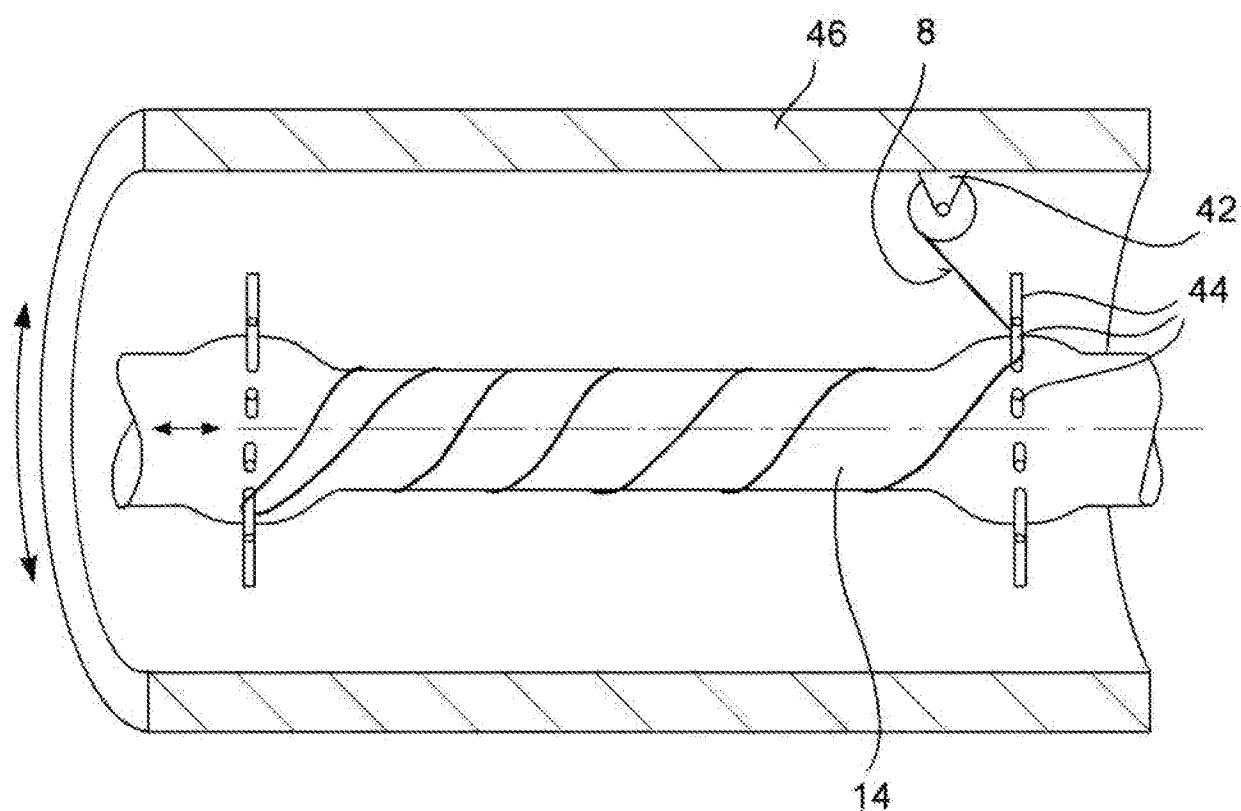


FIG. 24

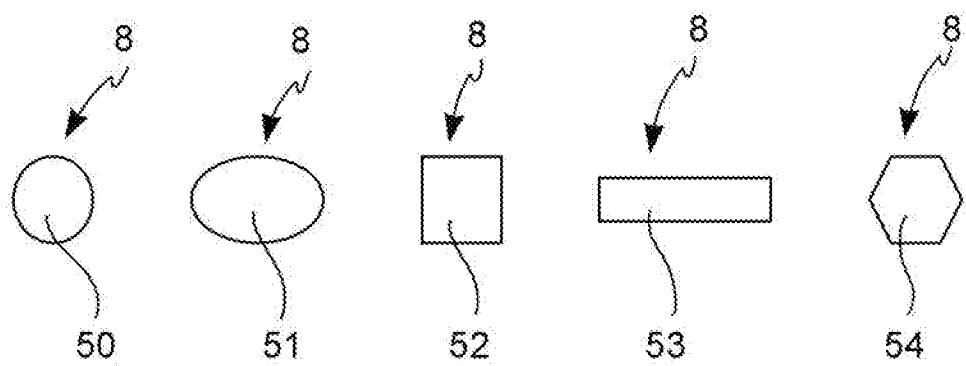


FIG. 25




FIG. 26

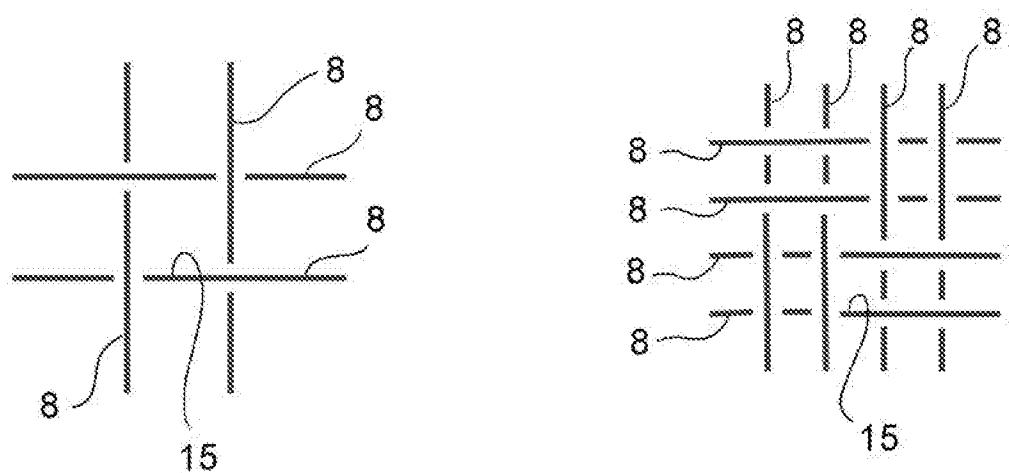


FIG. 27

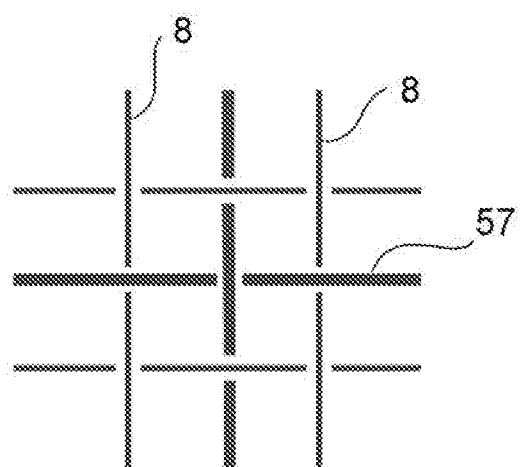


FIG. 28

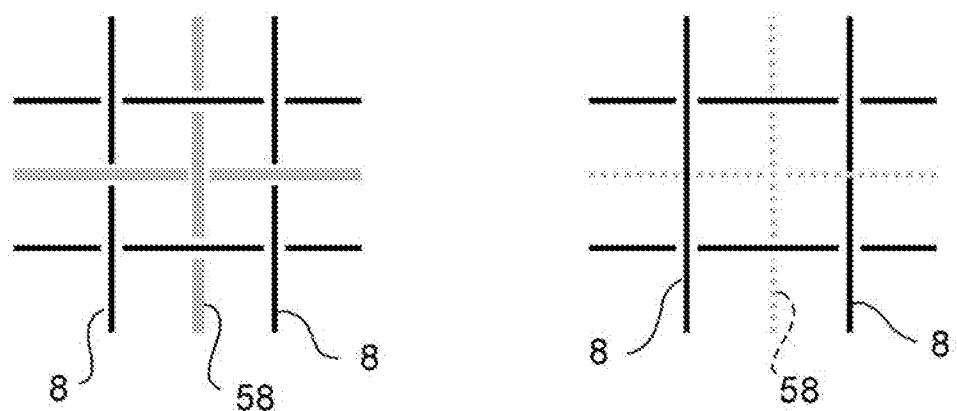


FIG. 29

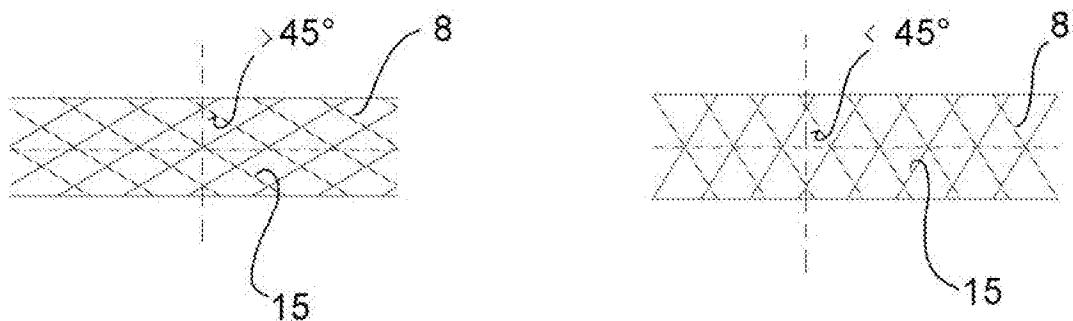


FIG. 30

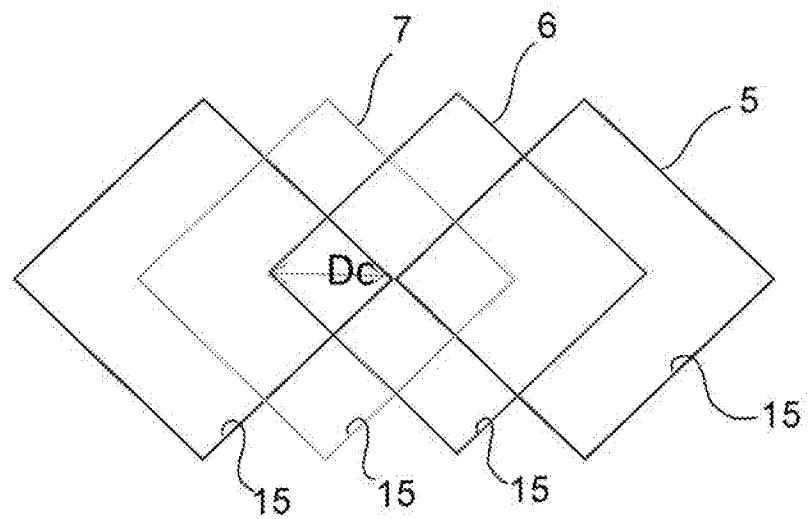


FIG. 31

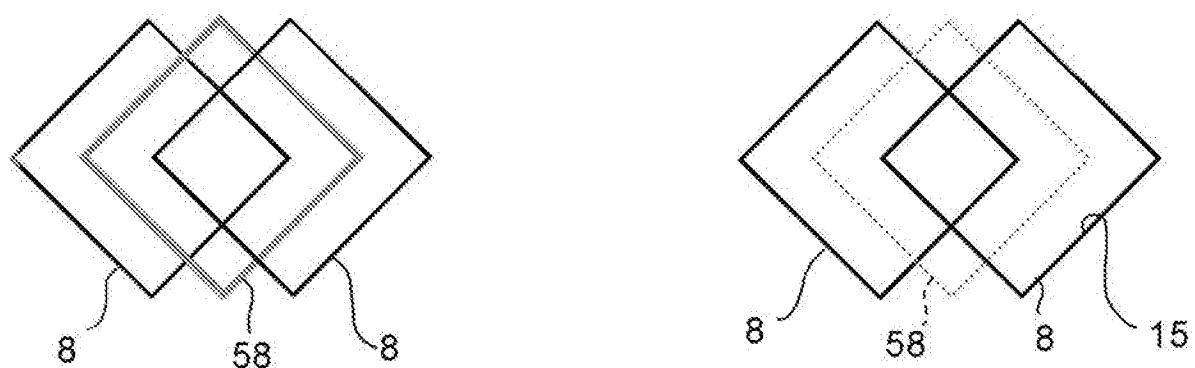


FIG. 32

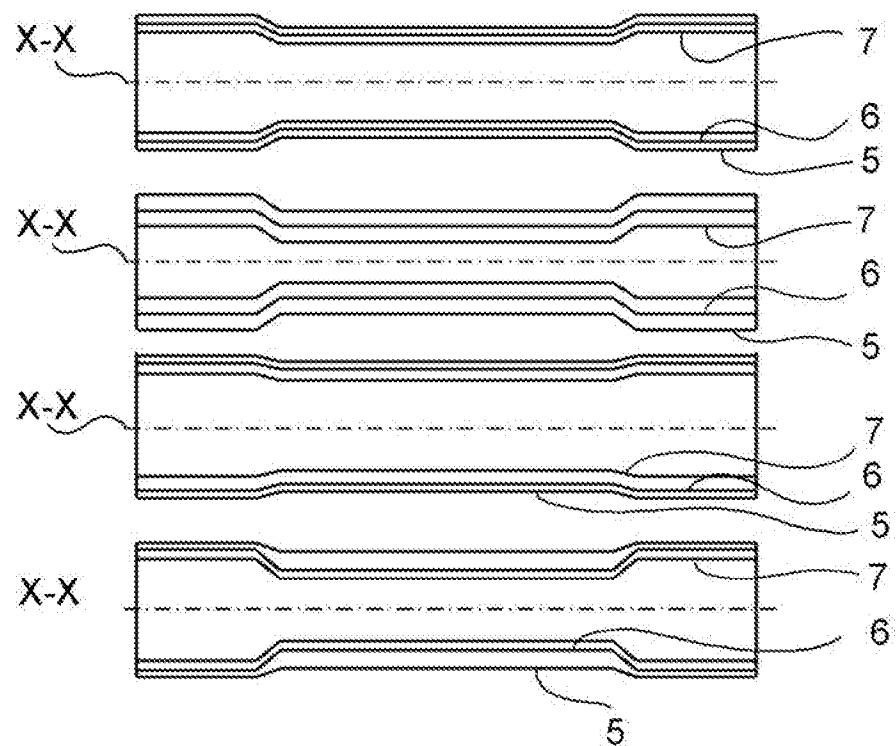


FIG. 33

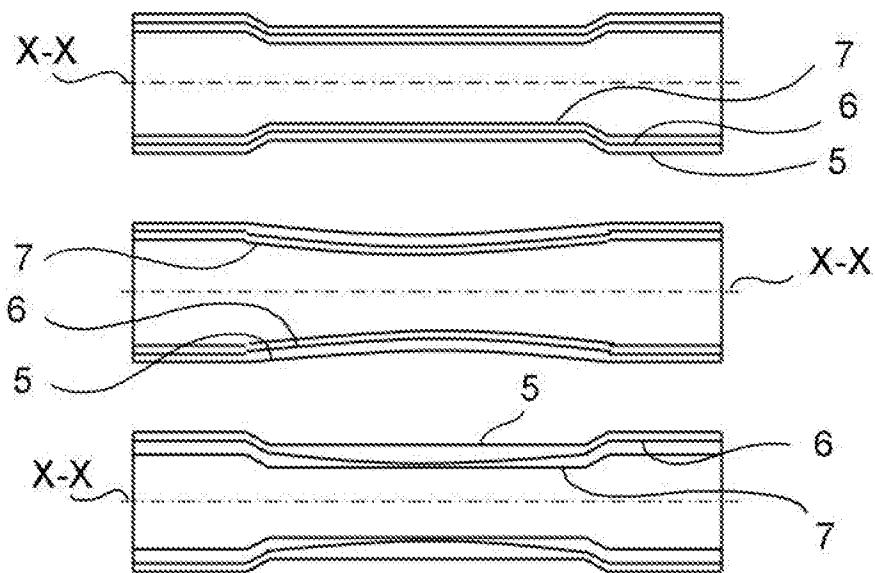


FIG. 34

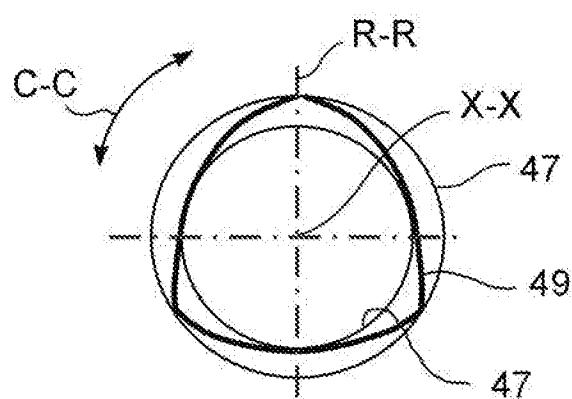


FIG. 35

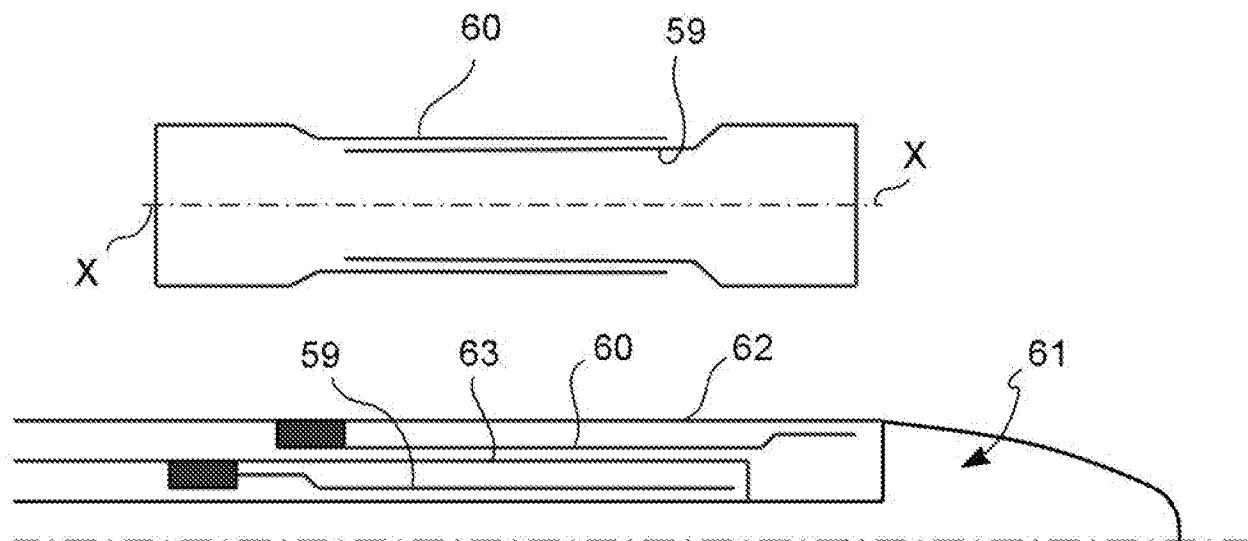


FIG. 36

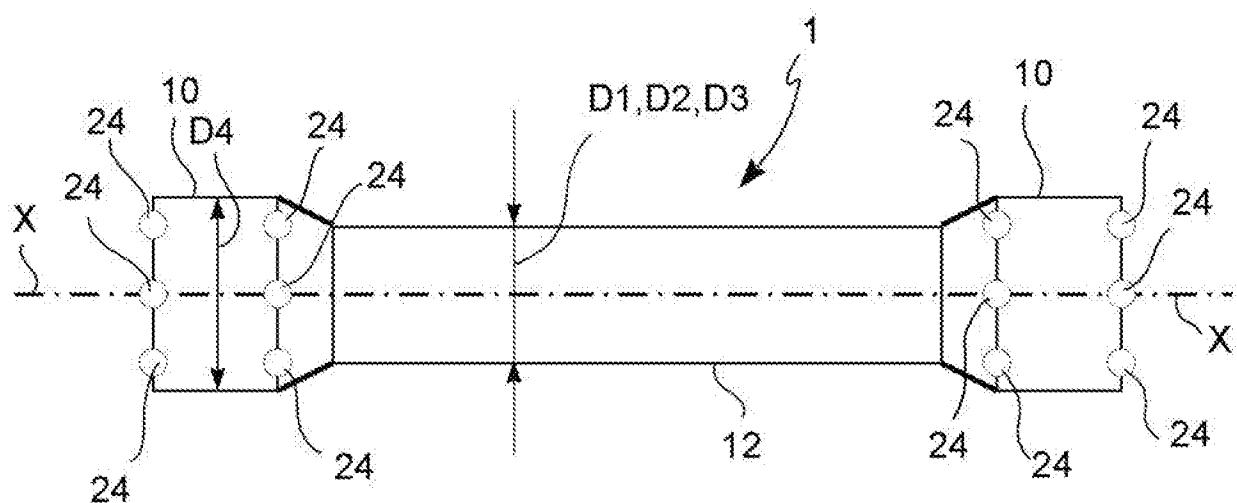


FIG. 37

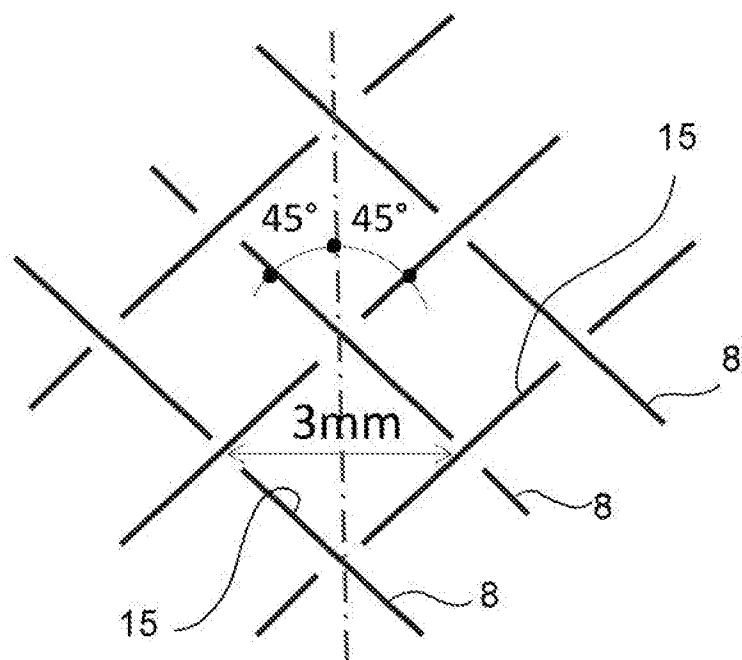


FIG. 38

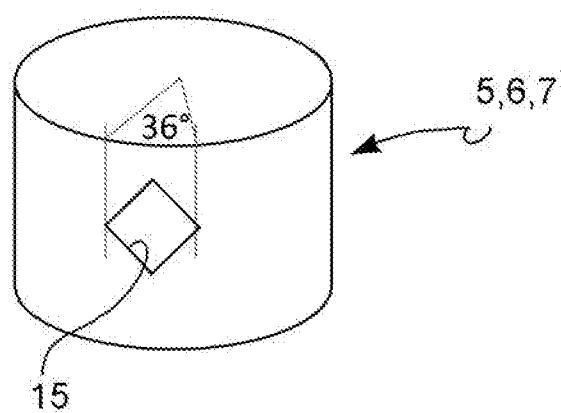


FIG. 39

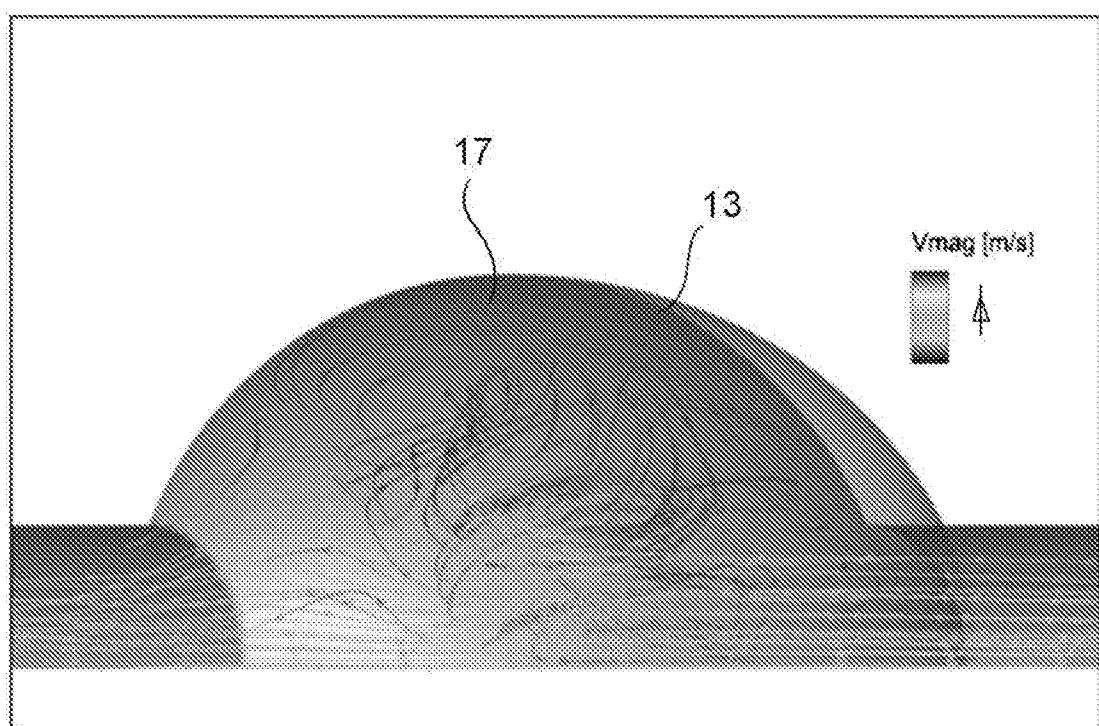


FIG. 40

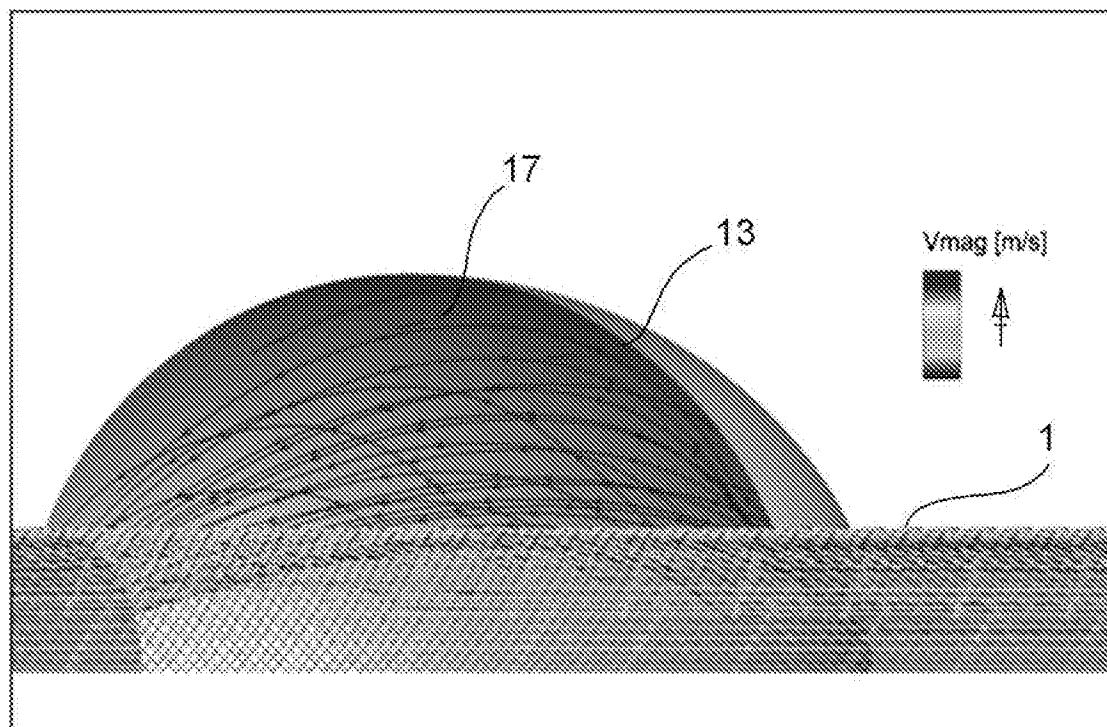


FIG. 41

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2018/051425

A. CLASSIFICATION OF SUBJECT MATTER
 INV. A61F2/852 A61F2/90
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	KR 2016 0133388 A (MI TECH CO LTD [KR]) 22 November 2016 (2016-11-22) paragraphs [0078] - [0109]; figures 4-8 -----	1-21
A	US 2016/158037 A1 (SHIN KYONG-MIN [KR] ET AL) 9 June 2016 (2016-06-09) paragraphs [0028], [0063] - [0061]; figures 2-4b, 15-22 -----	1-21
A	EP 1 946 721 A1 (AGA MEDICAL CORP [US]) 23 July 2008 (2008-07-23) paragraphs [0030], [0039] - [0044], [0047], [0054], [0059]; figures 2-4 -----	1-4, 6-11, 14-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
8 May 2018	18/05/2018

Name and mailing address of the ISA/
 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Porta, Marcello

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2018/051425

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
KR 20160133388 A	22-11-2016	KR WO	20160133388 A 2018038319 A1	22-11-2016 01-03-2018
US 2016158037 A1	09-06-2016	EP JP US US	2085050 A1 2009178545 A 2009192588 A1 2016158037 A1	05-08-2009 13-08-2009 30-07-2009 09-06-2016
EP 1946721 A1	23-07-2008	AU BR CA CN CO EA EP JP JP KR SG US WO	2007221953 A1 PI0705977 A2 2607516 A1 101234046 A 6200110 A1 200800084 A1 1946721 A1 4801655 B2 2008173461 A 20080067953 A 144793 A1 2007168019 A1 2008118132 A1	31-07-2008 13-06-2009 28-04-2008 06-08-2008 20-09-2010 29-08-2008 23-07-2008 26-10-2011 31-07-2008 22-07-2008 28-08-2008 19-07-2007 02-10-2008