



(51) International Patent Classification:

A45C 3/12 (2006.01) A47G 25/00 (2006.01)
A45F 3/14 (2006.01) B65D 85/18 (2006.01)

(21) International Application Number:

PCT/US2016/038477

(22) International Filing Date:

21 June 2016 (21.06.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14/976,137 21 December 2015 (21.12.2015) US

(72) Inventor; and

(71) Applicant : PRISCO, Geoffrey [US/US]; 256 Union Street, Brooklyn, NY 11231 (US).

(72) Inventor: BARIL, Alex; 3115 Avenue I, Apt 3F, Brooklyn, NY 11210 (US).

(74) Agent: GRANT, Kristin; Grant Attorneys at Law PLLC, 125 Park Avenue, 25th Floor, New York, NY 10017 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: A SYSTEM FOR TRANSPORTING RECREATIONAL AND SPECIALIZED FOOTWEAR

(57) Abstract: The present invention presents a system for transporting a pair of recreational or specialized footwear comprising a handle, a left body for holding a left shoe, a right body for holding a right shoe, a left pivot point in between the left body and the left side of the handle allowing the left body to be rotated 360 degrees, a right pivot point in between the right body and the right side of the handle allowing the right body to be rotated 360 degrees and a connector comprising of two or more corresponding parts for securing the left body to the right body.

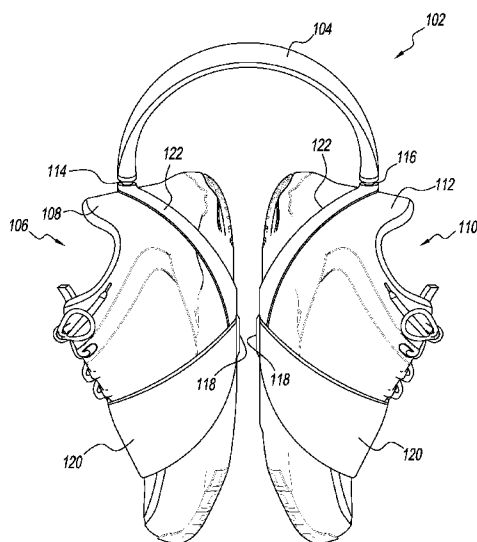


FIG. 2

WO 2017/111999 A1



Published:

— *with international search report (Art. 21(3))*

A SYSTEM FOR TRANSPORTING RECREATIONAL AND SPECIALIZED FOOTWEAR

BACKGROUND

Field of the Invention

[001] The present invention is directed to carriers for footwear and, in particular, to a system for transporting recreational and specialized footwear using a sleek and flexible apparatus capable of retaining its shape.

Related Art

[002] Many sports and recreational activities require the use of specialized footwear. By way of example only, specialized footwear is available for the following activities: cross-fit, hiking, cycling, rock climbing, mountain biking, soccer, basketball, baseball, boxing, wrestling, tennis, running and training.

[003] In the majority of instances it is not feasible to wear specialized footwear throughout the day, therefore individuals who wish to travel with a pair of specialized footwear while commuting tend to look for convenient ways to carry them. Typically an extra pair of footwear is carried in an additional bag or in an existing backpack or other item of luggage. Alternatively the laces are tied to an existing backpack or thrown over the individual's shoulder. These current methods have several disadvantages, for example carrying the footwear in your bag, backpack or luggage takes up a lot of space which may be needed for a laptop, books or other items.

Additionally, it may not be desirable to place dirty or wet footwear in a bag with other items. It may be desirable to have wet or dirty footwear exposed to the air after removal rather than trapping moisture and smell by placing them in an enclosed bag. Another disadvantage is that carrying an extra bag to hold the footwear or carrying the footwear in hand or on person can be cumbersome. Tying the laces onto an existing bag allows the footwear to swing while walking or biking which is not only uncomfortable for the carrier but also exposes the footwear to damage. There are existing footwear carriers that attempt to solve some of these problems for example U.S. Application No. 12/588,872 recognizes the need for a system that allows the transport of footwear by attaching to an existing bag or other item of luggage, however the disclosed device is an enclosed system for transporting footwear thereby trapping moisture and scent during transport. U.S. Application No. 10/792227 recognizes the need for a footwear carrier which allows the shoes to breathe during transport, however the disclosed device requires the user to bore a hole into the heel of each shoe in order to use the device. Additionally, the device allows swinging of the footwear during transport thereby exposing the footwear to damage. There is a need for a system for carrying recreational and specialized footwear which is easily transportable with minimal swinging and allows the footwear to breathe during transport.

SUMMARY OF THE INVENTION

[004] It is to be understood that the phraseology and terminology employed herein are for the purpose of the description and should not be regarded as limiting.

[005] The present invention is directed to a system for transporting an extra pair of footwear such as recreational or specialized footwear used during sports and indoor and outdoor

recreational activities, comprising a flexible footwear carrier and a bag. For the purposes of this invention a bag may include a gym bag, backpack, messenger bag, duffle bag, suitcase or other similar carrying item. The footwear carrier comprising a handle for either holding the carrier or connecting the carrier to the bag, a left body for holding a left shoe, a right body for holding a right shoe, a left pivot point in between the left body and the left side of the handle allowing the left body to be rotated 360 degrees, a right pivot point in between the right body and the right side of the handle allowing the right body to be rotated 360 degrees and a connector comprising of two or more corresponding parts for securing the left body to the right body thereby reducing swinging of the footwear. These and other features of the present invention will become readily apparent upon further review of the specification and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[006] Embodiments of the present invention will be described by way of example only, and not limitation, with reference to the accompanying drawings in which:

FIG. 1 is a perspective view of a system for transporting recreational and specialized footwear according to the present invention;

[007] FIG. 2 is a front perspective view of a footwear carrier with a pair of shoes inserted and rotated sufficiently to engage the corresponding parts of the connector where the corresponding parts of the connector are at the bottom of each shoe according to one embodiment of the present invention;

[008] FIG. 3 is a front perspective view of a footwear carrier with a pair of shoes inserted according to one embodiment of the present invention;

[009] FIG. 4 is a rear perspective view of a footwear carrier with a pair of shoes inserted according to one embodiment of the present invention;

[010] FIG. 5 is a front perspective view of a footwear carrier according to one embodiment of the present invention;

[011] FIG. 6 is a rear perspective view of a footwear carrier according to one embodiment of the present invention;

[012] FIG. 7a is a side view of the left body of a footwear carrier with a left shoe inserted according to an embodiment of the present invention;

[013] FIG. 7b is a rear perspective view of a left body of a footwear carrier with a left shoe inserted according to an embodiment of the present invention;

[014] FIG. 8 is a side view of the left body of a footwear carrier with both a bottom and side connector according to an embodiment of the present invention;

[015] FIG. 9 is a front perspective view of a handle of a footwear carrier according to an embodiment of the present invention; and

[016] FIG. 10 is a front perspective view of a pivot point of a footwear carrier according to one embodiment of the present invention.

DETAILED DESCRIPTION

[017] Referring now to the figures, where similar reference characters denote similar elements throughout the figures, FIG. 1 shows a perspective view of a system for transporting an extra pair of footwear according to the present invention comprising a sleek, lightweight and flexible footwear carrier **102** and a bag **100**. FIG. 2 depicts a preferred embodiment of the footwear

carrier **102** with a pair of shoes inserted, comprising a handle **104** for either holding the footwear carrier **102** or connecting the footwear carrier **102** to the bag **100**, a left body **110** for holding a left shoe **112**, a right body **106** for holding a right shoe **108**, a left pivot point **116** in between the left body **110** and the left side of the handle **104** allowing the left body **110** to be rotated 360 degrees, a right pivot point **114** in between the right body **106** and the right side of the handle **104** allowing the right body **106** to be rotated 360 degrees, and a connector **118** comprising of two or more corresponding parts for securing the left body **110** to the right body **106** thereby reducing swinging of the footwear carrier **102**.

[018] The footwear carrier **102** is primarily made of an elastic fabric or an elastic fabric blend such as neoprene, rubber, polyester neoprene blend, elastane fabric blend or some similar fabric blend typically known in the art to be flexible enough to allow folding while preventing creasing and shape loss. Different sections of the footwear carrier **102** may be made of different materials and fabrics some of which may include leather, mesh, nylon and cotton. The material used to form the dorsal section **120** should preferably be sufficiently thick such that the laces of the shoe are not imprinted into the material. The pivot points shown at **116** and **114** provide 360 degree rotation of the left body **110** and right body **106**. The pivot points **116** and **114** may be made of a fabric or material that is easily twisted or they may take the form of a small device such as a pivot hinge or ball bearing or another device generally known in the art to allow 360 degree rotation. The connector **118** comprises of two or more corresponding parts which may include, but are not limited to magnets, male and female connectors and fasteners, hook and eye fasteners, and hook and loop fasteners. The handle **104** may vary in length but is preferably sufficiently short such that the footwear carrier is secured snugly on a bag when the left body

110 and right body **106** are connected. The handle may be rigid or flexible, and flat, cylindrical or tubular.

[019] FIGS. 5 and 6 show front and rear perspective views respectively of a preferred embodiment of the footwear carrier **102**. FIGS 3 and 4 show the footwear carrier **102** after a pair of shoes are inserted. The toe of the left shoe **112** is inserted into the dorsal section **120** of the left body **110** and the heel section **122** of the left body is looped around the heel of the left shoe **112**. The toe of the right shoe **108** is inserted into the dorsal section **120** of the right body **106** and the heel section **122** of the right body **106** is looped around the heel of the right shoe **108**. As shown in FIG. 1 the handle **104** is placed over the strap of the bag **100** such that the shoes are hanging from the strap of the bag **100**. The pivot points **114** and **116**, as magnified in FIGS. 9 and 10 allow the left body **110** and the right body **106** to be rotated sufficiently such that the corresponding parts of the connector **118** are aligned to be engaged and are thereafter engaged.

[020] As shown in FIGS 2 and 6, the corresponding parts of the connector **118** may be located on the basal section **126** of the footwear carrier allowing the left body **110** and the right body **106** to be secured when rotated sufficiently such that the bottoms of the left body **110** and the right body **106** are facing one another. Alternatively, as shown in FIG 7a the corresponding parts of the connector **118** may be located on the inner sides of the left body **110** and the right body **106** of the footwear carrier **102** allowing the left body **110** and the right body **106** to be secured adjacently. FIG. 8 shows an embodiment of the footwear carrier where the corresponding parts of the connector **118** are located on the inner sides of the left body **110** and the right body **106** of

the footwear carrier **102** and on the basal section **126** of the footwear carrier allowing the left body **110** and the right body **106** to be secured adjacently or bottom to bottom.

[021] Referring now to FIGS. 7a and 7b, which show another embodiment of the present invention, the dorsal section **120** of the footwear carrier **102** loops around the front of the shoe, the heel section **122** connects to the dorsal section **120** on each side and loops around the heel of the shoe. In this embodiment of the present invention the basal section **126** is a mirror of the dorsal section **120**. In a preferred embodiment of the present invention according to FIGS. 4, 5 and 6 the basal section **126** of the footwear carrier **102** forms a cross **124**. When the shoes are inserted into the footwear carrier **102** the cross **124** of the basal section **126** rests on the arches of the shoe.

[022] In one embodiment of the present invention as shown in FIG. 9, the handle **104** of the footwear carrier **102** further comprises a secure connector for securing the footwear carrier to a bag **100**. The secure connector may be attached to the handle via an eyelet **130** or another connection means generally known in the art. The secure connector may take the form of a clasp, a ring with an open and close function, a clip, a hook and loop fastener or other similar means. It is to be understood that the present invention is not limited to the embodiments described above, but encompasses any and all embodiments within the scope of the following claims.

What is claimed is:

1. A footwear carrier, comprising:
 - a handle;
 - a left body for holding a left shoe;
 - a right body for holding a right shoe;
 - a left pivot point in between the left body and the left side of the handle for allowing the left body to be rotated 360 degrees;
 - a right pivot point in between the right body to the right side of the handle for allowing the right body to be rotated 360 degrees; and
 - a connector comprising of two or more corresponding parts for securing the left body to the right body.
2. The footwear carrier of claim 1 wherein the handle further comprises a secure connector attached to the handle for securing the footwear carrier to a bag.
3. The footwear carrier of claim 1 wherein the handle is adjustable.
4. The footwear carrier of claim 1 wherein the corresponding parts of the connector are located on the bottom of the footwear carrier.
5. The footwear carrier of claim 1 wherein the corresponding parts of the connector are located on the inner sides of the left body and the right body of the footwear carrier.
6. The footwear carrier of claim 1 wherein the corresponding parts of the connector are located on the bottom of the footwear carrier and on the inner sides of the left body and the right body of the footwear carrier.

7. A system for transporting footwear, comprising:
- a bag, comprising a receptacle and at least one strap; and
 - a footwear carrier attached to at least one strap of the bag, comprising:
 - a handle;
 - a left body for holding a left shoe;
 - a right body for holding a right shoe;
 - a left pivot point in between the left body and the left side of the handle for allowing the left body to be rotated 360 degrees;
 - a right pivot point in between the right body to the right side of the handle for allowing the right body to be rotated 360 degrees; and
 - a connector comprising of two or more corresponding parts for securing the left body to the right body.
8. A method of transporting footwear, comprising the steps of:
- selecting the footwear carrier of claim 1, 2, 3, 4, 5 or 6;
 - inserting a left shoe into the left body of the footwear carrier;
 - inserting a right shoe into the right body of the footwear carrier;
 - placing the handle of the footwear carrier over a strap of a bag so that the left body and the right body are hanging on either side of the strap;
 - using the pivot point, rotating the left body and the right body sufficiently so that the corresponding parts of the connector are lined up to be engaged; and
 - engaging the corresponding parts of the connector.

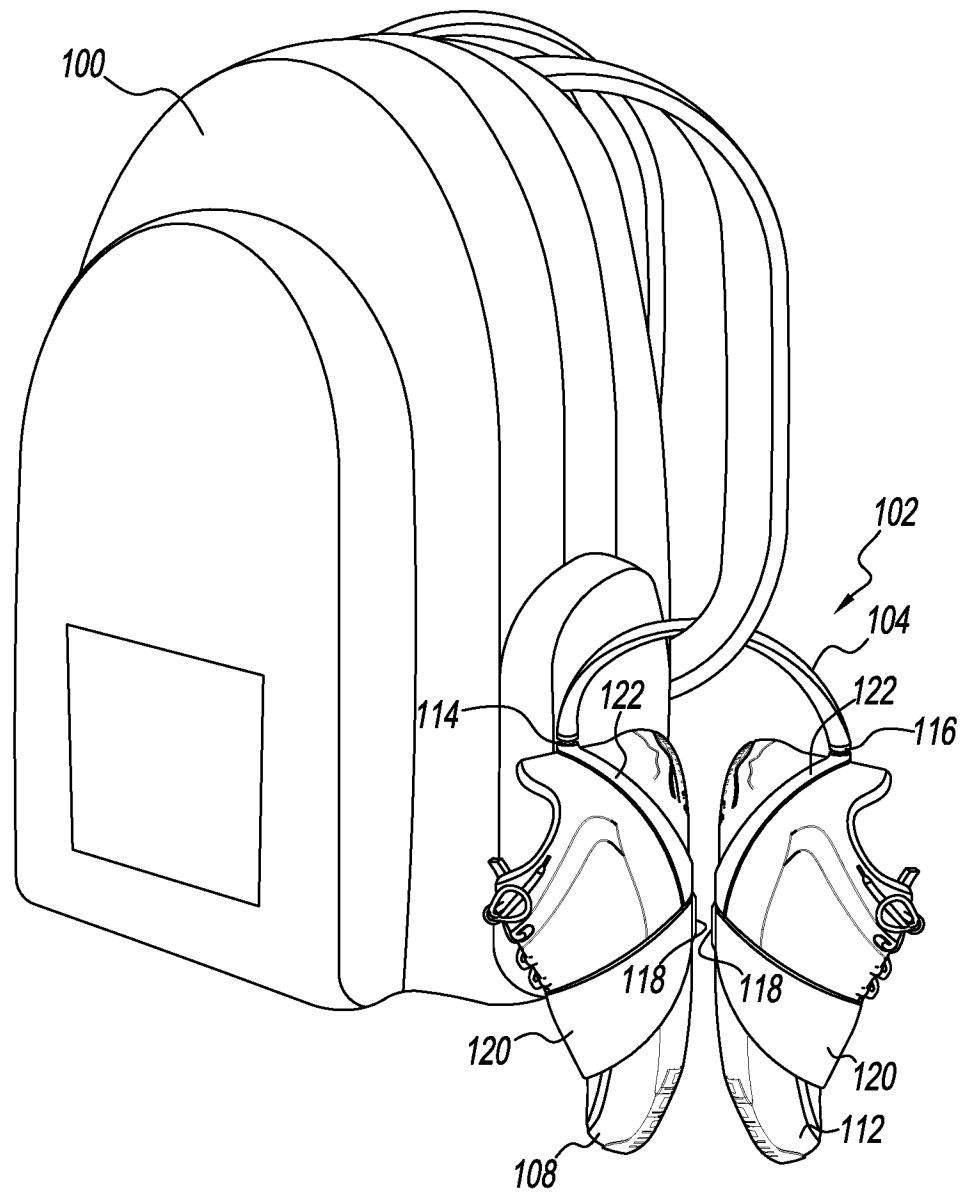


FIG. 1

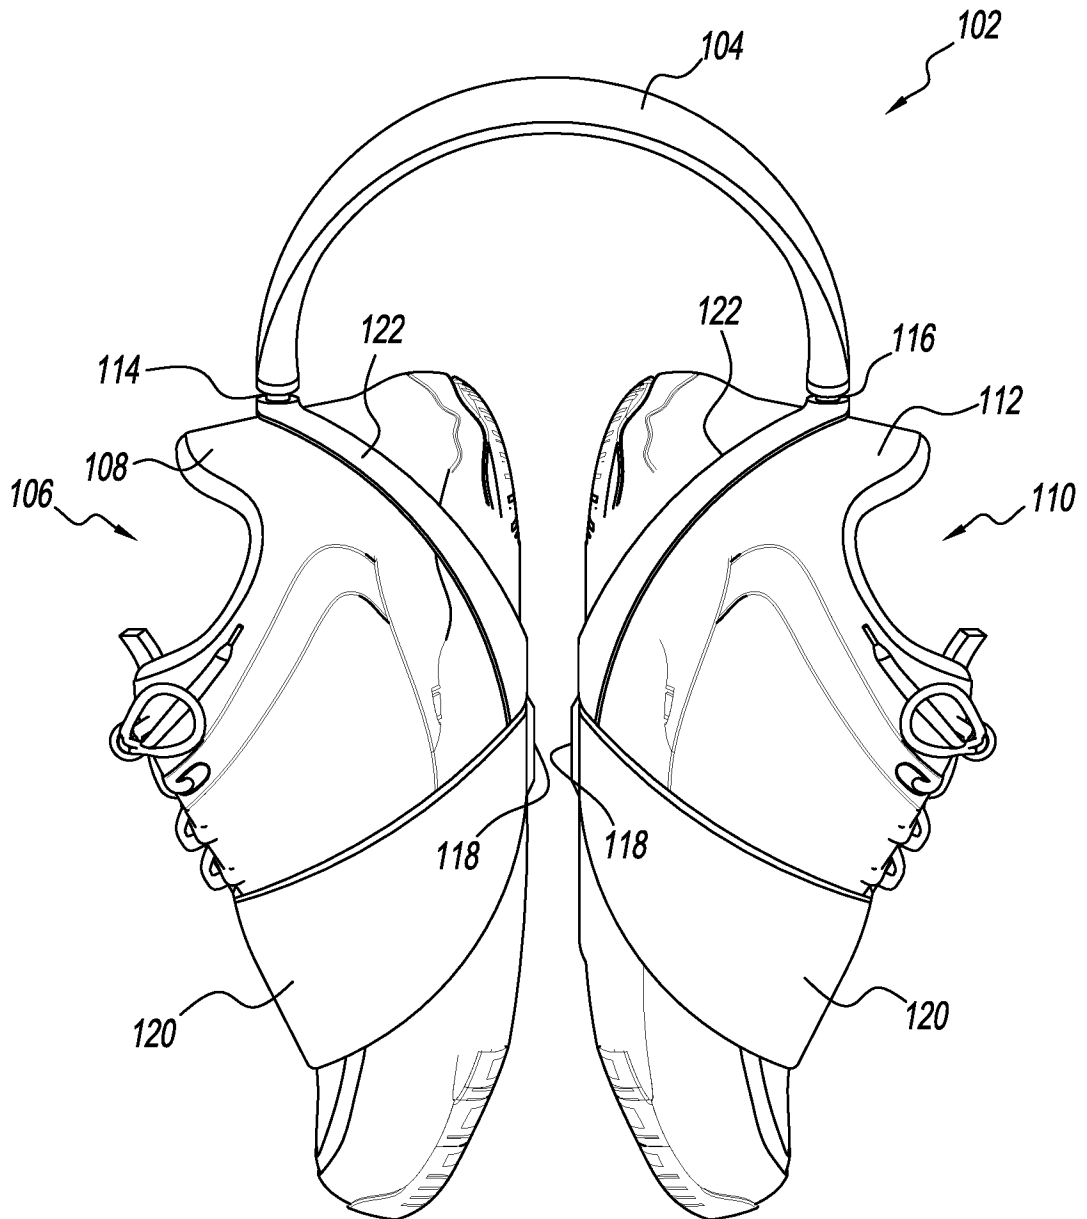


FIG. 2

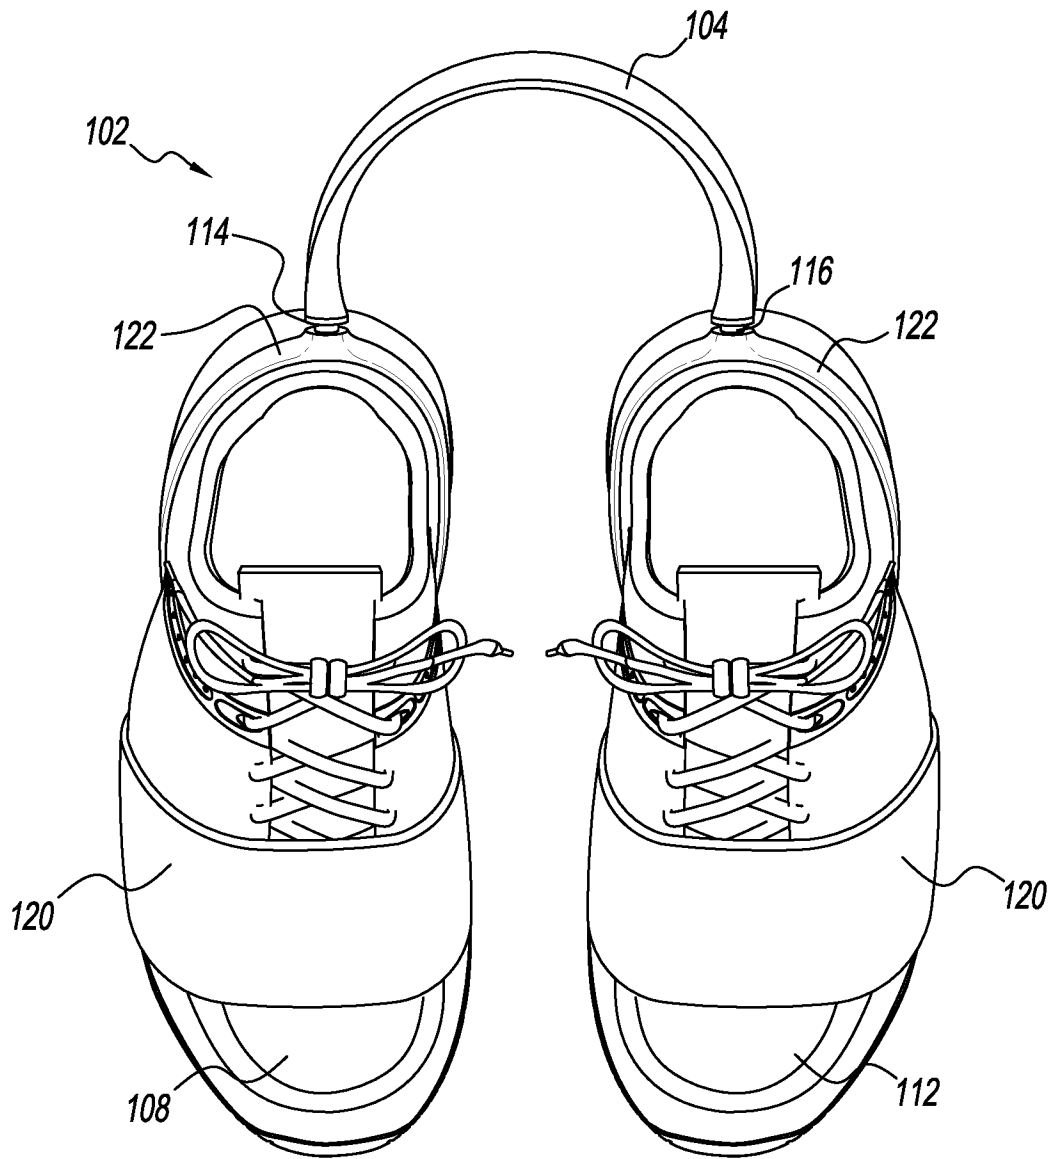


FIG. 3

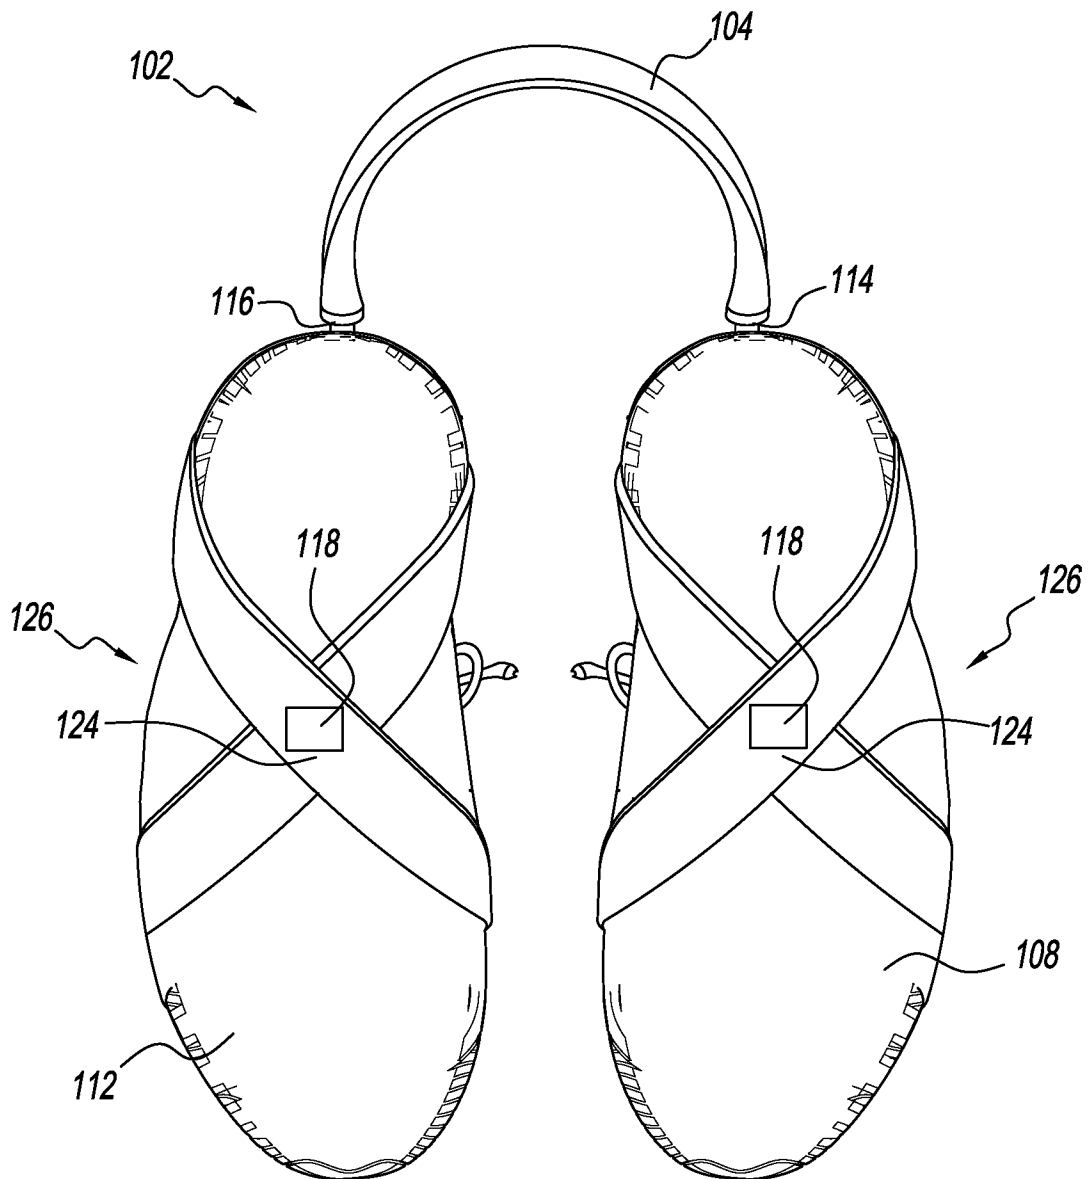


FIG. 4

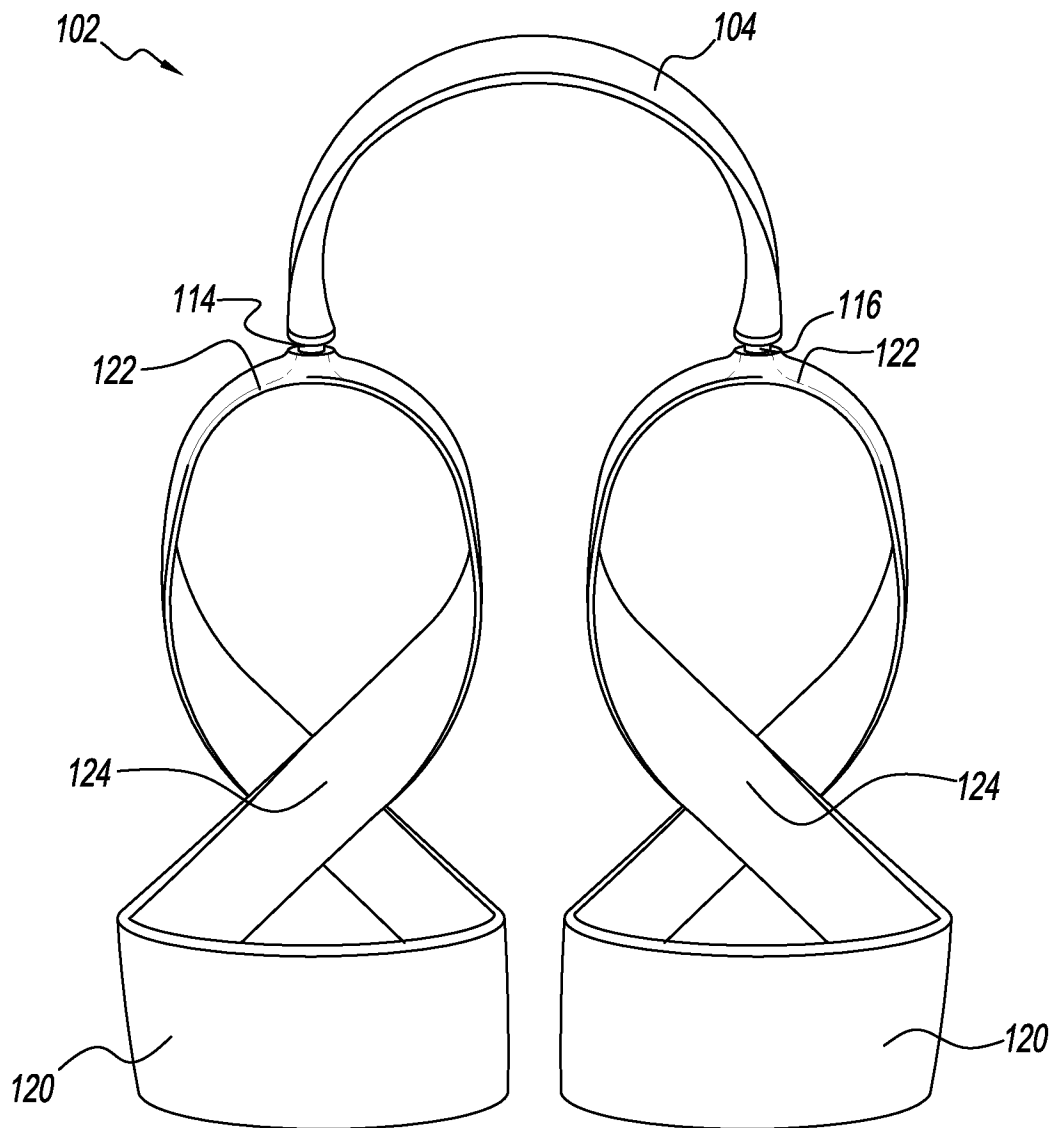


FIG. 5

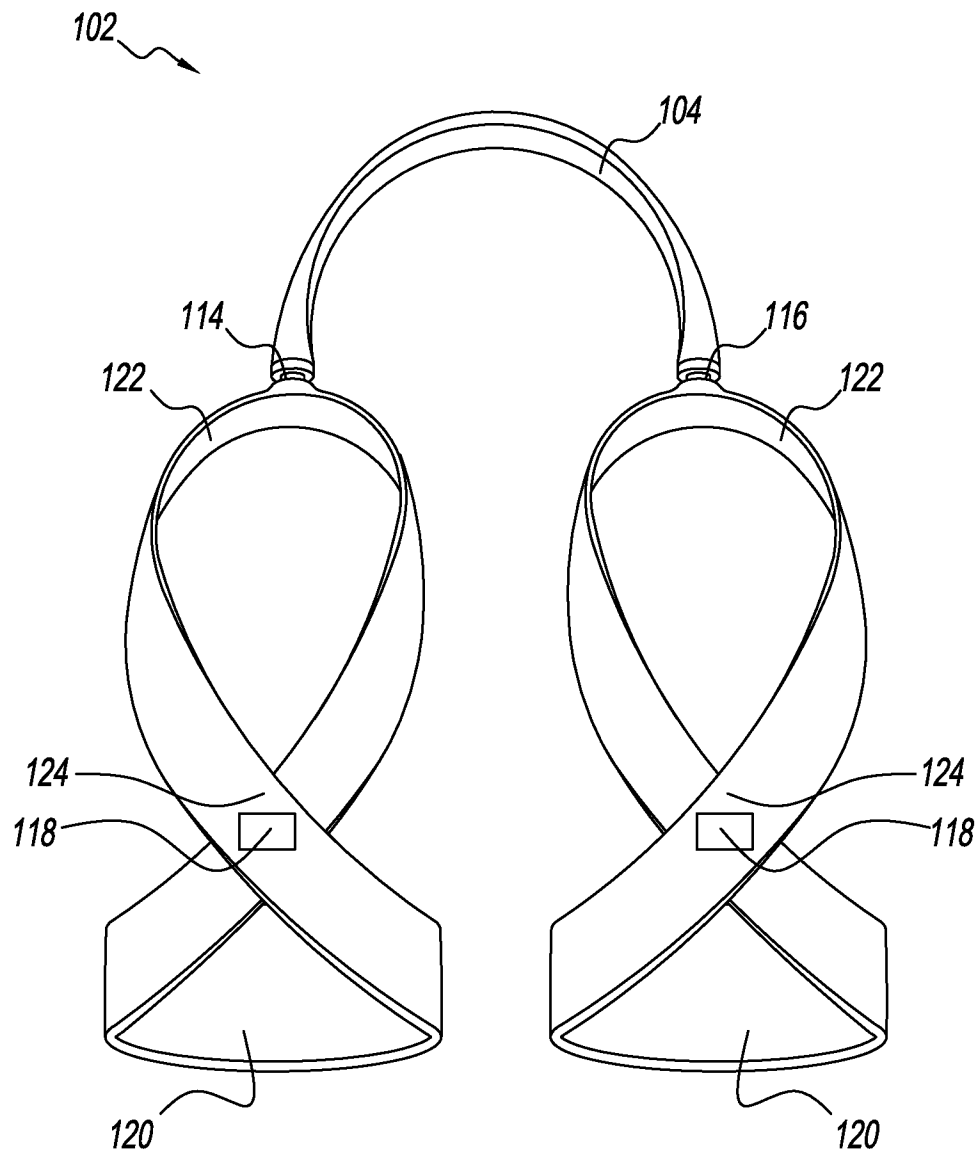


FIG. 6

7/9

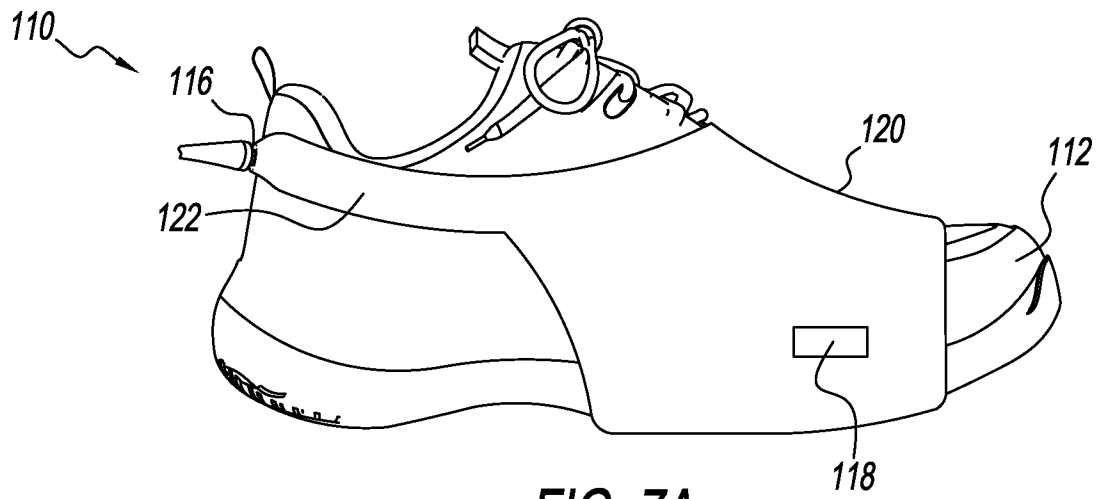


FIG. 7A

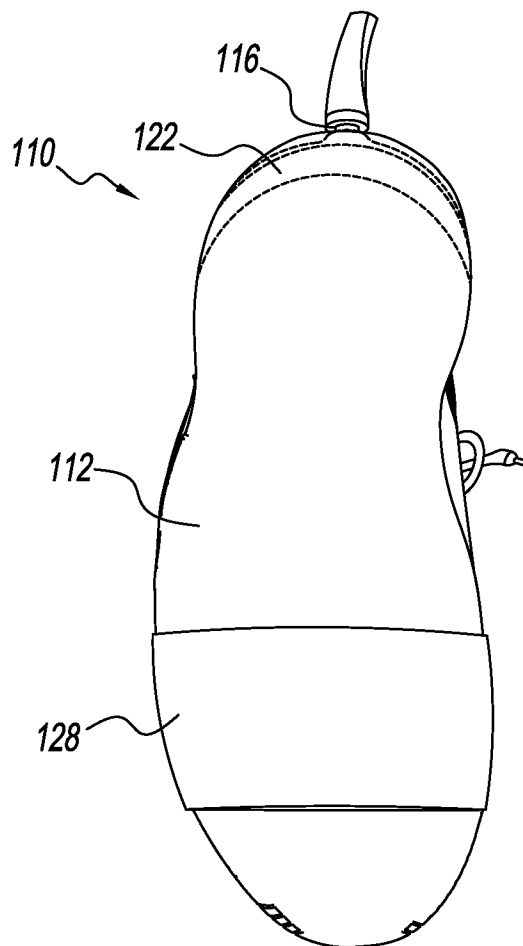


FIG. 7B

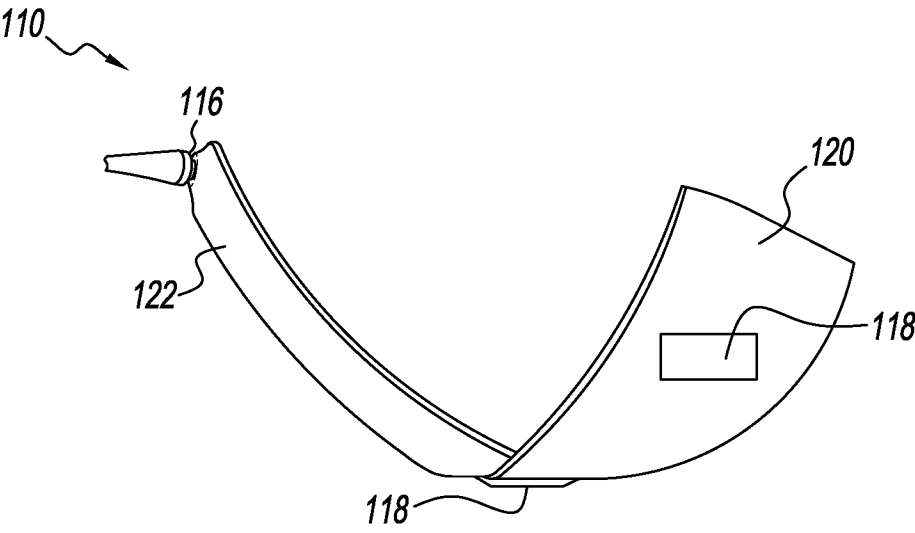


FIG. 8

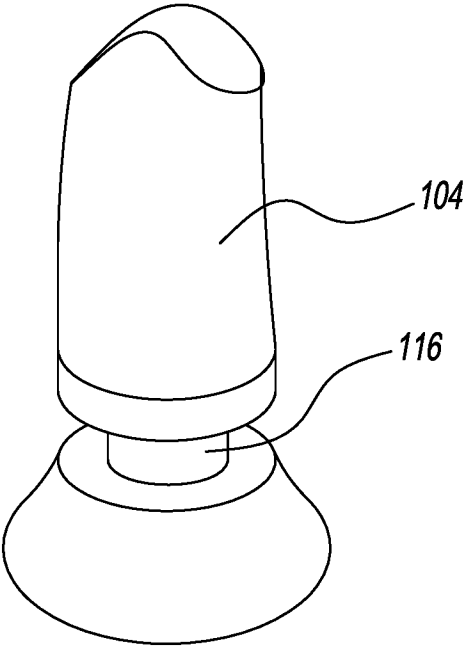
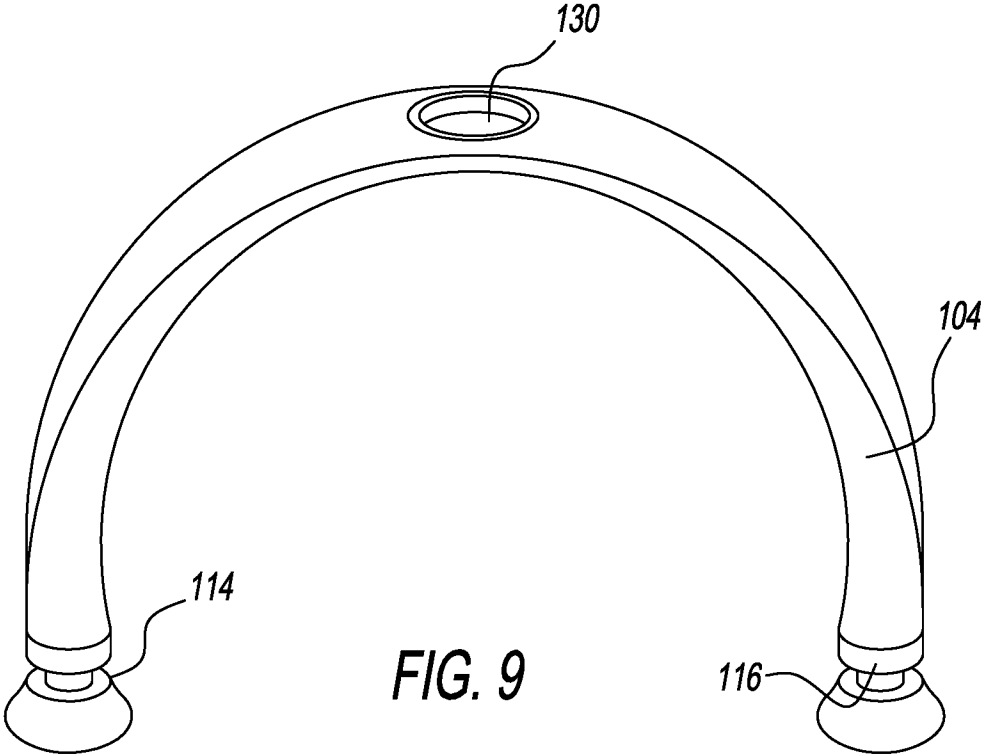


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2016/038477

A. CLASSIFICATION OF SUBJECT MATTER IPC(8) - A45C 3/12; A45F 3/14; A47G 25/00; B65D 85/18 (2016.01) CPC - A45C 3/12; A45F 3/14; A45F 2003/003; A47G 25/005; B65D 85/18 (2016.08) According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC - A45C 3/12; A45F 3/14; A47G 25/00; B65D 85/18 CPC - A45C 3/12; A45F 3/14; A45F 2003/003; A47G 25/005; B65D 85/18 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched USPC - 206/278; 224/254; 224/255; 383/13; 383/15; 383/22; 383/24 (keyword delimited) Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) PatBase, Google Patents, Google, YouTube Search terms used: footwear, shoes, transport, carrier, holder, support, handle, pivot, rotate, connect, attach, secure		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2011/0101052 A1 (ARMSTRONG) 05 May 2011 (05.05.2011) entire document	1-8
A	US 2009/0173647 A1 (BOOKHAMER) 09 July 2009 (09.07.2009) entire document	1-8
A	US 2005/0194803 A1 (PERRY) 08 September 2005 (08.09.2005) entire document	1-8
A	GB 2501807 A (SHERGILL) 06 November 2013 (06.11.2013) entire document	1-8
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 17 August 2016		Date of mailing of the international search report 06 SEP 2016
Name and mailing address of the ISA/ Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, VA 22313-1450 Facsimile No. 571-273-8300		Authorized officer Blaine R. Copenheaver PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774