



(51) International Patent Classification:

A61B 5/053 (2006.01) A61B 5/00 (2006.01)
A61B 5/16 (2006.01) A61B 5/0482 (2006.01)

(21) International Application Number:

PCT/EP2019/084133

(22) International Filing Date:

09 December 2019 (09.12.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

18211570.9 11 December 2018 (11.12.2018) EP

(71) Applicant: **KONINKLIJKE PHILIPS N.V.** [NL/NL];
High Tech Campus 52, 5656 AG Eindhoven (NL).

(72) Inventor: **OUWERKERK, Martin**; High Tech Campus 5,
5656 AE Eindhoven (NL).

(74) Agent: **PHILIPS INTELLECTUAL PROPERTY & STANDARDS**; High Tech Campus 5, 5656 AE Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available):

AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available):

ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: DEVICE, SYSTEM AND METHOD FOR PROVIDING BIO-FEEDBACK TO A USER

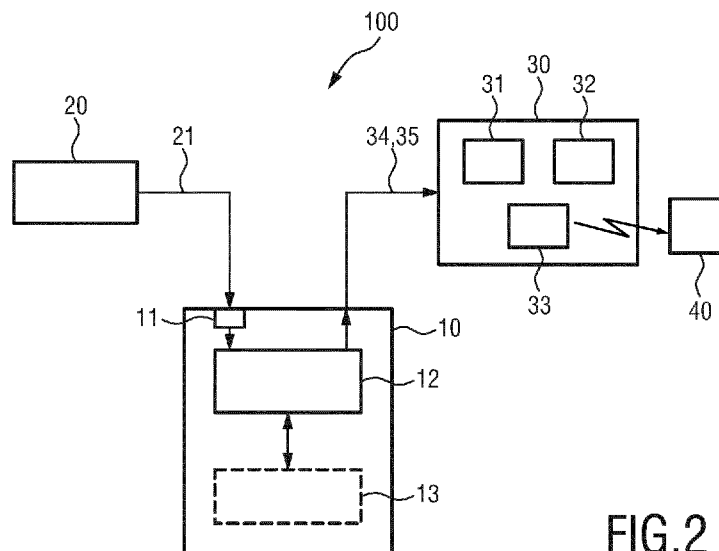


FIG.2

(57) Abstract: The present invention relates to device, system and method for providing bio- feedback to a user. The device comprises an interface (11) configured to obtain skin conductance measurements of a user and to output user instructions and bio-feedback information; and a processing unit (12) configured to generate user instructions indicating one or more actions to follow by the user, identify one or more galvanic skin response (GSR) storms in a skin conductance trace of the obtained skin conductance measurements, wherein a GSR storm is identified based on the number of peaks and/or the peak frequency in a time period having a duration in the range of 2 to 10 minutes, identify a latency of a predetermined duration without a further GSR storm after the end of an identified GSR storm, and generate, if at least one GSR storm followed by a latency has been identified, bio-feedback information providing bio-feedback related to the one or more actions followed by the user.



Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*

Device, system and method for providing bio-feedback to a user

FIELD OF THE INVENTION

The present invention relates to a device, system and method for providing bio-feedback to a user.

5 BACKGROUND OF THE INVENTION

The short term habituation to recently experienced stimuli disrupts brain homeostasis. Maintaining attentional capacity then requires more energy. Normally sleep promotes dishabituation and the restoration of brain homeostasis, but the plethora of information the society offered to its inhabitants these days causes the disruption of homeostasis to occur at a time of the day where sleep is not an option.

10 There is a need for way that enables a user to restore brain homeostasis in a simple and efficient manner and to provide bio-feedback to the user, particularly regarding the restoration.

US 2014/0288401 A1 discloses a mental balance or imbalance estimation system and a method for estimating a level of mental balance or imbalance of a user. The system comprises a skin conductance sensor for sensing the skin conductance of the user, the skin conductance over time forming a skin conductance trace. The system further comprises a processing unit for receiving and processing the skin conductance trace, the processing unit configured to determine at least one stimulus response in the skin conductance trace, to determine an estimated cortisol level trace of the user based on the determined at least one stimulus response and to determine the estimated level of mental balance or imbalance of the user based on the estimated cortisol level trace.

SUMMARY OF THE INVENTION

25 It is an object of the present invention to provide a device, system and method that enable a user to restore brain homeostasis and that provide bio-feedback to the user.

In a first aspect of the present invention a device for providing bio-feedback to a user is presented comprising

an interface configured to obtain skin conductance measurements of a user and to output user instructions and bio-feedback information; and

a processing unit configured to

- generate user instructions indicating one or more actions to follow by the user,

5 - identify one or more galvanic skin response (GSR) storms in a skin conductance trace of the obtained skin conductance measurements, wherein a GSR storm is identified based on the number of peaks and/or the peak frequency in a time period having a duration in the range of 2 to 10 minutes,

- identify a latency of a predetermined duration without a further GSR storm

10 after the end of an identified GSR storm, and

- generate, if at least one GSR storm followed by a latency has been identified, bio-feedback information providing bio-feedback related to the one or more actions followed by the user.

In a further aspect of the present invention a system for providing bio-
15 feedback to a user is presented comprising

- a sensing unit configured to acquire skin conductance measurements of the user,

- a device as disclosed herein configured to generate user instructions and to generate bio-feedback information based on the skin conductance measurements, and

20 - a user interface configured to output the user instructions and the bio-feedback information.

In yet further aspects of the present invention, there are provided a corresponding method, a computer program which comprises program code means for causing a computer to perform the steps of the method disclosed herein when said computer
25 program is carried out on a computer as well as a non-transitory computer-readable recording medium that stores therein a computer program product, which, when executed by a processor, causes the method disclosed herein to be performed.

Preferred embodiments of the invention are defined in the dependent claims. It shall be understood that the claimed method, system, computer program and medium have
30 similar and/or identical preferred embodiments as the claimed system, in particular as defined in the dependent claims and as disclosed herein.

The present invention is based on the idea enable or at least facilitate dishabituation and restoration of attentional capacity based on meditation, preferably based on the Zen meditation technique. Using skin conductance slow wave patterns caused by

sympathetic nervous system (SNS) activity are used to coach the person into a meditative state known, e.g. in yoga for millennia, as the clear mind state, and described already in the ancient Indian document called Aphorisms of Patanjali. Thus, the attentional capacity is restored without the need for slow wave sleep. Further, bio-feedback information is generated based on the skin conductance measurements and provided to the user, e.g. to inform the user of the achievement of the clear mind state or the level of the achieved clear mind state.

In an embodiment the processing unit is configured to generate a meditation depth information indicating if at least one GSR storm followed by a latency has been identified as bio-feedback information. This helps the user to understand if a clear mind state has been achieved.

The processing unit is configured to identify a GSR storm in the skin conductance trace by detecting peaks in the skin conductance trace, in particular based on number of peaks and/or the peak frequency in a time period. This provides for a simple but reliable detection of a GSR storm. Preferably, the rising edge of peaks is detected. Rising edges composed of two overlapping peaks having only one top can be detected.

A GSR storm in the skin conductance trace may for instance be identified by detecting if the peak frequency of the peaks in the skin conductance trace exceeds a predetermined frequency threshold in the time period. A frequency in the range of 0.05 Hz to 1 Hz, in particular in the range of 0.1 Hz to 0.3 Hz, may hereby be used as predetermined frequency threshold.

A GSR storm in the skin conductance trace may, alternatively or additionally, be identified by detecting if the number of peaks in the skin conductance trace exceeds a predetermined threshold number in the time period. A number in the range of 3 to 60, in particular in the range of 6 to 18, may hereby be used as predetermined threshold number for a time period of one minute.

In another embodiment a duration in the range of 2 to 10 minutes, in particular in the range of 3 to 6 minutes, may be used as time period. Further, in an embodiment a minimum number of subsequent peaks may set to be shown in the skin conductance trace to qualify as GSR storm.

In a practical exemplary embodiment a threshold number may be set at 3 peaks/minute and a minimum number of 45 subsequent peaks may be shown in the skin conductance trace to qualify as a GSR storm.

The processing unit is further be configured to use a duration in the range of 2 to 10 minutes, in particular in the range of 3 to 6 minutes, as latency. This period may be set

a as kind of waiting time after the end of a GSR storm before the bio-feedback information is output, e.g. signalling to the user that a clear mind state has reached.

In an embodiment user instructions may be generated that indicate one or more meditation actions to follow by the user. For instance, instructions how to sit, stand, lie, move, etc. may be issued as user instruction.

In another embodiment a meditation depth score may be generated based on the detection of peaks in the skin conductance trace, the meditation depth score indicating a meditation state of the user. The meditation depth score may e.g. indicate how deep and/or long the state of meditation is and/or how well and/or whether a clear mind state has been achieved and/or a brain homeostasis has been restored.

The system may be implemented as a wearable device, e.g. in the form of a wrist worn device or a body-mounted sensor. In an embodiment the sensing unit is a wearable skin conductance sensor, that measures at the upper side of the wrist (or any other skin part).

In another embodiment the user interface may comprise one or more of a display screen and/or a loudspeaker and/or a communication unit configured to communicate the user instructions and/or the bio-feedback information to another device, e.g. the user's smartphone, laptop or tablet. For instance, the user interface may be configured to convey the meditation depth score to the user or to an application or device that utilizes meditation depth information. More subtle information may be communicated using e.g. a built in buzzer. For instance, a buzz may indicate the presence of a GSR storm and three buzzes may indicate the clear mind state. Zen Buddhists use a bell for such signals, three for the start, one for intermediate signals and two as the end signal.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiment(s) described hereinafter. In the following drawings

Fig. 1 shows a first example of a skin conductance trace, relative peak heights and an accelerometer output;

Fig. 2 shows a schematic diagram of an embodiment of a system and device according to the present invention;

Fig. 3 shows an exemplary implementation of a system according to the present invention in the form of a wearable device;

Fig. 4 shows a flow chart of an embodiment of a method according to the present invention; and

Fig. 5 shows a second example of a skin conductance trace, relative peak heights and an accelerometer output.

5

DETAILED DESCRIPTION OF THE EMBODIMENTS

In the digital age information and communication overload are commonplace. The individual is exposed to an increasing amount of information and communication. The brain perceives this as stimuli. Analogous to the homeostasis of the body the brain has mechanisms to maintain homeostasis when exposed to external influences. Information and communication stimuli cause effects in the brain which are recently linked to GluA1-dependent synaptic plasticity, and ultimately lower a person's attentional capability.

10

With time sleep pressure increases, the metabolic load to process new stimuli and information increases and the attentional capability decreases. Sleep, and more specifically slow wave sleep restores these negative effects. Slow wave sleep, also known as deep sleep or stage IV sleep, is characterized by delta range brain frequencies during which parts of the brain stop all neural activity. Sleep slow oscillations potentiate synapses that were depressed due to persistent activities during the previous day.

15

The information and communication overload linked to social media and other digital sources, such as computer games and online movies and videos, causes the negative effects to occur earlier in the day compared to the pre-digital age. The recovery of action potential of synapses that are impacted by these stimuli by something other than slow wave sleep would be very beneficial. During a Zen meditation parts of the brain turn silent. As will be shown below, similar skin conductance patterns can indeed be measured during slow wave sleep and during Zen meditation.

25

Emotions cause the activation sympathetic outflow of the autonomous nervous system. This activates among others the eccrine sweat glands. An apparatus that measures the conductance of the skin can be used to monitor emotions of a human being. The emotions cause skin conductance responses, which may be small peaks with a width of a few seconds. There are also skin conductance responses which cannot be linked to emotions, called non-specific skin conductance responses, which make up the GSR storms. Skin conductance (SC) is often referred to as electrodermal activity (EDA). For instance the polygraph is an apparatus that monitors emotions linked to lying using among others this principle.

30

Slow wave sleep causes a phenomenon in the skin conductance trace known as GSR storms. The intensity and duration of the GSR is generally higher when the previous day was more emotionally intense. This is in line with the brain homeostasis hypothesis discussed above. Hence, slow-wave sleep can be linked to sympathetic nervous system activity visible in the skin conductance trace. When skin conductance is measured at the wrist this is even more pronounced compared to skin conductance measured with traditional methods.

In Error! Reference source not found. Fig. 1 a skin conductance trace 1 (in μS over time) measured during sleep and showing a GSR storm is depicted. Further, Fig. 1 shows the relative peak heights 2 of the peaks in the skin conductance trace 1 and an accelerometer output signal 3. From these signals it can be derived that the sleep ends at 7:30 hrs. Further, the GSR storm appeared between 6:51 hrs and 7:07 hrs. The GSR storm is characterized by the occurrence of many small peaks with a frequency of about 0.5-1 Hz.

The delta brain wave frequency during slow wave sleep is just slow enough to may become visible as separate peaks in the fluctuations of the skin conductivity caused by the activity of the sympathetic nervous system. Whether there is a direct link between delta brain wave activity and the GSR storms is not proven yet. There is a coincidence of the two phenomena. Other sleep stages are linked to faster brain wave frequencies and thus cannot become visible in the skin conductivity fluctuations, since they fluctuate too fast. Apparently the skin conductance acts as a low pass filter, blocking all frequencies over e.g. 0.5 or 1 Hz, making it an excellent detector of slow (delta range) brain waves.

Fatigue caused by continuous information and communication processing can be relieved without the need for slow wave sleep. The diminished attentional capacity of a person can be restored without the need for slow wave sleep.

Fig. 2 shows a schematic diagram of exemplary embodiment of a system 100 according to the present invention. The system 100 comprises a sensing unit 20 for acquiring skin conductance measurements 21 of the user. The sensing unit 20 may e.g. a wearable skin conductance sensor. The skin conductance measurements 21 over time form a skin conductance trace. The system 100 further comprises a device 10 for generating user instructions 34 and for generating bio-feedback information 35 based on the skin conductance measurements 21. Still further, the system 100 comprises a user interface 30 for outputting the user instructions and the bio-feedback information. The user interface 30 may thus comprise one or more of a display screen 31, a signalling lamp, a loudspeaker 32 and/or a communication unit 33, which is configured to communicate the user instructions 34 and/or

the bio-feedback information 35 to another device 40, such as a smartphone, laptop, table, computer, etc. of the user, where the user instructions and/or the bio-feedback information may be outputted and/or further processed.

The device 10 comprises an interface 11 for obtaining (i.e. receiving or
5 retrieving from the sensor 20 or a memory (not shown)) the skin conductance measurements 21 of the user and for outputting the user instructions 34 and bio-feedback information 35 to the user interface 30. The device further comprises a processing unit 12 for processing the skin conductance measurements 21. The processing of the device and the corresponding method will be explained below in more detail.

10 The processing unit 12 can be any type of suitable processing unit or processor, such as for example a microprocessor/microcontroller, or embedded microcontroller but not limited thereto that is adapted accordingly. The interface 11 can be any kind of interface from obtaining data from the sensing unit 20 or a memory, e.g. a wireless or wired data interface or signal line. It will be understood that the sensing unit 20
15 and the device 10 can be part of the same device (e.g. wearable device or wristband) or can be implemented as or in separate devices.

It will be understood that the user interface 30 and the device 10 can be part of the same device (e.g. wearable device or wristband) or can be implemented as or in separate devices. For example, the user interface 30 of the system 100 may be implemented by means
20 of a smartphone or other information processing entity at the same or a remote location. Correspondingly, the processing unit 12 can also be implemented by means of a smartphone that is adapted to perform the afore-mentioned functionality for example by running a corresponding application or another suitable computing device running the corresponding software.

25 The system 100 may further comprise a memory 13 for storing skin conductance measurements, user instructions and/or bio-feedback used earlier. The memory 13 can be part of the device 10 or can be an external memory. The memory can be any suitable memory such as for example a memory register or RAM (random access memory). It will be understood that the memory 13 and the processing unit 12 can be part of the same
30 device (e.g. wearable device or wristband) or can be implemented as or in separate devices.

Fig. 3 shows an embodiment of a wearable device 50 wearable by user. In this embodiment, the wearable device 50 is implemented in the form of a smart watch. The smart watch comprises a wristband 53 and a casing 54. The wristband 53 can loop around the wrist of the user. It will be understood that a wearable device could also be worn around another

suitable part of the body such as the ankle foot or hand or may be adapted for attachment to other parts of the body, e.g. in the form of a patch.

The wearable device 50 can comprise the proposed system 100 for bio-feedback to a user. In this way a corresponding system 100 can be provided in an unobtrusive and wearable format. Alternatively, the wearable device 50 may only comprise the sensing unit 20, in this embodiment a skin conductance sensor 20. The device 10 of the system 100 may be located at the remote location or implemented in a remote device (e.g. a remote computer, smartphone or patient monitor).

The sensor 20 in this embodiment comprises a first and a second skin conductance electrode 51, 52 in combination with a skin conductance measuring unit (not shown). In the embodiment of Fig. 2, two skin conductance electrodes 51, 52 are integrated into the casing 54 of the wearable device, however is also possible to integrate them for example into the wristband 53 so that they contact the underside of the wrist. The skin conductance electrodes 51, 52 can be arranged so as to contact the upper side of the wrist when the user wears the wearable device 50. An exemplary implementation of a wearable device comprising a skin conductance sensor is the Philips discreet tension indicator DTI-4 or DTI-5.

The skin conductance sensor 20 is adapted to measure the skin conductance of the user 2 between the skin conductance electrodes 51, 52. For this purpose, the skin conductance measuring sensor may comprise a voltage generator for applying a voltage between the at least two skin conductance electrodes, a sensing unit for sensing a current between the at least two electrodes, and/or a calculating unit for calculating the skin conductance based on the sensed current. The measured skin conductance over time forms, in this embodiment, the skin conductance trace (or data). The skin conductance trace (or data) may for example be stored in a memory of the wearable device 50, or may be transmitted (wirelessly or through a wire or signal line) to an external unit.

The skin conductance measuring sensor 20 and/or the device 10 (as shown in Fig. 2) may be integrated into the casing 54 of the wearable device 50. The wearable device 50 can further comprise a transmitter for transmitting data (such as the skin conductance measurements, the user instructions and/or the bio-feedback) over a wireless or wired communication link, e.g. using Low Energy Bluetooth or a similar method. However, it will be understood that the device 10 or processing unit 12 can also be implemented as or in separate parts or devices and that the wearable device 50 then transmits the skin conductance

measurements to the separate part or device via the transmitter. Further, the user interface 30 may be integrated into the wearable device 50 as well.

Fig. 4 shows a flow chart of an embodiment of a method 200 for providing bio-feedback to a user according to the present invention. The processing unit 12 of the device 10 shown in Fig. 1 may carry out this method 200.

In a first step 201 user instructions 34 indicating one or more actions to follow by the user are generated. For instance, the user may be instructed by displaying a certain text and/or graphic on the display screen 31 or by issuing corresponding audible instructions via a loudspeaker of the user interface 30 to take a certain position, hold the hands in a certain position and to breath in a certain rhythm and/or at a certain type of breathing (in which the belly is expanded when inhaling air) for a certain period. Subsequently, one or more further instructions may be provided, as e.g. done in a conventional Zen meditation session.

In a second step 202 skin conductance measurements 21 of a user are obtained, e.g. from the sensing unit 20, which acquired these measurements while the user followed the instructions given in the first step 201.

In a third step 203 one or more GSR storms are identified in the skin conductance trace of the obtained skin conductance measurements. For identifying a GSR storm various options exist, as will be explained below in more detail.

In a fourth step 204 a latency of a predetermined duration (in which the mind disturbances settle down and no further GSR storm shows) is identified after the end of an identified GSR storm, as will be explained below as well.

In a fifth step 205, if at least one GSR storm followed by a latency has been identified, bio-feedback information is generated providing bio-feedback related to the one or more actions followed by the user. Said bio-feedback may e.g. be meditation depth information and/or a meditation depth score.

In a sixth step 206 the generated bio-feedback information 35 is output to the user, e.g. in text form or in any other subtle form that can be perceived by the user and that does not disturb the state.

The GSR storm patterns in skin conductance traces of sleep can also be found in skin conductance traces measured during a Zen meditation. In Fig. 5 an example skin conductance trace 4 of a Zen meditation from 6:24 hrs until 6:57 hrs, the relative peak heights 5 of peaks in the skin conductance trace 4 and an accelerometer output signal 6 are shown. The skin conductance trace shows two GSR storms from 6:24 hrs until 6:35 hrs and from 6:37 hrs until 6:43 hrs. Analogous to slow wave sleep periods during a sleep period

GSR storms occur at the beginning of the meditation period and settle down. In meditation terms (e.g. in line with the Aphorisms of Patanjali) a clear mind is obtained as soon as the mind disturbances settle down.

In the example of Fig. 5 a clear mind is obtained when the second GSR storm ends after about 18 minutes of meditation. The data processing unit 12 can detect and quantify the skin conductance peaks and signal the occurrence of slow (delta) brain frequencies to the meditator, or more advantageously the end of the GSR storms, indicating a clear mind state. A three to five-minute latency after the end of a GSR storm is preferably used to enable the detection of a new GSR storm.

The time and relative height or steepness of the individual GSR storm peaks can e.g. be calculated by taking the difference of logarithmic values of skin conductance measurement i and measurement $i+1$. Optionally, the value can be multiplied with the sampling:

$$steepness_{normalized,log} = (10\log(SC_i) - 10\log(SC_{i+1})) \cdot f$$

wherein SC_i denotes a sample value of the skin conductance signal trace at sample i ; SC_{i+1} denotes a sample value of the skin conductance signal trace at a subsequent sample $i+1$; and f denotes the sampling frequency. The sampling frequency is optional in the aforementioned formulae. For such a log-calculation, all negative values can be set to zero, leaving only the rising edges of the skin conductance trace. Instead of steepness, it can also be called the first time derivative. Optionally, a normalized maximum rising edge slope of each of a plurality of respective skin conductance peaks can be identified and used for further processing.

In another embodiment, aside from a minimum rising edge duration criterion required for identifying a rising edge (i.e. the rising edge must be given for a minimum duration), zero crossings of the first derivative of the skin conductance signal may be used to detect a peak.

From the peak times the peak occurrence frequency can be obtained. Various criteria for identifying a GSR storm may be used. One criterion is that the peak frequency exceeds 0.2Hz for the entire duration of the GSR storm, more generally if the peak frequency of the peaks in the skin conductance trace exceeds a predetermined frequency threshold in the time period. A frequency in the range of 0.05 Hz to 1 Hz, in particular in the range of 0.1 Hz to 0.3 Hz, may hereby be used as predetermined frequency threshold.

Another criterion for detecting a GSR storm may be the if number of peaks in the skin conductance trace exceeds a predetermined threshold number in the time period. A

number in the range of 3 to 60, in particular in the range of 6 to 18, may hereby be used as predetermined threshold number for a time period of one minute.

The duration of the GSR storm shall be in the range of 2 to 10 minutes, in particular in the range of 3 to 6 minutes. Further, a minimum number of subsequent peaks
5 may be provided in the skin conductance trace to qualify as a GSR storm.

In a practical implementation the criterion may be used that there shall be at least 3 peaks/minute and a minimum number of 45 subsequent peaks to qualify as a GSR storm.

In a practical embodiment the disclosed method may be implemented on a
10 smartphone which is usually the device that conveys information and communication to the user. A dedicated application (“app”) can monitor the amount of information and communication to which the user has been exposed. The wearable skin conductance sensor is capable to calculate a stress level that can be linked to the contextual information from the smartphone. When a preset limit of for example 3 hours of exposure or a cumulative stress
15 exposure of for instance 1 hour of level 3 or higher is exceeded the slow brain wave induction app can be offered to restore attentional capacity (recovery of action potential of synapses). The app may use known Zen meditation techniques. The user can wear the Philips DTI-5 skin conductance sensor, follow the instructions from the smartphone, conveyed via earphones, and obtain feedback of failure or success by means of a suitable discreet audio
20 signal generated by the GSR storm detection software. At least one GSR storm is needed to achieve the clear mind status. The end of the slow brain wave induction app may signaled when the preset latency of 3 to 5 minutes after the last GSR storm is reached. This end signal can again be conveyed as an audio signal via earphones connected to the smartphone.

The present invention may be used in the context of lifestyle coaching,
25 smartwatches, attentional capacity recovery coaching, and/or meditation coaching.

While the invention has been illustrated and described in detail in the drawings and foregoing description, such illustration and description are to be considered illustrative or exemplary and not restrictive; the invention is not limited to the disclosed embodiments. Other variations to the disclosed embodiments can be understood and effected by those
30 skilled in the art in practicing the claimed invention, from a study of the drawings, the disclosure, and the appended claims.

In the claims, the word "comprising" does not exclude other elements or steps, and the indefinite article "a" or "an" does not exclude a plurality. A single element or other unit may fulfill the functions of several items recited in the claims. The mere fact that certain

measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

5 A computer program may be stored/distributed on a suitable non-transitory medium, such as an optical storage medium or a solid-state medium supplied together with or as part of other hardware, but may also be distributed in other forms, such as via the Internet or other wired or wireless telecommunication systems.

Any reference signs in the claims should not be construed as limiting the scope.

CLAIMS:

1. Device for providing bio-feedback to a user, said device comprising:
an interface (11) configured to obtain skin conductance measurements of a user and to output user instructions and bio-feedback information; and
a processing unit (12) configured to
- 5 - generate user instructions indicating one or more actions to follow by the user,
- identify one or more galvanic skin response, GSR, storms in a skin conductance trace of the obtained skin conductance measurements, wherein a GSR storm is identified based on the number of peaks and/or the peak frequency in a time period having a duration in the range of 2 to 10 minutes,
- 10 - identify a latency of a predetermined duration without a further GSR storm after the end of an identified GSR storm, and
- generate, if at least one GSR storm followed by a latency has been identified, bio-feedback information providing bio-feedback related to the one or more actions followed by the user.
- 15
2. Device as claimed claim 1,
wherein the processing unit (12) is configured to generate a meditation depth information indicating if at least one GSR storm followed by a latency has been identified as bio-feedback information.
- 20
3. Device as claimed in any one of the preceding claims,
wherein the processing unit (12) is configured to identify a GSR storm in the skin conductance trace by detecting if the peak frequency of the peaks in the skin conductance trace exceeds a predetermined frequency threshold in a time period.
- 25
4. Device as claimed in claim 3,
wherein the processing unit (12) is configured to use a frequency in the range of 0.05 Hz to 1 Hz, in particular in the range of 0.1 Hz to 0.3 Hz, as predetermined frequency threshold.

5. Device as claimed in any one of the preceding claims,
wherein the processing unit (12) is configured to identify a GSR storm in the skin conductance trace by detecting if the number of peaks in the skin conductance trace exceeds a predetermined threshold number in a time period.

5

6. Device as claimed in claim 5,
wherein the processing unit (12) is configured to use a number in the range of 3 to 60, in particular in the range of 6 to 18, as predetermined threshold number for a time period of one minute.

10

7. Device as claimed in claim 2, 3, 5 or 6,
wherein the processing unit (12) is configured to use a duration in the range of 3 to 6 minutes as time period.

15

8. Device as claimed in any one of the preceding claims,
wherein the processing unit (12) is configured to use a duration in the range of 2 to 10 minutes, in particular in the range of 3 to 6 minutes, as latency.

9. Device as claimed in any one of the preceding claims,

20

wherein the processing unit (12) is configured to generate user instructions indicating one or more meditation actions to follow by the user and/or a meditation depth score based on the detection of peaks in the skin conductance trace, the meditation depth score indicating a meditation state of the user.

25

10. System for providing bio-feedback to a user, said system comprising:

- a sensing unit (20) configured to acquire skin conductance measurements of the user,

- a device (10) as claimed in any one of the preceding claims configured to generate user instructions and to generate bio-feedback information based on the skin conductance measurements, and

30

- a user interface (30) configured to output the user instructions and the bio-feedback information.

11. System as claimed in claim 10,
wherein the sensing unit (20) is a wearable skin conductance sensor and/or
wherein the user interface (30) comprises one or more of a display screen (31)
and/or a loudspeaker (32) and/or a communication unit (33) configured to communicate the
5 user instructions and/or the bio-feedback information to another device (40).

12. Computer-implemented method for providing bio-feedback to a user, said
method comprising:
- obtaining skin conductance measurements of a user and to output user
10 instructions and bio-feedback information;
- generating user instructions indicating one or more actions to follow by the
user,
- identifying one or more galvanic skin response, GSR, storms in a skin
conductance trace of the obtained skin conductance measurements, wherein a GSR storm is
15 identified based on the number of peaks and/or the peak frequency in a time period having a
duration in the range of 2 to 10 minutes,
- identifying a latency of a predetermined duration without a further GSR storm
after the end of an identified GSR storm, and
- generating, if at least one GSR storm followed by a latency have been
20 identified, bio-feedback information providing bio-feedback related to the one or more
actions followed by the user.

13. Computer program comprising program code means for causing a computer to
carry out the steps of the method as claimed in claim 12 when said computer program is
25 carried out on the computer.

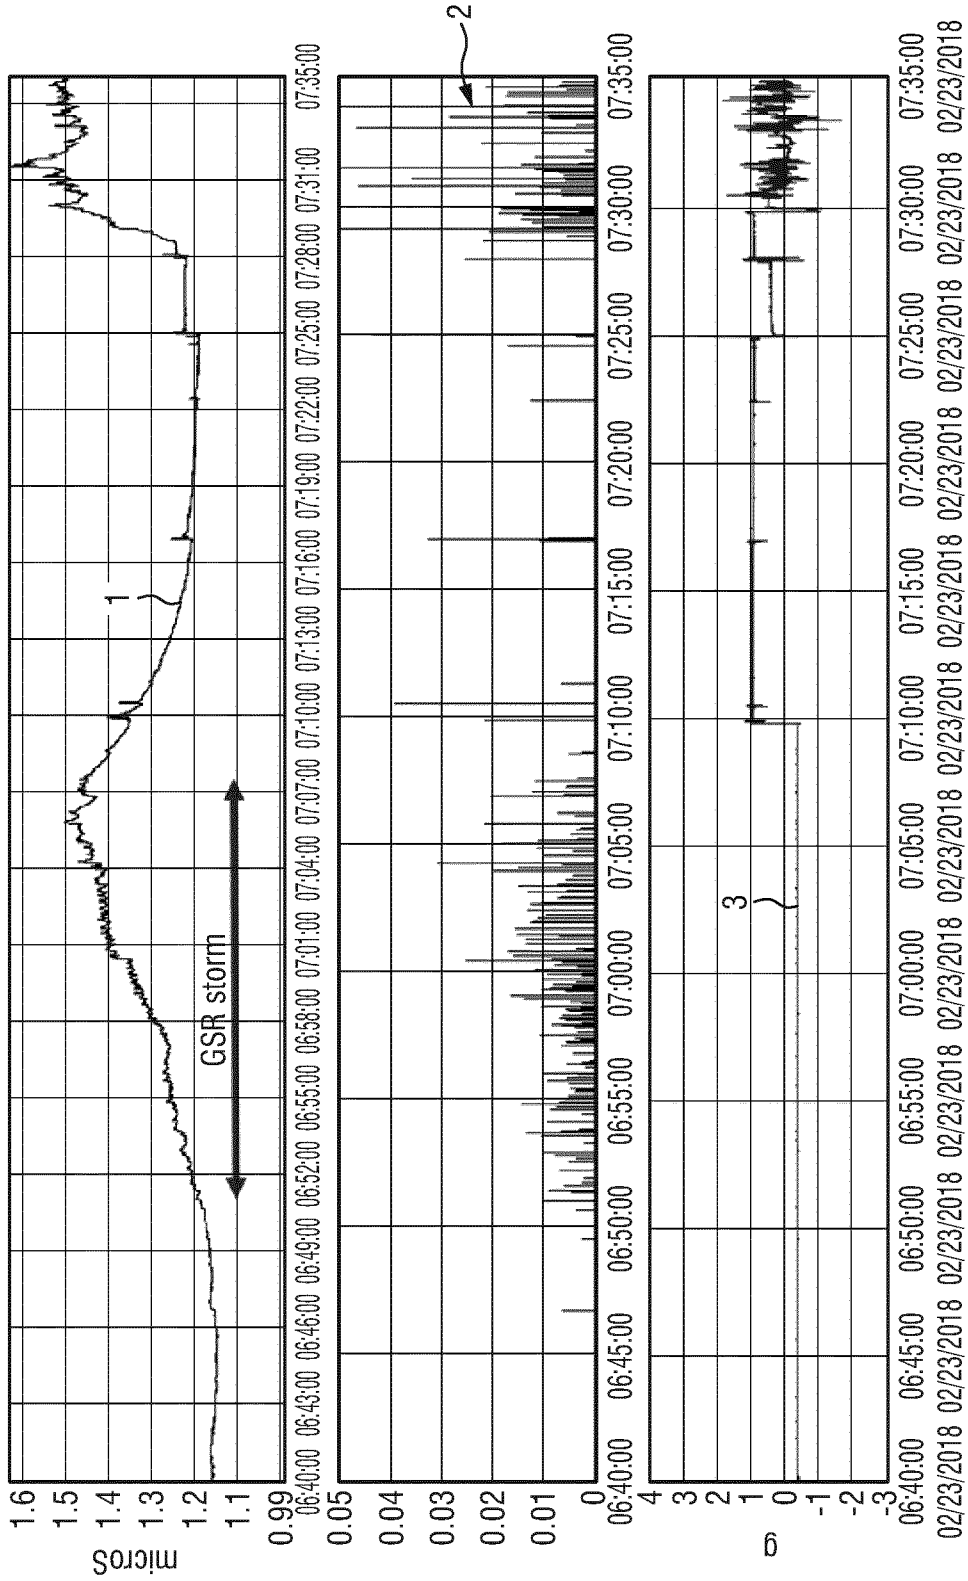


FIG.1

2/4

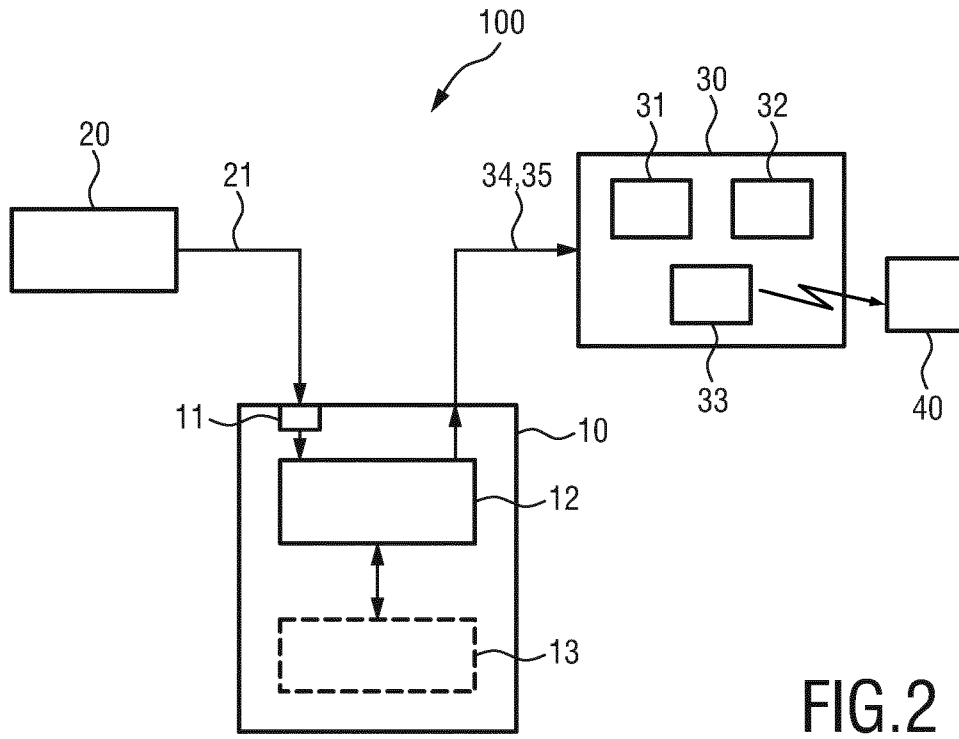


FIG.2

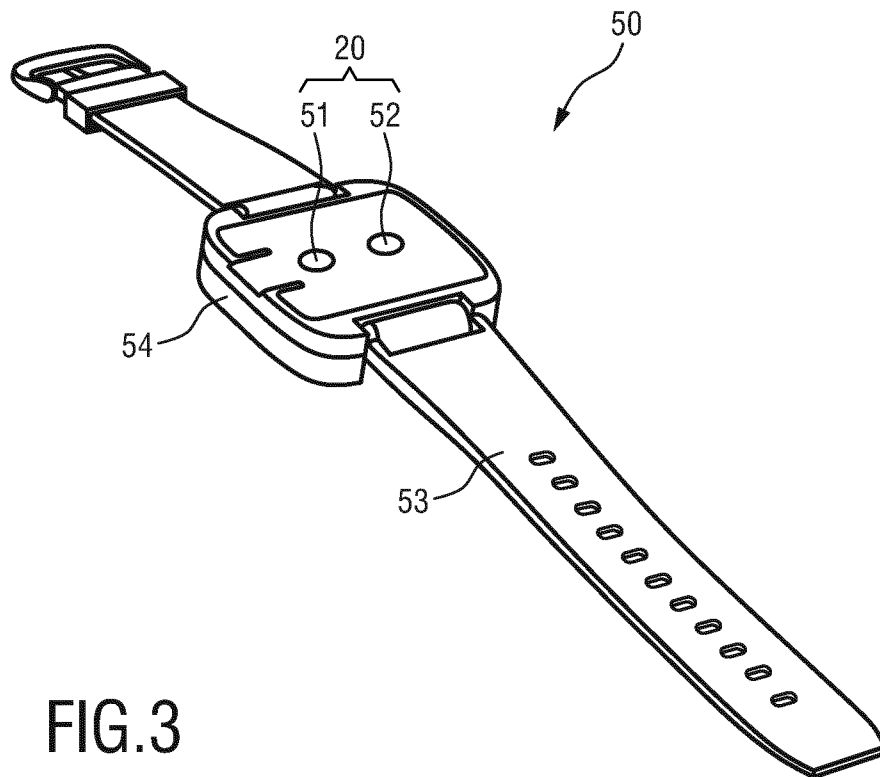


FIG.3

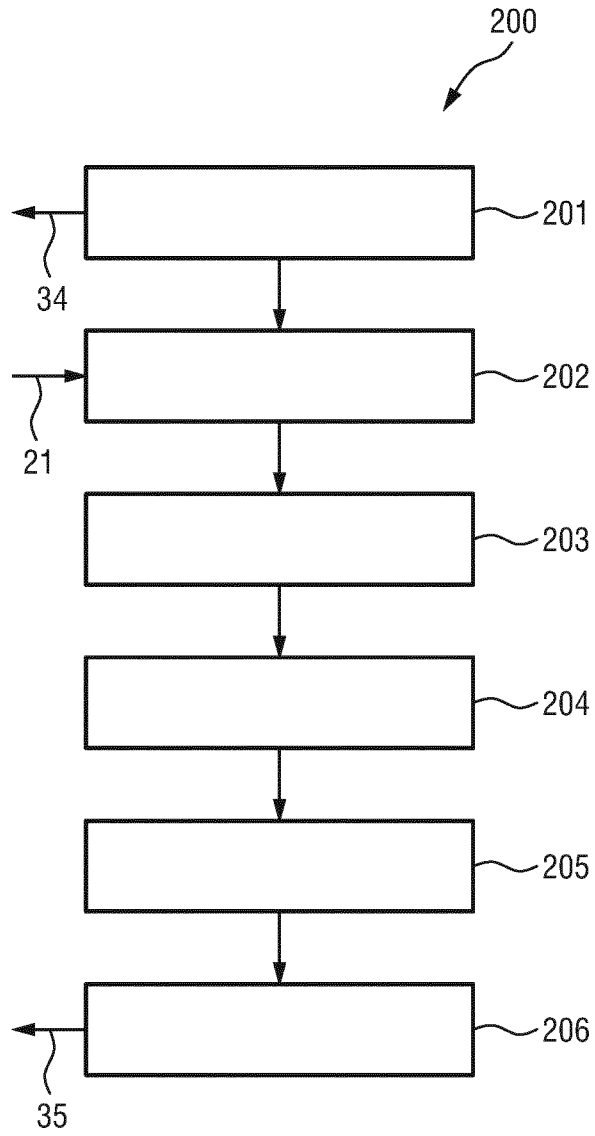


FIG.4

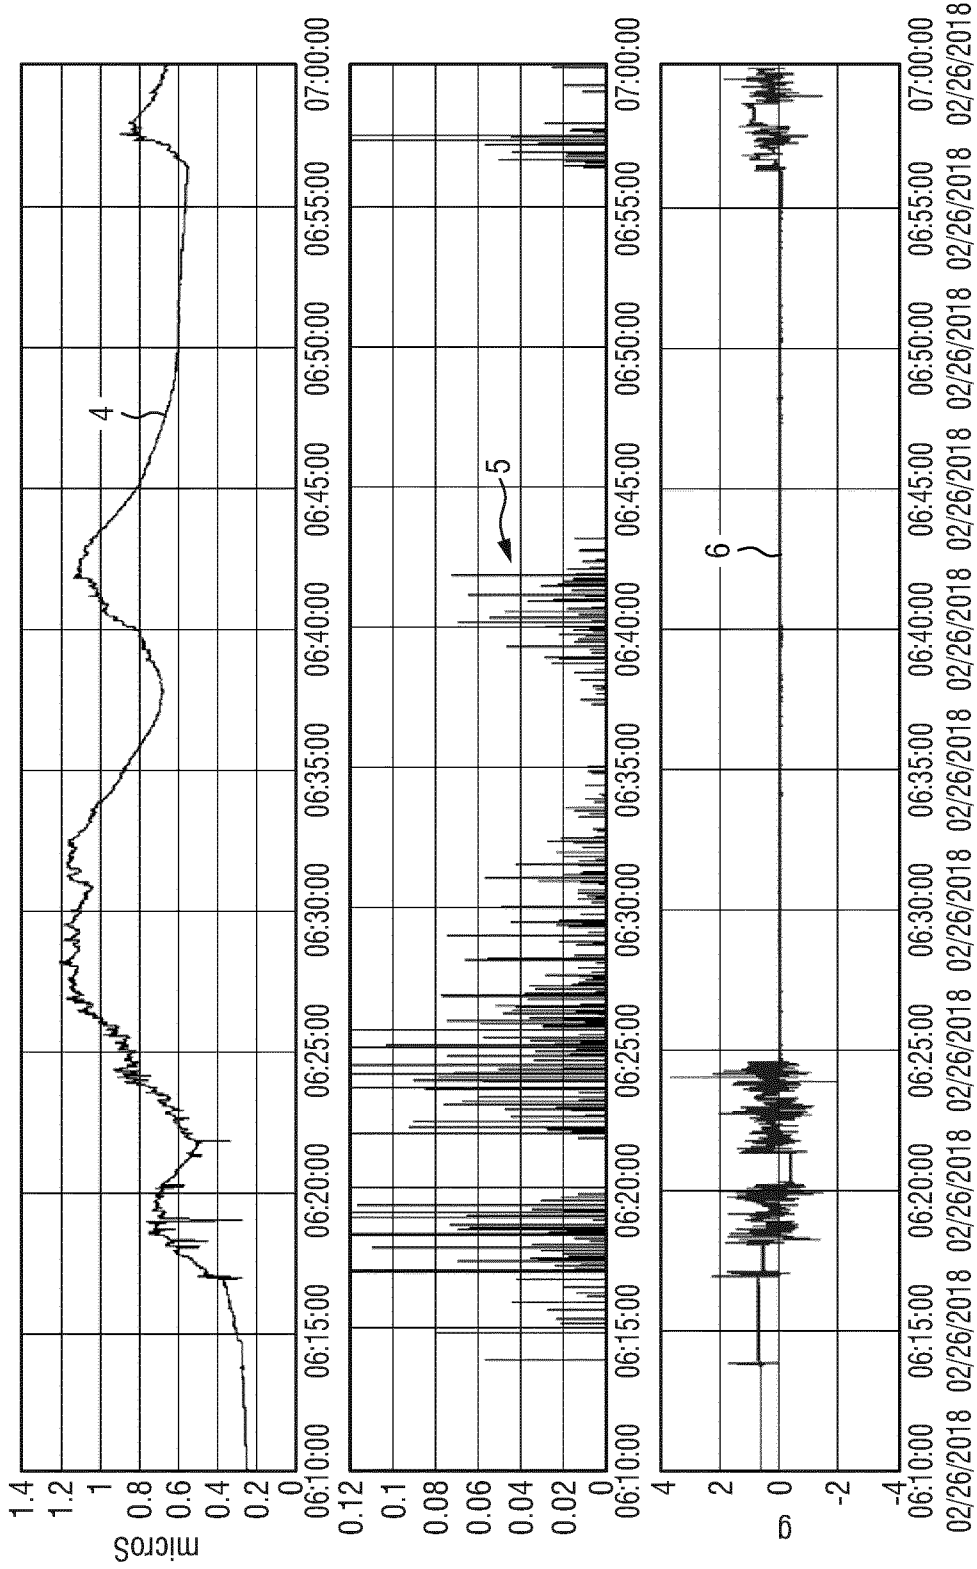


FIG.5

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/084133

A. CLASSIFICATION OF SUBJECT MATTER
 INV. A61B5/053 A61B5/16 A61B5/00
 ADD. A61B5/0482

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2017/178359 A1 (KONINKLIJKE PHILIPS NV [NL]) 19 October 2017 (2017-10-19) the whole document	1-13
A	US 2014/288401 A1 (OUWERKERK MARTIN [NL] ET AL) 25 September 2014 (2014-09-25) cited in the application the whole document	1-13
A	US 2017/000398 A1 (OUWERKERK MARTIN [NL] ET AL) 5 January 2017 (2017-01-05) the whole document	1-13
A	EP 3 409 205 A1 (KONINK PHILIPS NV) 5 December 2018 (2018-12-05) the whole document	1-13
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
29 January 2020	10/02/2020

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Faymann, Juan
--	---

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/084133

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 440 751 A (RABBITS PERRY JAMES [GB]) 13 February 2008 (2008-02-13) the whole document -----	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2019/084133

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
WO 2017178359	A1	19-10-2017	CN 109069056 A	21-12-2018
			EP 3442411 A1	20-02-2019
			JP 6581734 B2	25-09-2019
			JP 2019515726 A	13-06-2019
			US 2019117110 A1	25-04-2019
			WO 2017178359 A1	19-10-2017

US 2014288401	A1	25-09-2014	BR 112014012033 A2	30-05-2017
			CN 103957783 A	30-07-2014
			EP 2747638 A1	02-07-2014
			JP 6110869 B2	05-04-2017
			JP 2015503937 A	05-02-2015
			RU 2014125233 A	27-12-2015
			US 2014288401 A1	25-09-2014
			WO 2013076615 A1	30-05-2013

US 2017000398	A1	05-01-2017	CA 2932284 A1	11-06-2015
			CN 105792737 A	20-07-2016
			EP 3076868 A2	12-10-2016
			JP 6133512 B2	24-05-2017
			JP 2017501777 A	19-01-2017
			US 2017000398 A1	05-01-2017
			WO 2015082231 A2	11-06-2015

EP 3409205	A1	05-12-2018	CN 110662487 A	07-01-2020
			EP 3409205 A1	05-12-2018
			WO 2018219965 A1	06-12-2018

GB 2440751	A	13-02-2008	NONE	
