



US009894801B1

(12) **United States Patent**
Marroquin et al.

(10) **Patent No.:** **US 9,894,801 B1**
(45) **Date of Patent:** **Feb. 13, 2018**

(54) **COLD PLATE**

(56) **References Cited**

(71) Applicant: **International Business Machines Corporation**, Armonk, NY (US)
(72) Inventors: **Christopher M. Marroquin**, Rochester, MN (US); **Kevin M. O’Connell**, Rochester, MN (US); **Mark D. Schultz**, Yorktown Heights, NY (US); **Shurong Tian**, Mount Kisco, NY (US)

U.S. PATENT DOCUMENTS

6,111,749 A 8/2000 Lamb et al.
6,504,720 B2* 1/2003 Furuya H01L 23/427
165/104.33
6,988,543 B2 1/2006 Walczak
7,017,651 B1* 3/2006 Wilson H01L 23/473
165/109.1

(Continued)

(73) Assignee: **INTERNATIONAL BUSINESS MACHINES CORPORATION**, Armonk, NY (US)

OTHER PUBLICATIONS

F. Zhou, et al.: “A Novel Design of Hybrid Slot Jet and Mini-Channel cold Plate for Electronics Cooling”, 31st Semi-Therm Symposium, IEEE, 2015, pp. 60-67.

(Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

Primary Examiner — Adam B Dravininkas

(74) Attorney, Agent, or Firm — Patterson + Sheridan, LLP

(21) Appl. No.: **15/339,710**

(22) Filed: **Oct. 31, 2016**

(57) **ABSTRACT**

(51) **Int. Cl.**
H05K 7/20 (2006.01)
H01L 23/473 (2006.01)
H01L 23/427 (2006.01)


A cold plate, an electronic assembly including a cold plate, and a method for forming a cold plate are provided. The cold plate includes an interface plate and an opposing plate that form a plenum. The cold plate includes a plurality of active areas arranged for alignment over respective heat generating portions of an electronic assembly, and non-active areas between the active areas. A cooling fluid flows through the plenum. The plenum, at the non-active areas, has a reduced width and/or reduced height relative to the plenum at the active areas. The reduced width and/or height of the plenum, and exterior dimensions of cold plate, at the non-active areas allow the non-active areas to flex to accommodate surface variations of the electronics assembly. The reduced width and/or height non-active areas can be specifically shaped to fit between physical features of the electronics assembly.

(52) **U.S. Cl.**
CPC **H05K 7/20254** (2013.01); **H01L 23/427** (2013.01); **H01L 23/473** (2013.01); **H05K 7/2049** (2013.01); **H05K 7/20509** (2013.01)

(58) **Field of Classification Search**
CPC H01L 23/473; H01L 23/427; H01L 23/34; H01L 23/3672; H01L 23/3677; G06F 1/20; G06F 2200/201; F28F 3/12; F28F 3/02; F28F 2260/02; F28F 3/022; H05K 7/20772; H05K 7/20781; H05K 7/20836; H05K 7/20254; H05K 7/20927; H05K 7/20809; H05K 7/20218; H05K 7/20763

See application file for complete search history.

13 Claims, 9 Drawing Sheets

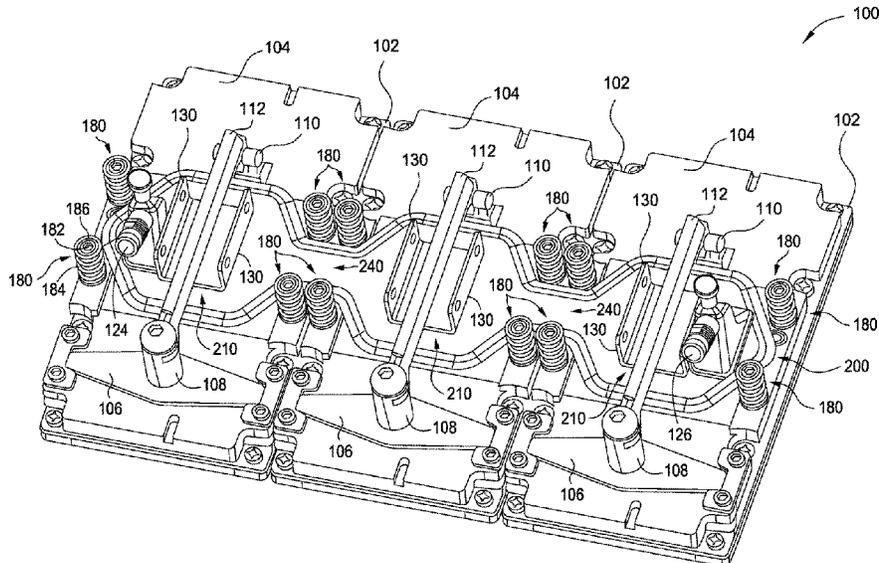

(56)

References Cited

U.S. PATENT DOCUMENTS

D553,656 S 10/2007 Reeves et al.
7,316,263 B2 1/2008 Loffland et al.
8,833,438 B2 9/2014 Wyatt et al.
9,219,022 B2 12/2015 Parida
2001/0014029 A1* 8/2001 Suzuki H02M 7/003
363/141
2008/0237847 A1* 10/2008 Nakanishi H01L 23/473
257/722
2009/0213541 A1 8/2009 Butterbaugh et al.
2012/0014066 A1* 1/2012 Morino H01L 23/473
361/707
2012/0018128 A1* 1/2012 Chang F28D 15/0233
165/104.19
2013/0187453 A1 7/2013 Flett et al.
2013/0214406 A1* 8/2013 Schultz H01L 23/46
257/713

2015/0136372 A1 5/2015 Sherbeck
2015/0369545 A1* 12/2015 Naritomi B23P 15/26
165/76
2016/0010772 A1 1/2016 Tiberghien et al.
2016/0056088 A1 2/2016 Uhlemann et al.
2016/0109197 A1 4/2016 Severson et al.
2016/0192534 A1* 6/2016 Pons H01L 23/3672
361/689
2016/0290728 A1* 10/2016 Coteus H01L 23/473

OTHER PUBLICATIONS

J. Fernandes, et al.: "Multi-Deswign Variable Optimization for a Fixed Pumping Power of a Water-Cooled Cold Plate for High Power Electronics Applications", 13th IEEE ITherm Conference, IEEE, 2012, pp. 684-692.

* cited by examiner

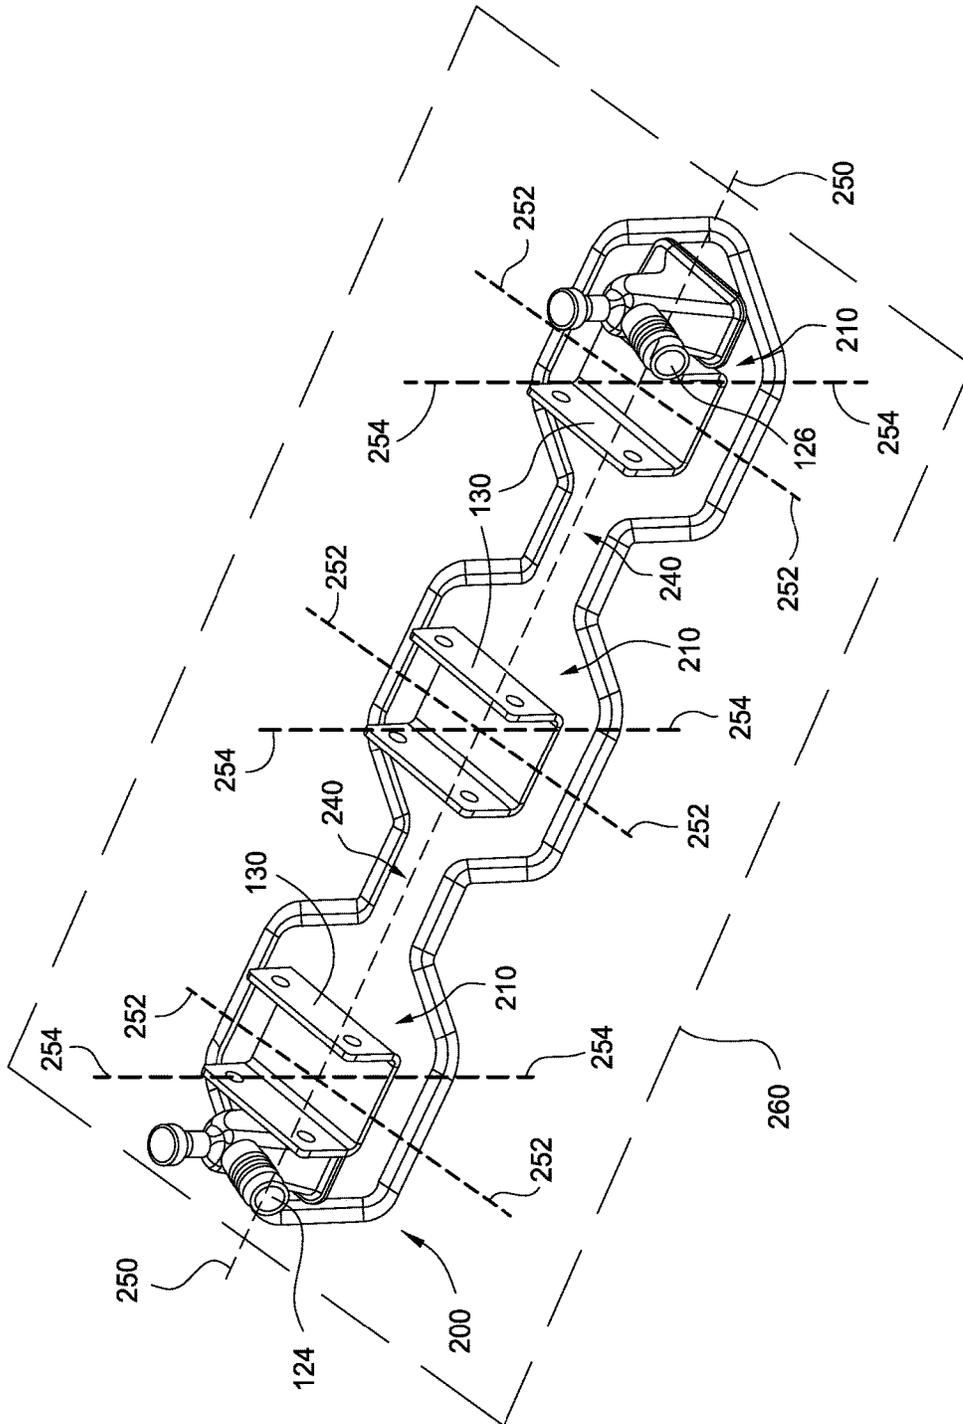


FIG. 2

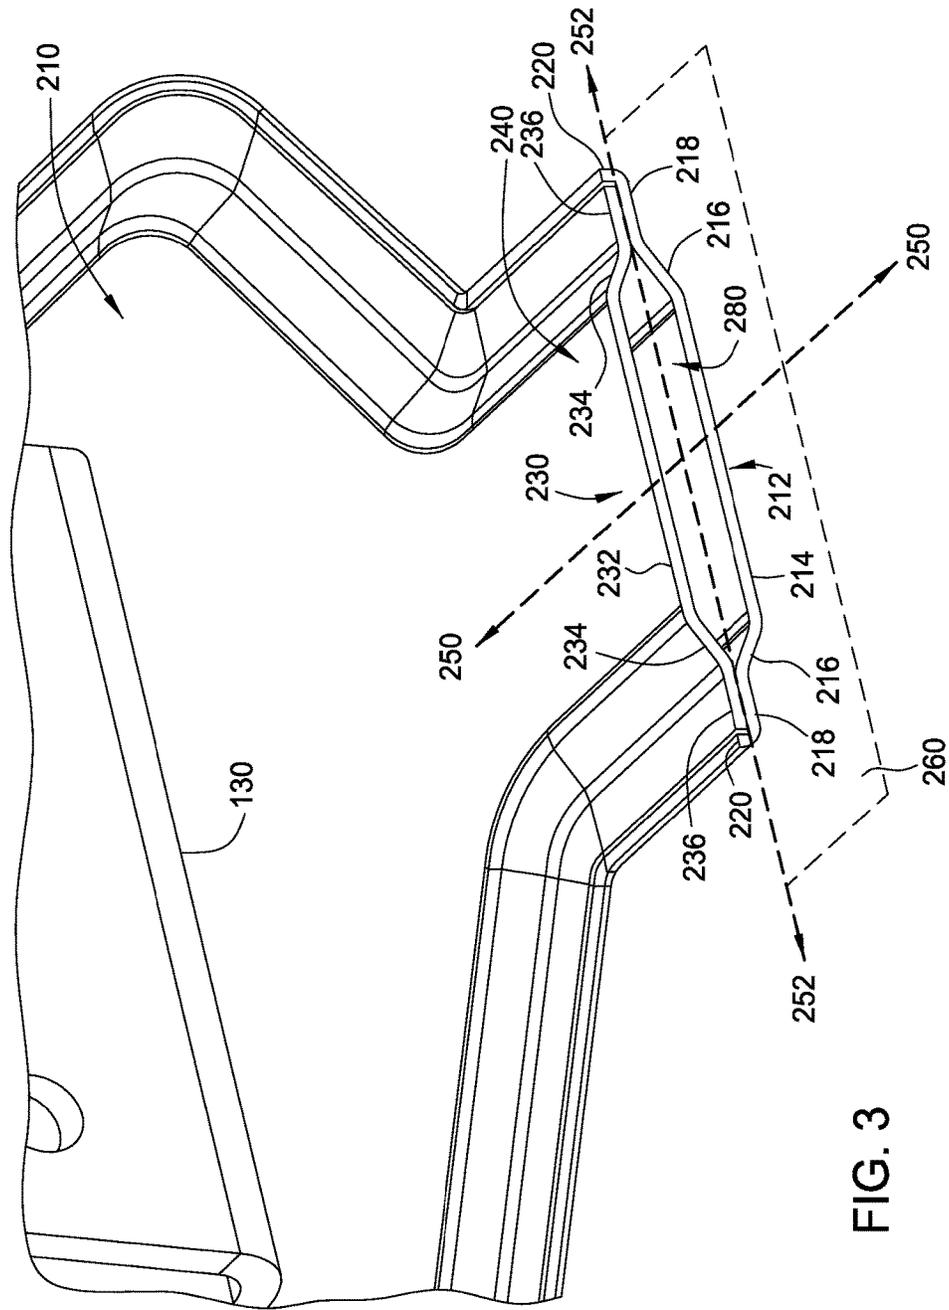


FIG. 3

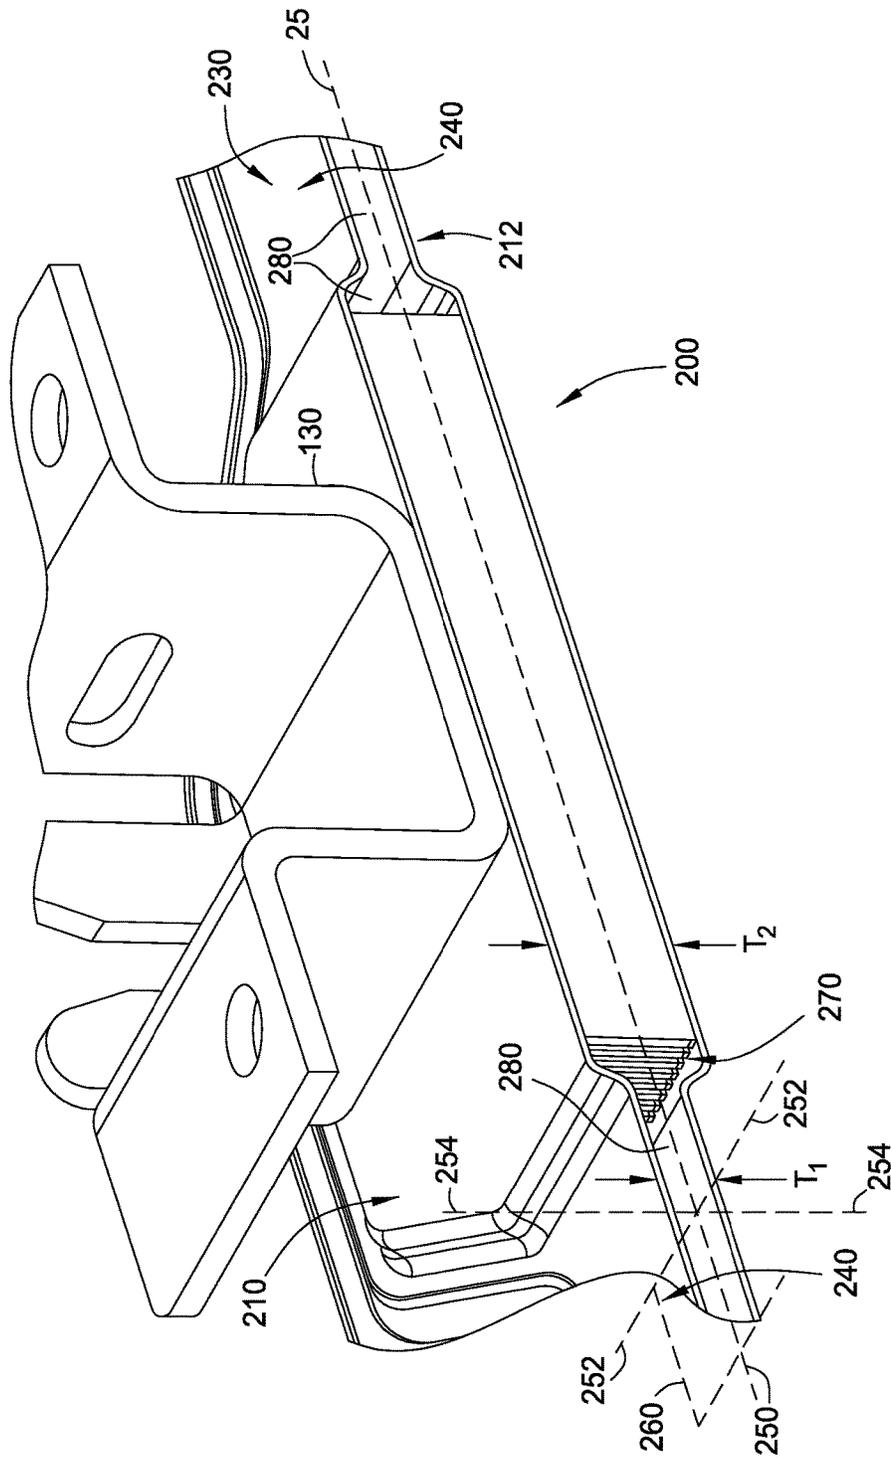


FIG. 4

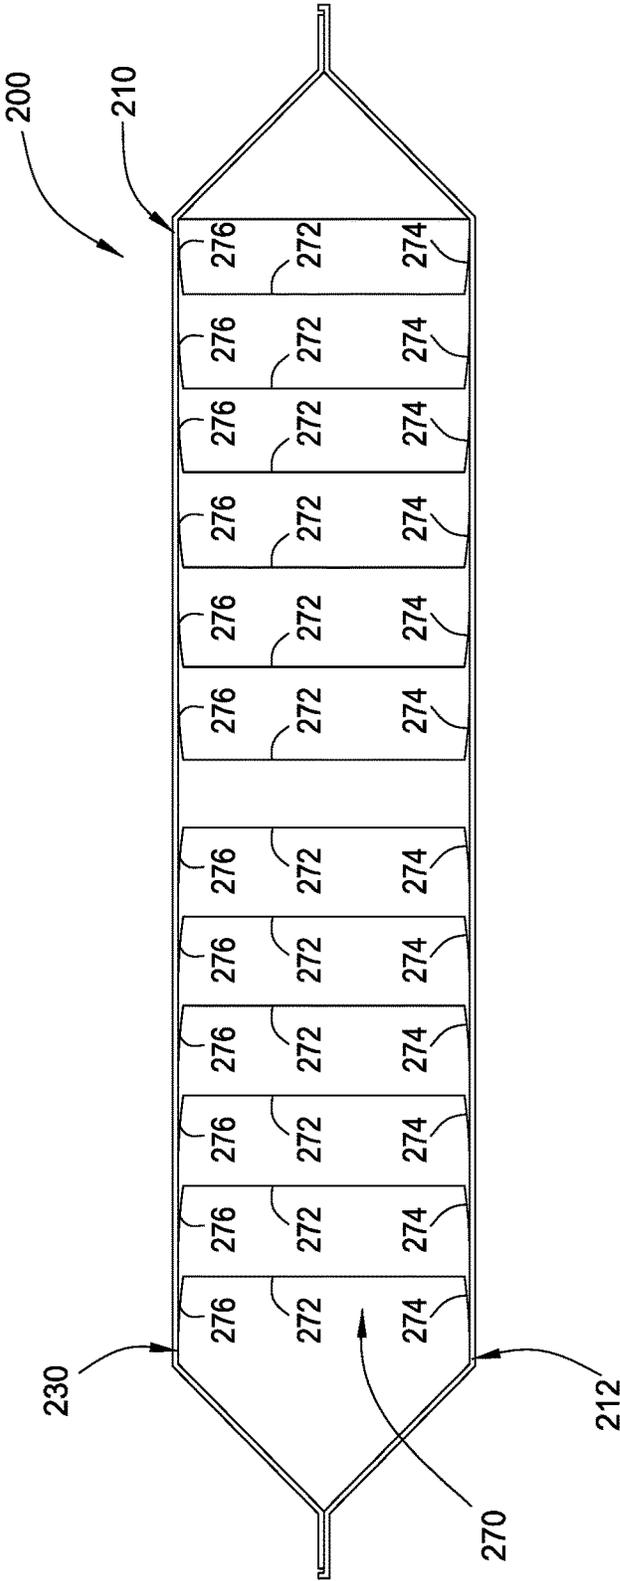


FIG. 5

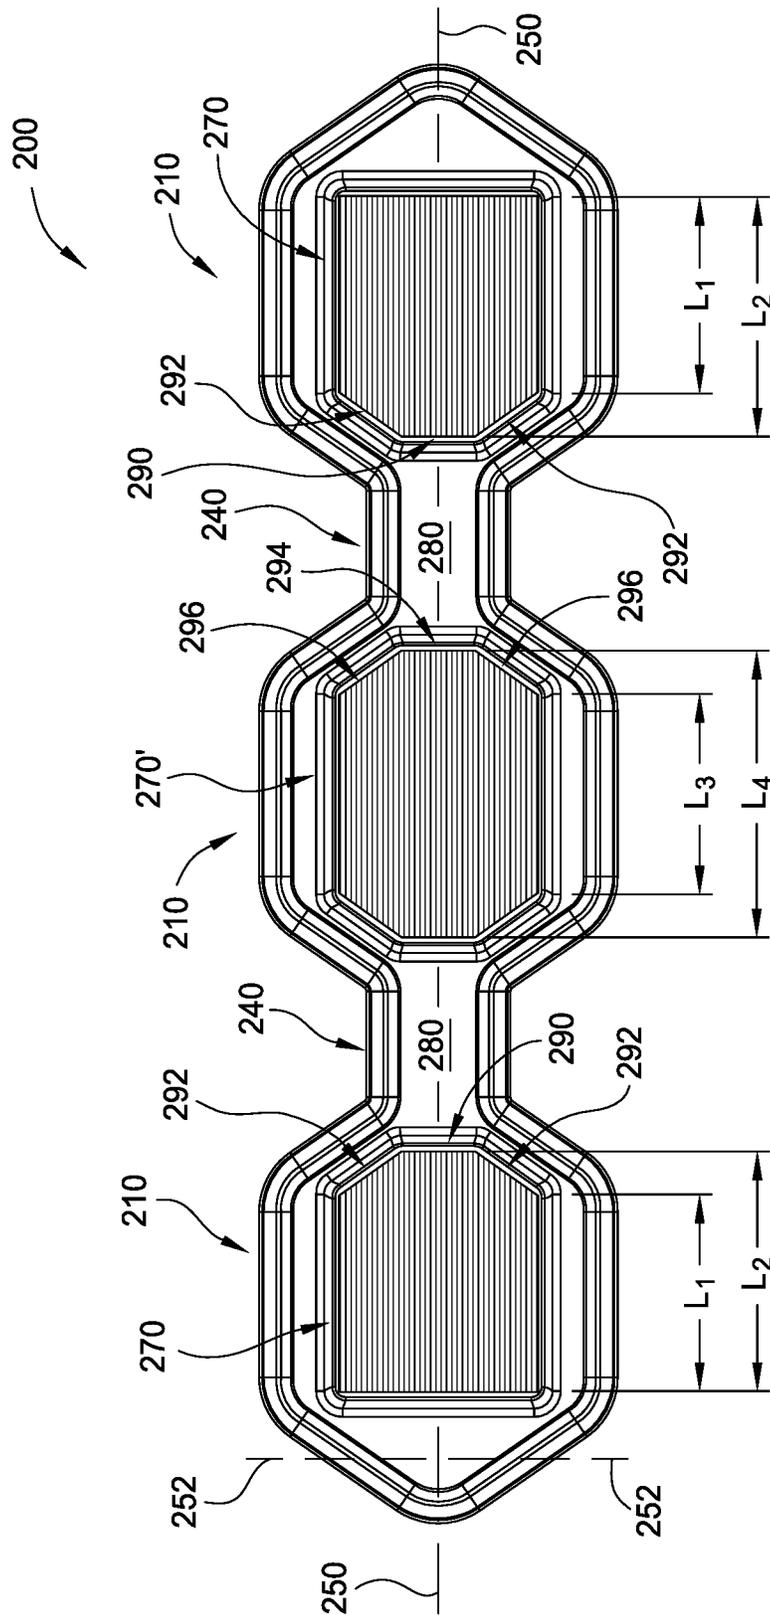


FIG. 6

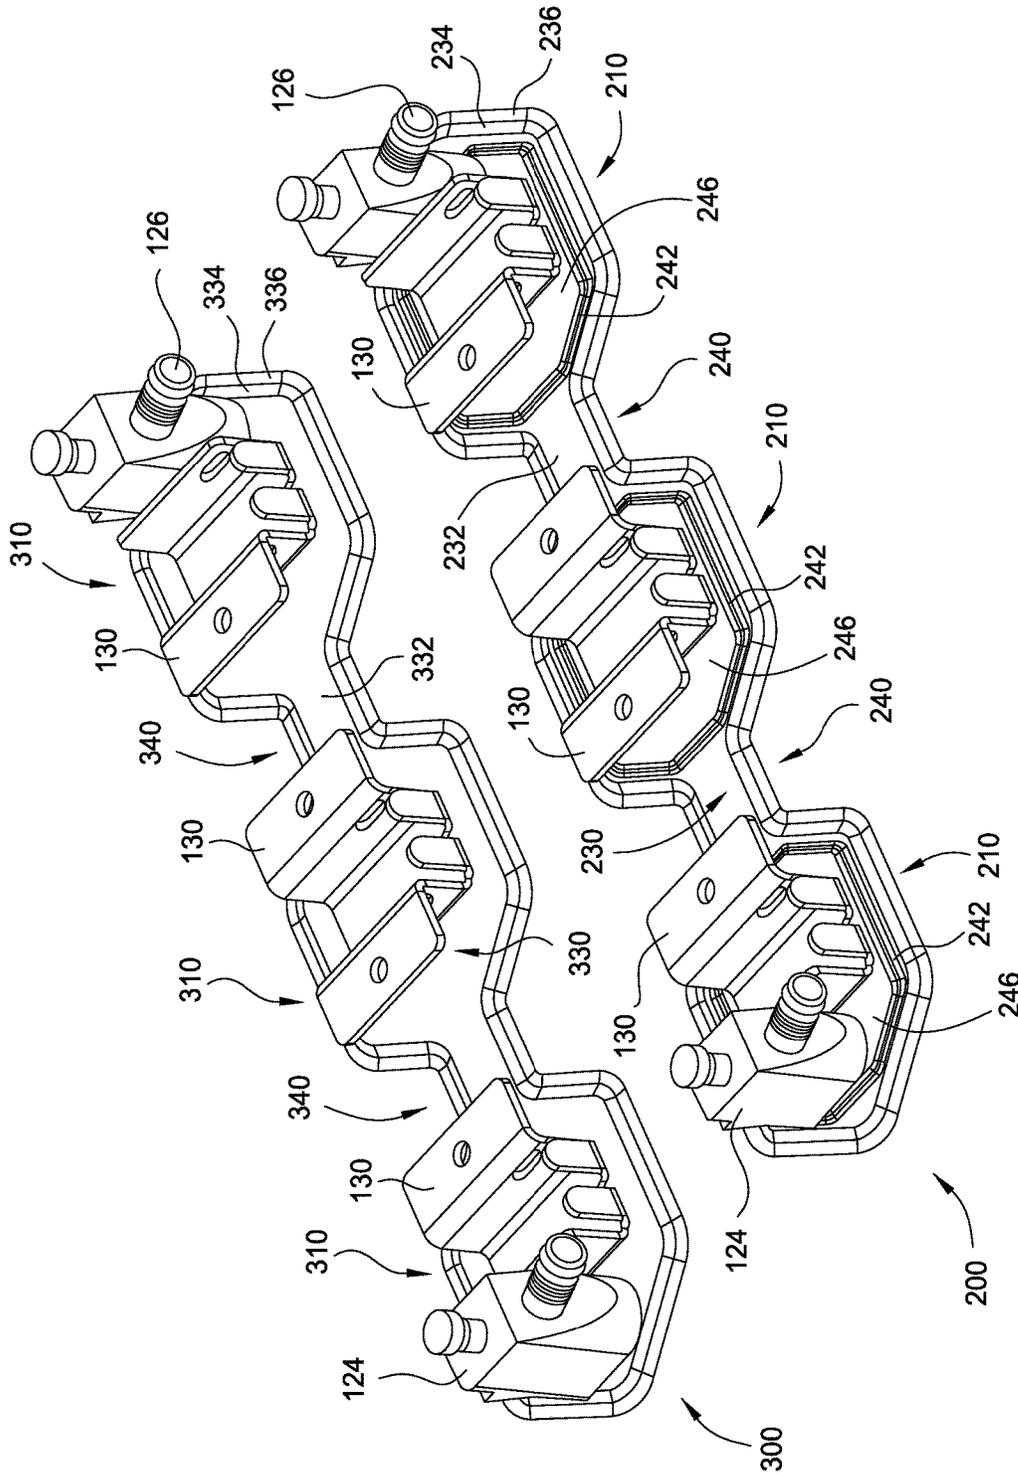


FIG. 8A

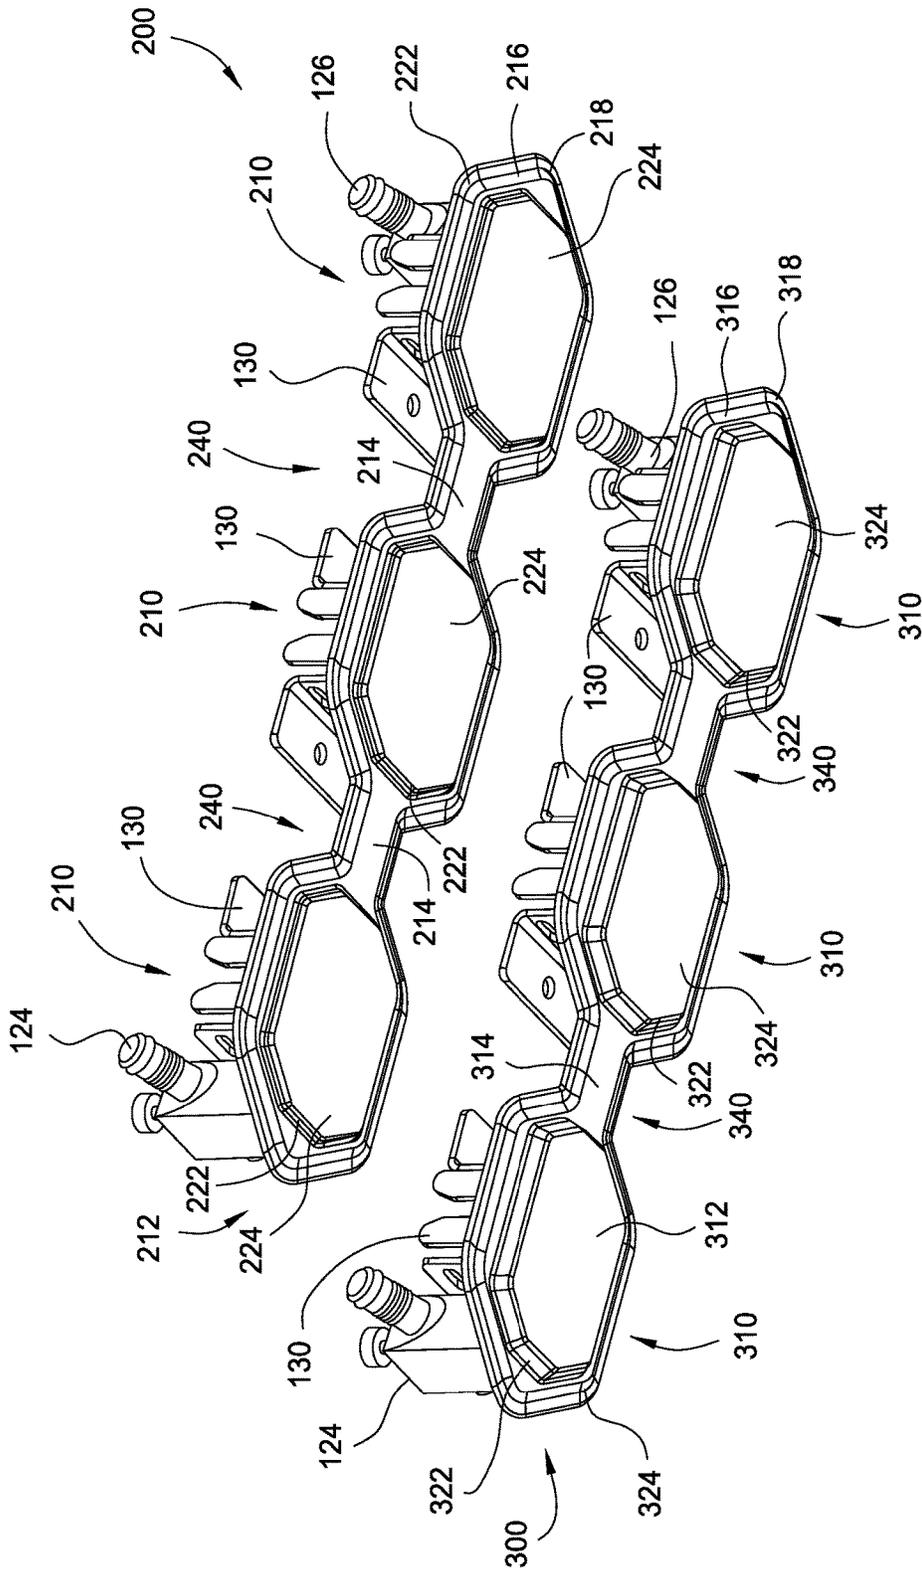


FIG. 8B

1

COLD PLATE

STATEMENT OF GOVERNMENT SUPPORT

This invention was made with government support under contracts awarded by the Department of Energy (Contract Nos. 4000131696 and B604142 awarded by Oak Ridge National Labs and Lawrence Livermore National Labs, respectively). The government has certain rights in the invention.

BACKGROUND

In certain applications, components of electrical systems are water cooled. In such electrical systems, a plenum is formed from sheet metal or another thermally conductive material. An exterior surface of the sheet metal or other thermally conductive material is arranged in contact (or conductive communication) with heat-generating components of the electrical system. Water, often treated with chemicals to avoid corrosion, flows through the plenum. Heat from the components of the electrical system is transferred to the sheet metal or other thermally conductive material and then to the water in the plenum. The water flowing through the plenum transports the heat away from the components of electrical system, thereby keeping the components cool.

SUMMARY

According to one embodiment, a cold plate for cooling electronics comprises an interface plate configured for arrangement on an electronics assembly. The interface plate comprises a plurality of active areas arranged for alignment over respective heat-generating portions of the electronics assembly and non-active areas between the active areas. The cold plate also comprises an opposing plate. Edges of the interface plate and the opposing plate are joined to form a plenum therebetween. The plenum defines a cooling fluid flow axis from a first end of the plenum to the second end of the plenum. The plenum includes active plenum volumes aligned with the active areas of the interface plate and non-active plenum volumes aligned with the non-active areas of the interface plate. A first width of the active plenum volumes in a first transverse direction to the cooling fluid flow axis is larger than a second width of the non-active plenum volumes in the first transverse direction. The cold plate also comprises a plurality of cooling fins arranged in each of the plurality of active plenum volumes. The surfaces of the cooling fins are arranged along the cooling fluid flow axis.

According to one embodiment, an electronic assembly comprises a plurality of electrical components arranged in a row. Each of the plurality of electrical components includes a heat-generating portion. The electronic assembly further comprises a cold plate arranged on the plurality of electrical components. The cold plate comprises an interface plate arranged on the plurality of electrical components. The interface plate comprises a plurality of active areas arranged for alignment over respective heat-generating portions of the electrical components and non-active areas between the active areas. The cold plate also includes an opposing plate. Edges of the interface plate and the opposing plate are joined to form a plenum therebetween. The plenum defines a cooling fluid flow axis from a first end of the plenum to the second end of the plenum. The plenum includes active plenum volumes aligned with the active areas of the inter-

2

face plate and non-active plenum volumes aligned with the non-active areas of the interface plate. A first width of the active plenum volumes in a first transverse direction to the cooling fluid flow axis is larger than a second width of the non-active plenum volumes in the first transverse direction. The cold plate also comprises a plurality of cooling fins arranged in each of the plurality of active plenum volumes. The surfaces of the cooling fins are arranged along the cooling fluid flow axis.

According to one embodiment, a method of forming a cold plate comprises stamping an interface plate from sheet metal. The interface plate is configured for arrangement on an electronics assembly. The interface plate comprises a plurality of active areas arranged for alignment over respective heat-generating portions of the electronics assembly and non-active areas between the active areas. The method also comprises affixing a plurality of cooling fins to the interface plate at each of the plurality of active area. The method also comprises stamping an opposing plate from sheet metal. The method also comprises joining edges of the first and opposing plates. Edges of the interface plate and the opposing plate form a plenum therebetween. The plenum defines a cooling fluid flow axis from a first end of the plenum to the second end of the plenum. The plenum includes active plenum volumes aligned with the active areas of the interface plate and non-active plenum volumes aligned with the non-active areas of the interface plate. A first width of the active plenum volumes in a first transverse direction to the cooling fluid flow axis is larger than a second width of the non-active plenum volumes in the first transverse direction. The surfaces of the cooling fins are arranged along the cooling fluid flow axis.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of an electronic assembly with a cold plate according to one embodiment arranged thereon;

FIG. 2 is a perspective view of the cold plate of FIG. 1; FIG. 3 is a detail, perspective, cross-sectional view of the cold plate of FIG. 1, wherein the cross-section is through a non-active area of the cold plate in a transverse direction with respect to the cooling fluid flow axis;

FIG. 4 is a detail, perspective, cross-sectional view of the cold plate of FIG. 1, where the cross-section is through an active area of the cold plate in the cooling fluid flow axis;

FIG. 5 is a cross-sectional end view of an active area of the cold plate of FIG. 1;

FIG. 6 is a top cross-sectional view of the cold plate of FIG. 1;

FIG. 7 is a detail, top cross-sectional of the cold plate of FIG. 1;

FIG. 8A is a top perspective view of the cold plate of FIG. 1 and a cold plate of another embodiment; and

FIG. 8B is a bottom perspective view of the cold plate of FIG. 1 and the cold plate of the other embodiment shown in FIG. 8A.

DETAILED DESCRIPTION

In the following, reference is made to embodiments presented in this disclosure. However, the scope of the present disclosure is not limited to specific described embodiments. Instead, any combination of the following features and elements, whether related to different embodiments or not, is contemplated to implement and practice contemplated embodiments. Furthermore, although embodi-

ments disclosed herein may achieve advantages over other possible solutions or over the prior art, whether or not a particular advantage is achieved by a given embodiment is not limiting of the scope of the present disclosure. Thus, the following aspects, features, embodiments and advantages are merely illustrative and are not considered elements or limitations of the appended claims except where explicitly recited in a claim(s). Likewise, reference to “the invention” or “the disclosure” shall not be construed as a generalization of any inventive subject matter disclosed herein and shall not be considered to be an element or limitation of the appended claims except where explicitly recited in a claim(s).

In certain electronics water cooling applications, several components of an electrical system are aligned in a row such that it is economical to cool the several components with a single water cooling system. FIG. 1 is a perspective view of an electrical assembly **100** with three electrical components **102** arranged in a row, and with a cold plate **200**, according to one embodiment, arranged thereon. The three electrical components **102** could be graphics processing units (GPUs), for example. The three electrical components **102** are covered by thermal spreaders **104**. In one embodiment, the thermal spreaders **104** are blocks of aluminum, and heat from the electrical components **102** is transferred to the thermal spreaders **104**. The three thermal spreaders **104** are in contact with a cold plate **200** according to one embodiment. The cold plate **200** includes a cooling fluid insertion port **124** arranged at a first end of the cold plate **200** and a cooling fluid extraction port **126** arranged at a second end of the cold plate **200**. The cooling fluid insertion port **124** and the cooling fluid extraction port **126** may be connected via tubing (not shown) to a pump and cooling fluid reservoir (not shown). Cooling fluid (e.g., treated water) flows into the cold plate **200** via the cooling fluid insertion port **124** and flows out of the cold plate **200** via the cooling fluid extraction port **126**.

The cold plate **200** is held in place and pressed against the thermal spreaders **104** with clamps **112**. The clamps **112** are connected to the thermal spreaders **104** via hinges **110** such that the clamps **112** can be moved into and away from contact with the cold plate **200**. The clamps **112** are also connectable to latches **108** (e.g., bayonet style connections) when the clamps are moved into contact with the cold plate **200**. The latches **108** may be affixed to leaf springs **106**, which can regulate an amount of pressure applied by the clamps **112** to the cold plate **200**. The cold plate **200** can optionally include U channels **130** arranged thereon. In one embodiment, the cold plate **200** comprises a nearly-pure copper (e.g., 99.9% pure copper), which is a soft material. The U channels **130** may be made of steel. Such steel U channels **130** distribute the load from the clamps **112** across a larger surface of the cold plate **200**, minimizing the likelihood of dents, dings, or other structural damage to the cold plate **200**.

Ideally, the surfaces of the thermal spreaders **104** (or other exposed electrical components to be cooled) contacted by the cold plate **200** are level and even with respect to one another. However, due to manufacturing tolerances and variances, the surfaces of the thermal spreaders **104** typically include slight variations from one to the next. For example, the heights of the surfaces of the thermal spreaders **104** may vary slightly due to manufacturing variations. As another example, the surfaces of the thermal spreaders **104** may be slightly tilted with respect to one another. As a result of the

slight variations of the surfaces of the thermal spreaders **104**, the cold plate **200** flexes to maintain contact with the three thermal spreaders **104**.

In embodiments described herein, a cold plate includes large widths (a dimension in a first direction transverse to the cooling fluid flow axis) in “active” areas arranged over the heat concentrated areas of the electrical system **100** (e.g., over the thermal spreaders **104**) and smaller widths in the first direction in “non-active” areas arranged between the heat concentrated areas of the electrical system (e.g., between the thermal spreaders **104**). In various embodiments, the cold plate also includes large thicknesses (a dimension in a second direction transverse to the cooling flow direction and transverse to the first direction) in the active areas and smaller thicknesses in the second direction in the non-active areas. The reduced width in the first direction (and, optionally, the reduced thickness in the second direction) reduce the dimensions (i.e., footprint) of the cold plate **200** on the electrical components (e.g., the thermal spreaders **104**) such that the electrical components do not have to be redesigned or may only require limited modifications to accommodate the cold plate **200**. In at least one embodiment, the reductions in width can be made to specifically avoid certain structures of the electrical components. Additionally, the reduced width in the first direction (and, optionally, the reduced thickness in the second direction) reduces torsional and bending stiffness of the cold plate **200** in the non-active areas such that the cold plate **200** can be flexed, bent, or otherwise deformed using lower forces to accommodate variations from one electrical component to the next (e.g., from one thermal spreader **104** to the next thermal spreader **104**).

The cold plate **200** includes three active areas **210** arranged over heat concentrated areas of the thermal spreaders **104**. The cold plate **200** also includes two non-active areas **240** arranged between and connecting the respective active areas **210**. The non-active areas **240** are narrower than the active areas **210**. Specifically, the non-active areas **240** have a narrower width that accommodate placement of the cold plate **200** between spring fasteners **180** that couple the thermal spreaders **104** to the electrical components **102** thereunder. The spring fasteners **180** include a threaded rod **182** extending through holes in the respective thermal spreaders **104** and engaged in threaded holes in the electrical components **102**. A spring **184** (or other elastomeric device) is placed over the threaded rod **182** and a cap **186** (e.g., a washer) is fastened to an end of the threaded rod **182**. The cap **186** and the spring **184** push the thermal spreaders **104** into contact with the electrical components **102** such that heat generated by the electrical components **102** is conductively transferred to the thermal spreaders **104**. By configuring the cold plate **200** to include non-active areas **240** having widths that fit within the spring fasteners **180**, the spring fasteners **180** do not have to be moved to other locations. Also, the narrower widths of the non-active areas **240** enable the non-active areas **242** flex, bend, or otherwise deform at relatively low forces to enable the active areas **210** to contact the thermal spreaders **104**.

FIG. 2 is a perspective view of the cold plate **200** of FIG. 2. The cold plate **200** is illustrated with a first broken line **250**, which represents a cooling fluid flow axis from the cooling fluid insertion port **124** to the cooling fluid extraction port **126**. The cold plate **200** is also illustrated with second broken lines **252**, which represents a first transverse direction with respect to the cooling fluid flow axis **250**. The cold plate **200** is also illustrated with third broken lines **254**, which represent a second transverse direction with respect to

5

the cooling fluid flow axis **250** and the first transverse direction **252**. The cooling fluid flow axis **250** and the first transverse direction **252** define a plane **260** with respect to the cold plate **200**.

FIG. 3 is a detail, perspective, cross-sectional view of the cooling plate **200**, wherein the cross-section is taken through a non-active area **240** in the first transverse direction **252**. The cooling plate **200** comprises an interface plate **212** that is configured for arrangement on electronics assembly (e.g., on the thermal spreader **104** in FIG. 1) and an opposing plate **230**. The interface plate **212** and the opposing plate **230** are joined along edges to form a plenum **280** therebetween. The cooling fluid flows from the cooling fluid insertion port **124** to the cooling fluid extraction port **126** through the plenum **280**. The interface plate **212** may be stamped from sheet metal, such as 99.9% pure copper, and includes a flat surface **214**, surrounded by a bevel **216**, and the bevel **216** is surrounded by a flange **218**. The flange **218** optionally may include an outer lip **220** that facilitates alignment of the interface plate **212** with the opposing plate **230**, discussed in greater detail below. The opposing plate **230** may be stamped from sheet metal, such as 99.9% pure copper, and includes a flat surface **232**, surrounded by a bevel **234**, and the bevel **234** is surrounded by a flange **236**. As shown in FIG. 3, the cooling fluid flow axis **250** is aligned with the interface between the flanges **218** and **236** of the interface plate **212** and the opposing plate **230**, respectively. The flat surfaces **212** and **232** and the bevels **216** and **234** of the interface plate **212** and the opposing plate **230**, respectively, may be identical such that the plenum **280** has a symmetric cross-sectional shape with respect to the plane **260**, defined by the cooling fluid flow axis **250** and the first transverse direction **250** when the plane **260** is aligned with an intersection of the flanges **218** and **236**.

To assemble the cold plate **200**, the interface plate **212** and the opposing plate **230** are aligned with respect to one another. As discussed above, the interface plate **212** can include an outer lip **220** extending from the flange **218**. The outer lip **220** could engage the flange **236** of the opposing plate **230** to urge the opposing plate **230** into alignment with the interface plate **212**. Once the interface plate **212** and opposing plate **230** are aligned, the flanges **218** and **236** of the interface plate **212** and the opposing plate **230** can be bonded. For example, the flanges **218** and **236** are bonded together (e.g., through brazing, welding, or bonded with epoxy). The bonding of the flanges **218** and **236** creates a watertight seal such that cooling fluid in the plenum **280** does not leak between the flanges **218** and **236**. As discussed above, the outer lip **220** of the flange **218** may facilitate alignment of the flanges **218** and **236**. The outer lip **220** of the flange **218** may also prevent bonding material (e.g., brazing material) used to bond and seal the flanges **218** and **236** from leaking out from between the flanges **218** and **236**.

FIG. 4 is a detail, perspective, cross-sectional view of the cold plate **200**, wherein the cross-section is taken through an active area **210** and adjacent non-active areas **240** along the cooling fluid flow axis **250**. The plenum **280** in the active area **240** includes a plurality of cooling fins **270** extending from the interface plate **212** to the opposing plate **230**. The cooling fins **270** include surfaces aligned along the cooling fluid flow axis **250**. The cooling fins **270** facilitate heat transfer from the electrical components (e.g., the thermal spreaders **104**) to the cooling fluid in the plenum **280**. Heat from the electrical components is transferred to the interface plate **212** and thereafter to the cooling fins **270** via conductive heat transfer. The cooling fins **270** provide a large

6

surface area over which the cooling fluid in the plenum **280** flows such that heat is transferred from the cooling fins **270** to the cooling fluid.

FIG. 4 also illustrates that the plenum **280** in the active areas **210** have different thicknesses (dimensions in the second transverse direction **254**) than the non-active areas **240** in at least one embodiment. In the embodiment illustrated in FIG. 4, the non-active areas **240** of the plenum **280** have a first thickness T_1 and the active area **210** of the plenum **280** has a second thickness T_2 . The increased thickness of the plenum **280** in the active areas **210** relative to the non-active areas **240** results in slower cooling fluid flow in the active areas **210**, providing additional time for the cooling fluid to absorb heat from the cooling fins **270**.

FIG. 5 is a cross-sectional end view of an active area **210** of the cold plate **200**, illustrating the cooling fins **270** arranged therein. Each of the plurality of cooling fins **270** includes a spanning member **272** extending from the interface plate **212** to the opposing plate **230**. Each of the cooling fins **270** also includes a first leg **274** extending from the spanning member **272** at an angle such that the first leg **274** abuts an interior surface of the interface plate **212**. For example, the first legs **274** could be arranged at a 90° angle relative to the respective spanning members **272**. Each of the cooling fins **270** also includes a second leg **276** extending from the spanning member **272** at an angle such that the second leg **276** abuts an interior surface of the opposing plate **230**. For example, the first legs **274** could be arranged at a 90° angle relative to the respective spanning members **272**. The plurality of cooling fins **270** are affixed in the active areas **210** by attaching the first and second legs **274** and **276** to the interface plate **212** and the opposing plate **230**, respectively. For example, the first and second legs **274** and **276** may be brazed to the interface plate **212** and the opposing plate **230**. During assembly, the first legs **274** of the cooling fins **270** could be brazed to the interface plate **212** before the interface plate **212** and the opposing plate **230** are joined, discussed above. After the interface plate **212** and the opposing plate **230** are joined, the second legs **274** of the cooling fins **270** could be brazed to the opposing plate **230**.

FIG. 6 is a cross-sectional top view of the cold plate **200**, illustrating the cooling fins **270** arranged within active areas **210** of the plenum. As shown in FIG. 6, in at least one embodiment, the cooling fins **270** have different lengths in different regions of the active areas **210**. For example, in the left-most and right-most active areas **210** illustrated in FIG. 6, cooling fins in central regions **290** have cooling fins with a length L_2 along the cooling fluid flow axis **250**. Cooling fins in side regions **292** have cooling fins with lengths varying from equal to or slightly shorter than length L_2 to a length L_1 along the cooling fluid flow axis **250**, wherein the length L_1 is shorter than the length L_2 . In at least one embodiment, the lengths of the cooling fins in the side regions **292** decreases linearly at increasing distances from the central region **290**. In another embodiment, all of the cooling fins in the side regions **292** could have a length L_2 .

FIG. 6 also shows that, in the central active area **210** illustrated in FIG. 6, cooling fins in a central region **294** have a length L_4 along the cooling fluid flow axis **250**. Cooling fins inside regions **296** have cooling fins with length varying from equal to or slightly shorter than the length L_4 to a length L_3 along the cooling fluid flow axis **250**, wherein the length L_3 is shorter than the length L_4 . In at least one embodiment, the lengths of the cooling fins in the side regions **296** decreases linearly at increasing distances from the central region **294**. In various embodiments, the cooling fins in the side regions **296** could all have the same length L_3 .

FIG. 7 is a top cross-sectional view of the center active area 210 of the cooling plate 200, illustrating the plurality of cooling fins 270' with the central region 294 having cooling fins with a length L_4 and side regions having lengths varying from L_4 to L_3 , as discussed above. The plurality of cooling fins 270' with variable lengths provides differential fluid flow restrictions to encourage distribution of the cooling fluid throughout the plenum 280 and the active area. Absent any flow restrictions, cooling fluid traveling from one non-active area 240 in the plenum 280 to the next non-active area 240 through an active area 210 in the direction of arrow A would tend to travel straight across the active area 210 with minimal spread in the first transverse direction 252. As a result, the side regions 296 of the active areas 210 would not efficiently extract heat from the electrical components (e.g., the thermal spreaders 104). The lengths of the cooling fins 270' provide varied flow restrictions along the first transverse direction 252 such that cooling fluid flowing from one non-active area 240 in the plenum 280 into the active area 210 is encouraged to spread in the first transverse direction 252. For example, the cooling fins in the central region 294 having length L_4 provide a larger flow restriction than the cooling fins in the side regions 296 having lengths between L_4 and L_3 . The reduced flow restriction of the side regions 296, relative to the central region 294, encourages some of the cooling fluid flowing into the active area 210 to move transversely in the direction of arrows B to flow through the cooling fins in the side regions 296. The remaining cooling fluid travels in the direction of arrow C through the cooling fins of the central region 294. Thus, the cooling fluid is more-evenly distributed in the first transverse direction 252, and cooling effectiveness is more evenly distributed across the entirety of the active regions 210 of the cold plate 200.

FIGS. 8A and 8B are top and bottom perspective views of the cold plate 200, discussed above, and another cold plate 300 according to another embodiment. As discussed above with reference to FIG. 4, the plenum 280 in the active areas 210 can be thicker (in the second transverse direction 254) than in the non-active areas 240. The thicker plenum 280 in the active areas 210 of the cold plate 200 is formed by a beveled surface 222 on the interface plate 212 and a beveled surface 242 on the opposing plate 230. The beveled surface 222 on the interface plate 212 forms an interface surface 224, which abuts the electronic components (e.g., the thermal spreaders 104). The beveled surface 242 on the opposing plate 230 forms a clamping surface 246 upon which the respective U channels 130 are mounted. For the alternative cold plate 300, the thicker plenum 280 is formed entirely by a beveled surface 322 on an interface plate 312. The beveled surface 322 forms an interface surface 324, which abuts electronic components. The flat surface 332 of the opposing plate 330 lacks any beveled surfaces that increase the thickness of the plenum 280 at active areas 310 of the cold plate 300.

In instances in which the interface plate 212 and the opposing plate 230 are formed from a sheet metal material, the interface plate 212 and the opposing plate 230 may be formed by stamping. The cold plate 200, in which the increased thickness of the plenum 280 and the active areas 210 is formed by beveled surfaces 242 and 222 on the interface plate 212 and the opposing plate 230, respectively, may be preferable for a stamping process to the cold plate 300. For a given plenum 280 thickness T_2 at the active areas, the cold plate 300, and in particular the interface plate 310 of the cold plate 300, requires a deeper stamping draw to form the deeper beveled surface 322 than to form the smaller beveled surface 222 of the cold plate 200. Such a larger draw

results in increased residual stresses in the interface plate 312 of the cold plate 300 compared to residual stresses in the interface plate 212 of the cold plate 200. Additionally, the amount of stamping pressure required to form the deeper beveled surface 322 can cause the formation, such as curling of the interface plate 312, that may not occur or that may occur to a lesser degree when forming the shallower beveled surface 222.

In various circumstances, the cold plate 300 with the deeper beveled surface 322 may be preferable to the cold plate 200. For example, the cold plate 300 raises portions of the cold plate 300 away from the interface surface 324 away from the electronics assembly 100, thereby providing additional clearance for physical components of the electronics assembly 100.

In the exemplary embodiments discussed above, the cold plates 200 and 300 have a substantially symmetric profile in the first transverse direction 252. Referring again to FIG. 1, the exemplary illustrated cold plates 200 and 300 are shaped to fit between the spring fasteners 180 on the thermal spreaders 104. In different applications, a cold plate according to embodiments herein could have different profiles, including asymmetric profiles, to fit between other, different features of electrical components.

In embodiments described herein, a cold plate includes active areas configured for arrangement over heat generating electrical components of an electronic assembly and non-active areas configured for arrangement over other portions of the electrical components and that that connect the active areas. The non-active areas have reduced widths and/or thicknesses relative to the active areas (i.e., the non-active areas are necked down relative to the active areas). Such reduced widths and/or thicknesses enable the cold plate to fit between and/or around physical features of the electronic assembly. Such reduced widths and/or thicknesses also enable the non-active areas to bend, twist, flex, or otherwise to form to accommodate any alignment discrepancies between the electrical components of the electronic assembly.

The reduced widths and/or thicknesses of the cold plate in the non-active areas also improve resistance to bursting. In the active areas, the fins, bonded to the flat surfaces of the interface plate and the opposing plate, increase the structural integrity of the active areas, enabling the larger active areas to resist deformation under higher internal pressures. The non-active areas do not include the fins, but the reduced surfaces areas resulting from the reduced widths and/or thicknesses reduces the forces on those surfaces. As a result, the non-active areas are also less susceptible to deformation under higher internal pressures.

The descriptions of the various embodiments of the present disclosure have been presented for purposes of illustration, but are not intended to be exhaustive or limited to the embodiments disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art without departing from the scope and spirit of the described embodiments. The terminology used herein was chosen to best explain the principles of the embodiments, the practical application or technical improvement over technologies found in the marketplace, or to enable others of ordinary skill in the art to understand the embodiments disclosed herein.

While the foregoing is directed to embodiments of the present disclosure, other and further embodiments of the invention may be devised without departing from the basic scope thereof, and the scope thereof is determined by the claims that follow.

What is claimed is:

1. A cold plate for cooling electronics, comprising:
an interface plate configured for arrangement on an elec-
tronics assembly, wherein the interface plate comprises
a plurality of active areas arranged for alignment over
respective heat-generating portions of the electronics
assembly and non-active areas between the active
areas;

an opposing plate, wherein edges of the interface plate
and the opposing plate are joined to form a plenum
therebetween, wherein the plenum defines a cooling
fluid flow axis from a first end of the plenum to the
second end of the plenum, wherein the plenum includes
active plenum volumes aligned with the active areas of
the interface plate and non-active plenum volumes
aligned with the non-active areas of the interface plate,
wherein a first width of the active plenum volumes in
a first transverse direction to the cooling fluid flow axis
is larger than a second width of the non-active plenum
volumes in the first transverse direction, and wherein a
first thickness of the active plenum volumes in a second
transverse direction to the cooling fluid flow axis and
orthogonal to the first transverse direction is larger than
a second thickness of the non-active plenum volumes;
and

a plurality of cooling fins arranged in each of the plurality
of active plenum volumes, wherein the surfaces of the
cooling fins are arranged along the cooling fluid flow
axis.

2. The cold plate of claim 1, wherein the active plenum
volumes are symmetrical in the second direction about a
plane bisecting the active plenum, wherein the plane is
aligned with the cooling fluid flow axis and the first direc-
tion.

3. The cold plate of claim 1, wherein the active plenum
volumes include transition regions, wherein widths of the
transition regions change from the first width to the second
width along the flow axis between the active plenum vol-
umes and adjacent non-active plenum volumes.

4. The cold plate of claim 1, further comprising a cooling
fluid insertion port arranged at a first end of the opposing
plate and a cooling fluid extraction port arranged at a second
end of the opposing plate, wherein cooling fluid is flowable
into the plenum through the cooling fluid insertion port and
is flowable out of the plenum through the cooling fluid
extraction port.

5. A cold plate for cooling electronics, comprising:
an interface plate configured for arrangement on an elec-
tronics assembly, wherein the interface plate comprises
a plurality of active areas arranged for alignment over
respective heat-generating portions of the electronics
assembly and non-active areas between the active
areas;

an opposing plate, wherein edges of the interface plate
and the opposing plate are joined to form a plenum
therebetween, wherein the plenum defines a cooling
fluid flow axis from a first end of the plenum to the
second end of the plenum, wherein the plenum includes
active plenum volumes aligned with the active areas of
the interface plate and non-active plenum volumes
aligned with the non-active areas of the interface plate,
wherein a first width of the active plenum volumes in
a first transverse direction to the cooling fluid flow axis
is larger than a second width of the non-active plenum
volumes in the first transverse direction; and

a plurality of cooling fins arranged in each of the plurality
of active plenum volumes, wherein the surfaces of the

cooling fins are arranged along the cooling fluid flow
axis, wherein the plurality of cooling fins in each of the
active plenum volumes include a central region and
side regions arranged on sides of the central direction
in the first transverse direction, wherein the surfaces of
cooling fins within the central region have a first length
along the cooling fluid flow axis, and wherein the
surfaces of cooling fins within the side regions have
lengths that are shorter than the first length.

6. The cold plate of claim 5, wherein lengths of the
surfaces of the cooling fins of the side regions decrease at
greater distances from the central region in the first trans-
verse direction.

7. An electronic assembly, comprising:

a plurality of electrical components arranged in a row,
each of the plurality of electrical components including
a heat-generating portion; and

a cold plate arranged on the plurality of electrical com-
ponents, the cold plate comprising:

an interface plate arranged on the plurality of electrical
components, wherein the interface plate comprises a
plurality of active areas arranged for alignment over
respective heat-generating portions of the electrical
components and non-active areas between the active
areas;

an opposing plate, wherein edges of the interface plate
and the opposing plate are joined to form a plenum
therebetween, wherein the plenum defines a cooling
fluid flow axis from a first end of the plenum to a
second end of the plenum, wherein the plenum
includes active plenum volumes aligned with the
active areas of the interface plate and non-active
plenum volumes aligned with the non-active areas of
the interface plate, wherein a first width of the active
plenum volumes in a first transverse direction to the
cooling fluid flow axis is larger than a second width
of the non-active plenum volumes in the first trans-
verse direction, wherein a first thickness of the active
plenum volumes in a second transverse direction to
the cooling fluid flow axis and orthogonal to the first
transverse direction is larger than a second thickness
of the non-active plenum volumes; and

a plurality of cooling fins arranged in each of the
plurality of active plenum volumes, wherein the
surfaces of the cooling fins are arranged along the
cooling fluid flow axis.

8. The electronics assembly of claim 7, wherein the active
plenum volumes are symmetrical in the second direction
about a plane bisecting the active plenum, wherein the plane
is aligned with the cooling fluid flow axis and the first
direction.

9. The electronics assembly of claim 7, wherein the active
plenum volumes include transition regions, wherein widths
of the transition regions change from the first width to the
second width along the flow axis between the active plenum
volumes and adjacent non-active plenum volumes.

10. The electronics assembly of claim 7, wherein the
plurality of cooling fins in each of the active plenum
volumes include a central region and side regions arranged
on sides of the central direction in the first transverse
direction, wherein the surfaces of cooling fins within the
central region have a first length along the cooling fluid flow
axis, and wherein the surfaces of cooling fins within the side
regions have lengths that are shorter than the first length.

11

11. The electronics assembly of claim 10, wherein lengths of the surfaces of the cooling fins of the side regions decrease at greater distances from the central region in the first transverse direction.

12. The electronics assembly of claim 7, further comprising a cooling fluid insertion port arranged at a first end of the opposing plate and a cooling fluid extraction port arranged at a second end of the opposing plate, wherein cooling fluid is flowable into the plenum through the cooling fluid insertion port and is flowable out of the plenum through the cooling fluid extraction port.

13. An electronic assembly, comprising:

a plurality of electrical components arranged in a row, each of the plurality of electrical components including a heat-generating portion; and

a cold plate arranged on the plurality of electrical components, the cold plate comprising:

an interface plate arranged on the plurality of electrical components, wherein the interface plate comprises a plurality of active areas arranged for alignment over respective heat-generating portions of the electrical components and non-active areas between the active areas;

an opposing plate, wherein edges of the interface plate and the opposing plate are joined to form a plenum

12

therebetween, wherein the plenum defines a cooling fluid flow axis from a first end of the plenum to a second end of the plenum, wherein the plenum includes active plenum volumes aligned with the active areas of the interface plate and non-active plenum volumes aligned with the non-active areas of the interface plate, wherein a first width of the active plenum volumes in a first transverse direction to the cooling fluid flow axis is larger than a second width of the non-active plenum volumes in the first transverse direction, wherein the opposing plate comprises copper, wherein the cold plate further comprises metal plate attached to the opposing plate on at least portions of the respective active regions, and the electrical components include respective clamps that press the active regions of the cold plate into contact with the respective heat-generating portions of the electrical component; and

a plurality of cooling fins arranged in each of the plurality of active plenum volumes, wherein the surfaces of the cooling fins are arranged along the cooling fluid flow axis.

* * * * *