

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
12 May 2005 (12.05.2005)

PCT

(10) International Publication Number  
**WO 2005/042825 A1**

- (51) International Patent Classification: **D04H 5/02**, 1/46, B32B 5/26
- (21) International Application Number: PCT/SE2004/001518
- (22) International Filing Date: 21 October 2004 (21.10.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0302875-0 31 October 2003 (31.10.2003) SE
- (71) Applicant (for all designated States except US): **SCA HYGIENE PRODUCTS AB** [SE/SE]; S-405 03 Göteborg (SE).
- (72) Inventors: **BILLGREN, Thomas**; Pl. 3560, S-429 34 Kullavik (SE). **SÖDERBERG, Mats**; Bågevägen 49A, S-856 52 Sundsvall (SE). **LINDSTEDT, Hein**; Da Linebeam 5, NL-9251 NW Burgum (NL). **VERSTEEG, Mees**; Hoarnleger 11, NL-9262 NZ Suameer (NL).
- (74) Agent: **STRÖM & GULLIKSSON IP AB**; Lindholmspiren 5, S-417 56 Gothenburg (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF PRODUCING A NONWOVEN MATERIAL

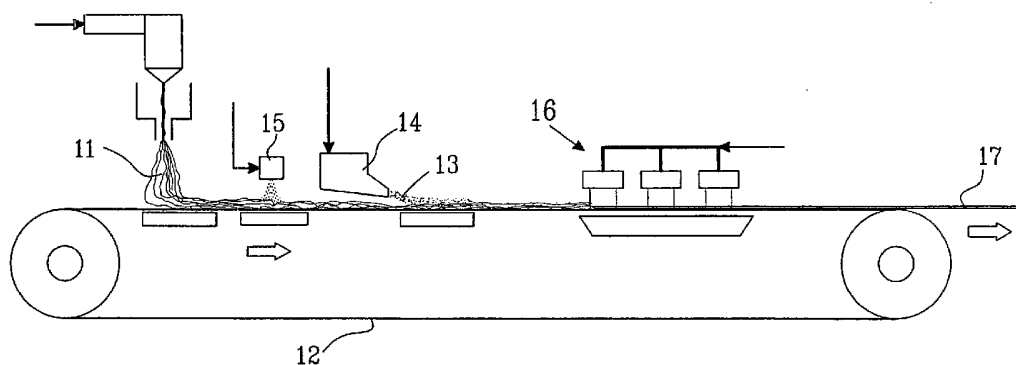

(57) Abstract: Method of producing a nonwoven material, comprising forming a web of continuous filaments on a forming member (12) and applying a wet- or foam formed fiber dispersion containing natural fibers and/or synthetic staple fibers on top of said continuous filaments. A fibrous web is thus formed containing continuous filaments and natural fibers and/or synthetic staple fibers, this web subsequently being hydroentangled to form a nonwoven material. Moisture is applied to the web of continuous filaments under a low pressure before laying the wet- or foam formed fiber dispersion on the web of continuous filaments, avoiding any substantial bonding between the filaments in said web.

WO 2005/042825 A1

## Method of producing a nonwoven material

### *Technical field*

5 The present invention refers to a method of producing a nonwoven material, comprising forming a web of continuous filaments on a forming member and applying a wet- or foam formed fiber dispersion containing natural fibers and/or synthetic staple fibers on top of said continuous filaments, thus forming a fibrous web containing said continuous filaments and said natural fibers and/or synthetic staple fibers and subsequently hydroentangling the fibrous web to form a nonwoven material.

10

### *Background of the invention*

Hydroentangling or spunlacing is a technique introduced during the 1970'ies, see e g CA patent no. 841 938. The method involves forming a fiber web which is either drylaid or wetlaid, after which the fibers are entangled by means of very fine water jets under high pressure. Several rows of water jets are directed against the fiber web which is supported by a movable wire. The entangled fiber web is then dried. The fibers that are used in the material can be synthetic or regenerated staple fibers, e g polyester, polyamide, polypropylene, rayon or the like, pulp fibers or mixtures of pulp fibers and staple fibers. Spunlace materials can be produced in high quality to a reasonable cost and have a high absorption capacity. They can e g be used as wiping material for household or industrial use, as disposable materials in medical care and for hygiene purposes etc.

15

20

25 Through e g EP-A-0 333 211 and EP-A-0 333 228 it is known to hydroentangle a fiber mixture in which one of the fiber components is meltblown fibers. The base material, i e the fibrous material which is exerted to hydroentangling, either consists of at least two preformed fibrous layer where one layer is composed of meltblown fibers or of a "coform material" where an essentially homogeneous mixture of meltblown fibers and other fibers is airlaid on a wire and after that is exerted to hydroentangling.

30

35 Through EP-A-0 308 320 it is known to bring together a web of continuous filaments with a wetlaid fibrous material containing pulp fibers and staple fibers and hydroentangle together the separately formed fibrous webs to a laminate. In such a material the fibers of the different fibrous webs will not be integrated with each other since the fibers already before the hydroentangling are bonded to each other and only have a very limited mobility.

40

EP-A-0 938 601 discloses a method of producing a nonwoven material by hydroentangling a fiber mixture containing continuous filaments, e.g. meltblown and/or spunbond fibers, and other fiber. The method is characterized by foamforming a fibrous dispersion of natural fibers and/or synthetic staple fibers and hydroentangling together the foamed fiber dispersion with the continuous filaments for forming a composite material, in which the continuous filaments are well integrated with the rest of the fibers.

One problem arising from that different process units are used for laying the continuous filaments and the fibrous dispersion of natural fibers and/or synthetic staple fibers, wherein the handling and transfer of the formed web components between the different process components is very sensitive and critical in order not to disturb the formed web components. A web of unbonded continuous filaments is very fluffy and tears very easily if disturbed by for example air streams or water streams.

***Object and most important features of the invention***

The object of the present invention is to provide a method for producing a hydroentangled nonwoven material of a fibrous mixture of continuous filaments, e.g. in the form of meltblown and/or spunbond fibers and a wet- or foam formed fiber dispersion of natural fibers and/or synthetic staple fibers, in which the above problem occurring in the interface between the different process components is avoided or at least minimized. This has according to the invention been obtained by applying moisture under a low pressure to the web of continuous filaments before laying the wet- or foam formed fiber dispersion on the web of continuous filaments, avoiding any substantial bonding between the filaments in said web.

By this the web of continuous filaments is flattened out and a firm contact between the web and the forming wire, due to the surface tension of the liquid used for moistening the web, is established before it enters the zone, usually a headbox, in which the wet- or foam formed fiber dispersion is laid on top of the web of continuous filaments. The surface tension of the liquid used for moistening the web will cause an adhesive effect between the filament web and the forming wire.

According to one aspect of the invention the fibrous web is wet-formed or foam-formed.

In a further aspect of the invention a surfactant is added to the water used for moistening the web of continuous filaments.

5 According to one embodiment the fibrous web comprises between 20 and 85% by weight, preferably between 40 and 75% by weight natural fibers. The natural fibers as in one embodiment pulp fibers.

10 The fibrous web may further contain between 5 and 50% by weight, preferably between 5 and 20% by weight synthetic or regenerated staple fibers. In one aspect of the invention at least a major part, which means at least 50, preferably at least 70, more preferably at least 90 and most preferably at least 100% by weight of said synthetic or regenerated staple fibers have a fiber length between 3 and 7 mm.

15 The content of continuous filaments in the web is suitably between 0.5 and 50% by weight, preferably between 15 and 30% by weight. The continuous filaments are usually in the form of spunlaid or meltblown filaments.

20 Further features of the present invention are disclosed in the description below.

#### ***Description of the drawings***

The invention will below be closer described with reference to an embodiment shown in the accompanying drawings.

25 Fig. 1 shows schematically an embodiment of a process for producing a hydroentangled nonwoven material according to the invention.

#### ***Description of embodiments***

30 The hydroentangled composite material according to the invention comprises a mixture of continuous filaments and natural fibers and/or synthetic staple fibers. These different types of fibers are defined as follows.

##### Continuous filaments

35 The continuous filaments are fibers that in proportion to their diameter are very long, in principle endless. They can be produced by extruding a molten thermoplastic polymer through fine nozzles, whereafter the polymer will be cooled and drawn, preferably by the action of an air flow blown at and along the polymer streams, and solidified into strands that can be treated by drawing, stretching or crimping. Chemicals for additional functions can be added to the surface.

40

Filaments can also be regenerated fibers produced by chemical reaction of a solution of fiber-forming reactants entering a reagent medium, for example by spinning of regenerated cellulose fibers from a cellulose xanthate solution into sulphuric acid. Examples of regenerated cellulose fibers are rayon, viscose or lyocell fibers.

Continuous filaments may be in the form of spunlaid filaments or meltblown filaments. Spunlaid filaments are produced by extruding a molten polymer, cool and stretch to an appropriate diameter. The fiber diameter is usually above 10  $\mu\text{m}$ , e g between 10 and 100  $\mu\text{m}$ . Production of spunlaid filaments is e g described in US patents 4,813,864 and 5,545,371.

Meltblown filaments are formed by means of a meltblown equipment 10, for example of the kind shown in the US patents 3,849,241 or 4,048,364. The method shortly involves that a molten polymer is extruded through a nozzle in very fine streams and converging air streams are directed towards the polymer streams so that they are drawn out into continuous filaments with a very small diameter. The filaments can be microfibers or macrofibers depending on their dimension. Microfibers have a diameter of up to 20  $\mu\text{m}$ , but usually are in the interval between 2 and 12  $\mu\text{m}$  in diameter. Macrofibers have a diameter of over 20  $\mu\text{m}$ , e g between 20 and 100  $\mu\text{m}$ .

All thermoplastic polymers can in principle be used for producing spunlaid and meltblown filaments. Examples of useful polymers are polyolefins, such as polyethylene and polypropylene, polyamides, polyesters and polylactides. Copolymers of these polymers may of course also be used.

Tow is another type of filaments, which normally are the starting material in the production of staple fibers, but which also is sold and used as a product of its own. In the same way as in the production of with spunlaid fibers, tow is produced from fine polymer streams that are drawn out and stretched, but instead of being laid down on a moving surface to form a web, they are kept in a bundle to finalize drawing and stretching. When staple fibers are produced, this bundle of filaments is then treated with spin finish chemicals, are often crimped and then fed into a cutting stage where a wheel with knives will cut the filaments into distinct fiber lengths that are packed into bales to be shipped and used as staple fibers. When tow is produced, the filament bundles are packed, with or without spin finish chemicals, into bales or boxes.

The continuous filaments will in the following be described as spunlaid fibers, but it is understood that also other types of continuous filaments, e g meltblown fibers, can be used.

5 Natural fibers

The natural fibers are usually cellulose fibers, such as pulp fibers or fibers from grass or straw. Pulp fibers are the most commonly used natural fibers and are used in the material for their tendency to absorb water and for their tendency to create a coherent sheet. Both softwood fibers and hardwood fibers are suitable, and also recycled fibers can be used, as well as blends of these types of fibers. The fiber lengths will vary from around 2-3 mm for softwood fibers and around 1-1.5 mm for hardwood fibers, and even shorter for recycled fibers.

15 Staple fibers

The staple fibers used can be produced from the same substances and by the same processes as the filaments discussed above. They may either be synthetic fibers or regenerated cellulose fibers, such as rayon, viscose or lyocell. The cutting of the fiber bundles is normally done to result in a single cut length, which can be altered by varying the distances between the knives of the cutting wheel. The fiber lengths of conventional wetlaid hydroentangled nonwovens are usually in the interval 12-18 mm. However according to the present invention also shorter fiber lengths, from about 2-3 mm, can be used.

25 The process

According to the embodiment shown in Fig. 1 continuous filaments 11 in the form of spunlaid fibers are produced by extruding a molten polymer, cool and stretch to an appropriate diameter. The fiber diameter is usually above 10  $\mu\text{m}$ , e g between 10 and 100  $\mu\text{m}$ .

30 In an alternative embodiment meltblown fibers are formed by means of a meltblown equipment. The meltblown technique shortly involves that a molten polymer is extruded through a nozzle in very fine streams and converging air streams are directed towards the polymer streams so that they are drawn out into continuous filaments with a very small diameter.

35 The fibers can be microfibers or macrofibers depending on their dimension. Microfibers have a diameter of up to 20  $\mu\text{m}$ , but usually are in the interval between 2 and 12  $\mu\text{m}$  in diameter. Macrofibers have a diameter of over 20  $\mu\text{m}$ , e g between 20 and 100  $\mu\text{m}$ .

40

All thermoplastic polymers can in principle be used for producing spunlaid and meltblown fibers. Examples of useful polymers are polyolefins, such as polyethylene and polypropylene, polyamides, polyesters and polylactides. Copolymers of these polymers may of course also be used.

The continuous filaments will in the following be described as spunlaid fibers, but it is understood that also other types of continuous filaments, e.g. meltblown fibers, can be used.

According to the embodiment shown in Fig. 1 the spunlaid fibers 11 are laid down directly on a forming wire 12 where they are allowed to form a relatively loose, open web structure in which the fibers are relatively free from each other. This is achieved either by making the distance between the spunlaying nozzle and the wire relatively large, so that the filaments are allowed to cool down before they land on the wire 12, at which their stickiness is reduced. The basis weight of the formed spunlaid layer should be between 2 and 50 g/m<sup>2</sup> and the bulk between 5 and 15 cm<sup>3</sup>/g.

An aqueous or a foamed fibrous dispersion 13 from a headbox 14 is laid on top of the spunlaid filaments. In wet laying technique the fibers are dispersed in water, with optional additives, and the fiber dispersion is dewatered on a forming fabric to form a wet laid fibrous web. In the foam forming technique a fibrous web is formed from a dispersion of fibers in a foamed liquid containing water and a tenside. The foam forming technique is described in for example GB 1,329,409, US 4,443,297, WO 96/02701 and EP-A-0 938 601. A foam-formed fibrous web has a very uniform fiber formation. For a more detailed description of the foam forming technique reference is made to the above mentioned documents.

The spunlaid filaments and the fiber dispersion of natural fibers and/or synthetic staple fibers may be formed on the same or on different wires. The web of spunlaid filaments laid on the wire 12 has a rather low basis weight and is substantially unbonded, which means that the web is very weak and has to be handled and transferred to the next forming station, the headbox 14, very gently.

In order to provide a certain consolidation of the web of spunlaid filaments and avoid that the web is damaged on its way to the headbox, it is according to the invention suggested that moisture is applied to the web by a spray bar 15 or

gentle shower before laying the wet- or foam formed fiber dispersion on the web of the continuous filaments. By this the web of continuous filaments is flattened out and a firm contact between the web and the forming wire is established before it enters the headbox zone, in which the wet- or foam formed fiber dispersion is laid on top of the web of continuous filaments. The wetting of the filaments takes place at a very low pressure so that no substantial bonding or sideways displacement of the fibers take place. The surface tension of the water will adhere the filaments to the wire so the formation will not distort while entering the headbox. The term "no substantial bonding" as used herein means that there will be no substantial bonding effect in addition to what is caused by the surface tension of the liquid used. In some cases, when hydrophobic polymers are used for forming the spunlaid filaments, a tenside may be added in the spraybar 23 to wet the fibers.

A further advantage of having the spunlaid filaments wetted before applying the wet- or foam formed fiber dispersion thereon is that an improved penetration of the fibers contained in the fiber dispersion is obtained, resulting in a better integration between the spunlaid filaments and the fibers from the fiber dispersion. A small amount of a tenside, between 0.001 and 0.1% by weight, may be added to the water used for moistening the spunlaid filaments in order to increase the wettability of the filaments.

If more water is used than what is taken up by the filament web, the excess of water is drained through the wire to a suction box.

According to one embodiment a relatively coarse forming wire 12 is used. This will aid in "binding" or "holding" the web of spunlaid filaments to the wire by bending up and down and conform to the topography of the wire and thus prevent it from moving when the wet- or foam formed fiber dispersion flushes down from the headbox 12 on top of the spunlaid web.

Fibers of many different kinds and in different mixing proportions can be used for making the wet laid or foam formed fibrous web. Thus there can be used pulp fibers or mixtures of pulp fibers and synthetic staple fibers, e.g. polyester, polypropylene, rayon, lyocell etc. Varying fiber lengths can be used. However, according to the invention, it is of advantage to use relatively short staple fibers, below 10 mm, preferably in the interval 2 to 8 mm and more preferably 3 to 7 mm. This is for some applications an advantage because the short fibers will more easily mix and integrate with the spunlaid filaments than longer fibers. There will also be more fiber ends sticking out from the material, which



increases softness and textile feeling of the material. For short staple fibers both wet laying and foam forming techniques may be used.

5 In foam forming technique longer fibers can be used than what is possible with wetlaying technique. Long fibers, ca. 18-30 mm, may in another aspect of the invention be an advantage, since they increase the strength of the hydroentangled material in dry as well as in wet condition.

10 As a substitute for pulp fibers other natural fibers with a short fiber length may be used, e g esparto grass, phalaris arundinacea and straw from crop seed.

15 It is preferred that the fibrous web comprises as least between 20 and 85% by weight, preferably between 40 and 75% by weight natural fibers, for example pulp fibers.

It is further preferred that the fibrous web contains between 10 and 50% by weight, preferably between 15 and 30% by weight, continuous filaments, for example in the form of spunlaid or meltblown filaments.

20 The fiber dispersion laid on top of the spunlaid filaments is dewatered by suction boxes (not shown) arranged under the wire 12. The wet- and foam formation benefits from an increased openness in the forming wire 12. The short pulp fibers and synthetic staple fibers are formed on top of the spunlaid web, which provides the necessary closeness and acts like an extra sieve for the formation of the short fibers. Also from this point of view the choice of  
25 forming wire 12 may be done from the coarse end of the available spectrum.

30 The thus formed fibrous web comprising spunlaid filaments and other fibers is quite stable by the presence of the pulp fibers and/or staple fibers that will interlock the spunlaid fibers, which in their turn, reinforce the structure. The web is then hydroentangled in an entangling station 16 including several rows of nozzles, from which very fine water jets under high pressure are directed against the fibrous web. For a further description of the hydroentangling technique or, as it is also called, the spunlace technique, reference is made to  
35 e g CA patent 841,938. Alternatively, the fibrous web can before hydroentangling be transferred to a special entangling wire, which optionally may be patterned in order to form a patterned nonwoven fabric. In this case the web can also prior to the transfer be hydroentangled by a first entangling station with one or more rows of nozzles in order to consolidate the web.

However such a pre-entangling will nest the material to the wire, which will require a successively increasing draw in the transfer to the entangling wire.

In an alternative embodiment the fibrous web is formed and hydroentangled on the same wire 12.

5

The hydroentangling may in a known manner from both sides of the fibrous material (not shown) at which a more homogeneous equilateral material is obtained.

10

The forming wire 12 and/or the entangling wire 16 may of course be substituted for another appropriate forming and entangling member respectively, such as an apertured belt, an apertured drum etc.

15

It is an important aspect of the invention that the spunlaid web is secured to the forming wire which is done by moistening or pre-wetting the spunlaid web. The formation of the whole composite material is then completed on the same wire, which can be relatively coarse.

20

After the hydroentangling the material 17 is dried and wound up. The material is then converted in a known manner to a suitable format and is packed.

25

Since it is preferred to have closed loops of process water as far as this is possible, the water that has been dewatered at the forming, moistening and hydroentangling steps is preferably recirculated.

**Claims**

- 5 1. Method of producing a nonwoven material, comprising forming a web of continuous filaments on a forming member (12) and applying a wet- or foam formed fiber dispersion containing natural fibers and/or synthetic staple fibers on top of said continuous filaments, thus forming a fibrous web containing said continuous filaments and said natural fibers and/or synthetic staple fibers and subsequently hydroentangling the fibrous web to form a nonwoven material,  
10 c h a r a c t e r i z e d i n applying moisture under a low pressure to the web of continuous filaments before laying the wet- or foam formed fiber dispersion on the web of continuous filaments, avoiding any substantial bonding between the filaments in said web.
- 15 2. Method as claimed in claim 1, c h a r a c t e r i z e d i n that a tenside is added to the water used for moistening the web of continuous filaments.
- 20 3. Method as claimed in claim 1 or 2, c h a r a c t e r i z e d i n that the fibrous web comprises between 20 and 85% by weight, preferably between 40 and 75% by weight natural fibers.
- 25 4. Method as claimed in claim 3, c h a r a c t e r i z e d i n that said natural fibers are pulp fibers.
- 30 5. Method as claimed in any of the preceding claims, c h a r a c t e r i z e d i n that the fibrous web contains between 5 and 50% by weight, preferably between 5 and 20% by weight synthetic or regenerated staple fibers.
- 35 6. Method as claimed in claim 5, c h a r a c t e r i z e d i n that at least a major part of said synthetic or regenerated staple fibers have a fiber length between 3 and 7 mm.
- 40 7. Method as claimed in claim 6, c h a r a c t e r i z e d i n that at least 50, preferably at least 70, more preferably at least 90 and most preferably at least 100% by weight of said synthetic or regenerated staple fibers have a fiber length between 3 and 7 mm.
8. Method as claimed in any of the preceding claims, c h a r a c t e r i z e d i n that the fibrous web contains between 0.5 and 50% by weight, preferably between 15 and 30% by weight, continuous filaments.

9. Method as claimed in claim 8, characterized in that the continuous filaments are in the form of spunlaid or meltblown filaments.

5

10

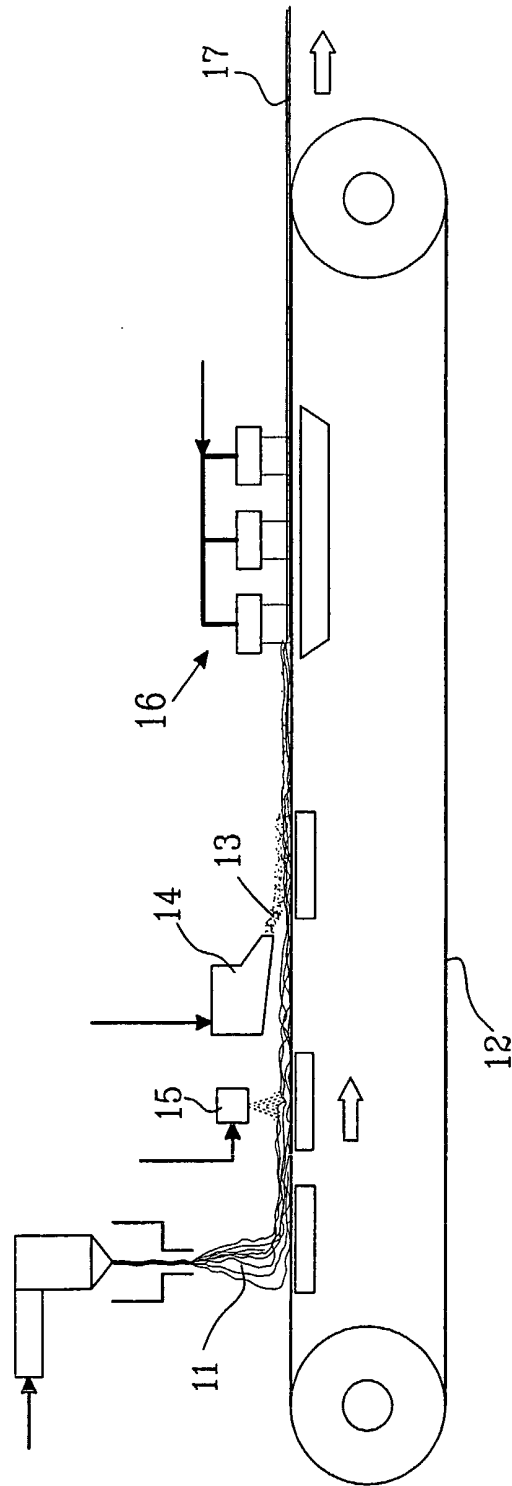


FIG. 1

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/001518

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: D04H 5/02, D04H 1/46, B32B 5/26  
According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: D04H, B32B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0308320 A2 (JAMES RIVER CORPORATION OF VIRGINIA), 22 March 1989 (22.03.1989), figure 1, abstract --	1-9
A	EP 0315507 A2 (JAMES RIVER CORPORATION OF VIRGINIA), 10 May 1989 (10.05.1989), figure 1, abstract --	1-9
A	EP 1215325 A1 (SCA HYGIENE PRODUCTS AB), 19 June 2002 (19.06.2002), figure 1, claims 1-6 --	1-9

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

27 January 2005

Date of mailing of the international search report

11-02-2005

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Anna Ahlander/MP

Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/001518

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1288362 A2 (NIPPON PETROCHEMICALS COMPANY LTD), 5 March 2003 (05.03.2003), column 6, line 44 - line 56; column 12, line 19 - column 13, line 15, figures 1,2, abstract --	1-9
A	WO 9922059 A1 (SCA HYGIENE PRODUCTS AB), 6 May 1999 (06.05.1999), figures 1-5, abstract -- -----	1-9

## INTERNATIONAL SEARCH REPORT

Information on patent family members

31/12/2004

International application No.

PCT/SE 2004/001518

EP	0308320	A2	22/03/1989	SE	0308320	T3	
				AT	97454	T	15/12/1993
				AU	4256997	A	26/03/1998
				CA	1312493	A,C	12/01/1993
				CA	2264710	A	12/03/1998
				DE	3885691	D,T	09/06/1994
				DK	510988	A	15/03/1989
				EP	0927085	A	07/07/1999
				FI	884231	A	16/03/1989
				JP	1111056	A	27/04/1989
				NO	169669	B,C	13/04/1992
				NO	884088	A	16/03/1989
				PT	88511	A,B	31/07/1989
				US	4808467	A	28/02/1989

EP	0315507	A2	10/05/1989	SE	0315507	T3	
				AT	105598	T	15/05/1994
				CA	1290928	A,C	22/10/1991
				DE	3889522	D,T	22/12/1994
				ES	2056117	T	01/10/1994
				JP	1148856	A	12/06/1989
				JP	7000863	B	11/01/1995
				US	4775579	A	04/10/1988

EP	1215325	A1	19/06/2002	JP	2002285466	A	03/10/2002
				SE	518035	C	20/08/2002
				SE	0004687	A	19/06/2002
				US	6592713	B	15/07/2003
				US	20020088099	A	11/07/2002

EP	1288362	A2	05/03/2003	JP	2003064570	A	05/03/2003
				US	20030045196	A	06/03/2003



INTERNATIONAL SEARCH REPORT  
Information on patent family members

31/12/2004

International application No.

PCT/SE 2004/001518

WO	9922059	A1	06/05/1999	AT	211193	T	15/01/2002
				AU	734656	B	21/06/2001
				AU	9770598	A	17/05/1999
				BR	9813271	A	22/08/2000
				CA	2308784	A	06/05/1999
				CN	1107753	B	07/05/2003
				CN	1277644	T	20/12/2000
				DE	69803035	D,T	29/08/2002
				EP	0938601	A,B	01/09/1999
				SE	0938601	T3	
				ES	2170531	T	01/08/2002
				HU	0004252	A	28/04/2001
				JP	2001521075	T	06/11/2001
				PL	340215	A	15/01/2001
				RU	2215835	C	10/11/2003
				SE	9703886	A	25/04/1999
				SK	5502000	A	09/04/2001
				TR	200001120	T	00/00/0000
				US	6163943	A	26/12/2000

---